

Tool Demonstration: Testing JSON Web Services Using jsongen

Ignacio Ballesteros

Luis Eduardo Bueso

Lars-Åke Fredlund

Julio Mariño

September 17, 2018

UPM

1. Context
2. Testing a web service operation using jsongen
3. Testing a web service dynamic state using jsongen

Context

What is jsongen

A tool for testing web services based on json communication.


Using the Quviq's Quichckeck state machine, jsongen can test the dynamic properties of web services.

We can start testing only with a JSON Schema file defining an API.

This makes web services testing easier and faster.

Our bank web service

Client side




Server side

/bank/users/

Our bank web service

Client side




`new_user(alice, pass)`


Server side

`/bank/users/`


Our bank web service

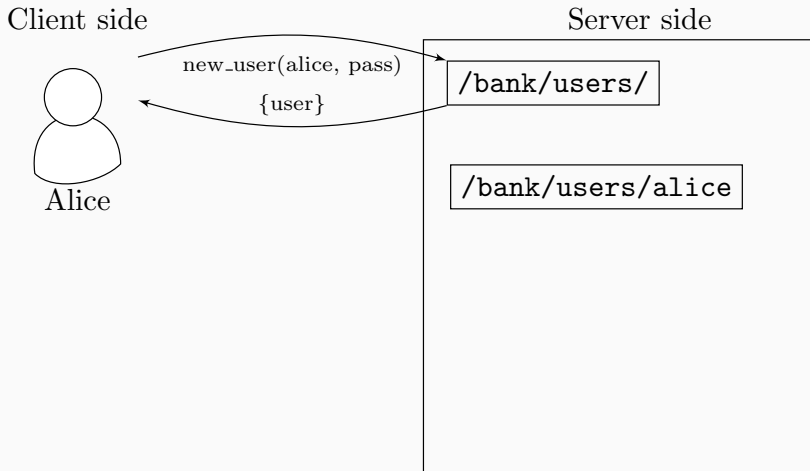


Our bank web service

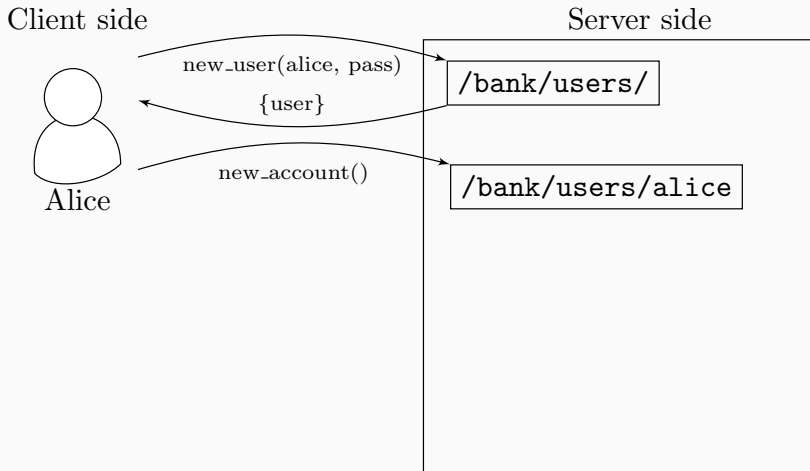


Our bank web service

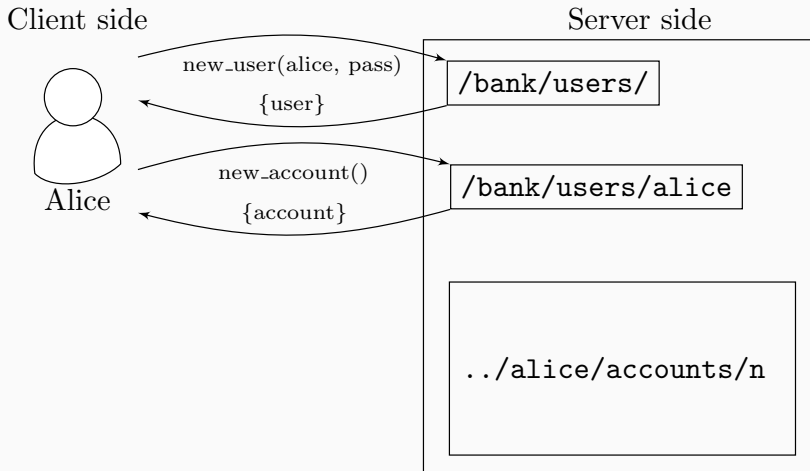

Our bank web service

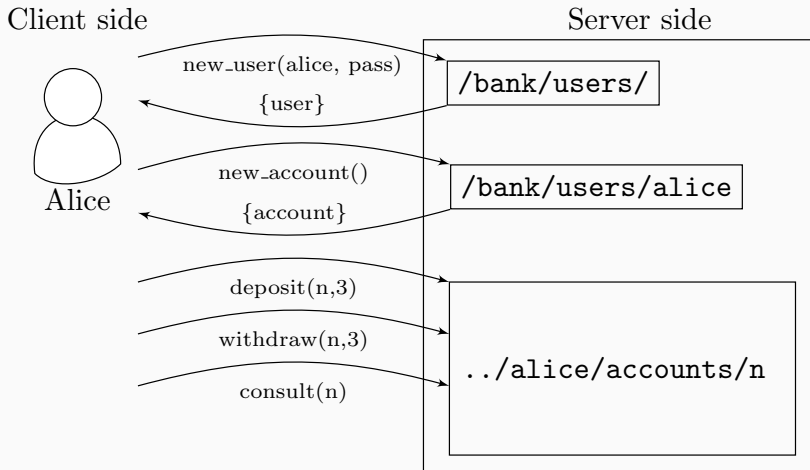

Our bank web service

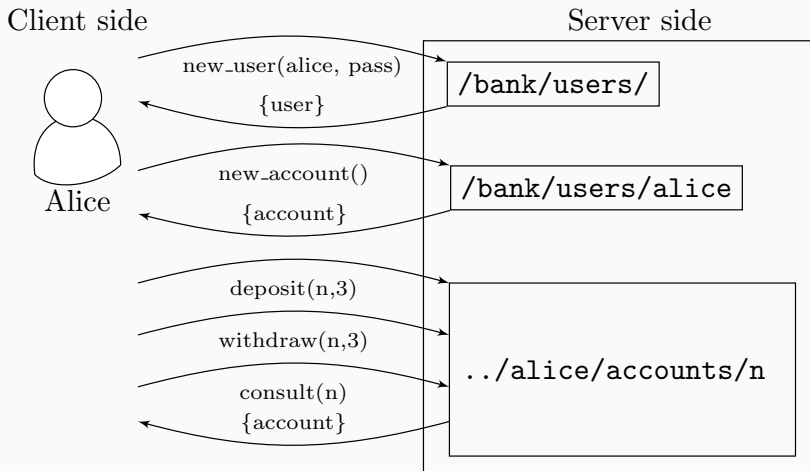

Testing a web service operation using jsongen

Objectives and example

The main objective of this example is to give a general idea of how to use jsongen to test a simple web service operation.

The web service operation:

Operation	new user
URI	http://localhost:5000/bank/users/
Method	POST
Body	name: string, password: string
Result	user: string
Status	201

Starting out our JSON Schema

Operation	new user
URI	http://localhost:5000/bank/users/
Method	POST

```
{  
  "rel": "new_user",  
  "href": "http://localhost:5000/bank/users/",  
  "title": "new user",  
  "method": "POST",  
  ...  
}
```

Body generator

Body	name: string, password: string
-------------	--------------------------------

```
...  
"schema": {  
  "type": "object",  
  "required": ["user",  
               "password"],  
  "properties": {  
    "user": {  
      "type": "string"  
    },  
    "password": {  
      "type": "string"  
    }  
  }  
}  
}  
...
```

Body generator

Body	name: string, password: string
-------------	--------------------------------

```
...
"schema": {
  "type": "object",
  "required": ["user",
               "password"],
  "properties": {
    "user": {
      "type": "string"
    },
    "password": {
      "type": "string"
    }
  }
}
...

{
  "user": "sxa2",
  "password": "vxkj"
}
```


Body generator: self-defined generators

Body	name: string, password: string
-------------	--------------------------------

```
...
"schema": {
  "type": "object",
  "required": ["user", "password"],
  "properties": {
    "user": {
      "quickcheck": { "name": "bank_generators:gen_user" }
    },
    "password": {
      "quickcheck": { "name": "bank_generators:gen_password" }
    }
  },
  "additionalProperties": false
}
```

Response validation

Result	user: string
Status	201

```
{  
  "type": "object",  
  "required": ["user"],  
  "status": 201,  
  "properties": {  
    "user": { "type": "string" }  
  },  
  "additionalProperties": false  
}
```

Structure

At the end we will have 2 files:

- `new_user.jsch` which contains the information used in the request generation.
- `new_user_response.jsch` which contains the information in the response validation.

The last important JSON Schema identifier is:

```
...  
"targetSchema": {  
  "$ref": "new_user_response.jsch#"  
}  
...
```

Demo

Testing a web service dynamic state using jsongen


Objectives and API description

The main objective of this example is to give a general idea of how to use the dynamic links discovering habilities of jsongen.

In this example we will test the protocol of the whole bank API.

Let's revisit our possible operations:

Bank api operations

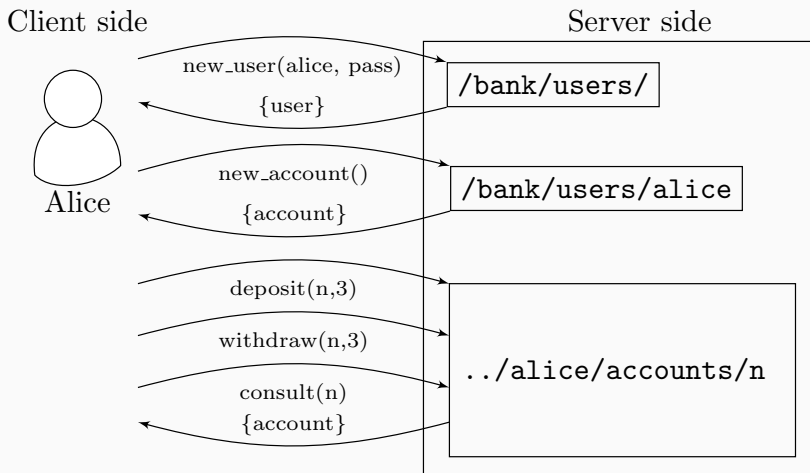

Dynamic discovery of operations

Jsongen can create sequences of operations with data received in previous requests.

When jsongen validates a response, we can define a new link to explore within the JSON Schema.

Our `create_account` operation unlocks three operations over the account created:

- `consult`
- `deposit`
- `withdraw`

Operation: new account

Operation	new account
URI	http://localhost:5000/bank/users/{user}/accounts/
Method	POST
Body	empty

```
{
  "rel": "new_account",
  "href": "http://localhost:5000/bank/users/{user}/accounts/",
  "title": "new account",
  "method": "POST",
  "schema": {
    "type": "object",
    "additionalProperties": false,
    "properties": {}
  }
}
```

Operation: new account

Result	accountid: string, balance: integer, owner: string
Status	201

```
{  
  "type": "object",  
  "required": ["accountid", "balance", "owner"],  
  "status": 201,  
  "properties": {  
    "accountid": { "type": "string" },  
    "balance": { "type": "integer" },  
    "owner": { "type": "string" }  
  },  
  "additionalProperties": false,  
}
```

Dependencies

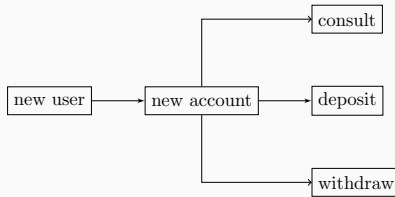


Figure 1: Operation availability dependency

Structure

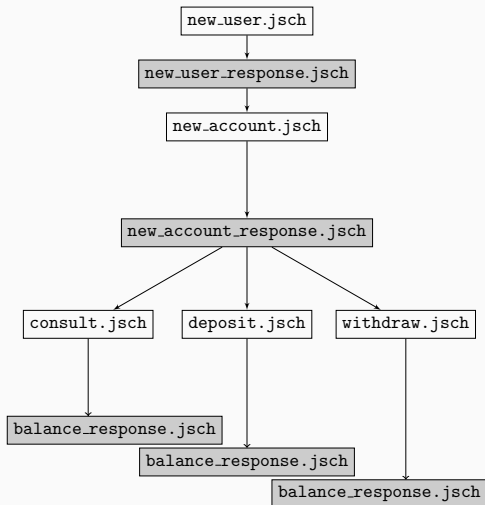


Figure 2: File discovery structure

Demo

Testing a web service state correctness with a jsongen model

Objectives and example

The main objective of this example is to give a general idea of how to use jsongen to test the state of a web service.

The web service state:

Operation	Changes the state
new user	yes
new account	yes
consult account	no
withdraw	yes
deposit	yes

The model interface

To use the model we need to implement the next 3 functions in an erlang module:

```
-export([initial_state/0, next_state/4, postcondition/4]).
```

```
initial_state() ->
```

```
...
```

```
next_state(Super, State, Result, Call) ->
```

```
...
```

```
postcondition(Super, State, Call, Result) ->
```

```
...
```



In our API we will model the state as:

```
-record(state, {users, accounts}).
```

```
initial_state() ->  
  #state  
  {  
    users = [],  
    accounts = #{}  
  }.
```


Client state

Server state

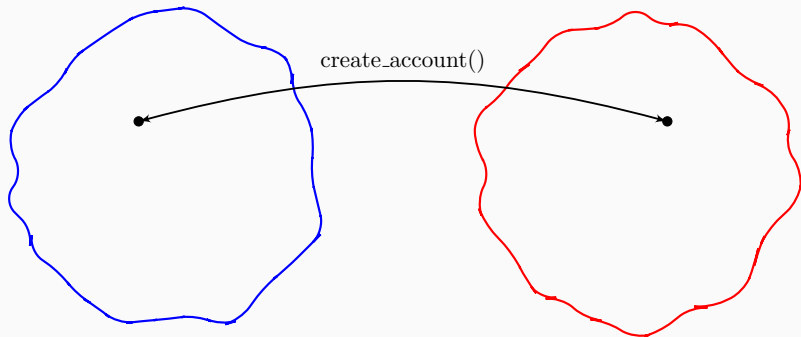


Client state

Server state

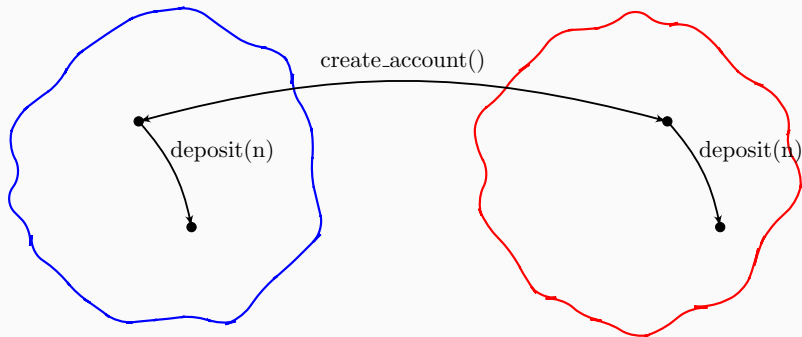

Client state

Server state

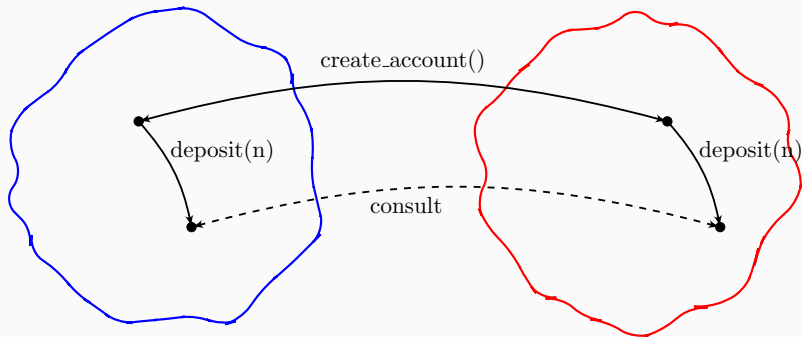

Model: next_state

This function changes the model's state and then calls the internal function of jsongen with the same name.

```
next_state(Super, State, Result, Call) ->
    Info = get_info(Call, State, Result),
    NextModelState = next_model_state(Info#info.op_title,
                                      Info#info.priv_state,
                                      Info#info.call_body,
                                      Info#info.json_res),
    NewState = jsg_links_utils:
        set_private_state(NextModelState, State),
    Super(NewState, Result, Call).
```

Model: next_model_state

```
next_model_state(Operation, ModelState, {struct,BodyValues},
                 {struct,Values}) ->
case Operation of
  "new_user" ->
    case proplists:lookup(<<"user">>, Values) of
      {_, User} ->
        ModelState#state {
          users = [User|ModelState#state.users]
        };
      none -> ModelState
    end;
  ...
end;
```

```

...
"new account" ->
  case {proplists:lookup(<<"accountid">>, Values),
        proplists:lookup(<<"balance">>, Values)} of
    [{_, AccountId}, {_, Balance}] ->
      ModelState#state {
        accounts = maps:put(AccountId,
                             Balance,
                             ModelState#state.accounts)
      };
    _ -> ModelState
  end;
...

```

Model: postcondition

This function checks the postcondition properties defined in the model.

```
postcondition(Super, State, Call, Result) ->
    Info = get_info(Call, State, Result),
    postcondition_model_state(Info#info.op_title,
                              Info#info.priv_state,
                              Info#info.json_res)
    and Super(State, Call, Result).
```


Model: postcondition_model_state

```
postcondition_model_state(Operation, ModelState,
                          {struct, Values}) ->

case Operation of
  "consult account" ->
    case {proplists:lookup(<<"accountid">>, Values),
          proplists:lookup(<<"balance">>, Values)} of
      [{_, AccountId}, {_, Balance}] ->
        Balance == maps:get(AccountId,
                              ModelState#state.accounts);
      _ -> false
    end;
  _ -> true
end.
```

Demo

Conclusion

What jsongen does:

- Automatic test case generation.
- Trazable errors.
- Extensible library to model service state.
- Property-based testing of web services.

What jsongen needs:

- A JSON Schema specification of the API.
- No programming knowledge needed for basic usage.
- Erlang knowledge for advanced usage.