### A7 - Web Architecture Specification

Databases and Web Applications Laboratory (LBAW)
Bachelor in Informatics Engineering and Computation (L.EIC)


Sérgio Nunes Dept. Informatics Engineering FEUP · U.Porto

### Web Resources

- → 'Web resources' represent your web application endpoints.
- → The A7 artifact corresponds to the identification and description of endpoints for the vertical prototype.
- → Types of endpoints:
  - → View endpoints: show user interface to the user (A3 Uls), returns HTML;
  - → Action endpoints: process information then redirects to view endpoint;
  - → Ajax endpoints: available for asynchronous calls, returns JSON / HTML\*.

→ \* JSON output requires rendering on the client; HTML is pre-rendered on the server.

## Overall Architecture – "View-Action Pages Pattern"

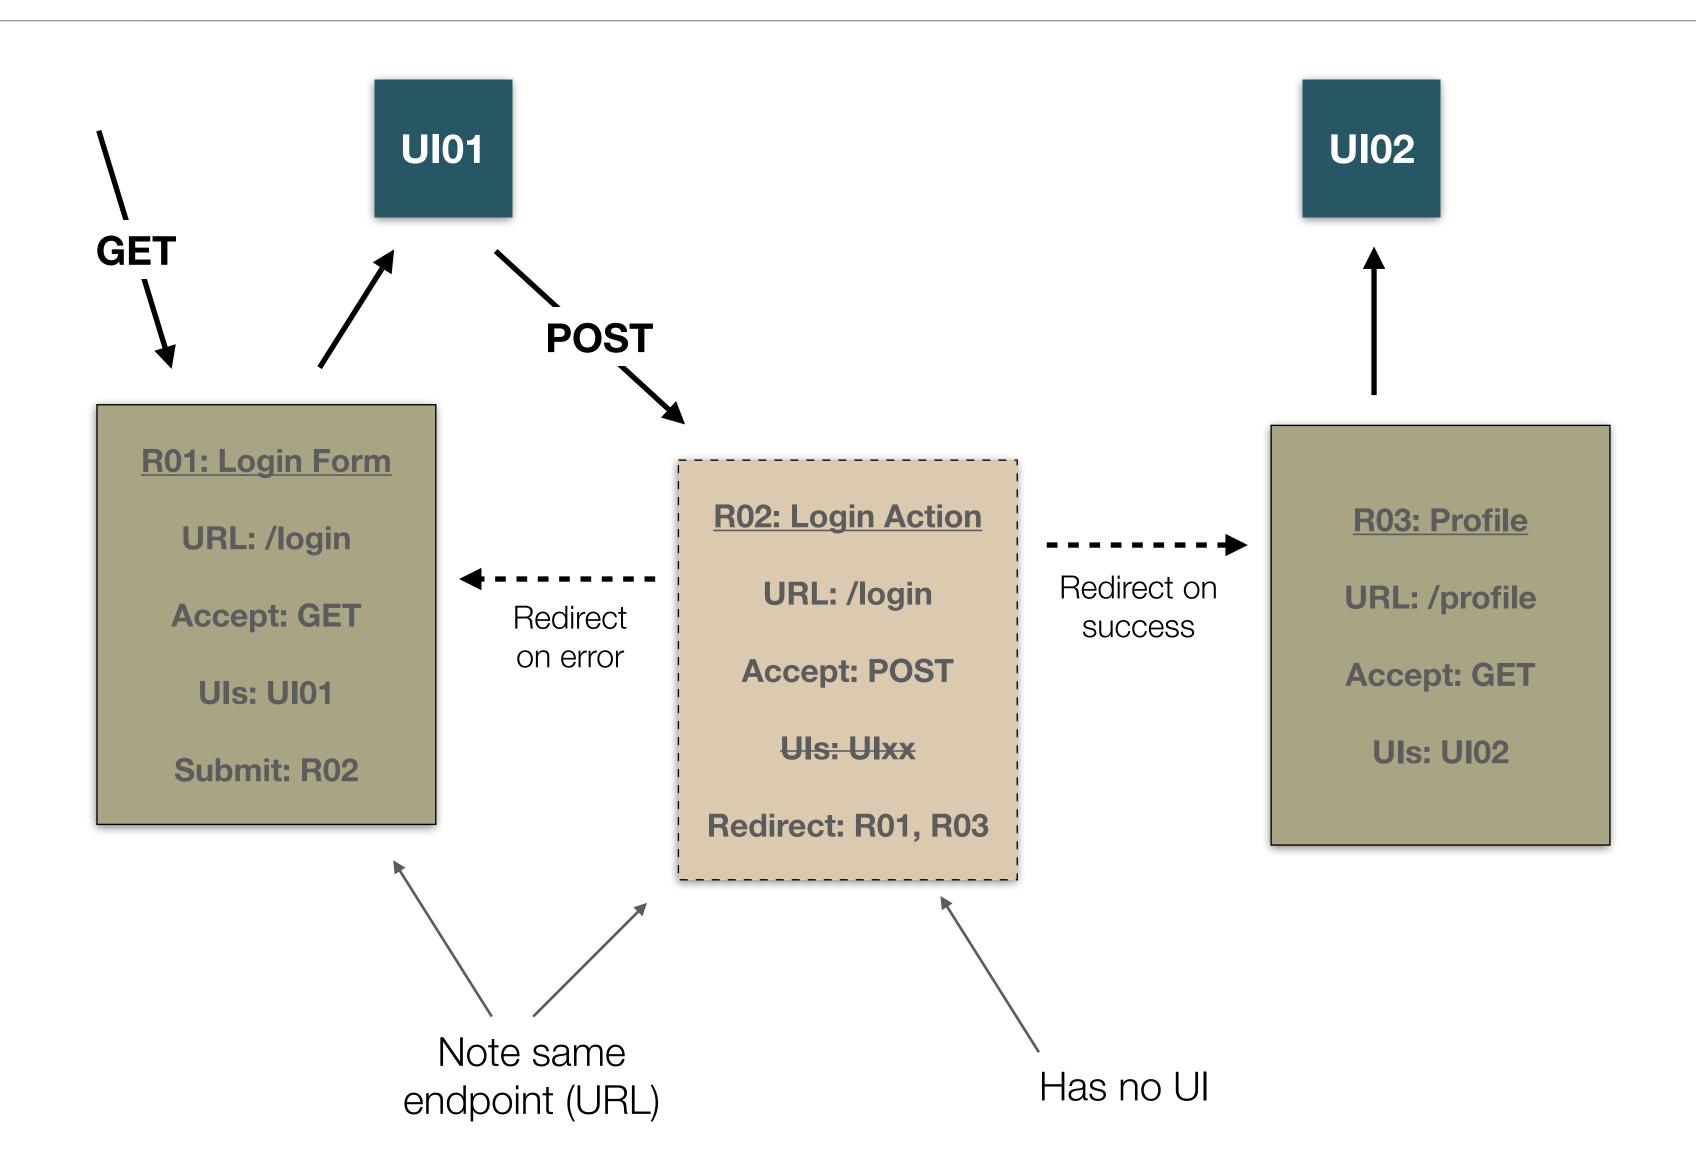

### OpenAPI

- → Goal: standardize on how APIs are described.
- → https://spec.openapis.org/oas/v3.1.0
  - → "The OpenAPI Specification (OAS) defines a standard, programming language-agnostic interface description for REST APIs, which allows both humans and computers to discover and understand the capabilities of a service without requiring access to source code, additional documentation, or inspection of network traffic."
- → The OpenAPI Initiative (OAI) is anchored under the Linux Foundation.

→ An OpenAPI document is a JSON object, and may be represented either in JSON or YAML.

### Example OpenAPI Document (YAML)

```
openapi: 3.0.0
info:
  title: Sample API
  description: Optional multiline or single-line description in [CommonMark](http://commonmark.org/help/) or HTML.
  version: 0.1.9
servers:
  - url: http://api.example.com/v1
    description: Optional server description, e.g. Main (production) server
paths:
  /users:
    get:
      summary: Returns a list of users.
      description: Optional extended description in CommonMark or HTML.
      responses:
        '200':
                  # status code
          description: A JSON array of user names
          content:
            application/json:
              schema:
                type: array
                items:
                  type: string
```

### Metadata

```
openapi: '3.0.0'
info:
  version: '1.0'
  title: 'LBAW MediaLibrary Web API'
  description: 'Web Resources Specification (A7) for MediaLibrary'
```

### External Documentation

```
externalDocs:
  description: Find more info here.
  url: https://web.fe.up.pt/~ssn/.../medialib/a07
```

### Servers

- → The servers section specifies the API server and base URL. You can define one or several servers, such as production and sandbox.
- → All API paths are relative to the server URL.

#### servers:

- url: http://lbaw.fe.up.pt
 description: Production server

### Tags

- → Used to grouping API operations (endpoints).
- → Use for the defined modules.

```
tags:
   - name: 'M01: Authentication and Individual Profile'
   - name: 'M02: Works'
   - name: 'M03: Reviews and Wish list'
   - name: 'M04: Loans'
   - name: 'M05: User Administration and Static pages'
```

### Paths

→ In OpenAPI terms, **paths** are endpoints (resources) that your API exposes, and operations are the HTTP methods used to manipulate these paths, such as GET, POST or DELETE.

# View Page (HTTP GET)

#### R101: Login Form

URL	/login	
Description	Page with a form to login to a user account.	
Method	GET	
UI	UI06	
SUBMIT	R102	
Permissions	PUB	

### View Page (HTTP GET) OpenAPI

```
/login:
    get:
        operationId: R101
        summary: 'R101: Login Form'
        description: 'Provide login form. Access: PUB'

    tags:
        - 'M01: Authentication and Individual Profile'

    responses:
        '200':
        description: 'Ok. Show log-in UI'
```

## Action Page (HTTP POST) – Form Submission

#### R102: Login Action

URL	/login	
Description	This web resource logs the user into the system. Redirects to the user profile page on success and the login form on failure.	
Method	POST	
Request Body	+email: string	Username
	+password: string	Password
Redirects	R106	Success
	R101	Error
Permissions	PUB	

### Action Page (HTTP POST) – Form Submission OpenAPI (1/3)

→ Endpoint header.

```
[/login:]

post:
   operationId: R102
   summary: 'R102: Login Action'
   description: 'Processes the login form submission. Access: PUB'
   tags:
     - 'M01: Authentication and Individual Profile'
```

### Action Page (HTTP POST) – Form Submission OpenAPI (2/3)

- → Request body section defines the accepted parameters.
- → Note the different types, and the required parameters.

```
[/login:]
  [post:]
    requestBody:
      required: true
      content:
        application/x-www-form-urlencoded:
          schema:
            type: object
            properties:
                              # <!--- form field name
              email:
                type: string
                           # <!--- form field name
              password:
                type: string
            required:
              - email
              - password
```

### Action Page (HTTP POST) – Form Submission OpenAPI (3/3)

→ All action pages have redirects.

```
responses:
  '302':
   description: 'Redirect after processing the login credentials.'
   headers:
      Location:
        schema:
          type: string
        examples:
          302Success:
            description: 'Successful authentication. Redirect to user profile.'
            value: '/users/{id}'
          302Error:
            description: 'Failed authentication. Redirect to login form.'
            value: '/login'
```

# Action Page – Logout

#### R103: Logout Action

URL	/logout	
Description	This web resource logs out the authenticated user or admin.	
Method	POST	
Redirects	R101 Success	
Permissions	USR, ADM	

### Action Page – Logout

```
/logout:
 post:
    operationId: R103
    summary: 'R103: Logout Action'
    description: 'Logout the current authenticated used. Access: USR, ADM'
    tags:
      - 'M01: Authentication and Individual Profile'
    responses:
      '302':
        description: 'Redirect after processing logout.'
        headers:
          Location:
            schema:
              type: string
            examples:
              302Success:
                description: 'Successful logout. Redirect to login form.'
                value: '/login'
```

# View Page – Register Form

#### R104: Register Form

URL	/register	
Description	Page with a form to register a new user account.	
Method	GET	
UI	UI07	
SUBMIT	R105	
Permissions	PUB	

### View Page – Register Form

# Action Page – Register

#### R105: Register Action

URL	/register	
Description	This web resource inserts the user into the system. Redirects to the user profile page on success and the register form on failure.	
Method	POST	
Request Body	+name: string	Name
	+email: string	Email
	+password: string	Password
	?picture: file	Profile picture
Redirects	R106	Success
	R104	Error
Permissions	PUB	

### Action Page — Register (1/3)

```
post:
   operationId: R105
   summary: 'R105: Register Action'
   description: 'Processes the new user registration form submission. Access: PUB' tags:
        - 'M01: Authentication and Individual Profile'
```

## Action Page — Register (2/3)

```
requestBody:
  required: true
  content:
    application/x-www-form-urlencoded:
      schema:
        type: object
        properties:
          name:
            type: string
          password:
            type: string
          email:
            type: string
          picture:
            type: string
            format: binary
        required:
          - email
          - password
```

### Action Page — Register (3/3)

```
responses:
  '302':
   description: 'Redirect after processing the new user information.'
   headers:
     Location:
       schema:
          type: string
       examples:
          302Success:
            description: 'Successful authentication. Redirect to user profile.'
            value: '/users/{id}'
          302Failure:
            description: 'Failed authentication. Redirect to register form.'
            value: '/register'
```

## View Page – View User

#### R106: View Profile

URL	/users/{id}	
Description	Shows the user individual profile page.	
Method	GET	
Parameters	+id: integer	user primary key
UI	UI14	
Permissions	USR	

## View Page — View User

```
/users/{id}:
  get:
    operationId: R106
    summary: 'R106: View user profile'
    description: 'Show the individual user profile. Access: USR'
    tags:
      - 'M01: Authentication and Individual Profile'
    parameters:
      - in: path
        name: id
        schema:
          type: integer
        required: true
    responses:
      '200':
        description: 'Ok. Show the view user profile UI'
```

## AJAX Page – Search Works

#### R202: Search Work API

URL	/api/works	
Description	This web resource searches the system for works and returns the results.	
Method	GET	
Parameters	?query: string	String field to search for in works
	?item: string	Category of the work
	?loaned: boolean	Boolean with the loaned flag value
	?owner: boolean	Boolean with the owner flag value
	?classification: integer	Integer with the work classification
Response body	JSON202	
Permissions	PUB	

### AJAX Page – Search Works (1/3)

```
/api/works:
get:
operationId: R202
summary: 'R202: Search Works API'
description: 'Searches for works and returns the results as JSON. Access: PUB.'
```

### AJAX Page – Search Works (2/3)

```
parameters:
  - in: query
    name: query
    description: String to use for full-text search
    schema:
      type: string
    required: false
  - in: query
    name: item
    description: Category of the works
    schema:
      type: string
    required: false
  - in: query
    name: loaned
    description: Boolean with the loaned flag value
    schema:
      type: boolean
    required: false
  - in: query
    name: owner
    description: Boolean with the owner flag value
    schema:
      type: boolean
    required: false
  - in: query
    name: classification
    description: Integer corresponding to the work classification
    schema:
      type: integer
    required: false
```

### AJAX Page – Search Works (3/3)

```
responses:
         '200':
          description: Success
          content:
            application/json:
              schema:
                type: array
                items:
                  type: object
                  properties:
                    id:
                       type: string
                    title:
                      type: string
                    obs:
                      type: string
                    year:
                      type: string
                    owner:
                       type: string
                    type:
                      type: string
continue -->
```


```
--> continued

example:
- id: 1
    title: Rihanna - Unapologetic
    obs: Good pop music album.
    year: 2012
    owner: Joana Lima
    type: MP3
- id: 15
    title: Mr. Bean
    obs: The best comedy movie.
    year: 1995
    owner: Manuel Teixeira
    type: DVD
```


- → GitLab provides an interactive human-readable view to a OpenAPI specification
- → File type must be YAML (.yaml) and include 'openapi' in filename
- → Recommended: a7\_openapi.yaml

→ MediaLibrary: GitLab > Ibaw > code-examples > medialibrary > a7 openapi.yaml


```
1 openapi: 3.0.0
3 info:
     version: '1.0'
     title: 'LBAW MediaLibrary Web API'
      description: 'Web Resources Specification (A7) for MediaLibrary'
8 servers:
9 - url: http://lbaw.fe.up.pt
      description: Production server
11
12 externalDocs:
      description: Find more info here.
      url: https://web.fe.up.pt/~ssn/wiki/teach/lbaw/medialib/a07
15
16
      - name: 'M01: Authentication and Individual Profile'
      - name: 'M02: Works'
      - name: 'M03: Reviews and Wish list'
      - name: 'M04: Loans'
      - name: 'M05: User Administration and Static pages'
22
23
    paths:
24
25
      /login:
26
27
          operationId: R101
28
          summary: 'R101: Login Form'
29
          description: 'Provide login form. Access: PUB'
30
31
           - 'M01: Authentication and Individual Profile'
32
          responses:
33
            '200':
34
              description: 'Ok. Show log-in UI'
35
        post:
36
          operationId: R102
37
          summary: 'R102: Login Action'
38
          description: 'Processes the login form submission. Access: PUB'
39
40
           - 'M01: Authentication and Individual Profile'
41
42
          requestBody:
43
            required: true
44
            content:
45
              application/x-www-form-urlencoded:
46
                schema:
47
                  type: object
48
                  properties:
49
                                   # <!--- form field name
                    email:
50
                      type: string
```

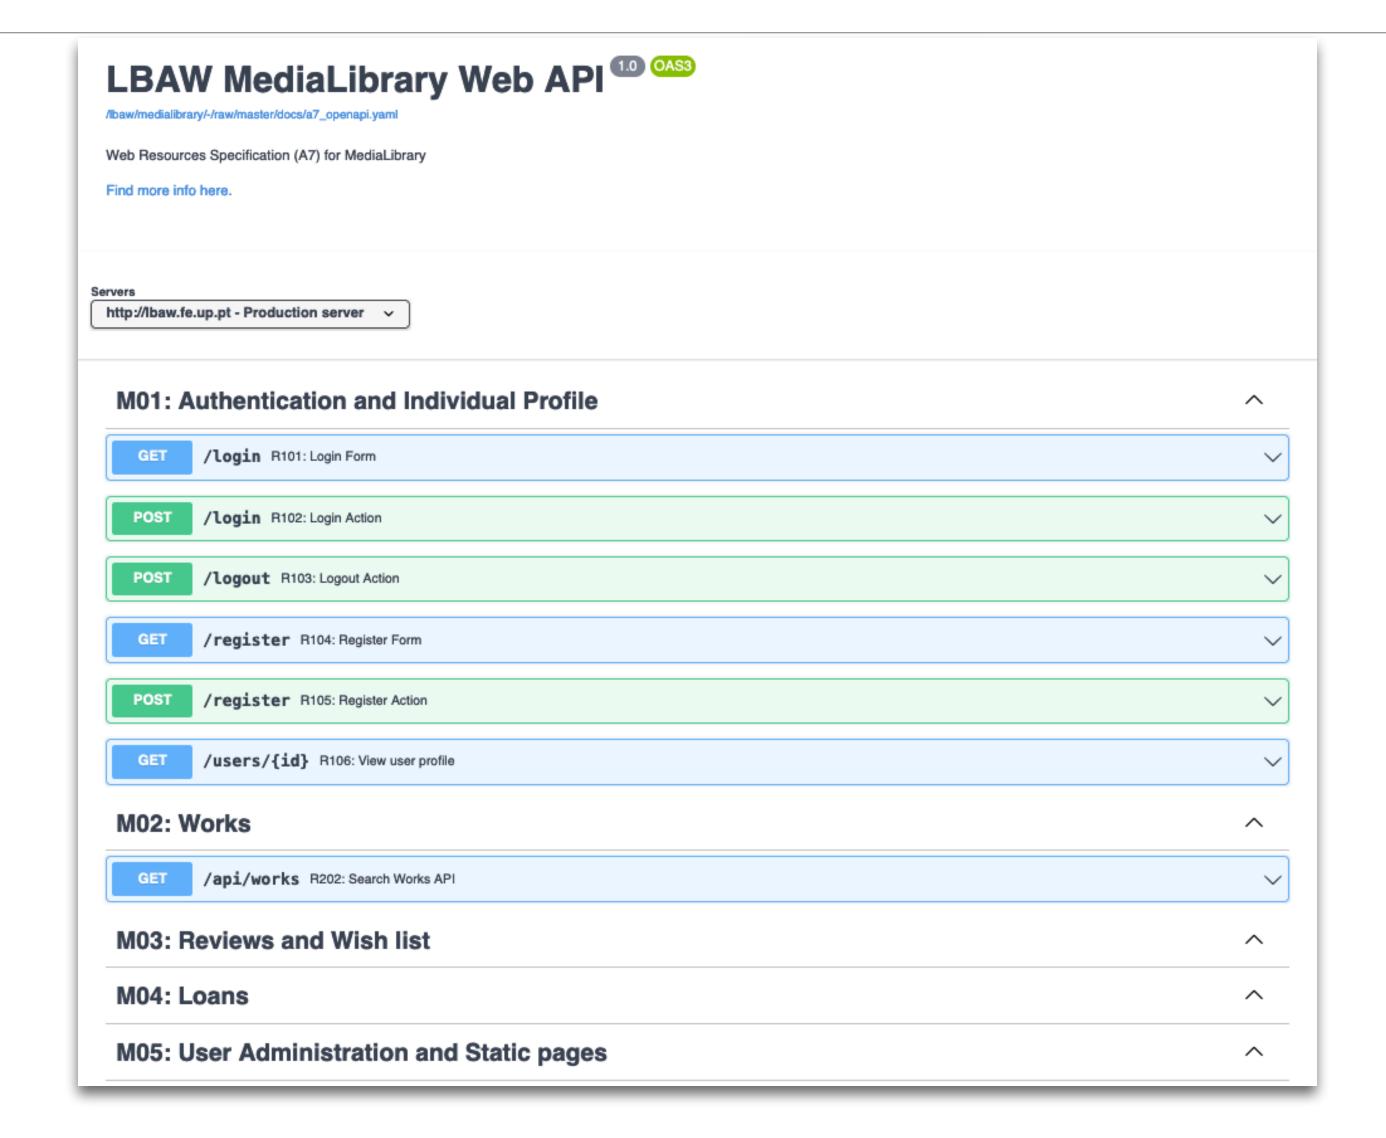

```
/login:
    get:
        operationId: R101
        summary: 'R101: Login Form'
        description: 'Provide login form. Access: PUB'
        tags:
            - 'M01: Authentication and Individual Profile'
        responses:
            '200':
                 description: 'Ok. Show log-in UI'
```

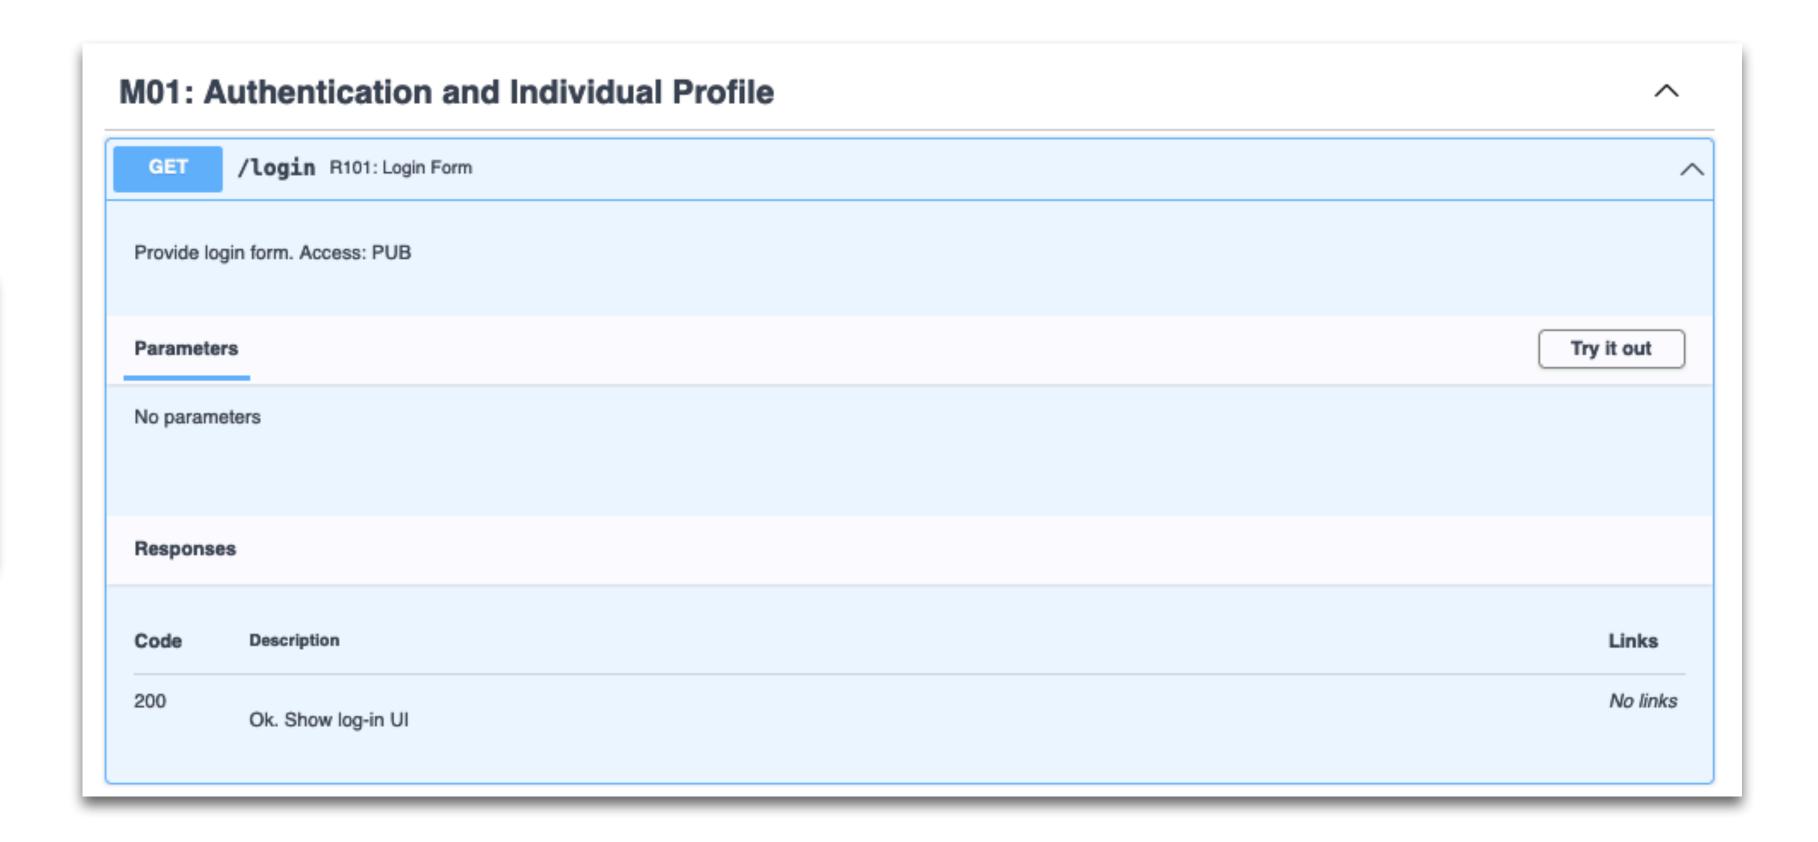

post:	
ope	erationId: R102
SUM	nmary: 'R102: Login Action'
des	cription: 'Processes the login form submission. Access: PUB'
tag	s:
-	'M01: Authentication and Individual Profile'
rec	uestBody:
r	required: true
c	content:
	application/x-www-form-urlencoded:
	schema:
	type: object
	properties:
	email: # form field name</td
	type: string
	password: # form field name</td
	type: string
	required:
	- email
	- password
res	sponses:
	302':
	description: 'Redirect after processing the login credentials.'
	headers:
	Location:
	schema:
	type: string
	examples:
	302Success:
	description: 'Successful authentication. Redirect to user profile.'
	<pre>value: '/users/{id}'</pre>
	302Error:
	description: 'Failed authentication. Redirect to login form.'
	value: '/login'

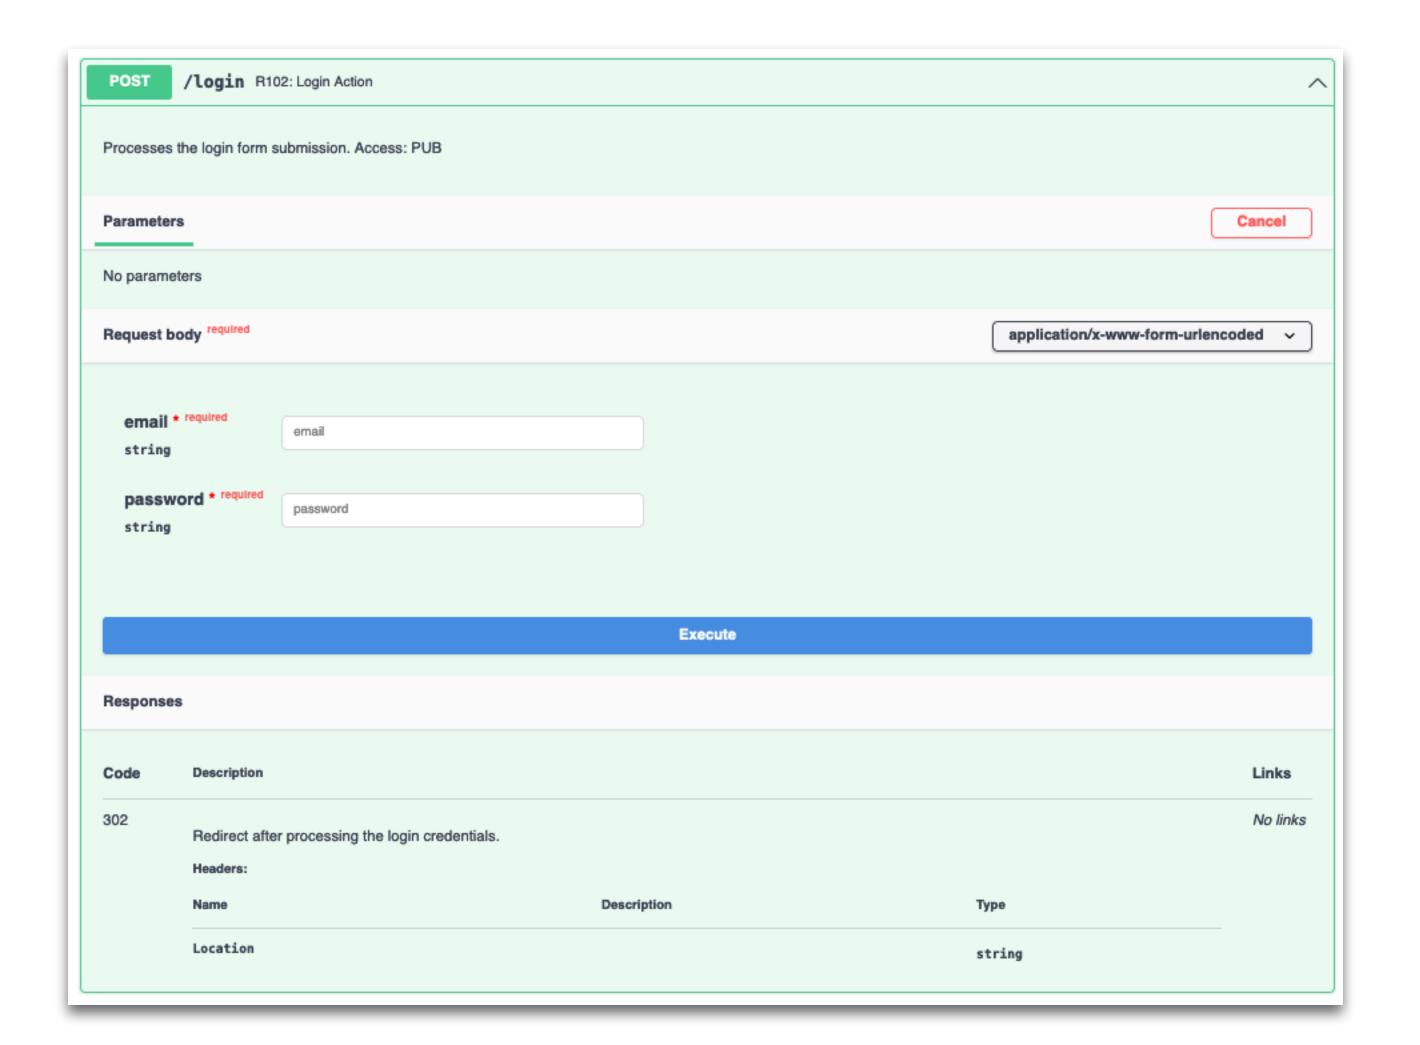

### OpenAPI References

- → There is a growing collection of OpenAPI related tools
  - → Data Validators
  - → Documentation
  - → GUI Editors
  - → SDK Generators
  - → Text Editors
  - **→** ...
- → Check <a href="https://openapi.tools">https://openapi.tools</a>