

InStream::GetNalType

InStream::ReadPictureParameterSet


InStream::ReadSequenceParameterSet

InStream::ReadSliceHeader

InStream::ReadSlicePrefix

InStream::ReadSubsetSequenceParameterSet

InStream::Comment

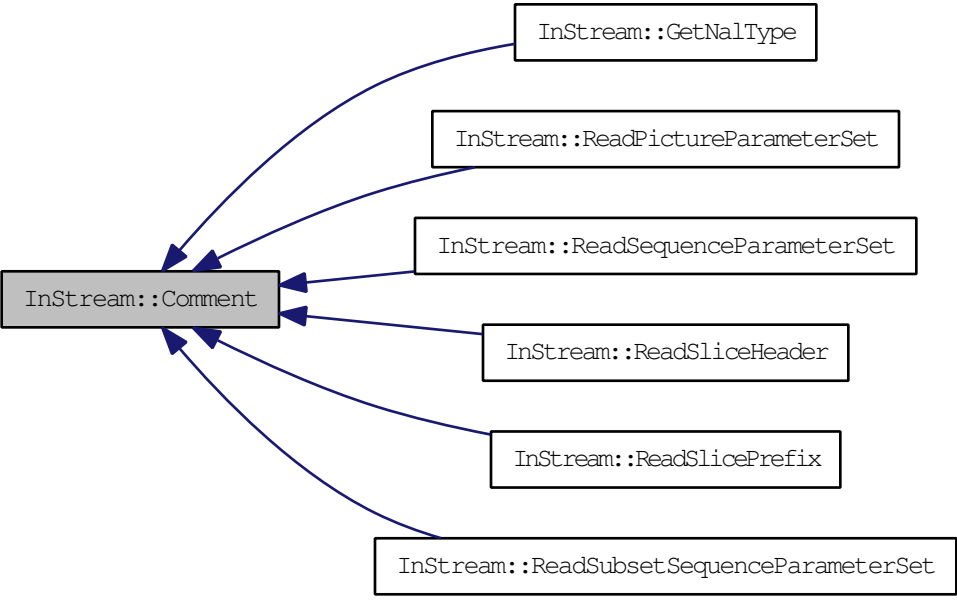

```
graph RL; A[InStream::GetNalType] --> D[InStream::Comment]; B[InStream::ReadPictureParameterSet] --> D; C[InStream::ReadSequenceParameterSet] --> D; E[InStream::ReadSliceHeader] --> D; F[InStream::ReadSlicePrefix] --> D; G[InStream::ReadSubsetSequenceParameterSet] --> D;
```

The diagram illustrates a central node, `InStream::Comment`, which is a gray rectangular box on the left. Five white rectangular boxes on the right represent different functions. Each function box has a blue arrow pointing towards the `InStream::Comment` box. The functions are: `InStream::GetNalType`, `InStream::ReadPictureParameterSet`, `InStream::ReadSequenceParameterSet`, `InStream::ReadSliceHeader`, and `InStream::ReadSlicePrefix`. A sixth function, `InStream::ReadSubsetSequenceParameterSet`, is located at the bottom right and also has a blue arrow pointing to the `InStream::Comment` box.