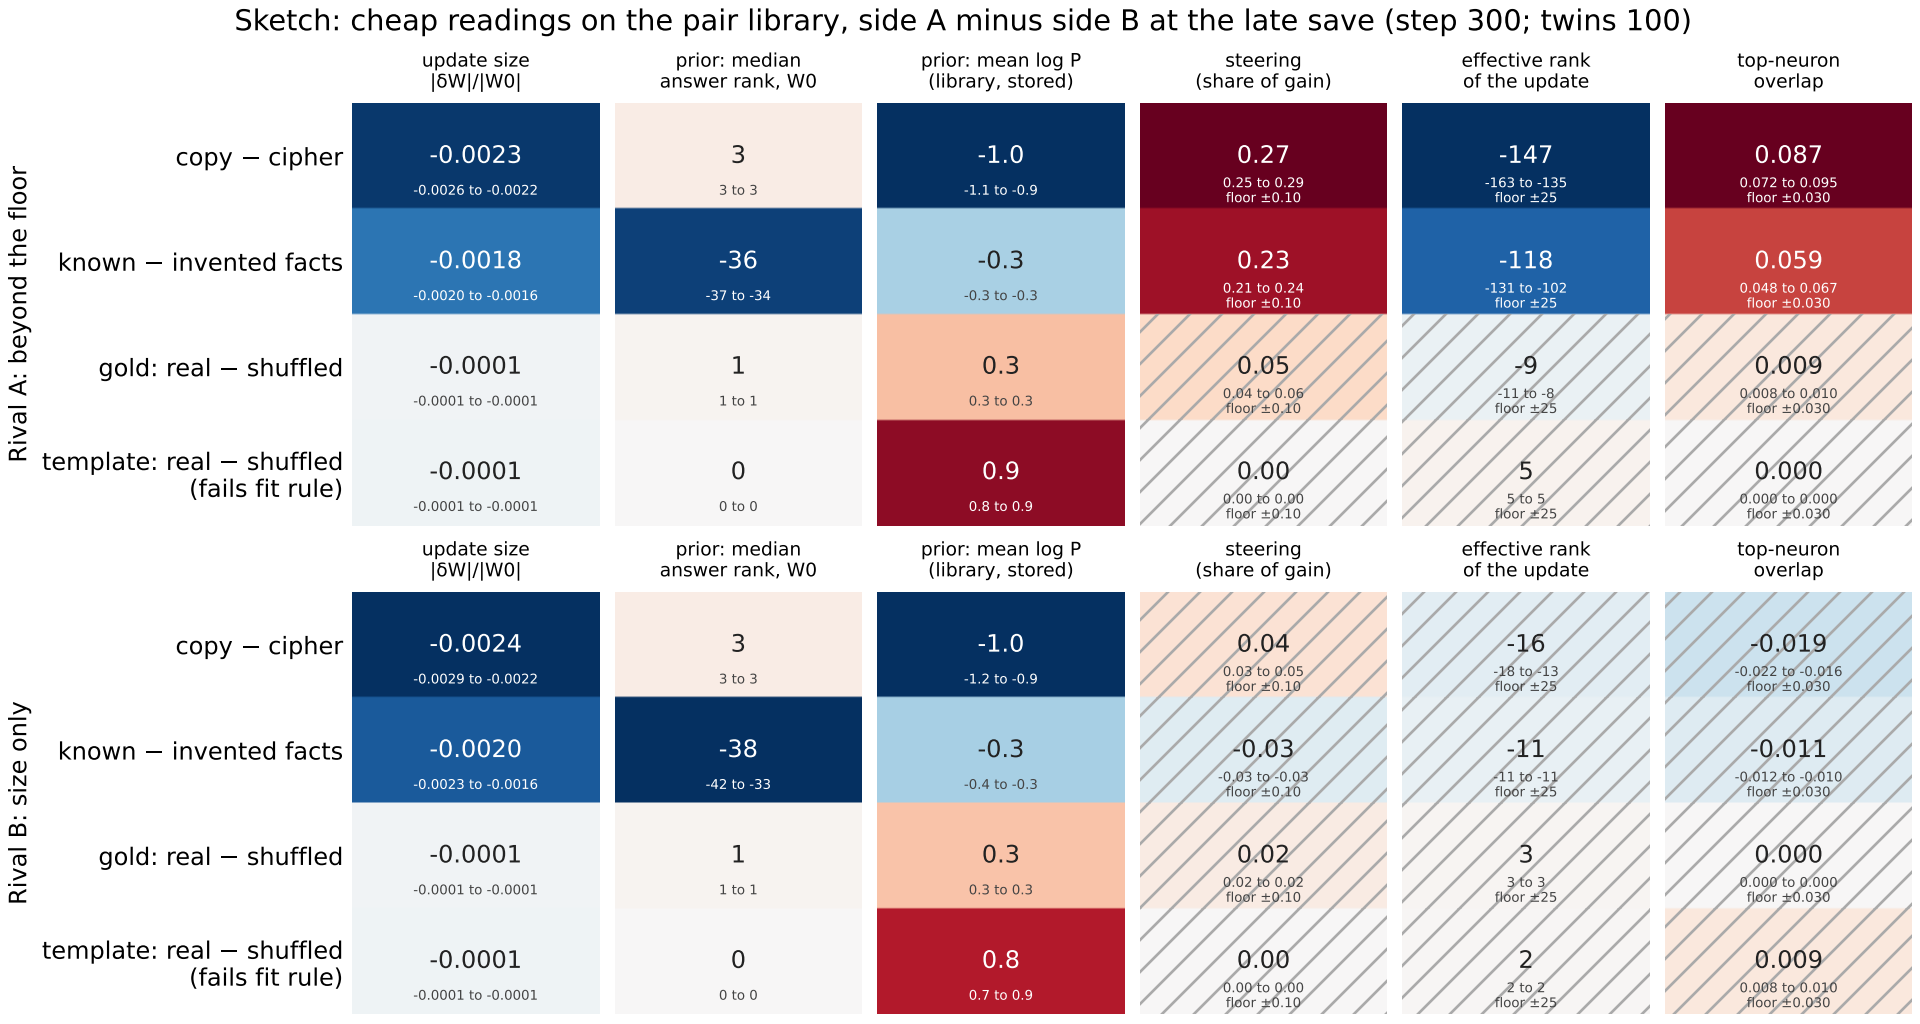
Sketch: cheap readings on the pair library, side A minus side B at the late save (step 300; twins 100)
Rival A: beyond the floor
update size |δW|/|W0|
prior: median answer rank, W0
prior: mean log P (library, stored)
steering (share of gain)
effective rank of the update
top-neuron overlap
copy − cipher
-0.0023
-0.0026 to -0.0022
3
3 to 3
-1.0
-1.1 to -0.9
0.27
0.25 to 0.29
floor ±0.10
-147
-163 to -135
floor ±25
0.087
0.072 to 0.095
floor ±0.030
known − invented facts
-0.0018
-0.0020 to -0.0016
-36
-37 to -34
-0.3
-0.3 to -0.3
0.23
0.21 to 0.24
floor ±0.10
-118
-131 to -102
floor ±25
0.059
0.048 to 0.067
floor ±0.030
gold: real − shuffled
-0.0001
-0.0001 to -0.0001
1
1 to 1
0.3
0.3 to 0.3
0.05
0.04 to 0.06
floor ±0.10
-9
-11 to -8
floor ±25
0.009
0.008 to 0.010
floor ±0.030
template: real − shuffled (fails fit rule)
-0.0001
-0.0001 to -0.0001
0
0 to 0
0.9
0.8 to 0.9
0.00
0.00 to 0.00
floor ±0.10
5
5 to 5
floor ±25
0.000
0.000 to 0.000
floor ±0.030
Rival B: size only
update size |δW|/|W0|
prior: median answer rank, W0
prior: mean log P (library, stored)
steering (share of gain)
effective rank of the update
top-neuron overlap
copy − cipher
-0.0024
-0.0029 to -0.0022
3
3 to 3
-1.0
-1.2 to -0.9
0.04
0.03 to 0.05
floor ±0.10
-16
-18 to -13
floor ±25
-0.019
-0.022 to -0.016
floor ±0.030
known − invented facts
-0.0020
-0.0023 to -0.0016
-38
-42 to -33
-0.3
-0.4 to -0.3
-0.03
-0.03 to -0.03
floor ±0.10
-11
-11 to -11
floor ±25
-0.011
-0.012 to -0.010
floor ±0.030
gold: real − shuffled
-0.0001
-0.0001 to -0.0001
1
1 to 1
0.3
0.3 to 0.3
0.02
0.02 to 0.02
floor ±0.10
3
3 to 3
floor ±25
0.000
0.000 to 0.000
floor ±0.030
template: real − shuffled (fails fit rule)
-0.0001
-0.0001 to -0.0001
0
0 to 0
0.8
0.7 to 0.9
0.00
0.00 to 0.00
floor ±0.10
2
2 to 2
floor ±25
0.009
0.008 to 0.010
floor ±0.030
made-up numbers; 3 seeds per side; cell = mean A − B over seeds, seed range under it; colour scaled per reading (red: A higher); hatched = inside the random-floor band