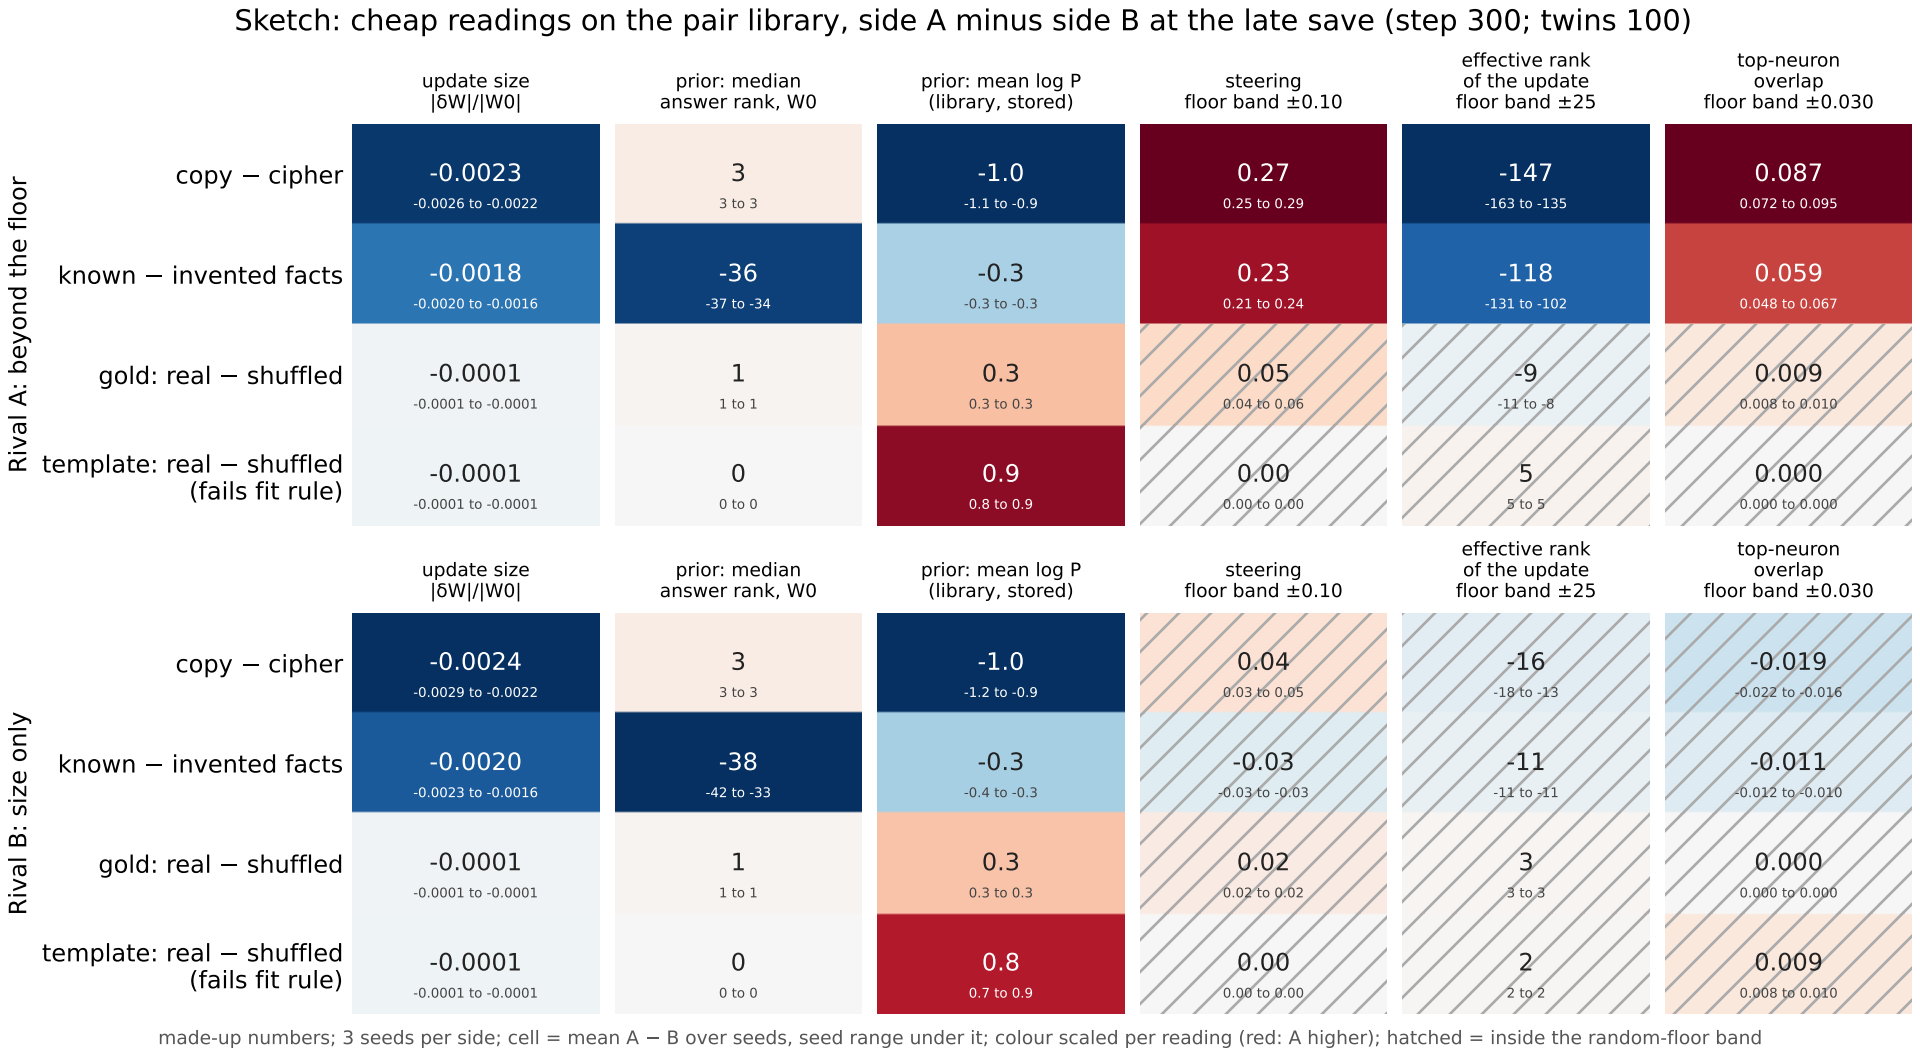
Sketch: cheap readings on the pair library, side A minus side B at the late save (step 300; twins 100)
update size |δW|/|W0|
prior: median answer rank, W0
prior: mean log P (library, stored)
steering floor band ±0.10
effective rank of the update floor band ±25
top-neuron overlap floor band ±0.030
Rival A: beyond the floor
copy − cipher
-0.0023
-0.0026 to -0.0022
3
3 to 3
-1.0
-1.1 to -0.9
0.27
0.25 to 0.29
-147
-163 to -135
0.087
0.072 to 0.095
known − invented facts
-0.0018
-0.0020 to -0.0016
-36
-37 to -34
-0.3
-0.3 to -0.3
0.23
0.21 to 0.24
-118
-131 to -102
0.059
0.048 to 0.067
gold: real − shuffled
-0.0001
-0.0001 to -0.0001
1
1 to 1
0.3
0.3 to 0.3
0.05
0.04 to 0.06
-9
-11 to -8
0.009
0.008 to 0.010
template: real − shuffled (fails fit rule)
-0.0001
-0.0001 to -0.0001
0
0 to 0
0.9
0.8 to 0.9
0.00
0.00 to 0.00
5
5 to 5
0.000
0.000 to 0.000
update size |δW|/|W0|
prior: median answer rank, W0
prior: mean log P (library, stored)
steering floor band ±0.10
effective rank of the update floor band ±25
top-neuron overlap floor band ±0.030
Rival B: size only
copy − cipher
-0.0024
-0.0029 to -0.0022
3
3 to 3
-1.0
-1.2 to -0.9
0.04
0.03 to 0.05
-16
-18 to -13
-0.019
-0.022 to -0.016
known − invented facts
-0.0020
-0.0023 to -0.0016
-38
-42 to -33
-0.3
-0.4 to -0.3
-0.03
-0.03 to -0.03
-11
-11 to -11
-0.011
-0.012 to -0.010
gold: real − shuffled
-0.0001
-0.0001 to -0.0001
1
1 to 1
0.3
0.3 to 0.3
0.02
0.02 to 0.02
3
3 to 3
0.000
0.000 to 0.000
template: real − shuffled (fails fit rule)
-0.0001
-0.0001 to -0.0001
0
0 to 0
0.8
0.7 to 0.9
0.00
0.00 to 0.00
2
2 to 2
0.009
0.008 to 0.010
made-up numbers; 3 seeds per side; cell = mean A − B over seeds, seed range under it; colour scaled per reading (red: A higher); hatched = inside the random-floor band