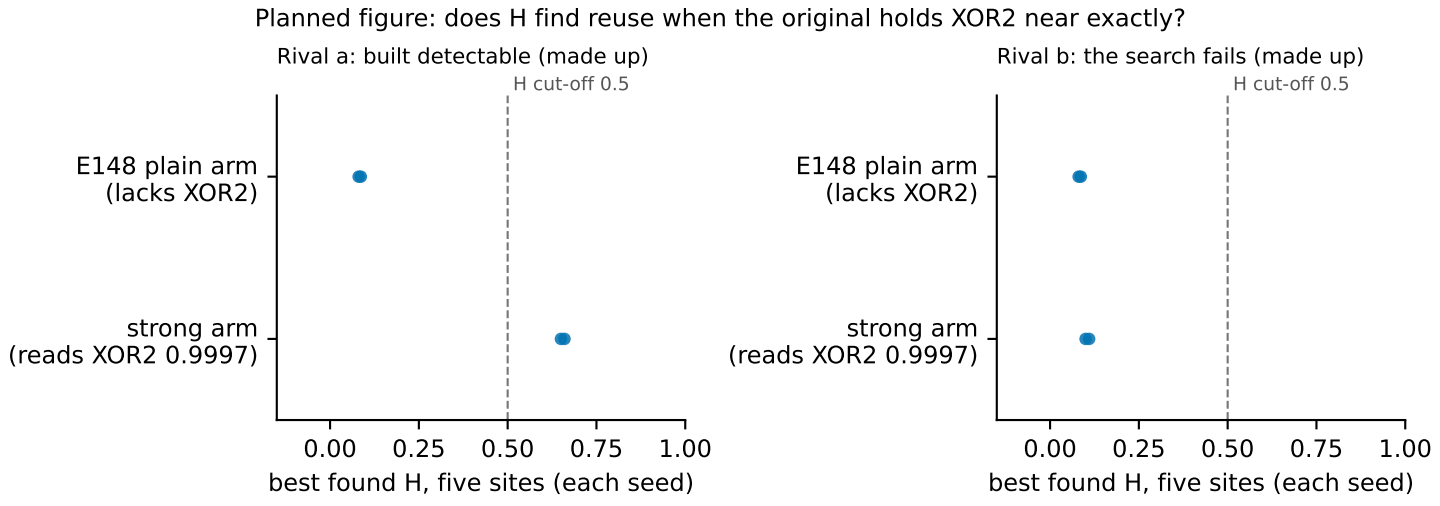
Planned figure: does H find reuse when the original holds XOR2 near exactly?
Rival a: built detectable (made up)
H cut-off 0.5
E148 plain arm
(lacks XOR2)
strong arm
(reads XOR2 0.9997)
0.00
0.25
0.50
0.75
1.00
best found H, five sites (each seed)
Rival b: the search fails (made up)
H cut-off 0.5
E148 plain arm
(lacks XOR2)
strong arm
(reads XOR2 0.9997)
0.00
0.25
0.50
0.75
1.00
best found H, five sites (each seed)
made-up numbers for the strong arm; E148's plain arm as read; 2 seeds per arm