



Pasos para utilizar JasperReports

1. Verificar que esté instalado java en la version 1.7

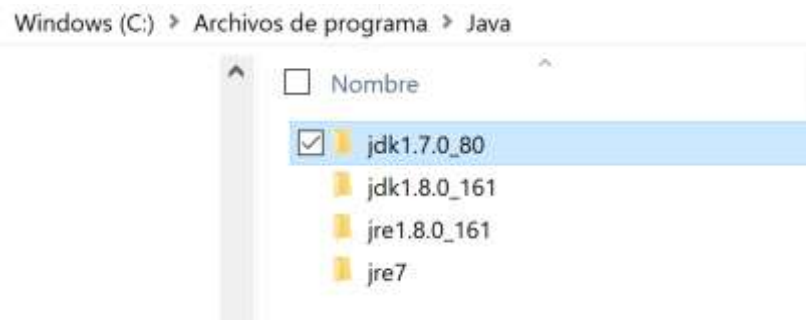

2. Descargar https://community.jaspersoft.com/modal_forms/nojs/jf-user-login-register?optoutdest=https://sourceforge.net/projects/ireport/files/iReport/iReport-5.6.0/iReport-5.6.0.zip/download
3. Descomprimir en cualquier ubicación y acceder a la ubicación **iReport-5.6.0\bin** y ejecutar **ireport.exe**

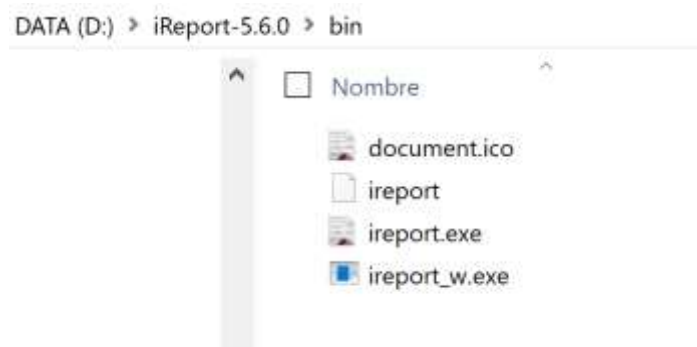

4. Si no se ejecuta se debe editar el archivo **iReport-5.6.0\etc\ireport.conf**



Y cambiar la línea 11

```
# ${HOME} will be replaced by user home directory according to platform
default_userdir="${HOME}/.${APPNAME}/5.6.0"
default_mac_userdir="${HOME}/Library/Application Support/${APPNAME}/5.6.0"

# options used by the launcher by default, can be overridden by explicit
# command line switches
default_options="-J-Xms256m -J-Xmx512m -J-Dorg.netbeans.ProxyClassLoader.level=1000 -J-XX:Max
# for development purposes you may wish to append: -J-Dnetbeans.logger.console=true -J-ea"

# default location of JDK/JRE, can be overridden by using --jdkhome <dir> switch
#jdkhome="/path/to/jdk"

# clusters' paths separated by path.separator (semicolon on Windows, colon on Unices)
#extra_clusters=
```

Por

```
# ${HOME} will be replaced by user home directory according to platform
default_userdir="${HOME}/.${APPNAME}/5.6.0"
default_mac_userdir="${HOME}/Library/Application Support/${APPNAME}/5.6.0"

# options used by the launcher by default, can be overridden by explicit
# command line switches
default_options="--J-Xms256m -J-Xmx512m -J-Dorg.netbeans.ProxyClassLoader.level=1000 -J-XX:M
# for development purposes you may wish to append: -J-Dnetbeans.logger.console=true -J-ea

# default location of JDK/JRE, can be overridden by using --jdkhome <dir> switch
jdkhome="C:/Program Files/Java/jdk1.7.0_80/"

# clusters' paths separated by path.separator (semicolon on Windows, colon on Unices)
#extra_clusters=
```

Tomando en cuenta la version de java 1.7 instalada.