URL

get request
{params}

Server Machine → httpbin

Our Computer / Machine

response
according to params
JSON, HTML, XML

?name=mohit   Small & unsecure data

① Via Arguments / Parameters
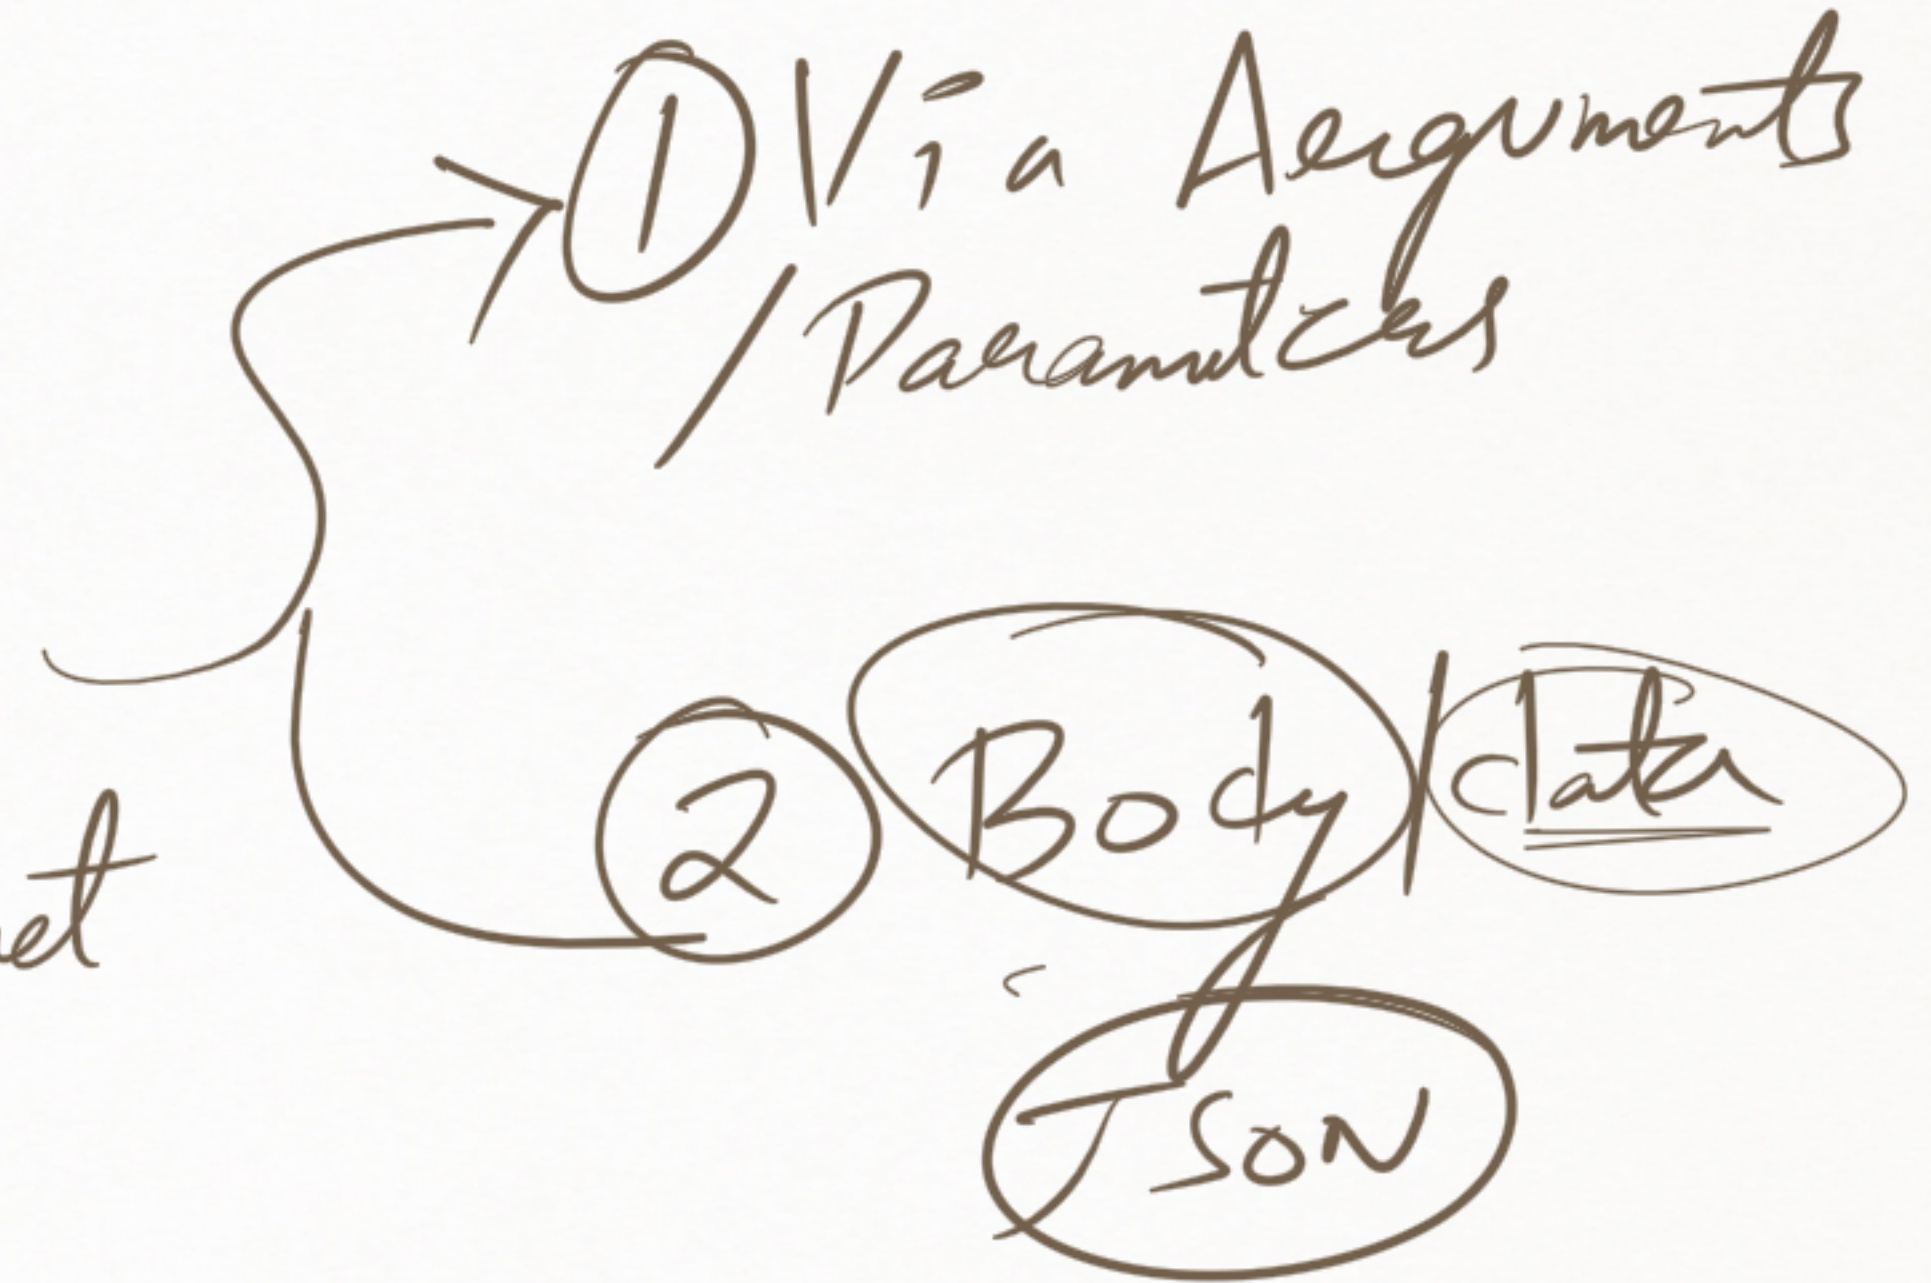
② Body | data
JSON

Payload = Just a bunch of data that we want to send over the internet

① Method

/URL = www.xyz.com?name=mohit&gender=male

GET = Receive Something

POST = Send Something