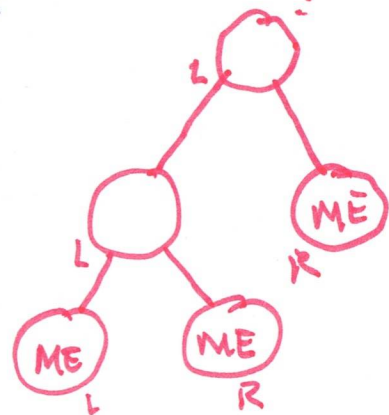


	operations			
	<u>sem. analysis</u>	<u>code generation</u>	<u>XX</u>	<u>YY</u>
<u>Ident Node</u>	✓	✓	✓	✓
<u>Decl Node</u>	✓	✓	✓	✓
<u>Assn Node</u>	✓	✓	⊙	✓
⋮	✓	✓	✓	✓
⋮	✓	✓	✓	✓

double-dispatch

$$AE \rightarrow ME((+|-)ME)^*$$


Left = parse ME():

```
while (nowReading.isLextant(+, -))
    add Token = nowReading;
    nextToken ( > );
    // = ( ) !
```



```

    right = parse ME (');
    left = new OperatorNode(addToken, left, right);
}

```

return left

3

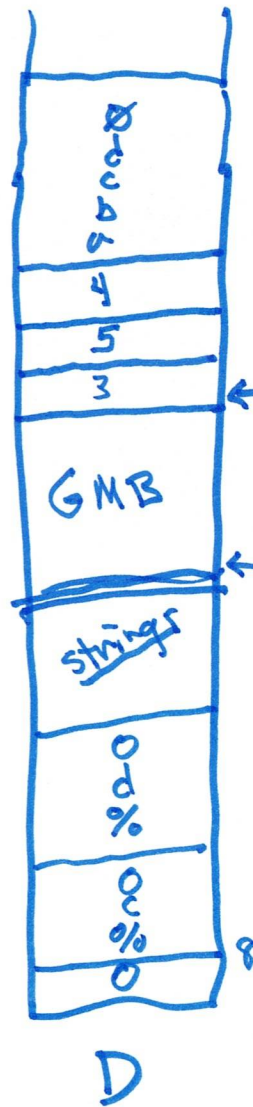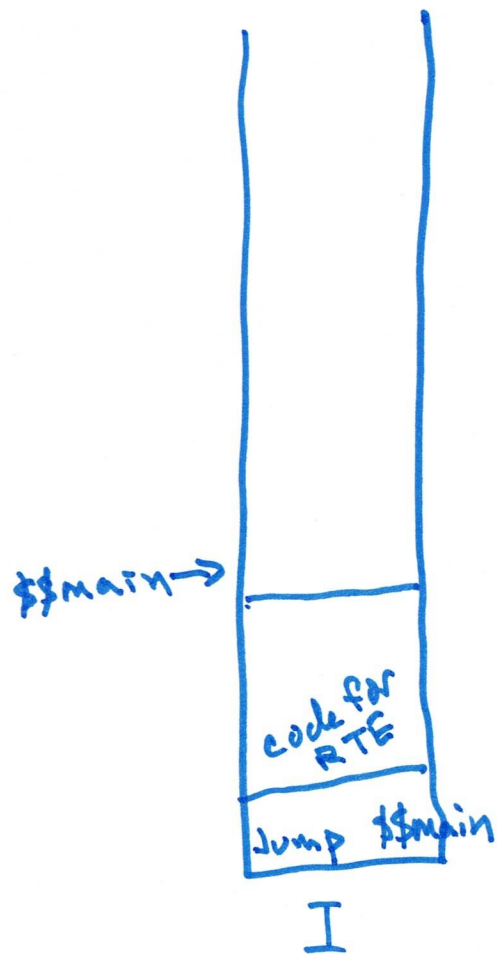

"abcd"

← string 147-

← USABLE_MEMORY-START
GLOBALMEMORY-BLOCK

DLABEL - string-147-
DATAI typeid 3
DATAI 5
DATAI length of string
DATA S String
PUSHID - string-147-

value of a string \equiv
ptr. to its record