


ARTICULO: 2292

Purgador Termostático y Eliminador de Aire

Thermostatic steam trap and Air Vent

Características	Features
1. Purgador Termostático y Eliminador de Aire. 2. Diseño Compacto. 3. Alta durabilidad y fácil mantenimiento. 4. Excelente eliminación de aire. 5. Filtro incorporado. 6. Extremos roscados según ISO 228/1. Condiciones de Trabajo: Máxima presión de Diseño del cuerpo: PN16. Presión máxima admisible (PMA): 14 bar. Temperatura máxima admisible (TMA): 225°C. Máxima presión diferencial: 13 bar. Instalación vertical.	1. Thermostatic steam trap and Air Vent. 2. Compact structure. 3. High durability and easy maintenance. 4. Excellent air discharge. 5. Built in Strainer. 6. Threaded ends according to ISO 228/1. Working Conditions: Body design conditions: PN16. Maximum allowable pressure (PMA): 14 bar. Maximum allowable temperature (TMA): 225°C. Maximum differential pressure: 13 bar. Vertical installation.

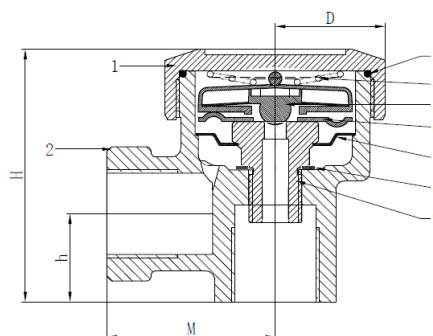

PARTES COMPONENTES – COMPONENT PARTS:

Nº	Nombre / Name	Material
1	Tapa / Cover	Latón / Brass CW617N
2	Cuerpo / Body	Latón / Brass CW617N
3	Junta / Gasket	Goma / Rubber
4	Resorte / Spring	Acero Inoxidable / Stainless Steel (Inconel)
5	Purgador de Aire / Air Vent	Acero Inoxidable 304 / Stainless Steel 304
6	Base / Base	Acero Inoxidable 304 / Stainless Steel 304
7	Malla Filtro / Strainer Screen	Acero Inoxidable 304 / Stainless Steel 304
8	Junta / Gasket	Acero Inoxidable 304 / Stainless Steel 304
9	Asiento / Seat	Acero Inoxidable 420 / Stainless Steel 420

DIMENSIONES – DIMENSIONS:

Ref.	Media / Size	Dimensiones / Dimensions				Peso / Weight (Kg)
		H	D	M	h	
2292 04	DN15	57.5	25	38	20	0,430

CAPACIDAD DE DESCARGA – DISCHARGE CAPACITY:

