


Cc


Synthesiz

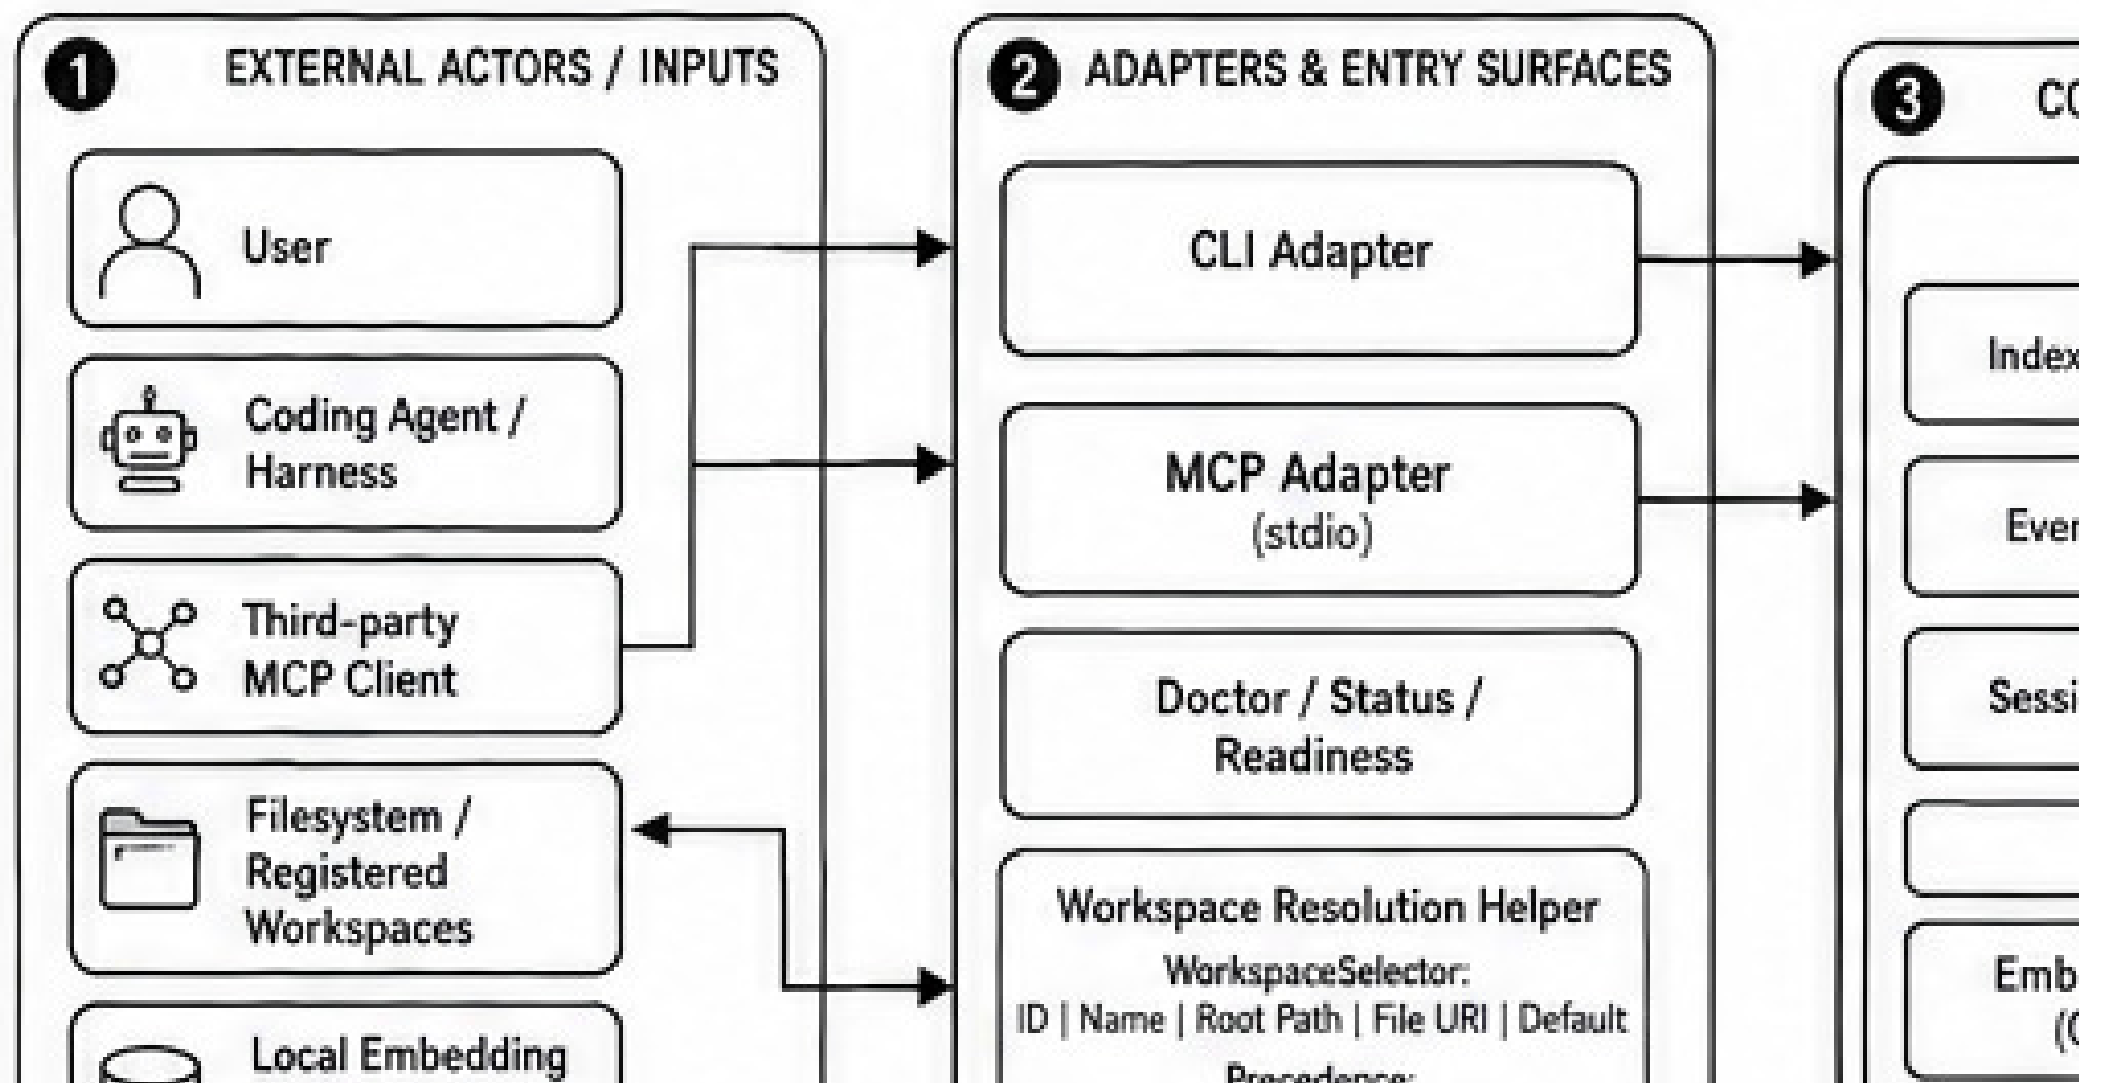

CortexWeave Architecture Map


Derived from README and v0.1 through v0.5 planning documents

Local-first context substrate for coding agents

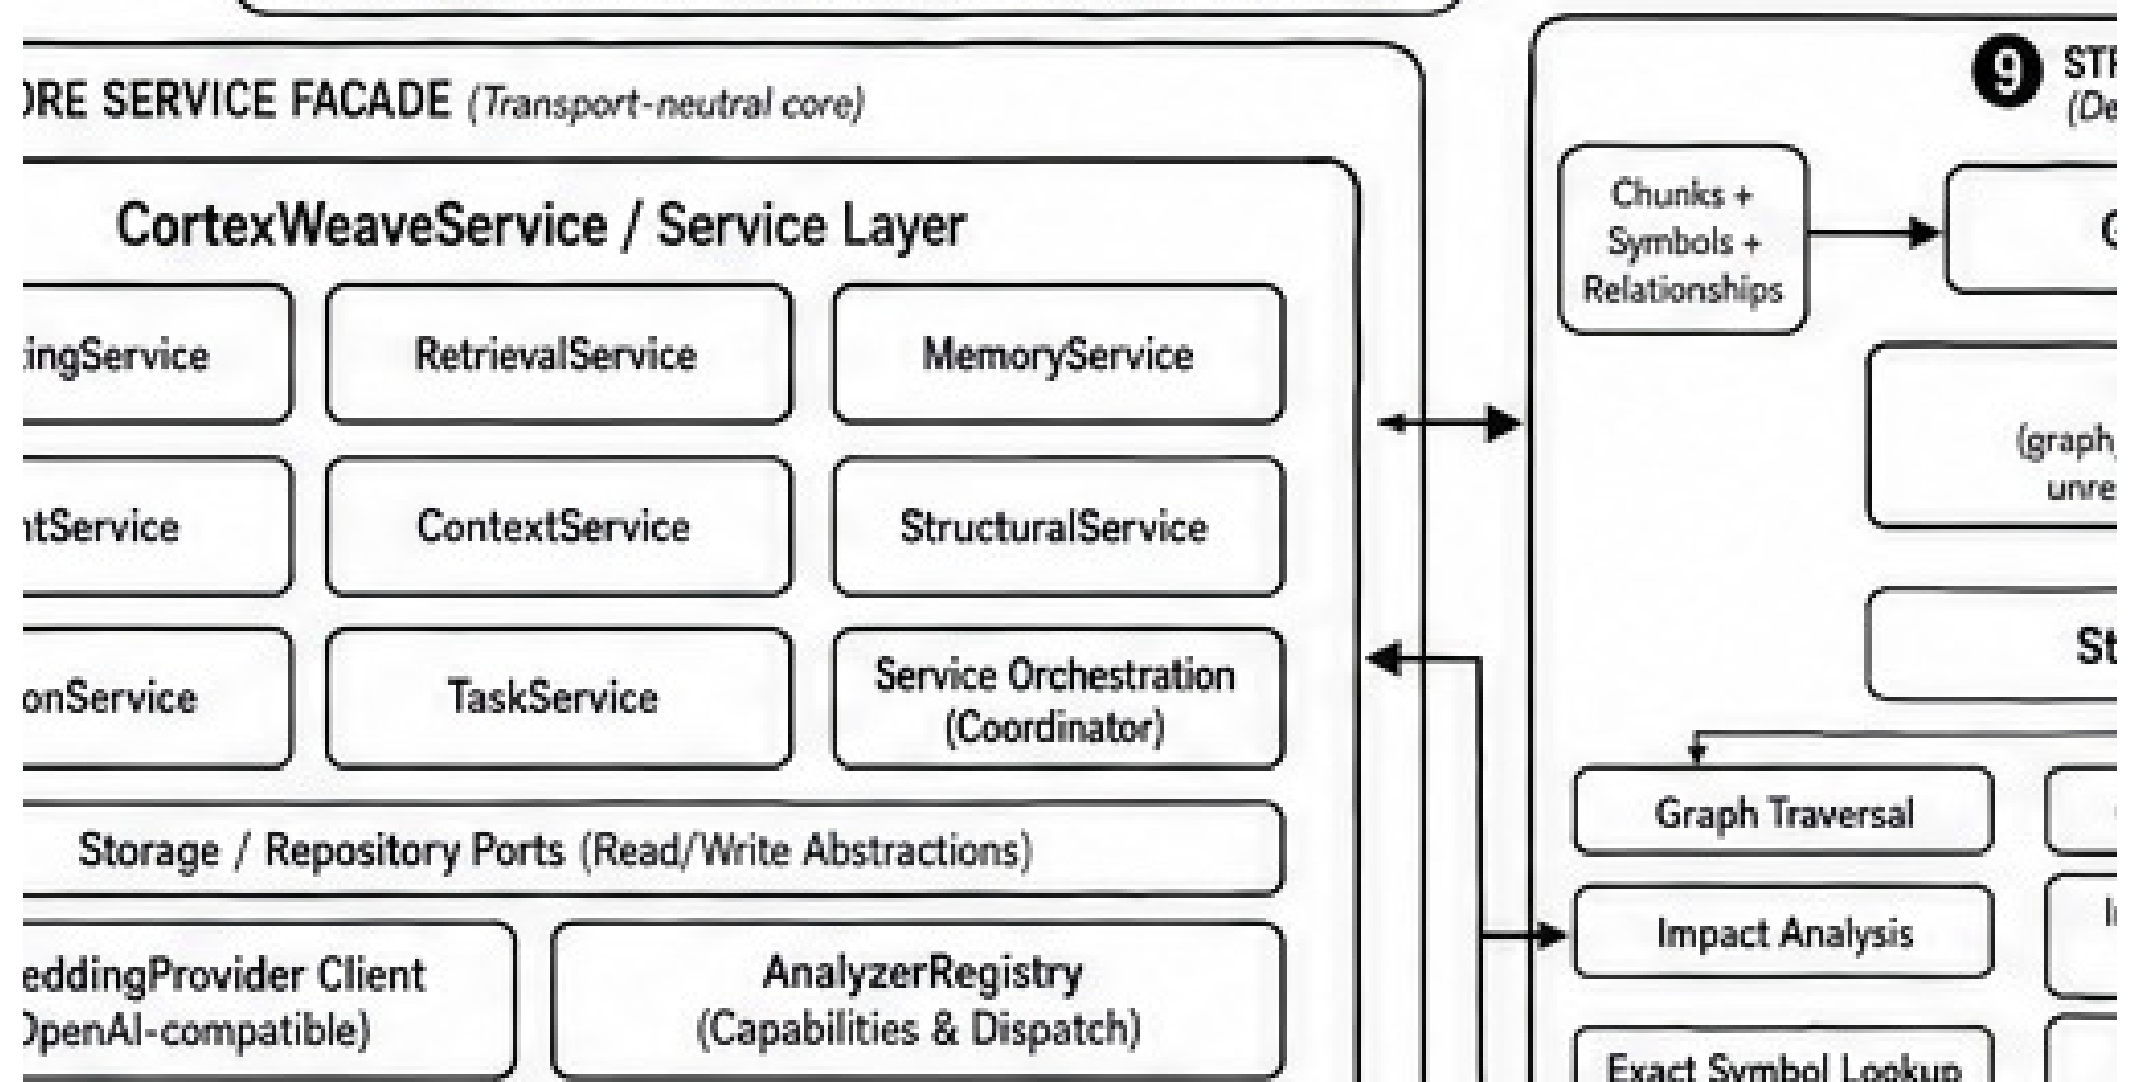


STRUCTURAL INTELLIGENCE / GRAPH


derived index, source remains authoritative

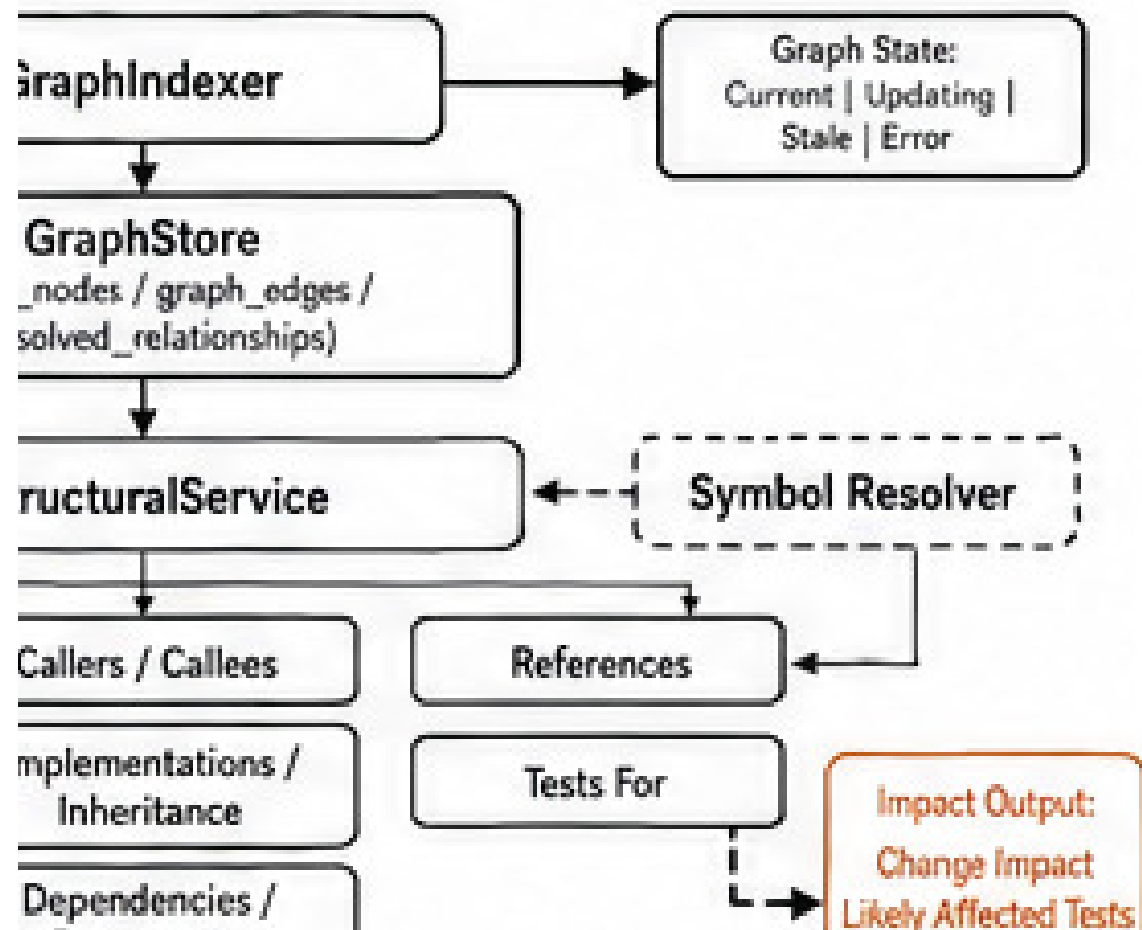

11 PLANNED v0.5 EXPERIENCE LAYER

(Planned, not yet core current runtime)

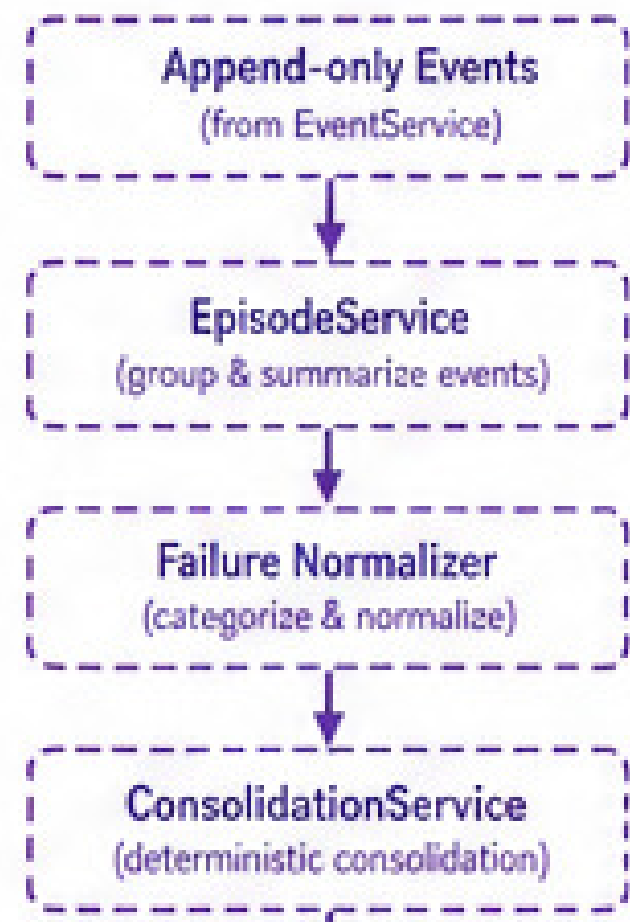

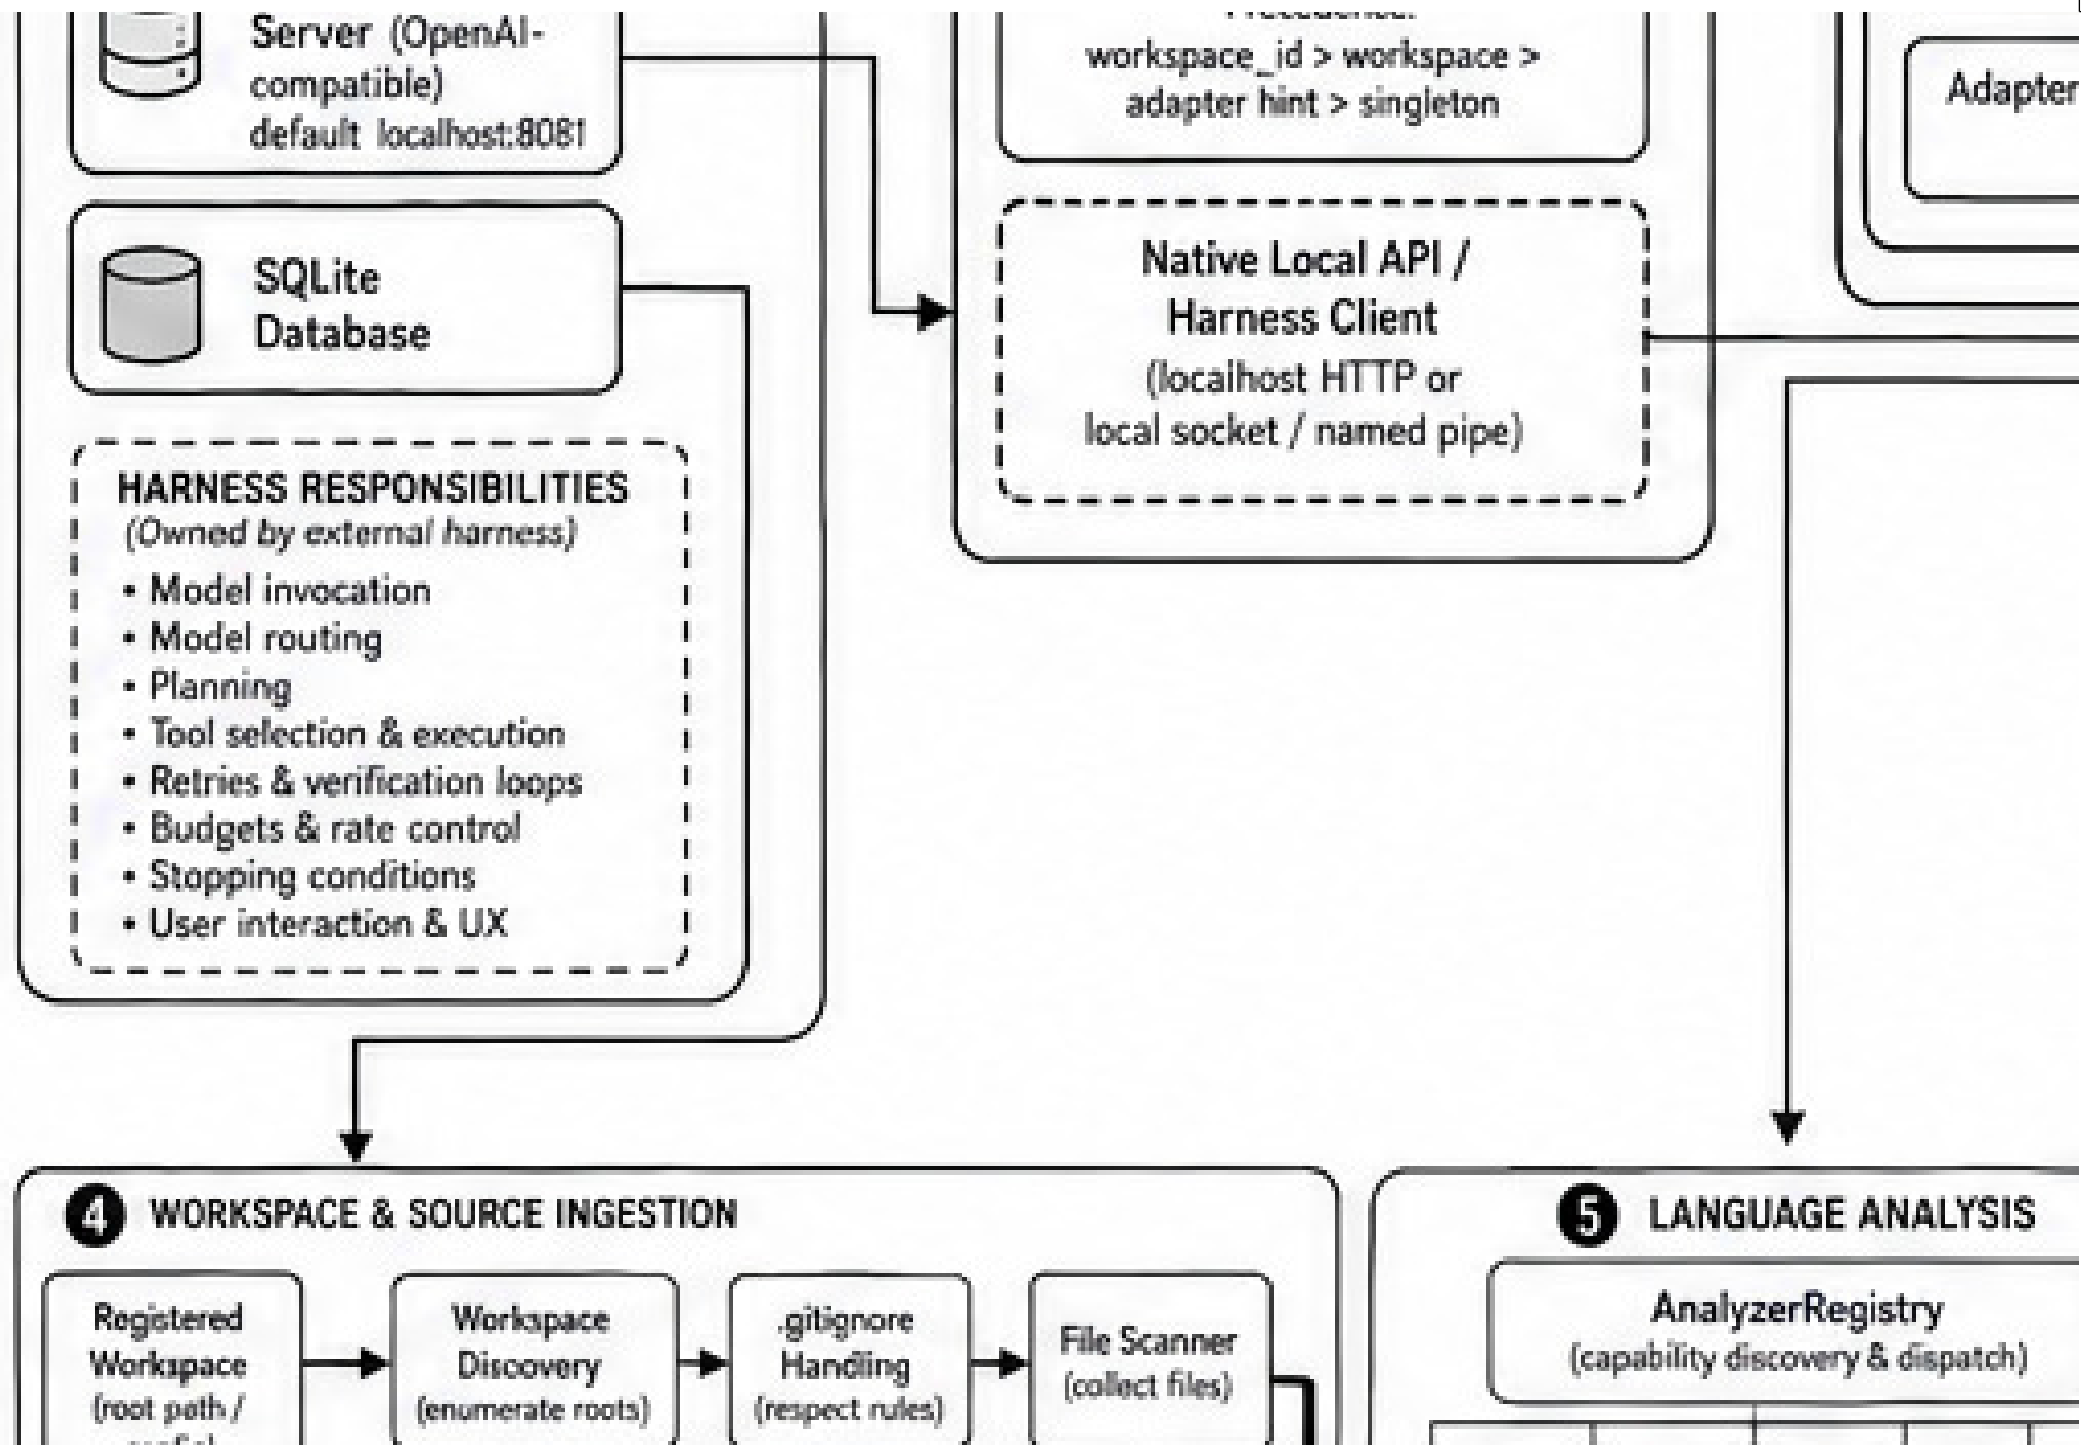


s call services; services call domain/storage; core does not call adapters.
Transport-neutral core.

Struct
(fan-out, central

Edge Types: Contains, l
Extends, UsesType, Construc

8 RETRIEVAL & CONTEXT ORCHESTRATION (Bounded, explainable context)

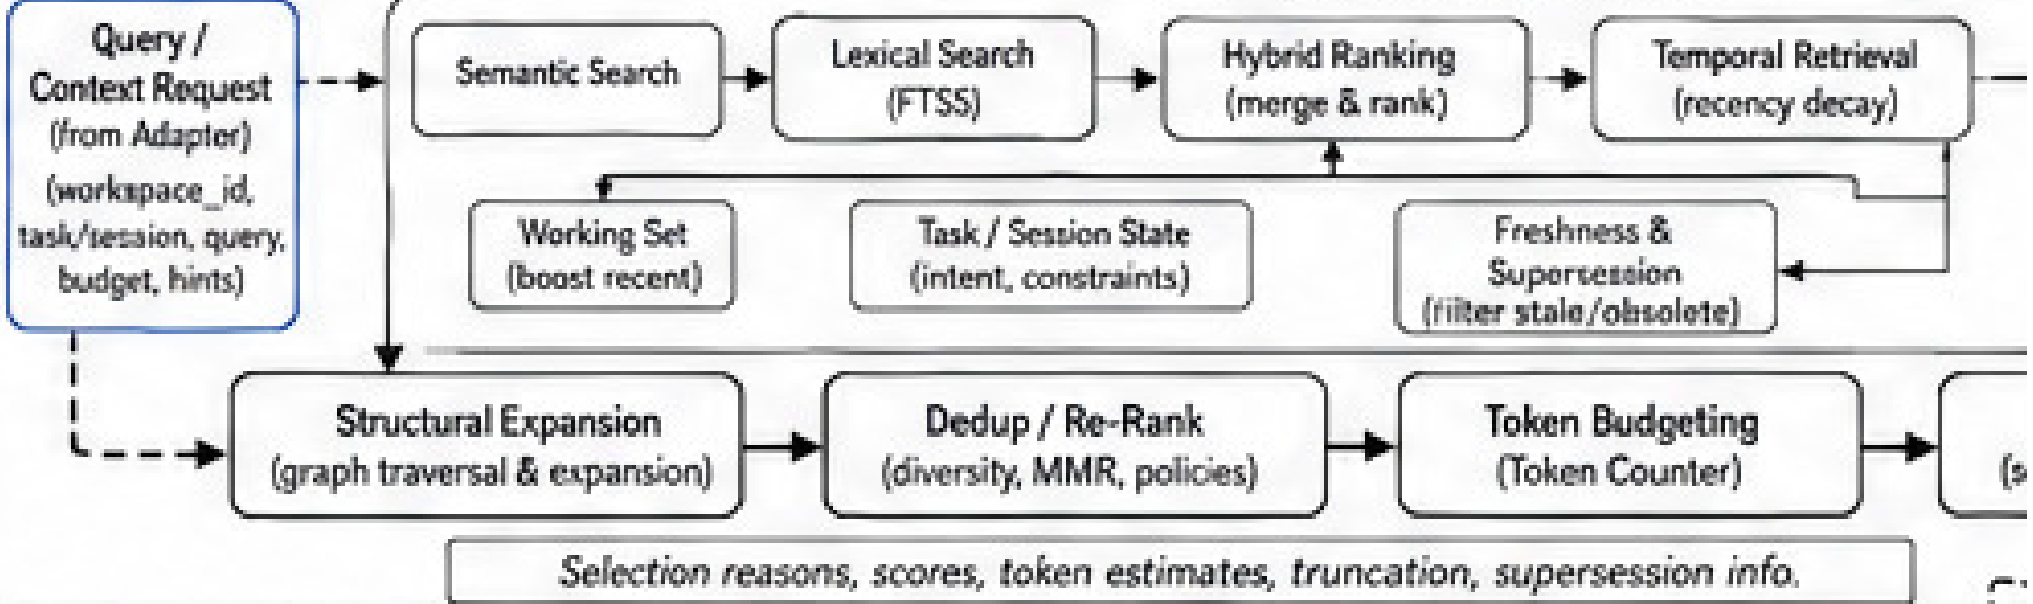


6 INDEXING & EMBEDDING




Capacity-aware Segmentation
(structural + size + token limits)


Local Embedding
Server

7 PERSISTENCE (via Storage / Repository P

SQLite

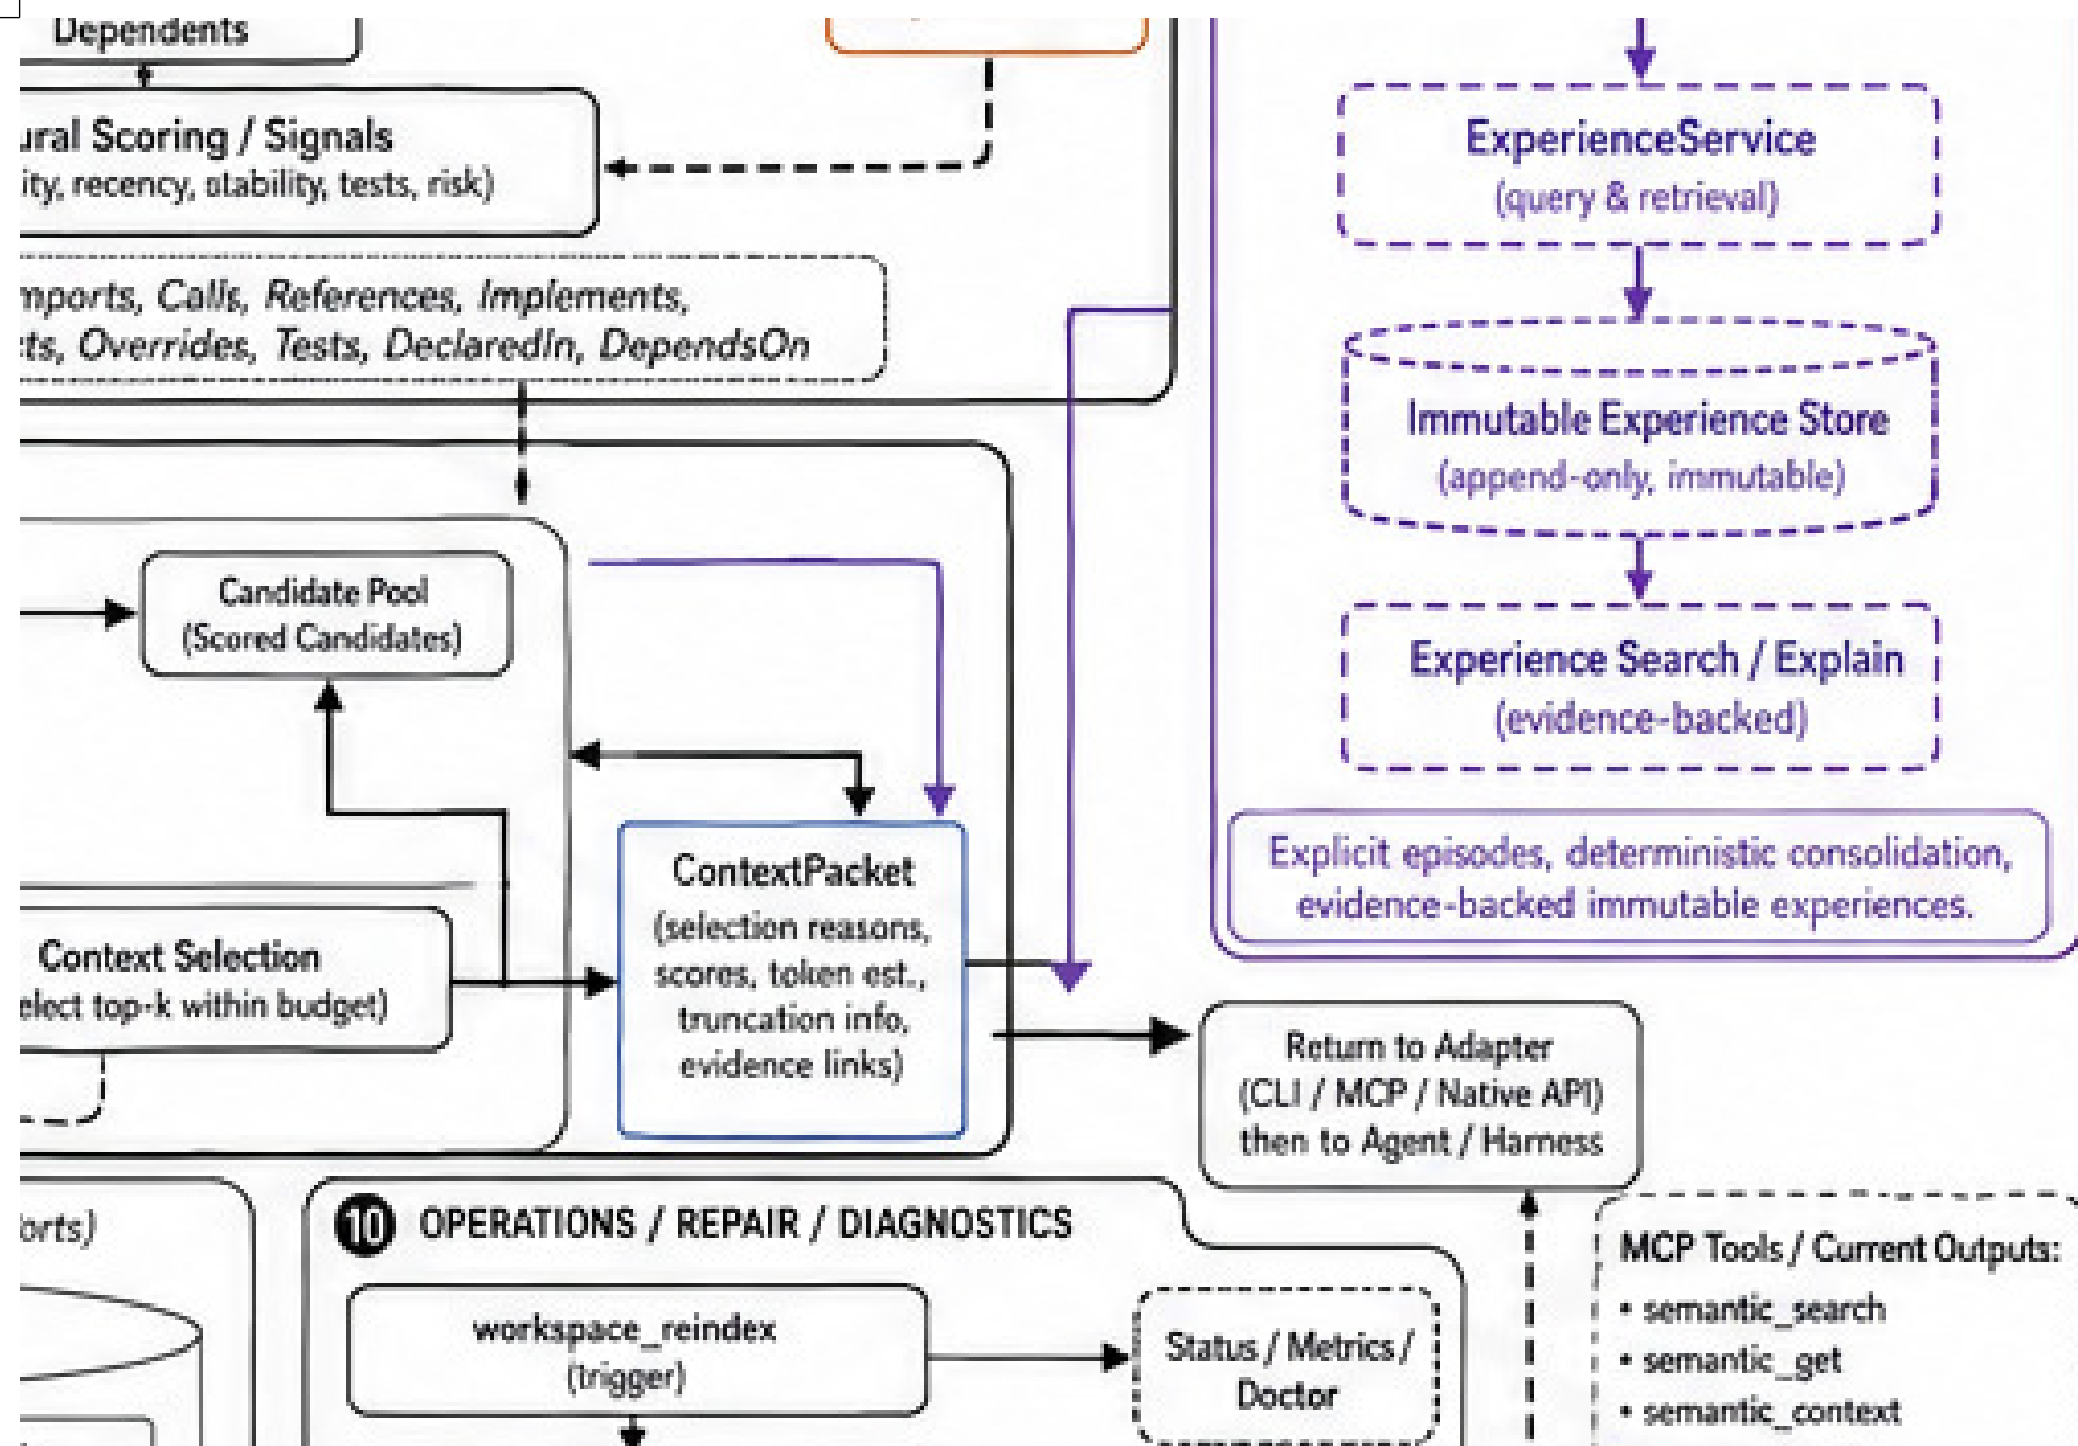

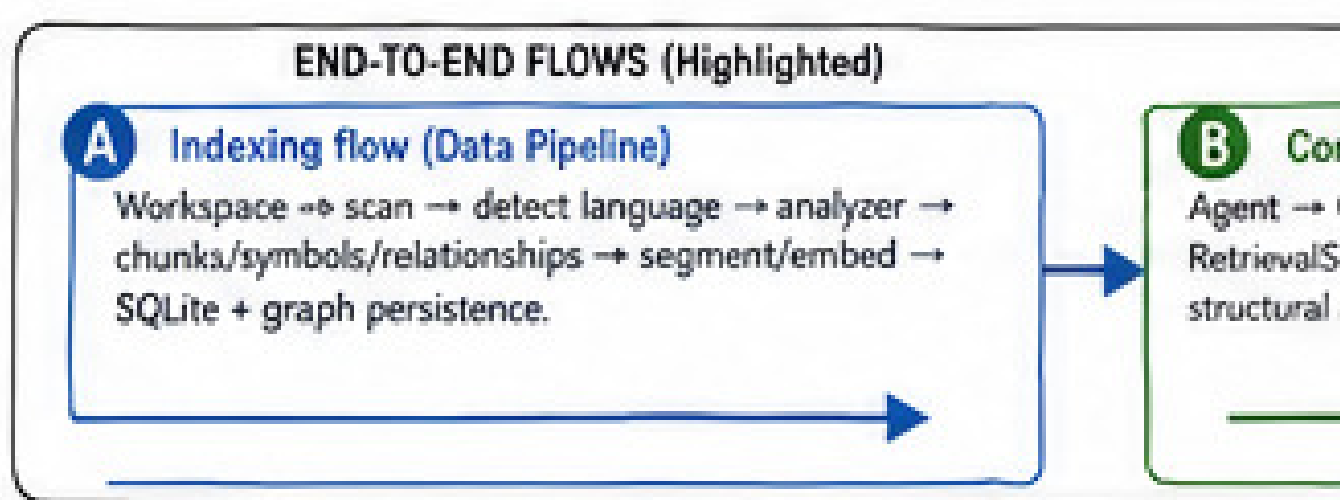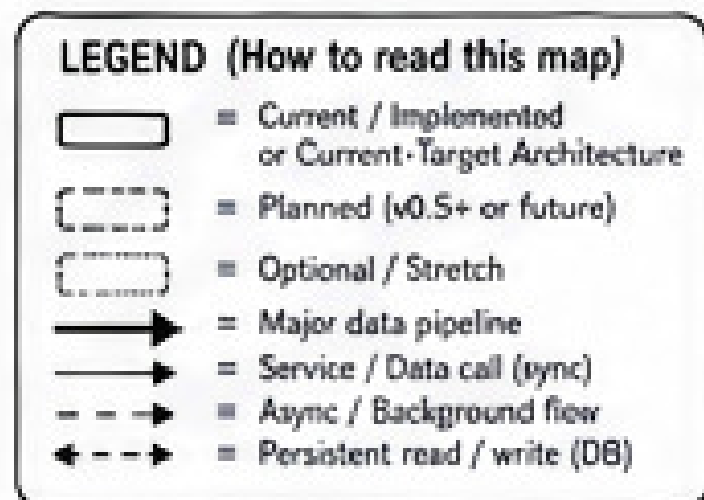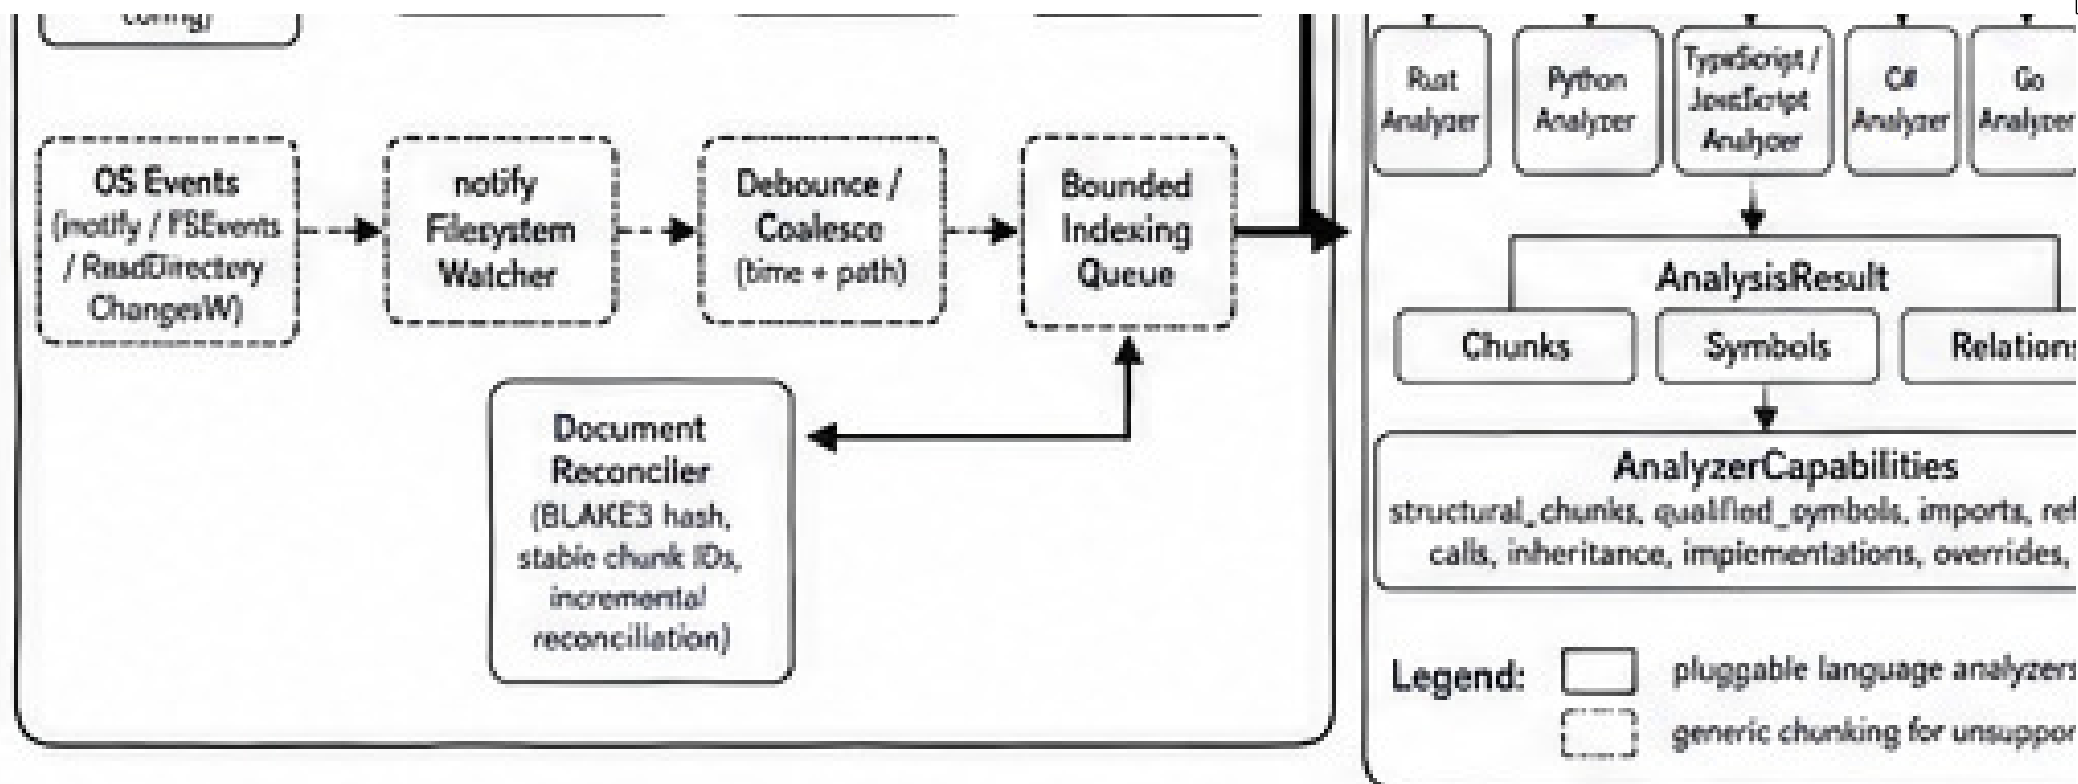

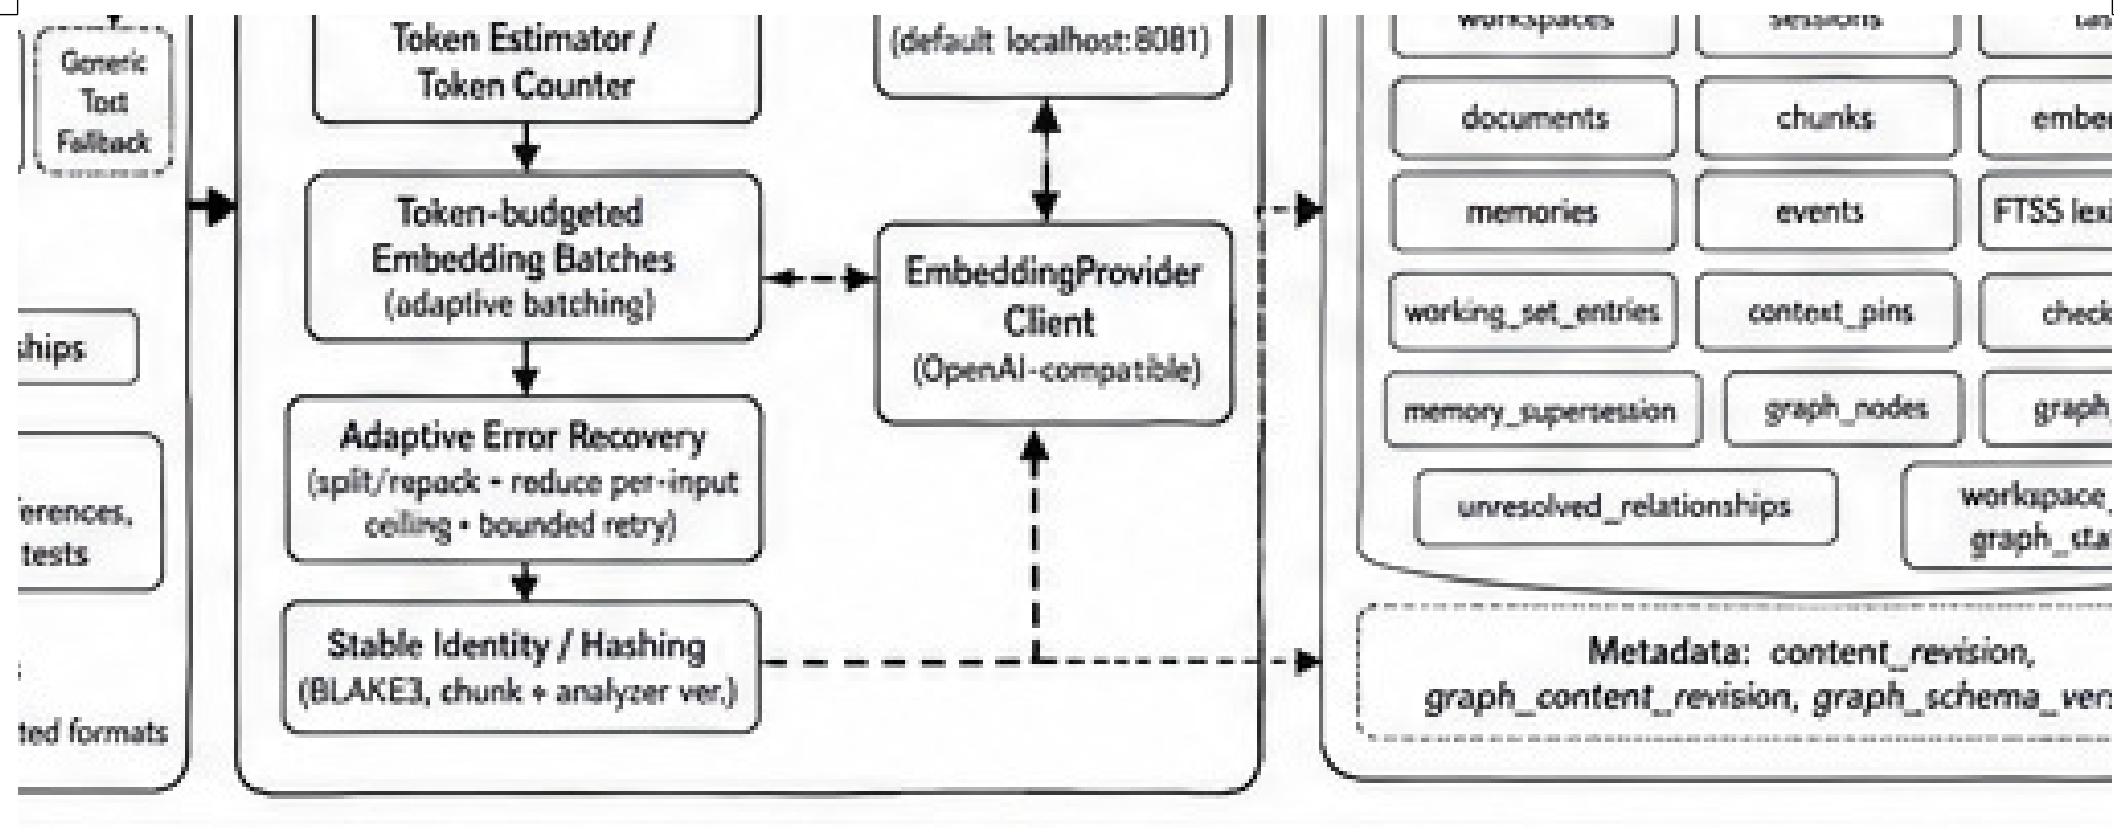

A Text request flow (Runtime)

CLI/MCP/Native API → workspace resolution → service + ContextService → semantic/lexical/retrieval → ContextPacket → Agent.




C Repair flow (Operations)

workspace_reindex → source reconciliation → graph inspect → graph repair / reprojection → coherent current graph.



D Planned experience flow

Append-only events → episode → coherent experience → ExperienceService → Co (consumed as hints / priors).

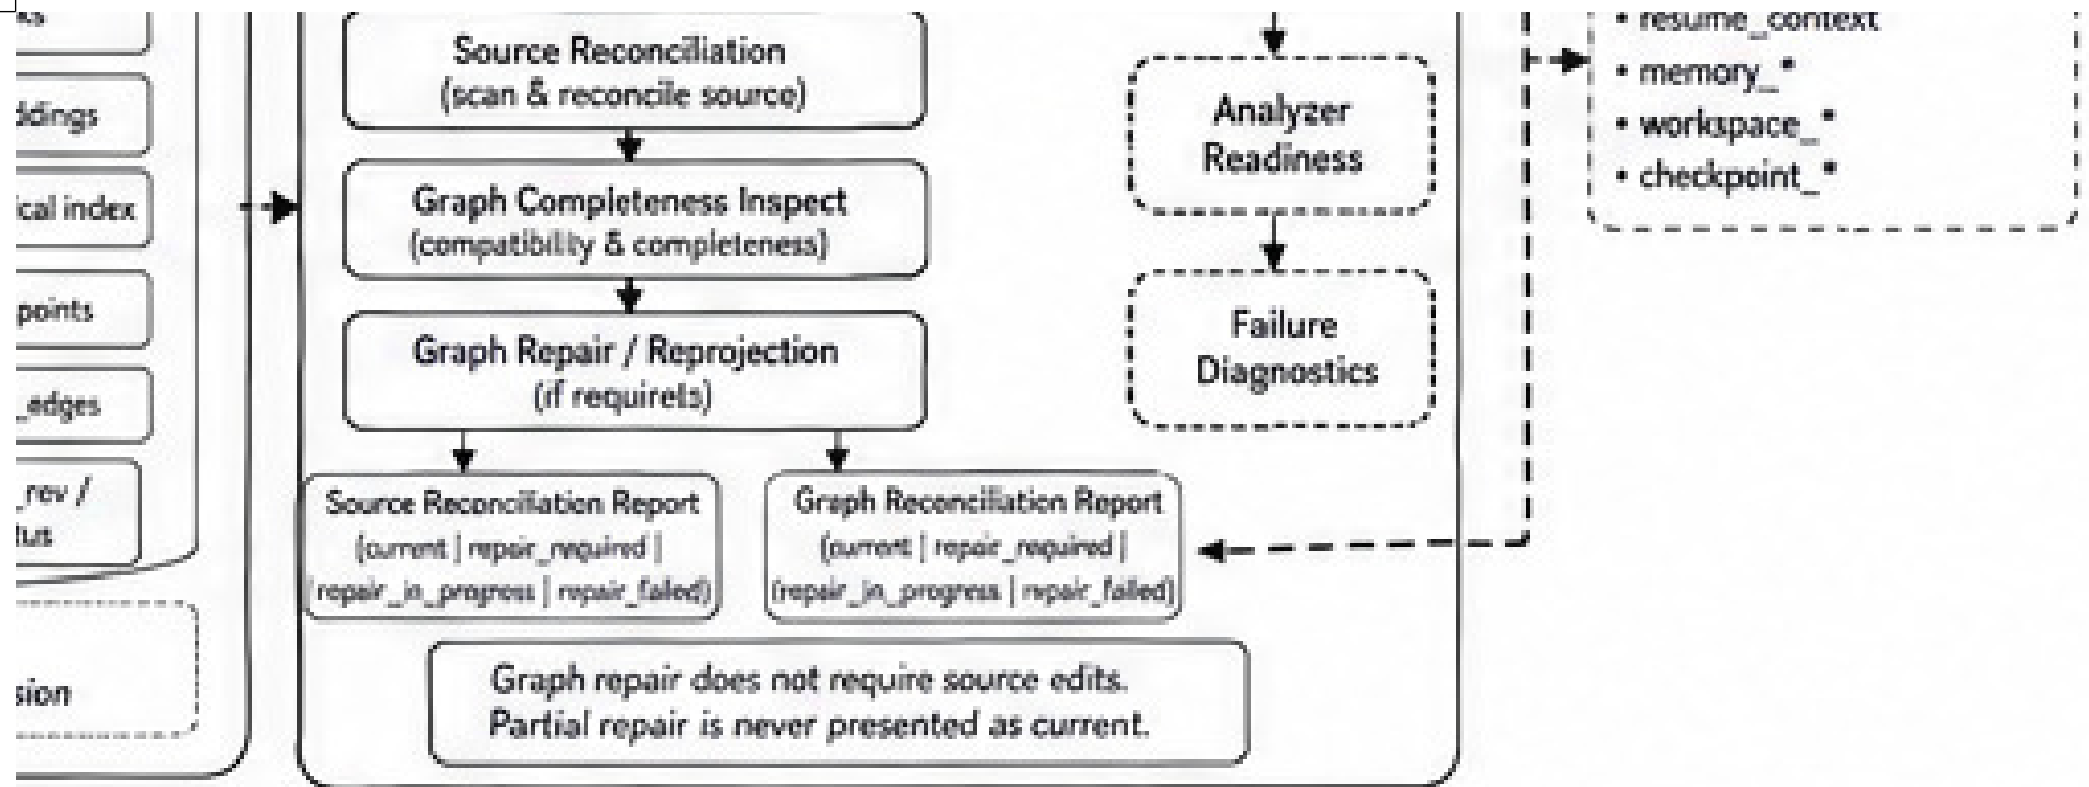

nw (v0.5+)

validate →
ntextService



NOTES

- CortexWeave is a local-first context substrate, not an agent harness.
- External harness owns models, planning, tools, retries, budgets, UX.
- Adapters are thin; core is transport-neutral.
- All context is bounded, explainable, and evidence-linked.
- Graph is derived; source files remain authoritative.

VERSION CONTEXT

Map reflects planning through v0.5
Documents synthesized: README,
v0.1, v0.2, v0.3, v0.4, v0.4.1, v0.5