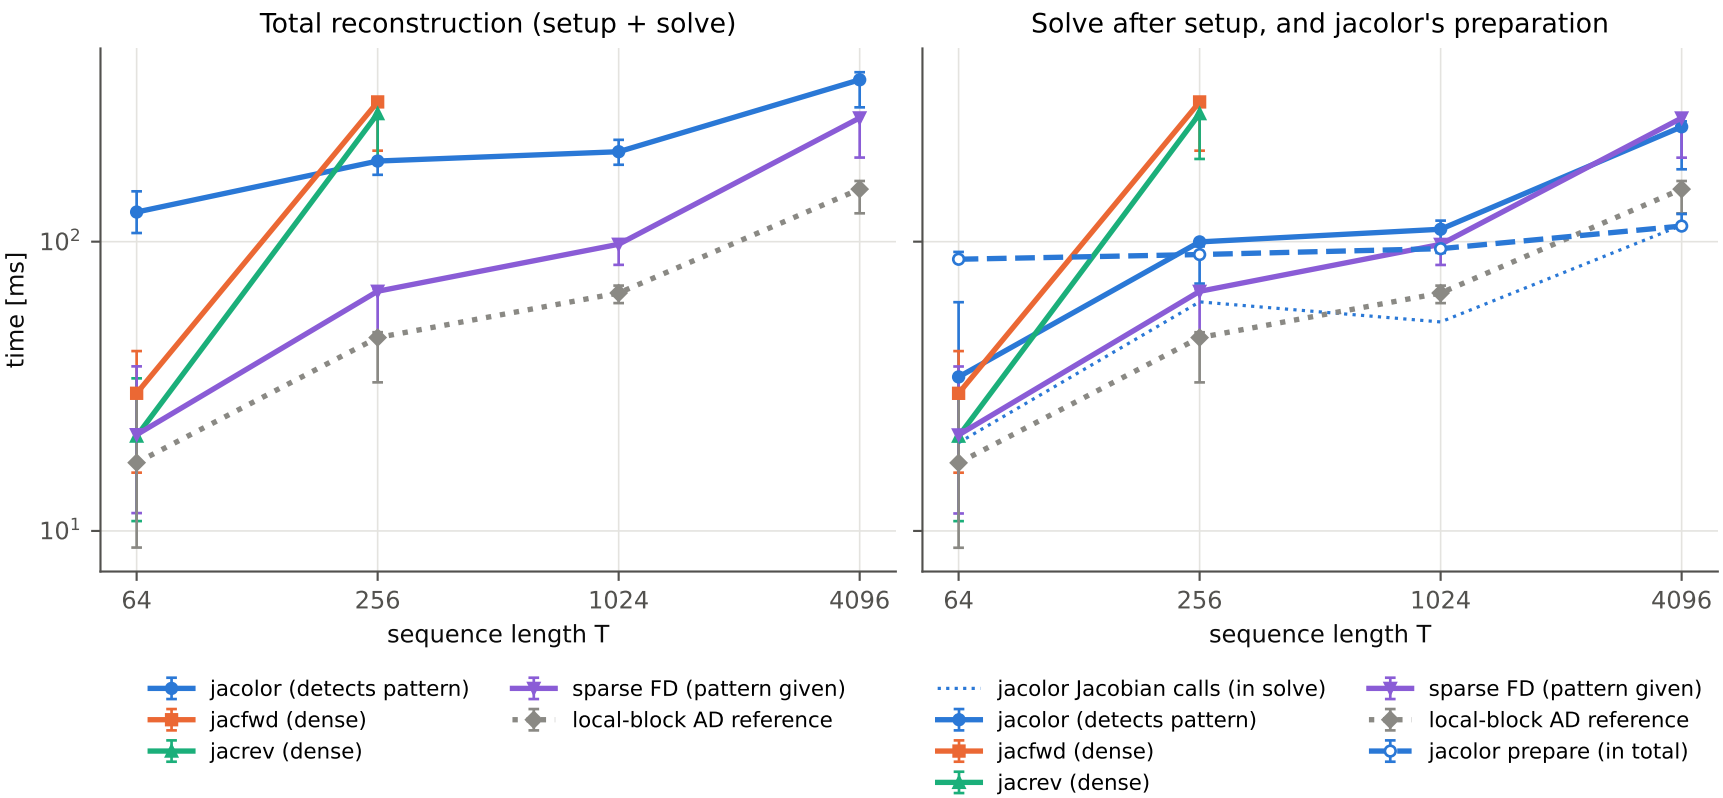

3 held-out trajectories per length, 3 complete reconstructions each. Points are medians over trajectories of per-trajectory medians; bars span the fastest and slowest trajectory.
SciPy least_squares trf/lsmr, float64, CPU, 1 thread, Apple M5, torch 2.13.0, scipy 1.16.3. Dense AD only for T <= 256.