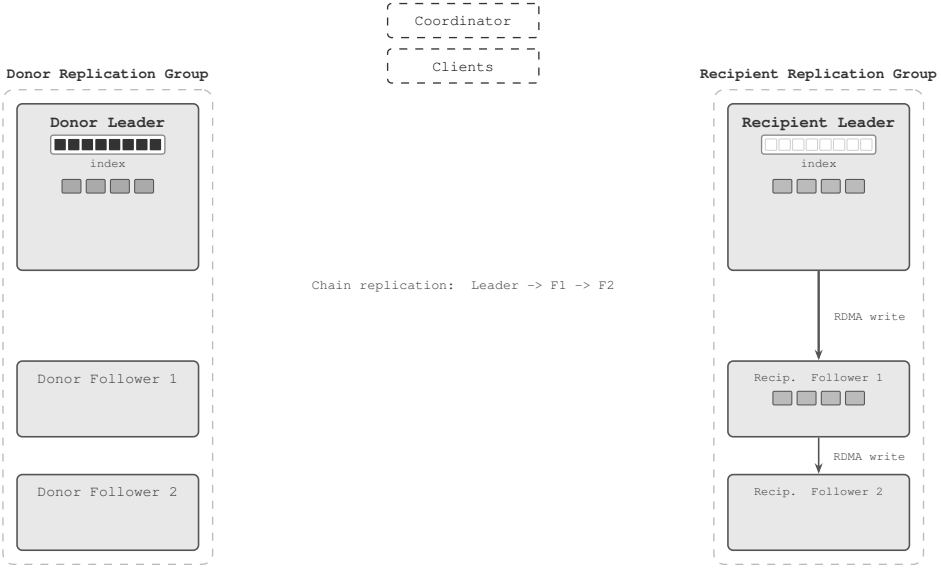
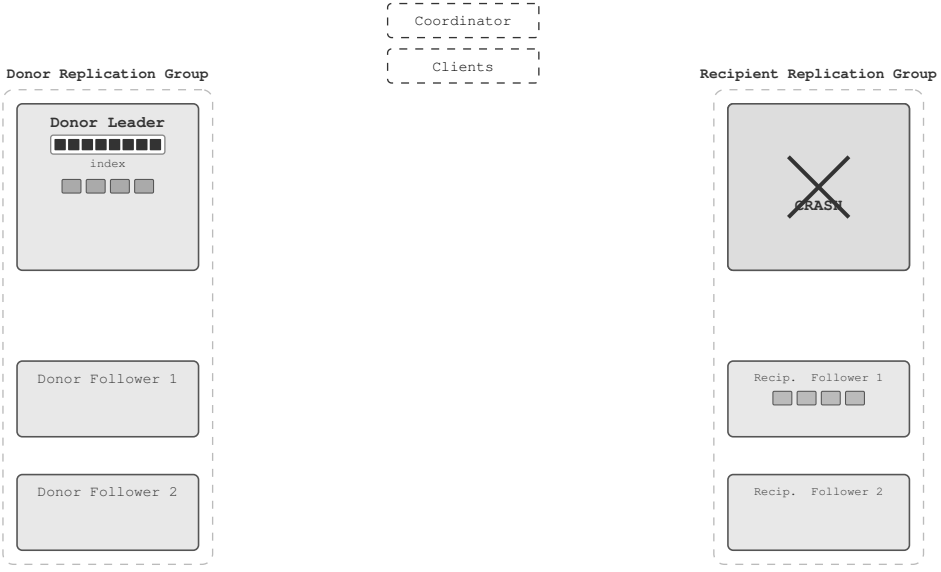
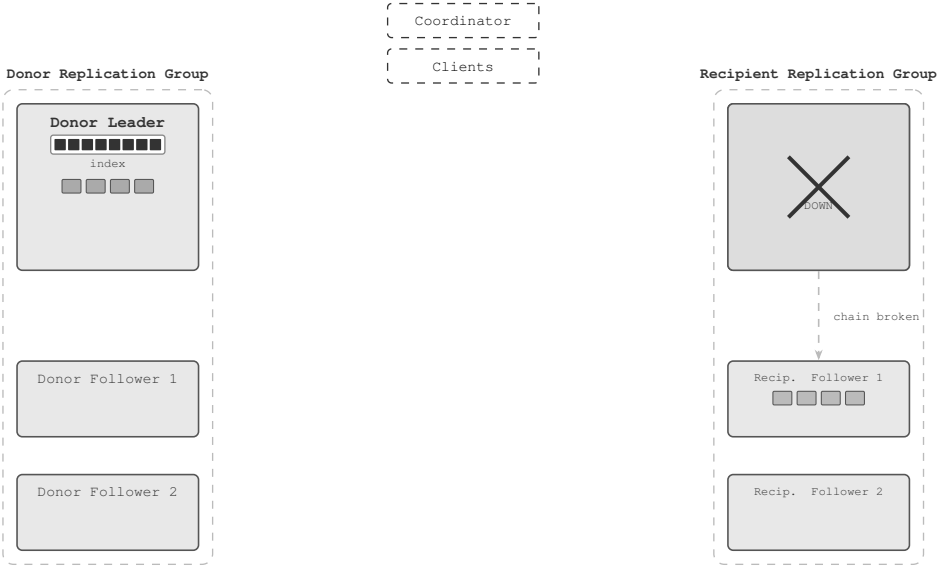
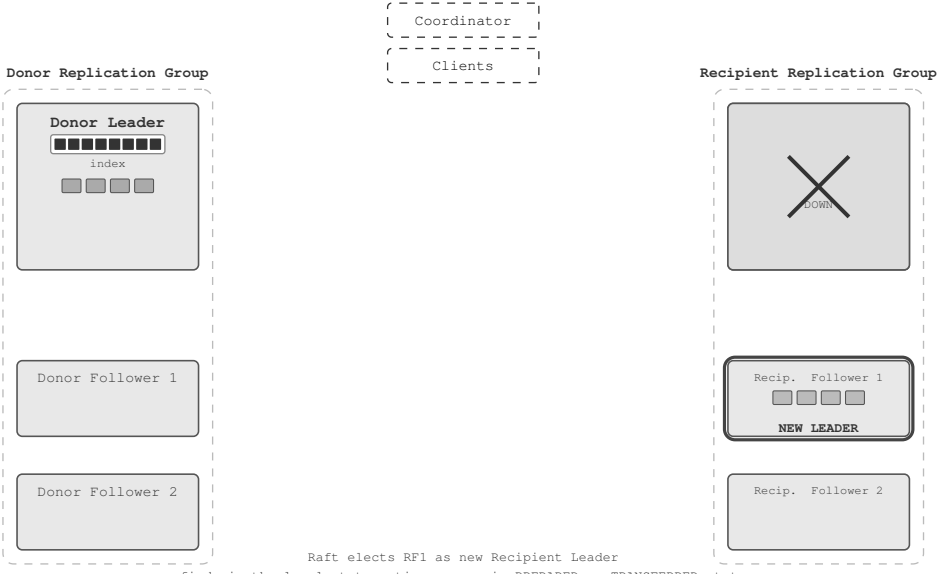
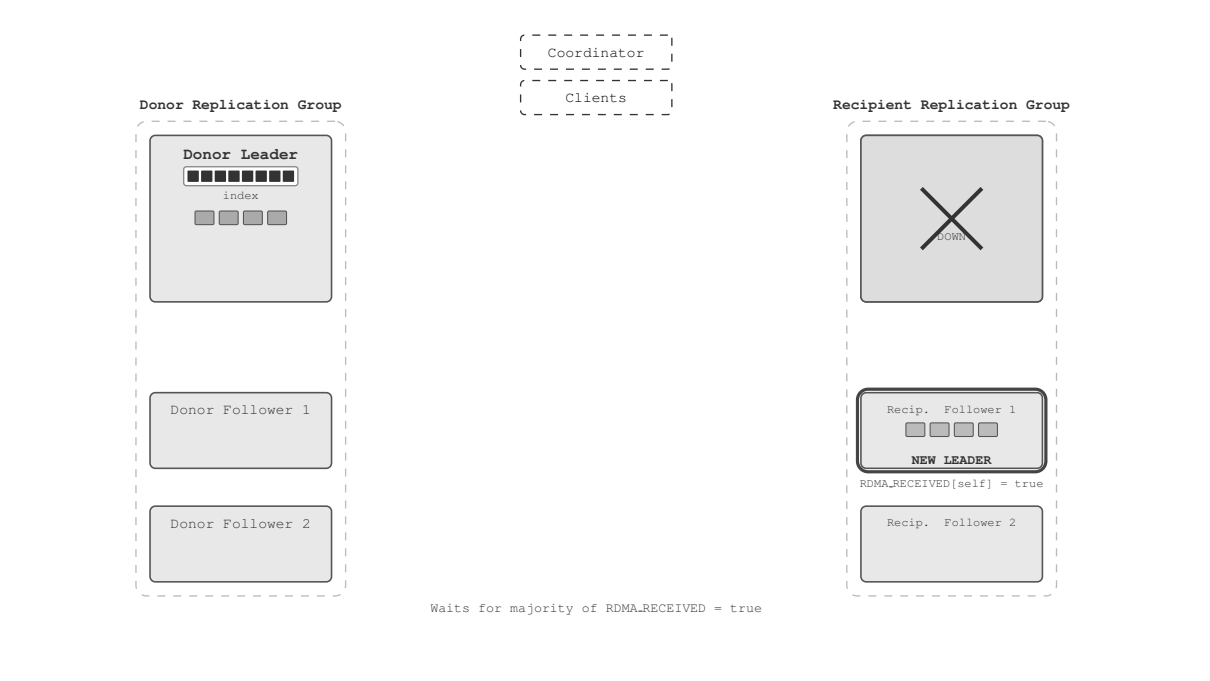
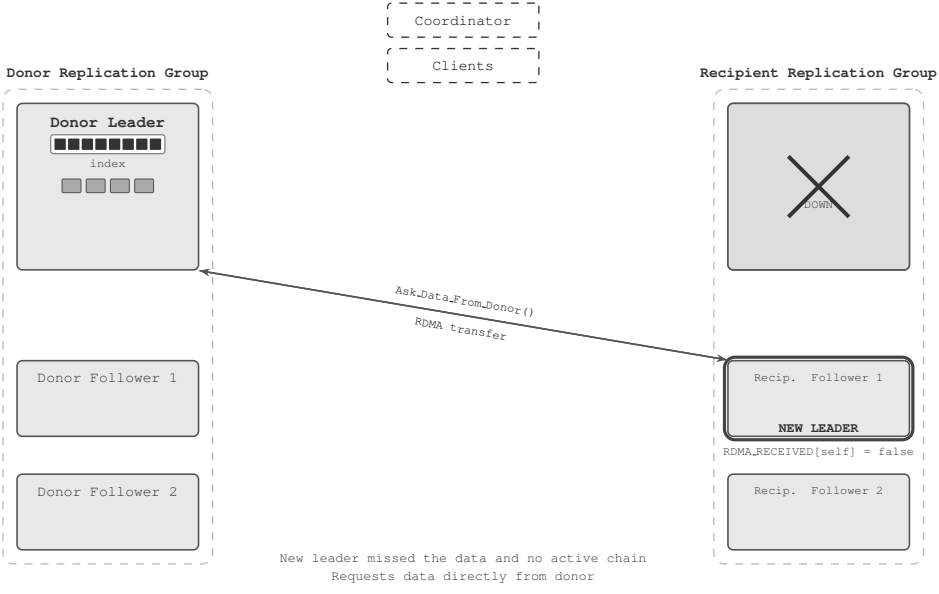

Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Chain replication: Leader -> F1 -> F2
Recipient Replication Group
Recipient Leader
index
RDMA write
Recip. Follower 1
RDMA write
Recip. Follower 2

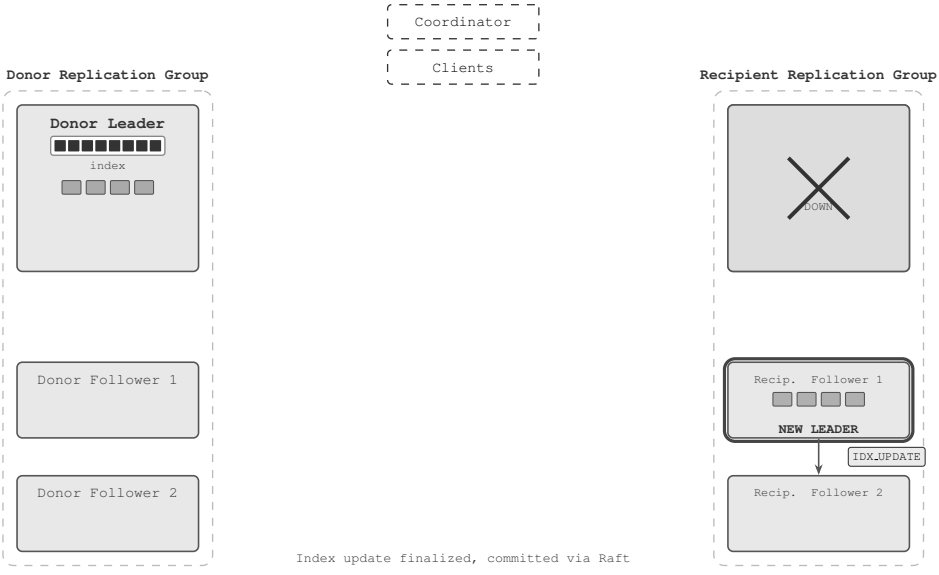

Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Recipient Replication Group
CRASH
Recip. Follower 1
Recip. Follower 2

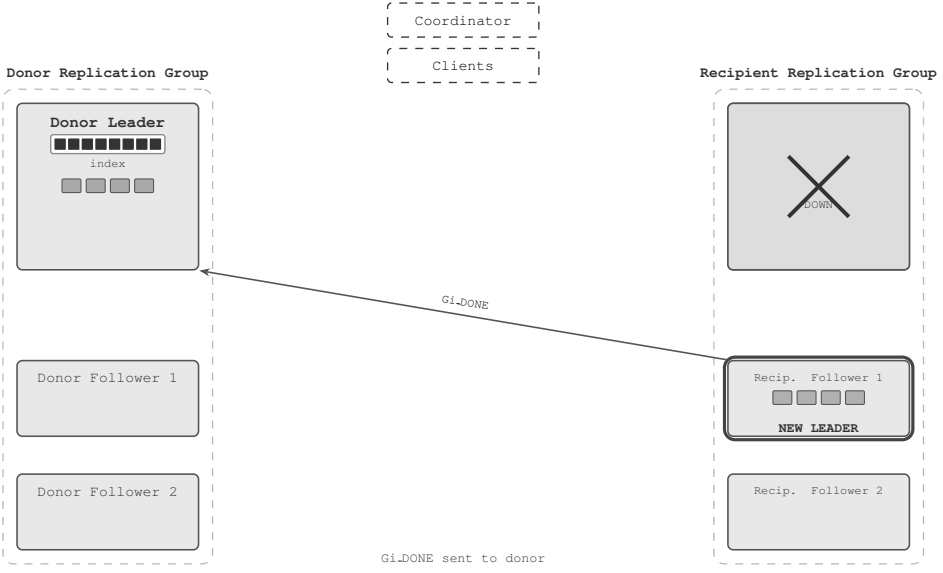

Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Recipient Replication Group
DOWN
chain broken
Recip. Follower 1
Recip. Follower 2


Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Recipient Replication Group
DOWN
Recip. Follower 1
NEW LEADER
Recip. Follower 2
Raft elects RF1 as new Recipient Leader
finds in the local state active groups in PREPARED or TRANSFERRED state


Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Recipient Replication Group
DOWN
Recip. Follower 1
NEW LEADER
RDMA_RECEIVED[self] = true
Recip. Follower 2
Waits for majority of RDMA_RECEIVED = true


Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Recipient Replication Group
DOWN
Ask_Data_From_Donor()
RDMA transfer
Recip. Follower 1
NEW LEADER
RDMA_RECEIVED[self] = false
Recip. Follower 2
New leader missed the data and no active chain
Requests data directly from donor


Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Recipient Replication Group
DOWN
Recip. Follower 1
NEW LEADER
IDX_UPDATE
Recip. Follower 2
Index update finalized, committed via Raft


Coordinator
Clients
Donor Replication Group
Donor Leader
index
Donor Follower 1
Donor Follower 2
Recipient Replication Group
DOWN
Recip. Follower 1
NEW LEADER
Recip. Follower 2
Gi_DONE
Gi_DONE sent to donor