

CIS241

System-Level Programming and Utilities

SSH

Erik Fredericks, frederer@gvsu.edu

Fall 2025

Based on material provided by Erin Carrier, Austin Ferguson, and Katherine Bowers

First, Linux

What is it?

- Often referred to as an operating system (OS)
 - Competing with Mac/Windows
- *Technically*, it is a kernel

Many OSs use the Linux kernel


- Ubuntu (what is on EOS)
- Arch, Kali, Gentoo, Fedora, etc.

Isn't Mac Linux too?

- Nope, Darwin! (Unix-based)



Protection Rings

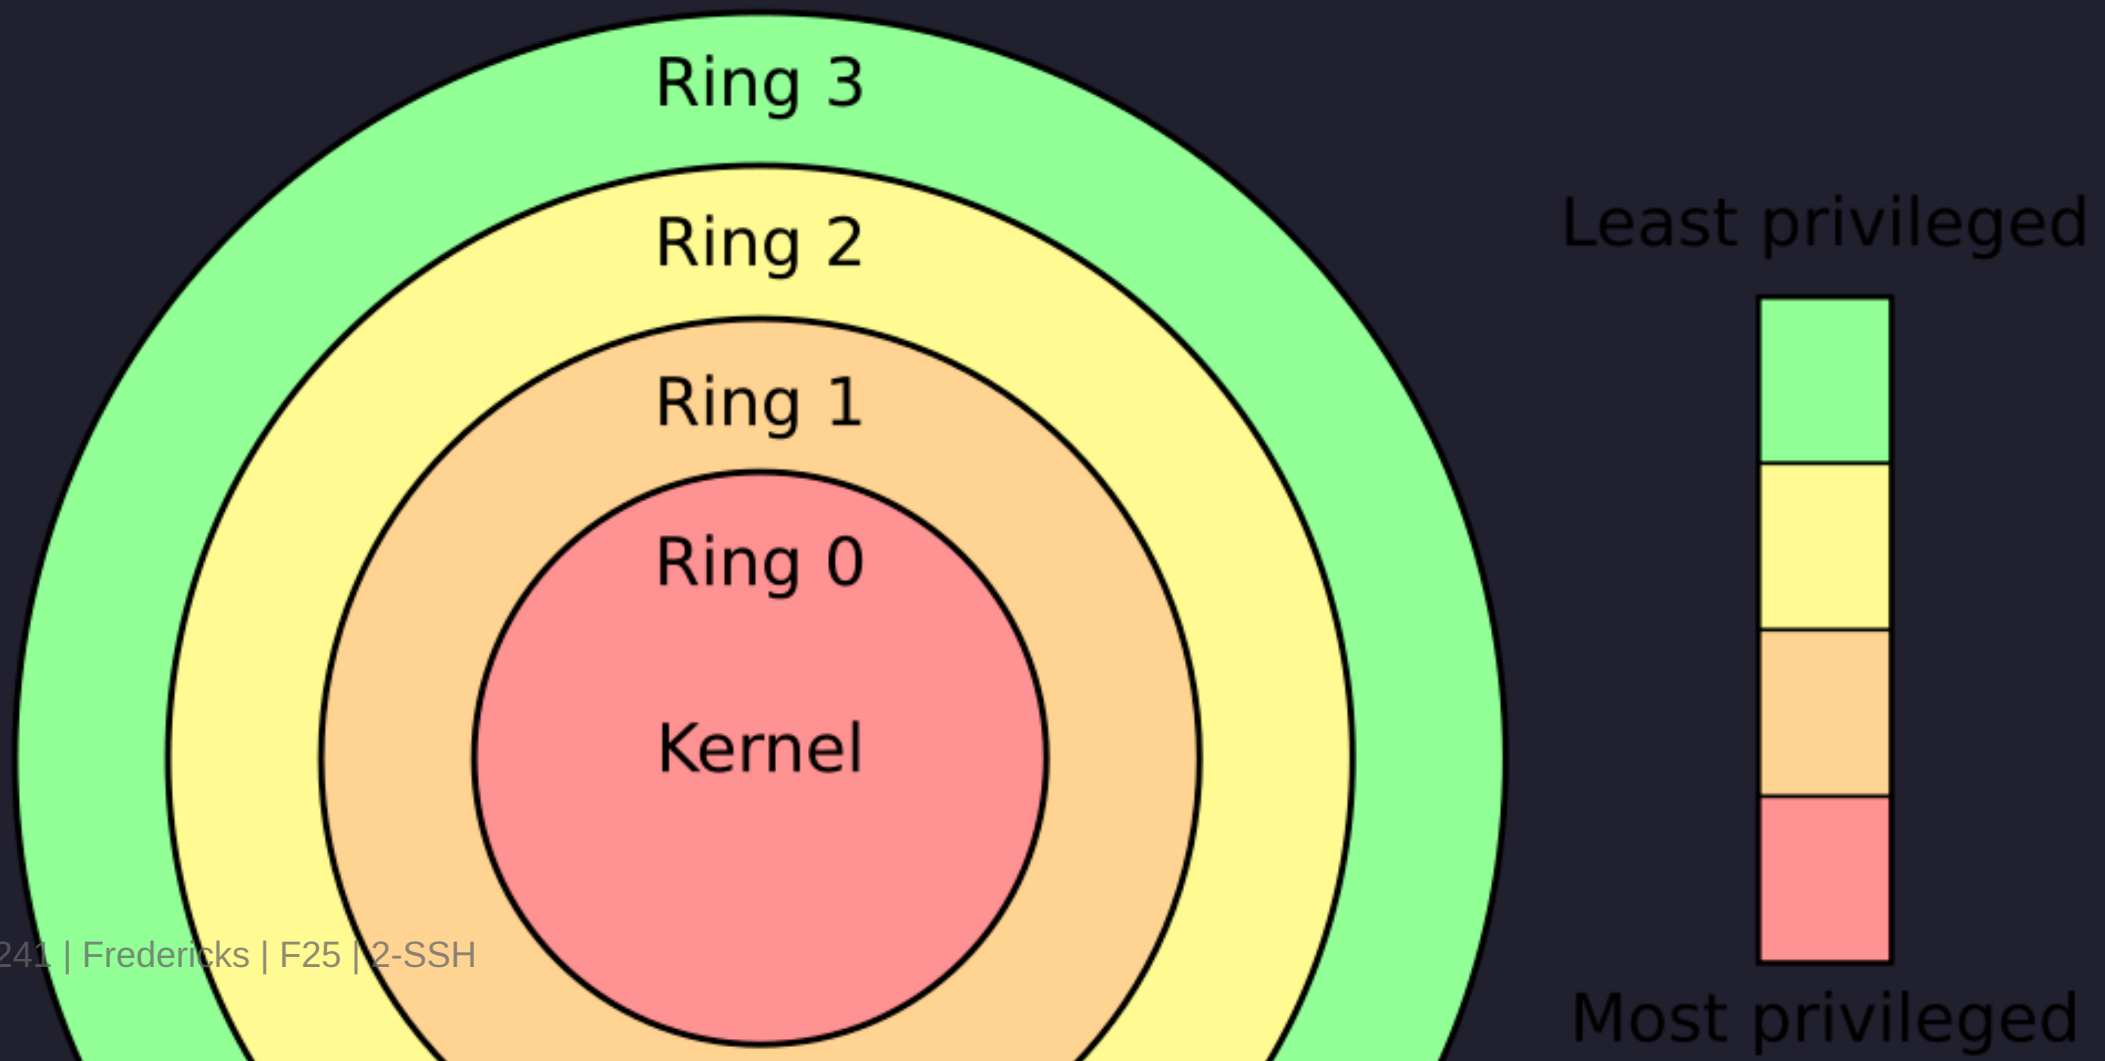

A bit of history

1970s: UNIX source code typically stripped from distribution

- Exorbitant amounts of money to acquire source

Linux first developed by Linus Torvalds to be a copy of UNIX

- Released it to Internet for suggestions on how to improve it
- Kernel only updated by core developers and from suggestions
- Short history of Linux



Unix?

Unix was an earlier operating system

- Linux and other systems are heavily influenced by Unix


We now use “Unix-like” to describe systems

- They follow the same general ideas as Unix
- This means most things (commands, properties) carry over!

"Unix-like" systems:

- Linux
- macOS
- FreeBSD
- Solaris

Unix Timeline

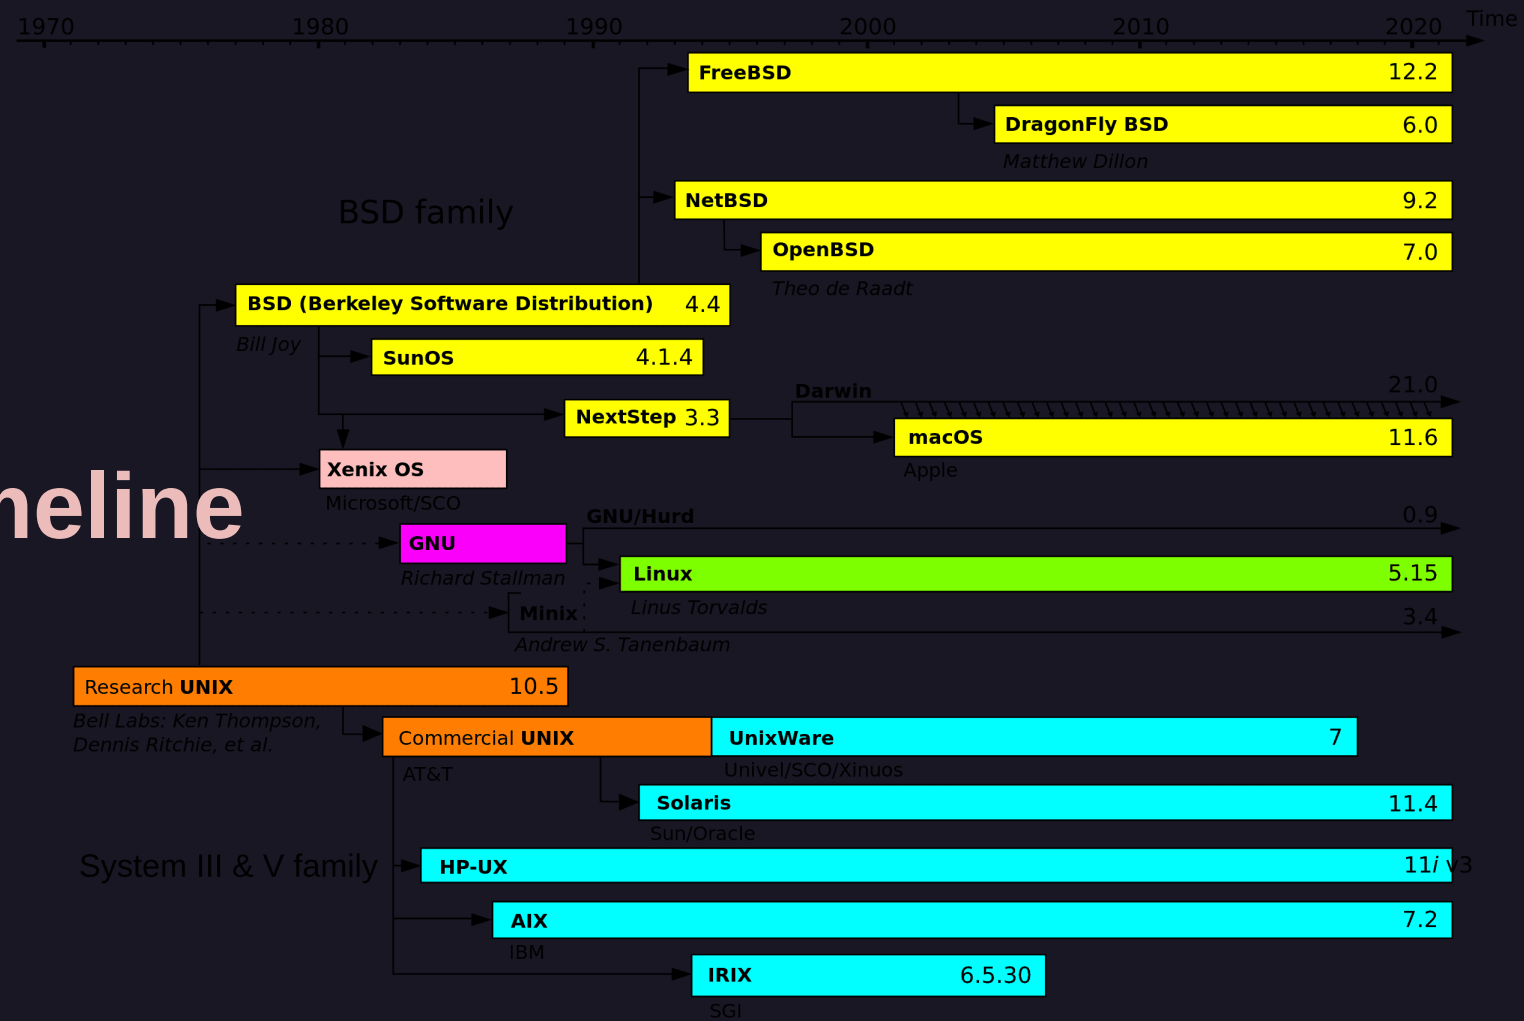

Advantages of a Linux system

- Risk reduction
- Business needs
- Stability and security
- Flexibility
- Customization
- Support
- Cost reduction

Advantages - Risk reduction

- Changes in the market or customer needs may cause companies to change software frequently
- Can be costly and time-consuming
- Support for closed source software may end
- Vendor may go out of business
- Software version may be retired
- OSS products offer the opportunity to maintain and change the source code

Advantages - Business needs

- Common software available for Linux includes:
- Scientific and engineering software
- Software emulators
- Web servers, web browsers, and e-commerce suites
- Desktop productivity software
- Graphics manipulation software
- Database software
- Security software

Advantages - Stability and security

- Customers using a closed source OS must rely on the OS vendor to fix any bugs
 - Waiting for a hot fix may take weeks or months
- The collaborative open source approach to testing and fixing bugs increases the stability of Linux
- Bugs and security loopholes in OSS programs can be identified and fixed quickly
 - Code is freely available and scrutinized by many developers

Advantages - Flexibility

- Partial list of hardware platforms on which Linux can run:
 - Linux can be (and is) customized to work on mobile and embedded devices

Intel x86/x64	M68K
Itanium	PA-RISC
Mainframe (S/390)	SPARC
ARM	Ultra-SPARC
Alpha	PowerPC
MIPS	

Advantage - Customization

Ability to control the inner workings of the OS

- To use Linux as an Internet Web server, recompile the kernel to include only the support needed to be an Internet Web server
 - Results in a much smaller and faster kernel
- Can choose to install only software packages needed to perform required tasks
- Linux supports several programming languages, such as shell and PERL scripts to customize or automate tasks

Advantage - Support

Linux documentation can be easily found on the Internet

- Frequently asked questions (FAQs)
- HOWTO documents

HOWTO documents are maintained by their authors but are centrally collected by the Linux Documentation Project (LDP)

Linux newsgroups

Linux User Groups (LUGs): Open forum of Linux users who discuss and assist each other in using and modifying the Linux OS

Advantage - Cost reduction

Linux is less expensive than other OSs

- There is no cost associated with acquiring the software
- A wealth of OSS can run on a variety of different hardware platforms running Linux

The largest costs associated with Linux:

- Costs associated with hiring people to maintain the Linux system
- Potential support from vendors (i.e., Red Hat)

Total cost of ownership (TCO): overall cost of using a particular OS

Disadvantages of a Linux system


No standard edition of Linux

Support means that you'll be searching for very specific fixes

- Browsing SuperUser/ServerFault, forums, etc.

Not as easy to use as closed-source (Windows)

Program support

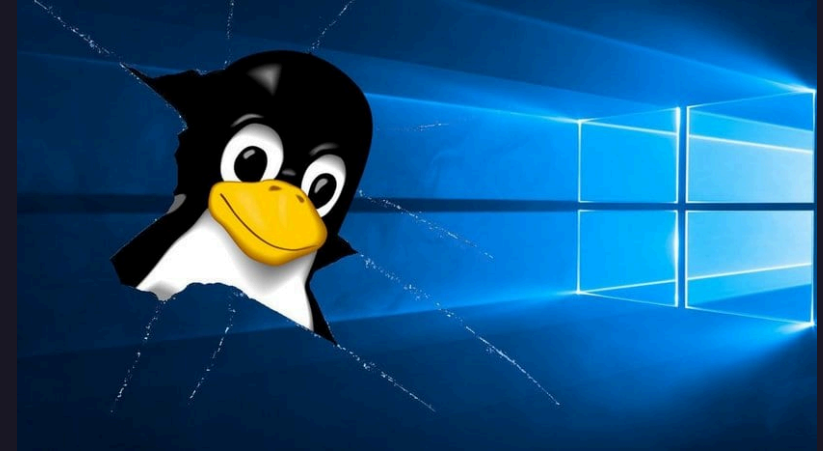

Common uses of Linux

- Internet servers
- File/print server
- Application server
- Cloud servers
- Supercomputing
- Workstations (Office, personal, scientific, etc.)
- Mobile



Windows

Windows (today), is not Unix-like

- Can you do your homework on a Windows machine?
- Not by default

However, we have WSL! (🐧_🐧🌸)

- Windows Subsystem for Linux
- If you are on Windows, you must install WSL
<https://learn.microsoft.com/en-us/windows/wsl/install>
 - Be very happy about this - I dreamed about just having the ability to SSH from the terminal when in industry

Terminal

A screenshot of a Linux terminal window. The title bar at the top shows a window icon and the text "erik@worktop: ~". The terminal content is split into two main sections. On the left, there is a large ASCII art graphic of a mountain range, constructed from various symbols including slashes, asterisks, and the number 7. On the right, the output of the "cat /etc/os-release" command is displayed, showing system details such as OS version (Pop!_OS 22.04 LTS), host name (Latitude 7400), kernel version (Linux 6.12.10), uptime (2 days, 34 mins), and hardware specifications (CPU: Intel(R) Core(TM) i7-8665U, GPU: Intel UHD Graphics 620). At the bottom left, the prompt "erik@worktop:~\$" is visible next to a cursor. At the bottom right, there is a color calibration bar with ten colored squares: black, white, red, green, blue, yellow, cyan, magenta, and two shades of gray.

Shells (local)

See the little dollar sign?

Shell!

What shell are we

```
echo $0
```


```
erik@worktop: ~  
  
          ///////////////  
          ///////////////////  
          //////////*767/////////  
          //////////76767676*/////////  
          //////////76767//7676767/////////  
          //////////767676//*76767/////////  
          //////////767676//76767.//7676*/////////  
          //////////767676//76767//767676/////////  
          //////////76767676767//76767/////////  
          //////////76767676//7676/////////  
          //////////,7676,,//767/////////  
          //////////*7676////////76/////////  
          //////////7676////////767/////////  
          //////////7676//767/////////  
          //////////'/////////  
          //////////.7676767676767676767,/////////  
          //////////7676767676767676767/////////  
          ///////////////////////////  
          ///////////////////////////  
          ///////////////////////////  
  
erik@worktop  
-----  
OS: Pop!_OS 22.04 LTS x86_64  
Host: Latitude 7400  
Kernel: Linux 6.12.10-76061203-generc  
Uptime: 2 days, 34 mins  
Packages: 4267 (dpkg), 7 (flatpak-us)  
Shell: bash 5.1.16  
Display (AU0243D): 1920x1080 @ 60 Hz]  
DE: GNOME 42.9  
WM: Mutter (X11)  
WM Theme: Pop-dark  
Theme: Pop-dark [GTK2/3/4]  
Icons: Pop [GTK2/3/4]  
Font: Fira Sans (10pt, SemiLight) [G]  
Cursor: Pop (24px)  
Terminal: GNOME Terminal 3.44.0  
Terminal Font: Fira Mono (12pt)  
CPU: Intel(R) Core(TM) i7-8665U (8) z  
GPU: Intel UHD Graphics 620 @ 1.15 G]  
Memory: 15.70 GiB / 31.16 GiB (50%)  
Swap: 0 B / 20.00 GiB (0%)  
Disk (/): 421.50 GiB / 928.94 GiB (44%)  
Disk (/recovery): 2.84 GiB / 3.99 GiB  
Local IP (wlo1): 192.168.1.46/24  
Battery (DELL 5VC2M85): 100% [AC Con]  
Locale: en_US.UTF-8  
  
erik@worktop:~$
```

Shells (local)

Where is the shell here?

- Ring 3, typically!

How do we run in other rings?

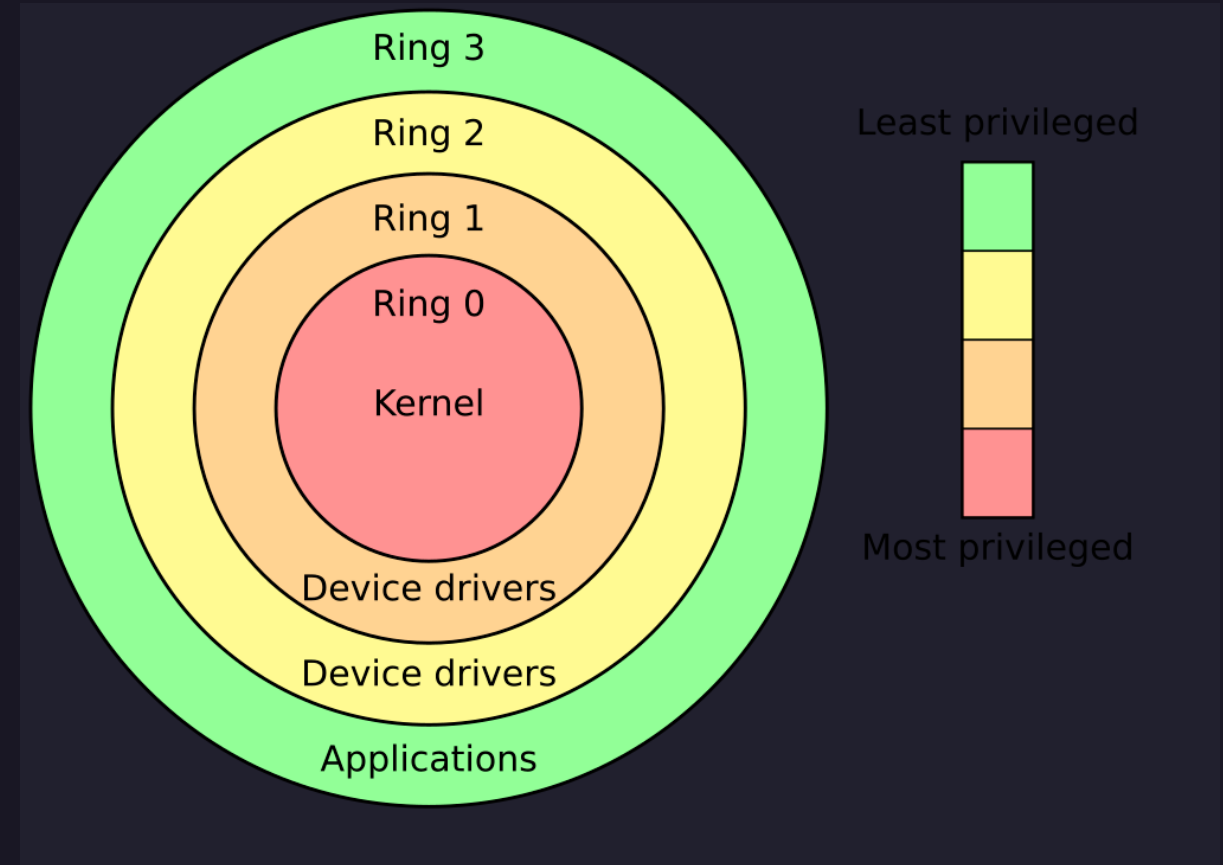

You can use `eos01.cis.gvsu.edu` - `eos30.cis.gvsu.edu` !

Shells (remote)

Note - if you're off-campus you'll need a VPN!

Or, connecting to another machine

- Or or, **doing your homework** ٠_٠

`ssh` --> Secure Shell

Usage: `ssh username@address`

For example, connecting to EOS:

```
ssh username@eos1.cis.gvsu.edu
```

Lab fun

DO NOT

SHUT DOWN

THESE MACHINES



Last - the web interface

<https://computing.gvsu.edu>

This will provide a web-based point of access for you!

- **Allows for desktop or terminal**
- **Note that the user experience is not great!**
 - Can't copy/paste files from your computer to the desktop
 - Random connection breaks common
- **However - don't need a VPN!**

Ok now really the last

To exit an SSH session (or to kill your terminal)

```
exit
```