Assignment 3: Does gaze reveal what code is read, without gaze position?

Eivind Systad Geiran and Trym Andreas Johnsen - IT3212 - EMIP eye-tracking dataset

Code and every result file: https://github.com/egeiran/Data-Preprocessing-EMIP, folder `assignment3/` (`src/` for code, `results/` for evidence, `WORKLOG.md` for the full decision log).

1. Problem statement

Real-world problem. Eye trackers are moving into consumer devices such as VR/AR headsets, webcam-based tracking in browsers and remote studies that share raw recordings. Gaze data is sensitive because it shows what a person looks at and reads. Researchers have proposed that applications receive only *derived* measures, such as fixations and dwell times within areas of interest, instead of raw gaze samples, which can identify the user (David-John et al., 2021). Some platforms do not share the user's eye input with apps at all (Apple, 2026). We test a simple, position-free version of this idea: keep derived signals such as pupil size, blinks, eye speed and gaze spread, but withhold absolute screen position. Is that enough to hide what someone is reading?

Machine-learning problem. Binary classification of two-second gaze windows: is a previously unseen person reading the `vehicle` or the `rectangle` program? Every model is trained twice:

- **A, with absolute position:** the window features include the mean gaze position on screen.
- **B, without absolute position:** the same features with the mean position removed.

The difference between A and B compares predictive performance with and without absolute position. Each group is tuned separately, so this is a pipeline comparison, not a measure of how much information remains or evidence of causation. Evaluation is on people the model has never seen, using balanced accuracy averaged with equal weight per person, so that people with long recordings do not dominate.

Why this dataset fits. The EMIP recordings come from a code-comprehension study. Each participant read both short programs, one after the other, and answered a multiple-choice question after each (20 started with `rectangle`, 13 with `vehicle`). Most retained people contribute both classes, allowing comparisons of the two programs *within* a person, and grouped validation by person is possible in every fold. Labels such as expertise or answer correctness would give one label per person, about 30 examples in total, and they are not part of the recordings we have.

Scope. This is a closed-set study with two known texts and 30 usable people. We assume a recipient has labelled reference recordings for these two screens and receives prepared gaze

windows, without the current screen's name or screenshot. This is offline recognition of known screens, not code reconstruction or comprehension. A weak result without position would not prove that content cannot leak through other signals, larger models or more data. The comparison of A and B was planned before any results existed; using it as the main question and adding the privacy motivation was decided after the first development results (recorded in `WORKLOG.md`).

2. Preprocessing

Reused from Assignment 1. Invalid samples (tracker validity, off-screen or exactly-zero coordinates) are removed. Holes up to 150 ms are linearly interpolated, which covers blinks, and longer holes stay as gaps. Samples faster than 1,000 deg/s are removed as physically impossible. A (person, program) pair is kept only with at least 20 s of usable data. The cleaned 250 Hz samples are cached once, and Assignment 3 never rewrites them.

Windows. Each code screen is cut into non-overlapping two-second windows, starting at the raw screen message. A window never crosses a screen change, and a partial last window is dropped. Two quality rules are applied:

Rule	Requirement	Reason
V1	>=90% of the 2 s covered by samples, no hole over 150 ms	a summary needs most of its window
V2	additionally >=80% directly measured, not interpolated	interpolated blinks are straight lines, not gaze

The 80% threshold was fixed from the development quality distribution before any V2 model was trained. It removes 31 of 992 development windows and no person.

Split. The seven test people from Assignment 1's participant split are locked: they were not used for model choices and were evaluated in one planned final run (section 8). All seven have test predictions (369 windows), but only six have both classes after quality filtering. Pid 18 has only vehicle windows and is reported separately by vehicle recall. The 23 development people (961 windows, 546 vehicle and 415 rectangle) are divided into three outer folds by person. Inside each outer training set, three inner folds by person choose the hyperparameters, so an outer validation person never influences a model choice.

Reproducibility. The committed V2 CSV evidence and predictions were reproduced byte-for-byte on macOS, where the later stages were run. Later stages record content fingerprints because Parquet bytes differ between machines. A Linux rebuild of V3 does not match the macOS fingerprint, which hashes every float to the last digit. With the Linux features, tree, kNN, SVM and bagged kNN give identical development predictions; AdaBoost moves slightly (A3/B3 .656/.546 instead of .659/.561; `WORKLOG.md`).

3. Feature extraction

Window summaries (13 features). For each window:

- mean and SD of gaze x and y

- mean and SD of left and right pupil diameter
- median and 90th-percentile gaze speed, from consecutive samples at most 20 ms apart
- the mean of Assignment 1's trailing blink-rate and gap-fraction signals
- the fraction of interpolated samples

These describe where the gaze is, how spread out it is, how fast it moves and how much signal is missing. They are cheap to compute and easy to interpret. Mean x and y are the only absolute-position features; spread, speed and pupil size do not move if the whole window is shifted on screen.

Fixation and saccade events (8 features). The summaries above say nothing about the structure of reading, so a velocity-threshold detector (I-VT; Salvucci and Goldberg, 2000) was added:

Setting	Value	Justification
speed	centred over three samples	less noise than consecutive-sample speed at 250 Hz
threshold	30 deg/s	common default for screen-based trackers (Olsen, 2012)
minimum fixation	60 ms (15 samples)	shorter fixations are treated as noise by the same source
breaks	interpolated sample or interval >20 ms	interpolation would invent smooth fixations

From the events we compute fixation rate, mean fixation duration, fraction of time in fixation, saccade rate, mean saccade amplitude, and the share of saccades that are horizontal, leftward (regressions and line returns) and upward. All eight use coordinate differences only. To check this, every window was recomputed after shifting it 128 px right and 64 px up, and every event and feature was identical. The medians look like normal reading: 3.5 fixations per second, 266 ms per fixation and 92% of the time in fixation.

The resulting feature groups are **A3** (21 features, with position) and **B3** (19 features, without). Thresholds were fixed in `feature_plan_v3.json` before any distribution or score was seen.

4. Feature selection and dimensionality reduction

Hand-designed selection. The A/B design is itself a feature selection: B removes the two mean-position features to test a specific hypothesis. Identifiers, labels, stimulus names, timestamps, language and raw eye-position or gaze-vector columns are never given to a model.

No PCA. We keep the small feature sets (11–21) in their original, interpretable form. PCA fitted separately within the A and B training pipelines would preserve the exclusion of absolute position from B. Instead, tree, kNN and SVM use the mutual-information filter below, including the option to keep all features. The ensembles select through tree splits or random feature subsets, so we do not add a separate PCA stage.

Learned filter selection. For tree, kNN and SVM, a mutual-information filter (`SelectKBest`) is part of the training pipeline and keeps k = 5, 10 or all features. k is tuned jointly with the model's own hyperparameters on inner folds, so no-selection remains a possible choice. Mutual information was chosen because it is model-agnostic, captures non-linear dependence and is fitted only on

training people. The ensembles do not get the filter: boosted trees select features at every split, and bagging already draws random feature subsets.

What it found. The inner folds chose k = all in 12 of 18 cases. When k = 5 or 10 won, the chosen features differed between folds. Mutual information therefore found no small, stable subset. Mean pupil size was often among the top five. A likely reason is screen luminance or task order rather than reading behaviour; this is a limitation, not a finding.

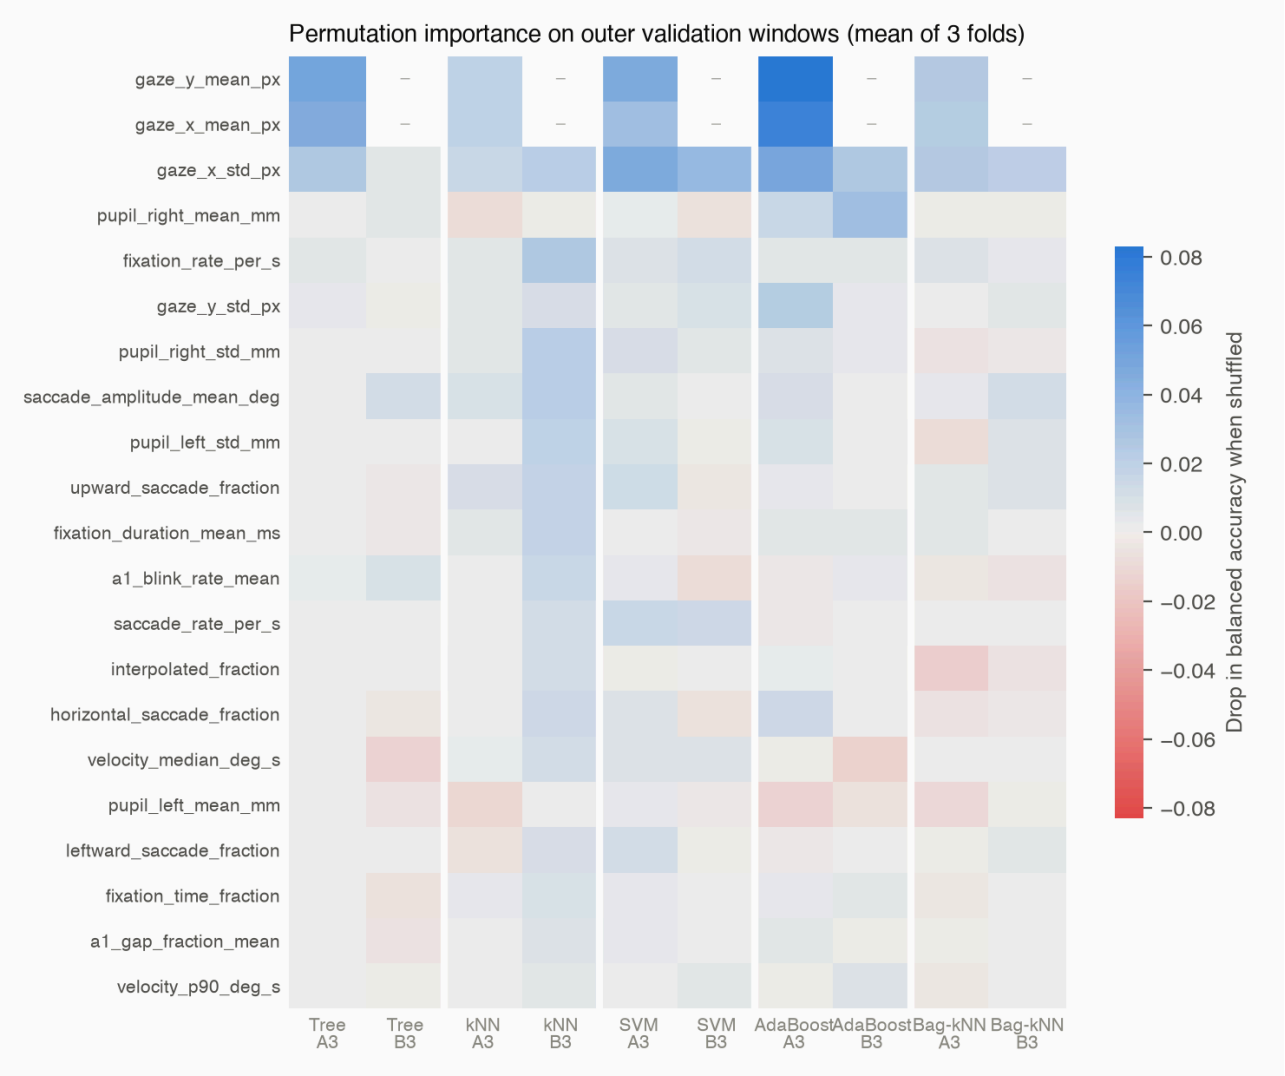


Figure 1. Permutation importance on outer validation windows (drop in balanced accuracy when one feature is shuffled; mean of three folds; "–" means the feature is not in the group). With position, the models rely mostly on mean x and y and on horizontal spread. Without position, the best models use horizontal spread (roughly line length); SVM also uses the rates of fixations and saccades, and AdaBoost mean pupil size (mainly in one fold), which may reflect luminance rather than reading. B therefore still contains relative spatial structure. It is not purely "how" people look.

5. Three algorithms

The data are small and tabular: 961 development windows from 23 people, about 640 in each outer training set, and 19–21 features in different units (pixels, millimetres, degrees per second, fractions).

Algorithm	Why it fits this problem	Tuned values
Decision tree	splits on single features like the position stump (one split on mean y), so it shows what more than one threshold adds; no scaling across units	depth 2/4/6, minimum leaf 5/10 windows
k-nearest neighbours	no assumption about the shape of the classes; tests directly whether windows of the same program lie close together	5/15/31 neighbours, uniform/distance votes
RBF-kernel SVM	non-linear boundary with explicit regularisation, which limits overfitting with few people	C = 0.1/1/10, gamma = 0.01/0.1

Why these values. Each family has six settings, crossed with the filter's three k values (section 4). Tree depth runs from 2, one step above the stump, to 6: up to 64 leaves, which at the larger minimum leaf of 10 windows is about all 640 training windows. Odd neighbour counts avoid tied votes; 5 is local and 31 (about 5% of the training windows) is smooth. C spans strong to weak regularisation on a log scale, and gamma 0.01/0.1 lies on either side of scikit-learn's default (1/number of features for standardised data, about 0.05 when all features are kept). The chosen values often sit at a grid edge (depth 6 and 5 neighbours in 4 of 6 folds each), so the best setting may lie outside the grid; the grids were declared before the comparison and not widened afterwards.

Why not the others. Regression and additive models give each feature a separate effect unless interactions are added by hand, while the tree and SVM can combine position with spread. Gaussian Naive Bayes assumes independent, normally distributed features within each class, but several fractions pile up at 0 or 1; at least half of the windows have no upward saccade. A neural network is covered in section 9.

The three have different inductive biases: rules on single features, local similarity in the full space, and a global smooth margin. This makes their disagreement informative. kNN and SVM standardise features inside the training pipeline, so validation people never influence the scaling. Tree and SVM use balanced class weights because vehicle windows are 57% of the data (the vehicle program takes longer to read); scikit-learn's kNN has no such option. Every family and feature group gets the same search budget and the same folds, so differences are paired by person.

6. Comparison of the three algorithms

Development results are averaged over the 23 people, using each person's prediction from the outer fold where that person was held out.

Model	Balanced accuracy, A3 / B3	Macro-F1, A3 / B3	Outer-fold range, A3 / B3
Decision tree	.607 / .509	.567 / .465	.573–.657 / .489–.530
kNN	.535 / .528	.507 / .495	.491–.614 / .476–.615
RBF-SVM	.607 / .558	.581 / .528	.526–.690 / .504–.595
Majority class / position-only stump	.500 / .581	.352 / .453	

Position improves prediction. A depth-one tree that only sees mean y reaches .581, providing a positional benchmark. Without absolute position, tree and kNN are near chance. SVM retains a

modest result above the position-free dummy (.558 vs .500), though one of its outer folds is at .504. B therefore still carries some predictive information for the SVM.

Similar accuracy, different errors. The stump predicts rectangle for 96% of rectangle windows but only 17% of vehicle windows, because it learned a single y-threshold. Tree and SVM with A3 have more even class recalls (.56/.63 and .61/.59). kNN favours the majority class (vehicle recall .69, rectangle .41).

Why kNN is weakest with position. One likely reason is that it is the only one of the three without class weights, so it under-predicts rectangle, which balanced accuracy penalises. This is not the whole story: it has the same bias without position, where it matches the tree. Fewer features did not help either; on the inner folds, keeping five beat keeping all 21 in only one of three folds. Without position, the three are within .05 of each other.

Uncertainty. Single people range from .44 to .80 (tree, A3) and from .34 to .89 (SVM, A3), and the person SD is .09–.14. With three folds and 23 people, differences of a few points between models are not reliable. The first set of features (V2, 13 features) gave .616/.527 (tree), .584/.498 (kNN) and .582/.534 (SVM). The event features and the filter did not give a consistent gain.

7. Boosting and bagging

Following the assignment, boosting and bagging use different base algorithms: decision trees for boosting and kNN for bagging.

AdaBoost with shallow trees (boosting). The steps:

1. Start with weights that give both classes equal total weight.
2. Fit a shallow tree (depth 1–3) to the weighted windows.
3. Compute its weighted error e and its vote weight, learning-rate x log((1-e)/e).
4. Increase the weight of the windows it got wrong, then normalise.
5. Repeat for 200 rounds. The prediction is the weighted vote of all trees.

Boosting suits weak, high-bias learners: one shallow tree barely beats chance, but a sequence of trees that focuses on earlier mistakes can model interactions. Depth (1/2/3) and learning rate (0.1/1) are tuned.

Bagged kNN (bagging). The steps:

1. Draw a bootstrap sample of the training windows, with replacement.
2. Draw a random subset of the features (50%, 75% or 100%).
3. Fit a scaler and a kNN classifier on that sample and subset.
4. Repeat for 50 members. Average their class probabilities and predict the class with the largest average.

Bagging reduces variance by averaging models fitted to perturbed data. kNN changes little under row resampling alone, so the random feature subsets are what make the members differ. k (15/31) and the feature share are tuned.

A correction before any result. The plan first gave the base tree balanced class weights. That crashed AdaBoost on its first fit: the tree optimised balanced weights while AdaBoost scored it under uniform weights, so its error could exceed 0.5. The balance was moved to AdaBoost's starting weights. This change was made and recorded before any ensemble score existed.

Model	Balanced accuracy, A3 / B3	Outer-fold range, A3 / B3
AdaBoost (trees)	**.659** / .561	.648–.672 / .527–.588
Bagged kNN	.558 / .518	.486–.612 / .487–.553

AdaBoost with position is the best tabular development model and also the most stable over folds. It is .05 above the best single model and .08 above the stump. Bagging helps kNN with position (.535 to .558) but not without it. AdaBoost improves more with position, while its position-free score (.561) still exceeds the dummy (.500).

8. Basic vs boosting vs bagging vs transfer

What "transfer" means here. The assignment does not define it, so we interpret it as transfer learning. The CNN from section 9 is first trained on a *source task* whose label is unrelated to the program shown: is the participant looking at an instruction screen or at a multiple-choice answer screen? These screens come from the same recordings, tracker and people, but are never code. The convolution layers are then reused for vehicle/rectangle in one of two modes, chosen on inner folds:

- **freeze:** the pretrained layers are fixed and only a new output layer is trained;
- **fine-tune:** all layers continue training at a lower learning rate (0.0003).

Pretraining uses only the training people of the current split (255–322 source windows per inner split, 430–447 per outer split), so no validation or test person leaks in.

Development comparison (23 people, outer folds; best single model per group shown as "basic"):

Method	With position (A)	Without position (B)	A − B
Basic: best of tree, kNN, SVM	.607 (tree)	.558 (SVM)	.049
Boosting: AdaBoost (trees)	.659	.561	.098
Bagging: bagged kNN	.558	.518	.040
CNN from scratch	**.687**	.483	.204
CNN + transfer	.684	.499	.185
Controls: majority / position-only stump	.500 / .581		

Locked test: seven people, six with both classes. Every method was then tuned on all 23 development people and refitted on all 961 development windows. The final run produced predictions for all 369 windows from the seven locked people. Pid 18 has only vehicle windows; its 29 predictions and vehicle recall are retained in the result files. Balanced accuracy, macro-F1 and the paired comparisons below use the other six people, with equal weight per person. The intervals resample those six people 10,000 times and are descriptive only.

Method	With position (A)	Without position (B)	A − B, paired (95% interval)	People with A > B
Decision tree	.728	**.584**	.144 (.029 to .254)	5 of 6
kNN	.622	.523	.099 (.041 to .147)	5 of 6
RBF-SVM	.632	.582	.050 (−.020 to .122)	4 of 6
AdaBoost (trees)	.713	.575	.138 (.077 to .204)	6 of 6
Bagged kNN	.552	.504	.048 (−.010 to .101)	4 of 6
CNN from scratch	.753	.527	.227 (.157 to .289)	6 of 6
CNN + transfer	**.759**	.458	.301 (.236 to .379)	6 of 6
Majority / position-only stump	.500 / .582			

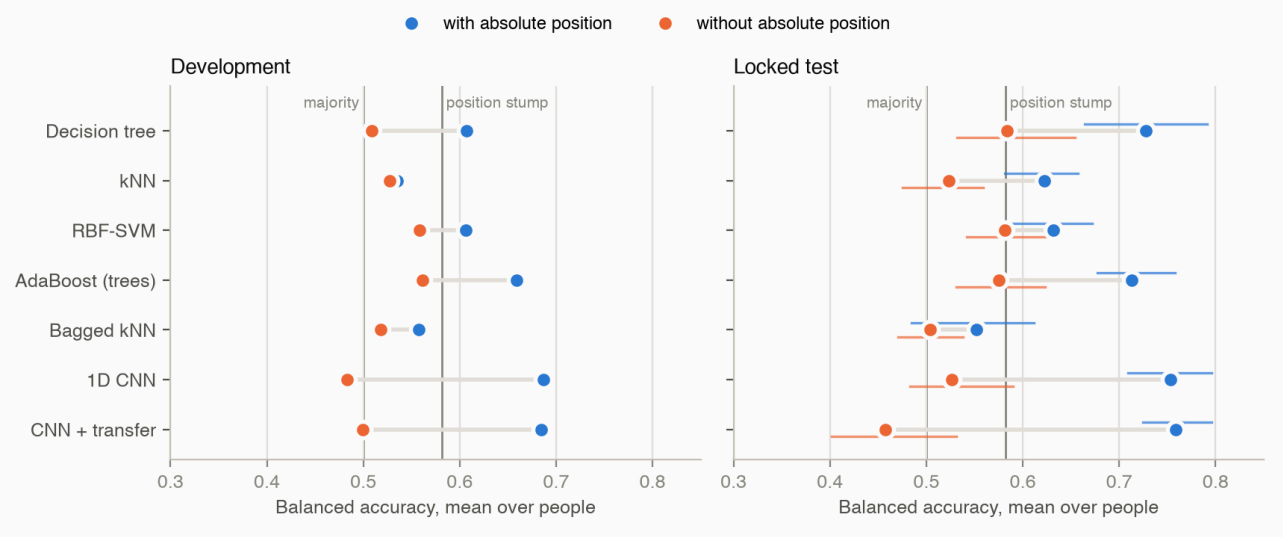


Figure 2. Balanced accuracy with (blue) and without (orange) absolute position. Left: 23 development people, outer folds. Right: locked test, six two-class people, with 95% person-bootstrap intervals. Vertical lines: majority class and the position-only stump.

The test supports the development pattern on fresh people. With position, the CNN, the tree and AdaBoost reach .71–.76. Without position, tree (.584), SVM (.582) and AdaBoost (.575) still exceed the dummy (.500). Tree B is close to the position-only stump (.582), which is a positional benchmark rather than a position-free baseline. Every family's mean is higher with position; for five of the seven the descriptive paired interval excludes zero. Scores with position are higher on test than on development (CNN .753 vs .687, tree .728 vs .607). Six people cannot tell whether that is luck or easier recordings, so development remains the main comparison, and no model was re-chosen after the test.

Explanation. On development, the A–B gap is about .05 for the best basic models and bagging, .10 for boosting and .20 for the CNN. Without position, the best methods reach about .56 against the .500 dummy, while the CNN is near chance. The positional stump (.581) is a separate reference, not a test of whether B contains useful information. AdaBoost profits because sequential shallow trees combine the position features with spread and pupil features. The CNN profits most because it sees the whole two-second trajectory on the screen rather than one mean point. Bagging gives kNN little, because kNN changes little when training rows are resampled (section 7), and the bagged model leans even more toward vehicle: it finds only about 30% of rectangle

windows, against 40% for single kNN. A likely reason is that it chose 31 neighbours with equal votes in five of six folds, where single kNN mostly chose 5; larger neighbourhoods follow the 57% vehicle share more closely. Transfer gives no consistent gain: development A/B is .684/.499 against .687/.483 from scratch; on test it is .759/.458 against .753/.527. The small test A difference (.006) does not establish an improvement, given participant and seed variation. The source task is small and may also mostly reflect layout, but that explanation is untested. The two variants share the selected architecture; transfer also changes source data, learning rate and training duration, so this comparison does not isolate pretraining alone.

9. Convolutional neural network

Input. The assignment allows the preprocessed data to be used directly, so the CNN sees each two-second window as a sequence of 500 time steps (4 ms each) with six channels: gaze x, gaze y, left and right pupil, a "measured" mask and an "interpolated" flag. A step without a sample is zero with mask 0, so holes are visible to the network and never squeezed out. For A, x and y are divided by the screen size; for B, each window's mean x and y is subtracted first, which removes absolute location but keeps relative movement, mirroring feature group B. Pupil channels are standardised with statistics from the training people only.

Architecture. Three blocks of 1D convolution, batch normalisation and ReLU, with max-pooling after the first two (f, 2f and 2f channels); then global average pooling, dropout 0.3 and a linear layer to two classes. This is 8,466 to 95,650 parameters depending on the setting, small enough for about 640 training windows. The loss is cross-entropy with balanced class weights.

Tuned hyperparameters and why.

Hyperparameter	Values	Reason
filters f	16, 32	capacity; tests whether more feature maps help with this little data
kernel size	5, 9, 15	the first layer spans 20, 36 or 60 ms, the range of saccade durations; the last block sees 128, 240 or 408 ms, about one fixation and saccade

Adam (learning rate 0.001), batch size 32, at most 60 epochs and dropout are standard values and fixed. Training stops when inner-validation balanced accuracy has not improved for 10 epochs, and the outer model is refitted for the median best epoch of the chosen setting. The search uses the same nested person folds as all other models: six settings x three inner folds x three outer folds x two groups. Inner scores are somewhat optimistic because the same inner people also stop training, but outer validation people are never used. Each refit was repeated with three seeds; seed changes move fold scores by about .02, less than the differences between folds.

Results. With absolute position, the CNN is the best development model (.687; folds .620–.757). Without it, the CNN is near chance (.483; folds .404–.550). Centred sequences carry spread, speed, pupil and fixation structure, but the network finds no reliable difference between the programs in them, while SVM and AdaBoost reach .56 from summary features of the same windows. About 640 training windows were enough for the CNN to learn the strong position signal, but are probably too few to learn such a weak one from raw sequences.

10. Complexity, computation time and performance

Sizes and times below come from the final models on an otherwise idle laptop (Apple M4): refit on all 961 development windows (median of five warm repetitions; one timed run for the CNNs, on four threads) and prediction of all 369 test windows, about 12 minutes of gaze (five warm repetitions on one CPU thread). These timings start with prepared inputs and exclude cleaning and feature extraction; transfer refit time also excludes pretraining. Balanced accuracy is development / test, with six eligible people for the two-class test score.

Model (A / B)	Size of the fitted model	Refit (s)	Predict 369 windows (ms)	BA with position	BA without position
Decision tree	39 / 57 nodes, depth 6	.03 / .03	0.1 / 0.1	.607 / .728	.509 / .584
kNN	stores 961 windows	.03 / .02	1.8 / 1.0	.535 / .622	.528 / .523
RBF-SVM	737 / 836 support vectors	.04 / .04	7.6 / 9.2	.607 / .632	.558 / .582
AdaBoost	200 trees, 2,622 / 1,088 nodes	.47 / .32	8.3 / 7.6	.659 / .713	.561 / .575
Bagged kNN	50 x 961 stored windows	.04 / .03	164 / 66	.558 / .552	.518 / .504
CNN	24,786 / 8,466 weights	5.9 / 2.2	43 / 37	.687 / .753	.483 / .527
CNN + transfer	24,786 / 8,466 weights	3.5 / 0.7 + pretraining	44 / 35	.684 / .759	.499 / .458

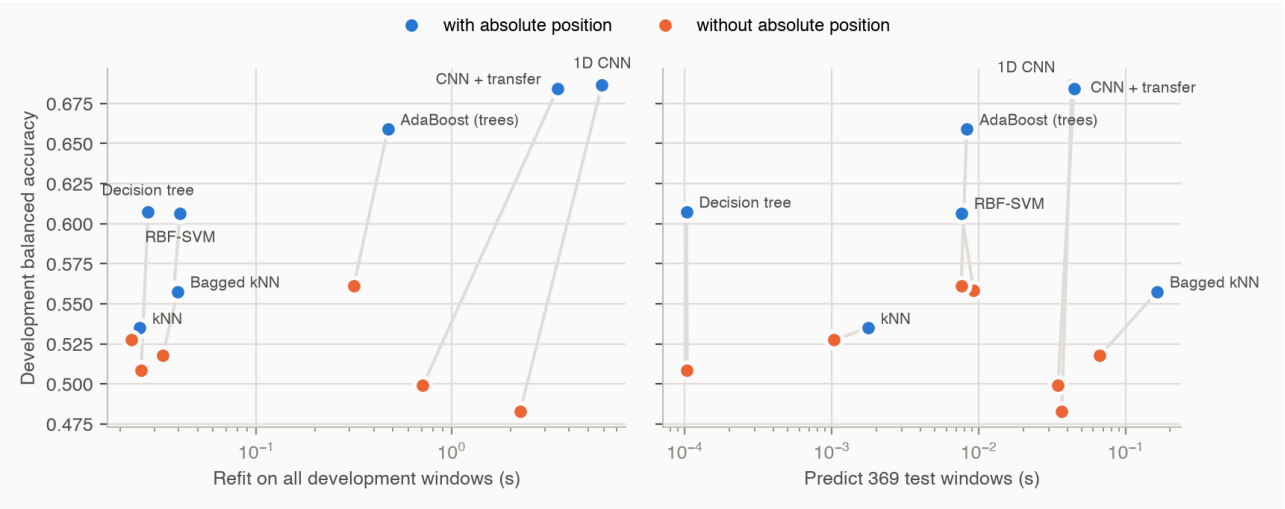


Figure 3. Development balanced accuracy against refit time (left) and prediction time for the 369 test windows (right), log scale. Lines join each method's two feature groups.

Complexity and time. Time follows model size. A tree predicts by following one path of at most six splits, so 369 windows take 0.1 ms. kNN and the SVM compare every window with stored windows or support vectors (1–9 ms). AdaBoost evaluates 200 trees (8 ms). Bagged kNN runs 50 neighbour searches per window, the slowest prediction of the feature models (66–164 ms) for little or no gain in accuracy. The CNN costs the most to train, seconds against well under a second for the others, plus a hyperparameter search of one to two minutes per feature group. Search time also depends heavily on the machine: on the shared laptop during development, with other jobs and a power-

saving mode competing for the CPU, the nested CNN search took almost four hours. The final tuning of every method, including the CNNs, took under five minutes on the idle machine.

In terms of the machine-learning problem. With absolute position, more capacity buys accuracy: from a one-split stump (.58) to a 39-node tree (.61 / .73), AdaBoost (.66 / .71) and the CNN (.69 / .75), at a cost that grows from microseconds to seconds. Without position, extra capacity buys little in this comparison. On development, a 0.1 ms tree and an 8 ms ensemble reach .51–.56 against the .50 dummy, and the CNN is near chance (.48); on test, the tree (.58) is close to AdaBoost (.58) and above the CNN (.53). Several summary-feature models retain modest performance above dummy. The CNN must learn its own summaries from 640–960 windows; limited data may contribute to its weaker B result (section 9).

In terms of the real-world problem. The measured model costs are low. Given prepared inputs, every model classifies 12 minutes of gaze in under 0.2 s on one CPU thread, and even the CNN refits in seconds. These model costs make inference feasible in this setting. What matters is which signals are shared. With raw coordinates, a 39-node tree identifies the program for new people well above chance, and the CNN has a higher score. With absolute position withheld, performance is lower across the evaluated families, but the remaining signals (horizontal spread, pupil size) still give .56–.58 for several models, above the .50 dummy. This does not establish person-level privacy protection or a limit on what another model could infer. Pupil size is also known to reveal cognitive load and emotional arousal (David-John et al., 2021), and with more texts, people or data a stronger model might find more.

Conclusion

On new people, eye-tracking windows predict which of two known programs is being read. Absolute gaze position improves performance in the evaluated pipelines: a CNN reaches .69 on development and .75 on the locked test, while transfer gives .68/.76 without a clear gain. The test two-class scores average six of the seven held-out people. Without absolute position, the best summary-feature models reach about .56 on development and .58 on test, above the .50 dummy, while the CNN is near chance. Removing position reduces performance in this experiment, but does not measure how much content information remains or demonstrate privacy protection.

Limitations

- **Two known texts, 30 people.** This is a closed-set study. A weak result without position does not prove that no information leaks with more texts, more data or other models.
- **Layout and luminance.** The two programs differ in length and shape on screen. Position and pupil features can reflect layout and screen brightness rather than reading.
- **Task order.** 20 of 33 people read `rectangle` first, so time-related drift (fatigue, pupil change) is slightly confounded with the label.
- **B is not purely dynamic.** It still contains relative spatial structure such as horizontal spread, which tracks line length.
- **Reused development people.** The same 23 people informed the V1, V2 and V3 choices. Nested folds limit the optimism from tuning, but only the locked test people are truly fresh.

- **Seven test people, six two-class.** Pid 18 has only vehicle windows and is reported by vehicle recall separately. The two-class scores and descriptive intervals use six people; the intervals do not include retraining uncertainty.
- **Transfer interpretation.** Our reading of "transfer" may differ from what the course intends.

References

1. EMIP Workshop. *Distributed Collection of Eye Movement Data in Programming: Dataset*. https://emipws.org/dataset/ (accessed 14 September 2026)
2. David-John, B., Hosfelt, D., Butler, K. and Jain, E. (2021). A privacy-preserving approach to streaming eye-tracking data. *IEEE Transactions on Visualization and Computer Graphics*, 27(5), 2555–2565. https://doi.org/10.1109/TVCG.2021.3067787
3. Apple (2026). *Eyes, Hands & Privacy*. https://www.apple.com/legal/privacy/data/en/eyes-hands/ (updated 14 September 2026, accessed 3 November 2026)
4. Salvucci, D. D. and Goldberg, J. H. (2000). Identifying fixations and saccades in eye-tracking protocols. *Proceedings of the 2000 Symposium on Eye Tracking Research & Applications (ETRA)*, 71–78.
5. Olsen, A. (2012). *The Tobii I-VT Fixation Filter: Algorithm description*. Tobii Technology.

AI declaration

Claude (Anthropic) and Codex (OpenAI) were used as assistants for writing and checking code, for the figure and export scripts, and for drafting and editing the report text. Every method choice, number and interpretation was checked by the authors.