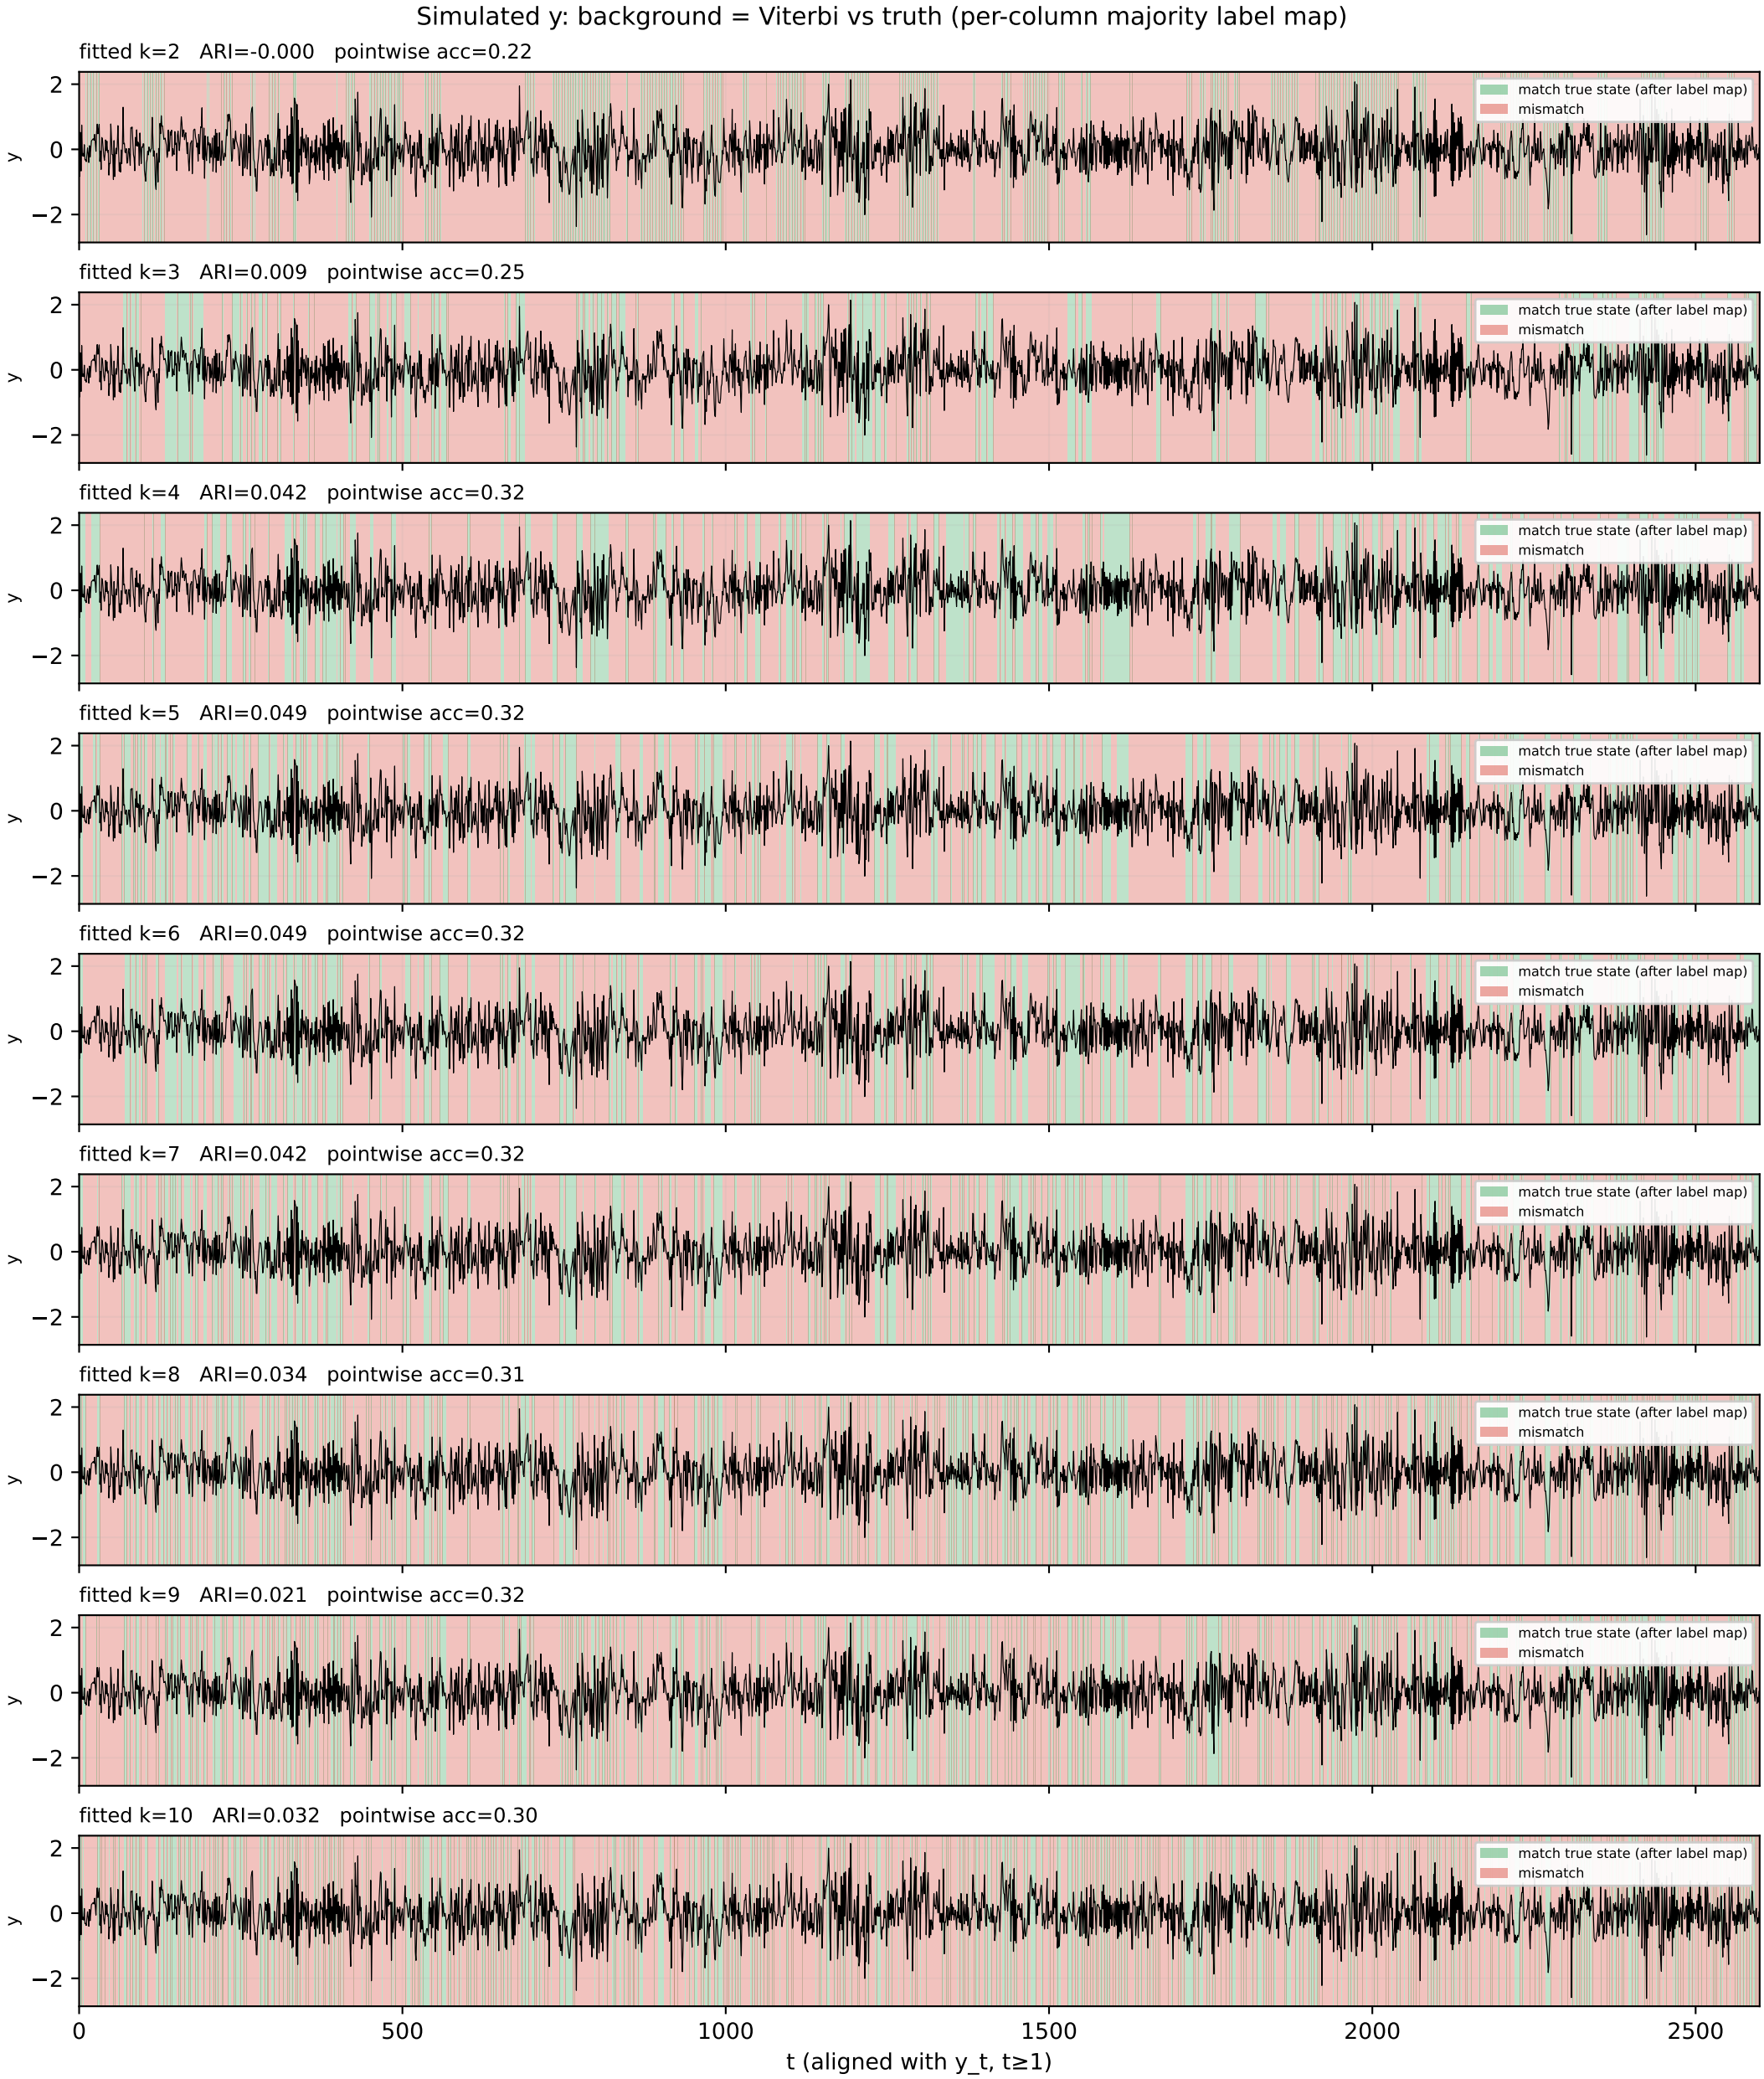
Simulated y: background = Viterbi vs truth (per-column majority label map)
fitted k=2 ARI=-0.000 pointwise acc=0.22
fitted k=3 ARI=0.009 pointwise acc=0.25
fitted k=4 ARI=0.042 pointwise acc=0.32
fitted k=5 ARI=0.049 pointwise acc=0.32
fitted k=6 ARI=0.049 pointwise acc=0.32
fitted k=7 ARI=0.042 pointwise acc=0.32
fitted k=8 ARI=0.034 pointwise acc=0.31
fitted k=9 ARI=0.021 pointwise acc=0.32
fitted k=10 ARI=0.032 pointwise acc=0.30
match true state (after label map)
mismatch
y
2
0
−2
0
500
1000
1500
2000
2500
t (aligned with y_t, t≥1)