

How to Download and Install Docker, and Create a Stack for MQTT Broker and Node-RED

Docker Desktop is a user-friendly application that enables to build, share, and run containerized applications on the local machine. It provides a complete environment for working with Docker containers, making it easy to manage and deploy applications across different environments.

1. How to Download and Install Docker

1.1 Downloading Docker

1. Visit the Docker Website:
 - Go to the official Docker website: <https://www.docker.com/get-started>.
2. Select Your Operating System:
 - Choose the appropriate version for your operating system:
 - Windows
 - macOS
 - Linux

1.2 Installing Docker on Windows

1. Download Docker Desktop Installer:
 - Download the Docker Desktop installer `.exe` file.
2. Run the Installer:
 - Open the `.exe` file and follow the installation instructions.
3. Enable WSL 2 (Windows Subsystem for Linux):
 - Make sure WSL 2 is enabled during setup. Install it if required.
4. Launch Docker Desktop:
 - After installation, launch Docker Desktop, accept the Term of Service, and skip the rest until the Program is ready.
5. Verify Installation:
 - Open a command prompt and type:
docker --version

```
PS C:\Users\manager> docker --version
Docker version 27.2.0, build 3ab4256
PS C:\Users\manager> |
```

1.3 Installing Docker on macOS

1. Download Docker Desktop Installer:
 - Download the `.dmg` file for macOS.
2. Install the Application:
 - Drag Docker into the Applications folder.
3. Launch Docker Desktop:
 - Open Docker from the Applications folder.
4. Verify Installation:
 - Open terminal and type:
`docker --version`


1.4 Installing Docker on Linux

1. Update Your Package List:
 - Run:
`sudo apt-get update`
2. Install Required Packages:
 - Run:
`sudo apt-get install apt-transport-https ca-certificates curl software-properties-common`
3. Add Docker's GPG Key:
 - Run:
`curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo apt-key add -`
4. Set Up the Docker Repository:
 - Run:
`sudo add-apt-repository "deb [arch=amd64] https://download.docker.com/linux/ubuntu $(lsb_release -cs) stable"`
5. Install Docker CE:
 - Run:
`sudo apt-get update`
`sudo apt-get install docker-ce`
6. Verify Installation:
 - Run:
`docker -version`

2. How to Create a Docker Stack Running MQTT Broker and Node-RED

2.11 Setting Up a Docker Compose File (Windows)

To facilitate a quick setup, there are two .bat Files included:
Once Docker Desktop is up and Running, and you see this:

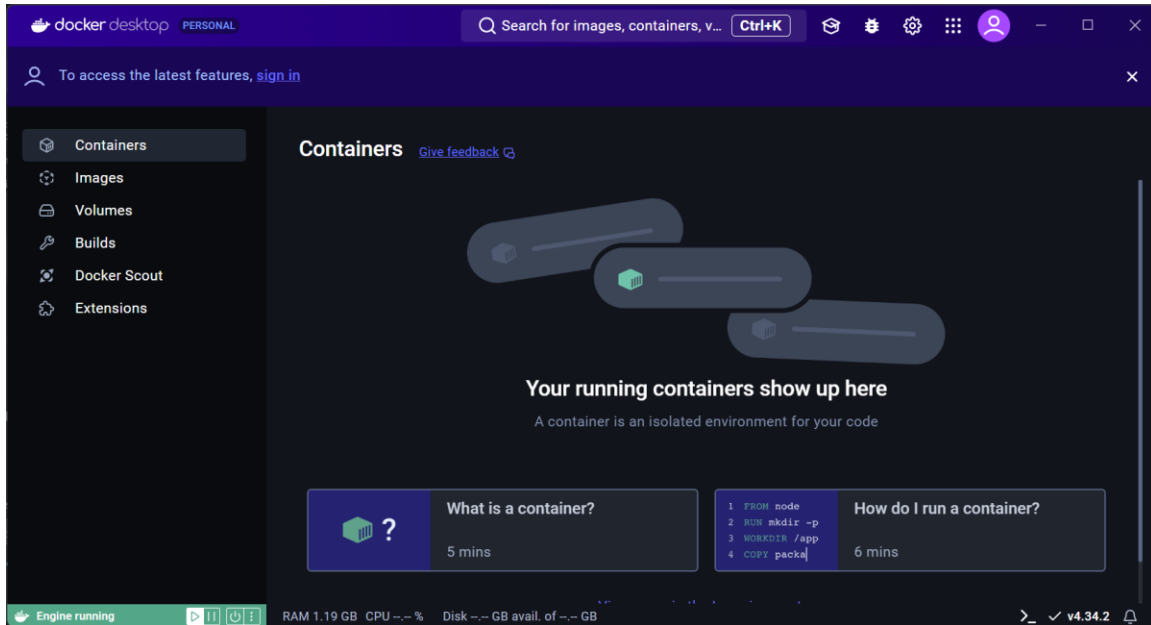

Then you can start register_stack.bat and follow the Instructions. It will register the two pre-made Docker Containers after downloading the official Images.

After completion, your Window should look like this:

```
C:\WINDOWS\System32\cmd.exe
Starting the Docker stack...
time="2024-10-03T18:38:53+02:00" level=warning msg="C:\\bin\\voxta_tutorial\\docker-stack\\docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion"
[+] Running 3/3
  ✓ Network docker-stack_default      Created          0.0s
  ✓ Container docker-stack-nodered-1  Started          0.6s
  ✓ Container docker-stack-mosquitto-1 Started          0.7s
Docker stack started successfully.
You can access Node-RED at http://127.0.0.1:1880
Press any key to continue . . .
```


2.12 Accessing the Services (Windows)

1. To access Node-RED, open a web browser and enter:


``http://localhost:1880``

This is where you can access the Node-RED flow editor.

You should see the Example Flow now

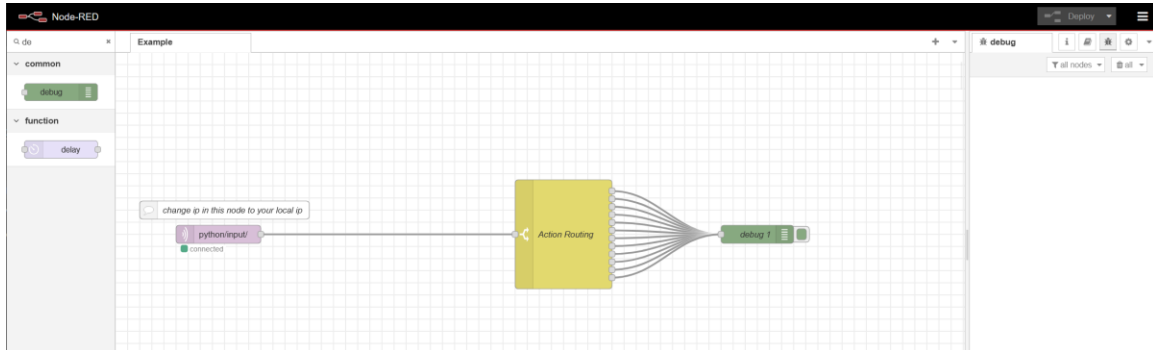

~~Edit the Server IP Address to your local one. You can obtain this Information either from the Console that opened with start_ProviderAPP.bat or you open a Command Console in Windows via Start -> CMD and enter in the Console: ipconfig~~

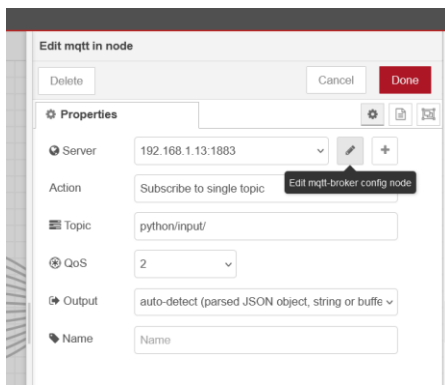

**Only necessary for Server
Installation of existing HOIT!**

```
Microsoft Windows [Version 10.0.22631.4169]
(c) Microsoft Corporation. All rights reserved.

C:\Users\manager>ipconfig

Windows IP Configuration

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::85a0:7554:ae3a:823f%15
    IPv4 Address. . . . . : 192.168.1.13
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.1.1

Ethernet adapter vEthernet (WSL (Hyper-V firewall)):

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::6885:60e6:eebe:644a%33
    IPv4 Address. . . . . : 172.23.144.1
    Subnet Mask . . . . . : 255.255.240.0
    Default Gateway . . . . . : 

C:\Users\manager>
```

2.21 Setting Up a Docker Compose File (Linux)

1. Create a Working Directory:

- Run:
mkdir mqtt-nodered-stack
cd mqtt-nodered-stack

2. Create the docker-compose.yml File:

- Run:
nano docker-compose.yml

3. Define the Stack (copy content the created File):

```
version: '3.8'
```

```
services:
```

```
  mosquitto:
```

```
    image: eclipse-mosquitto:latest
```

```
    ports:
```

- "1883:1883" # MQTT port
- "9001:9001" # WebSockets port

```
    volumes:
```

- ./mosquitto/config:/mosquitto/config
- ./mosquitto/data:/mosquitto/data
- ./mosquitto/log:/mosquitto/log

```
    restart: always
```

```
  nodered:
```

```
    image: nodered/node-red:latest
```

```
    ports:
```

- "1880:1880" # Node-RED dashboard port

```
    volumes:
```

- ./nodered/data:/data

```
    restart: always
```

4. Save and Exit the File:

- Save the file and exit the editor.

2.22 Launching the Stack (Linux)

1. Run the Docker Compose Command:

- Run:
docker-compose up -d

2. Check if Containers are Running:

- Run:
docker ps

2.23 Accessing the Services (Linux)

1. Node-RED:

- Go to:
http://localhost:1880

2. MQTT Broker:

- The MQTT broker is running on port 1883 (MQTT clients) and 9001 (WebSockets).

2.4 Stopping the Stack (Linux)

To stop the services, run:

- docker-compose down