

RHEINISCHE  
FRIEDRICH-WILHELMS-UNIVERSITÄT BONN

MATHEMATISCH-NATURWISSENSCHAFTLICHE  
FAKULTÄT

MASTER THESIS

**Distributed Online Learning for Large-scale  
Pattern Prediction over Real-time Event Streams**

*Author:*

Ehab QADAH

*First Examiner:*

PD. Dr. Michael MOCK

*Second Examiner:*

Prof. Dr. Stefan WROBEL

# Declaration of Authorship

I, Ehab Qadah, confirm that this work is my own and is expressed in my own words. Any uses made within it of the works of other authors in any form (e.g. ideas, equations, figures, text, tables, programs) are properly acknowledged at the point of their use. A full list of the references employed has been included.

# Abstract

In this paper, we present a distributed online prediction system for user-defined patterns over multiple massive streams of movement events, built using the general purpose stream processing framework Apache Flink. The proposed approach is based on combining probabilistic event pattern prediction models on multiple predictor nodes with a distributed online learning protocol in order to continuously learn the parameters of a global prediction model and share them among the predictors in a communication-efficient way. Our approach enables the collaborative learning between the predictors (i.e., "learn from each other"), thus the learning rate is accelerated with less data for each predictor. The underlying model provides online predictions about when a pattern (i.e., a regular expression over the event types) is expected to be completed within each event stream. We describe the distributed architecture of the proposed system, its implementation in Flink, and present experimental results over real-world event streams related to trajectories of moving vessels.

To my family

# Contents

<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
1.1	Motivation . . . . .	1
1.2	Thesis Overview . . . . .	1
1.3	Outline . . . . .	2
<b>2</b>	<b>RELATED WORK AND BACKGROUND</b>	<b>3</b>
2.1	Related work . . . . .	3
2.1.1	Pattern Prediction Over Event Streams . . . . .	3
2.1.2	Distributed Online Learning . . . . .	4
2.2	Technological Background . . . . .	5
2.2.1	Apache Flink . . . . .	5
2.2.2	Apache Kafka . . . . .	6
<b>3</b>	<b>Method and Theoretical Analysis</b>	<b>7</b>
3.1	Pattern Prediction Over a Single Event Stream . . . . .	7
3.1.1	Problem formulation . . . . .	7
3.1.2	Proposed approach . . . . .	8
3.2	Pattern Prediction on multiple Streams . . . . .	9
3.2.1	Problem Formulation . . . . .	9
3.2.2	The Proposed Approach . . . . .	10
3.3	Theoretical Analysis of Proposed Approach . . . . .	12
3.3.1	Proprieters of Proposed Approach . . . . .	13
3.3.2	Computing the Transition Matrix From the Matrix of $PMC_{\mathcal{P}}^m$ . . . . .	14
<b>4</b>	<b>System Overview</b>	<b>15</b>
4.1	System Architecture . . . . .	15
4.2	Implementation Details . . . . .	16
<b>5</b>	<b>Empirical Evaluation</b>	<b>19</b>
5.1	Evaluation Over Synthetic Event Streams . . . . .	19
5.2	Evaluation Over Real-word Event Streams . . . . .	19
<b>6</b>	<b>Discussion</b>	<b>27</b>
6.1	Future Work . . . . .	27
<b>7</b>	<b>Conclusion</b>	<b>29</b>



# List of Figures

3.1	DFA and PMC for $\mathcal{P} = a; c; c$ , $\Sigma = \{a, b, c\}$ , and order $m = 1$ [3]. . .	8
3.2	Example of how prediction intervals are produced. $\mathcal{P} = a; b; b; b$ , $\Sigma = \{a, b\}$ , $m = 1$ , $\theta_{fc} = 0.5$ [3]. . . . .	9
4.1	System architecture overview. . . . .	15
5.1	Precision scores with respect to the number of input events over time for $\mathcal{P}_1$ . . . . .	22
5.2	Commutative communication with respect to the number of input events over time for $\mathcal{P}_1$ . . . . .	23
5.3	Average spread value for $\mathcal{P}_1$ . . . . .	24
5.4	Precision scores of $\mathcal{P}_2$ for <i>PLEASURE CRAFT</i> vessels. . . . .	25





# 1 INTRODUCTION

## 1.1 Motivation

In recent years, technological advances have led to a growing availability of massive amounts of continuous streaming data (i.e., data streams observing events) in many application domains such as social networks [25], Internet of Things (IoT) [26], and maritime surveillance [32]. The ability to detect and predict the full matches of a pattern of interest (e.g., a certain sequence of events), defined by a domain expert, is typically important for operational decision making tasks in the respective domains.

An event stream is an unbounded collection of time-ordered data observations in the form of a tuple of attributes that is composed of a value from finite event types along with other categorical and numerical attributes. In this work, we deal with movement event streams. For instance, in the context of maritime surveillance, the event stream of a moving vessel consists of spatiotemporal and kinematic information along with the vessel’s identification and its trajectory related events, based on the automatic identification system (AIS) [30] messages that are continuously sent by the vessel. Therefore, leveraging event patterns prediction over real-time streams of moving vessels is useful to alert maritime operation managers about suspicious activities (e.g., fast sailing vessels near ports, or illegal fishing) before they happen. However, processing real-time streaming data with low latency is challenging, since data streams are large and distributed in nature and continuously arrive at a high rate.

## 1.2 Thesis Overview

In this paper, we present the design, implementation, and evaluation of an online, distributed and scalable pattern prediction system over multiple, massive streams of events. More precisely, we consider event streams related to trajectories of moving objects (i.e., vessels). The proposed approach is based on a novel method that combines a distributed online prediction protocol [11, 18] with an event forecasting method based on Markov chains [3]. It is implemented on top of the Big Data framework for stream processing Apache Flink [15]. We evaluate our proposed system over real-world data streams of moving vessels, which are provided in the

context of the dataCron project<sup>1</sup>.

### 1.3 Outline

The rest of the paper is organized as follows. We discuss the related work and used frameworks in Section ???. In Section 3, we describe the problem of pattern prediction, our proposed approach, and the architecture of our system. The implementation details on top of Flink are presented in Section 4.2 and the experimental results in Section 5.2. We conclude in Section 7.

---

<sup>1</sup><http://www.datacron-project.eu/>

## 2 RELATED WORK AND BACKGROUND

In this chapter, we survey some of the related research in the areas of pattern prediction over event streams task, and techniques of distributed online learning over data streams. we also give a brief overview of the Big Data technologies are used to implement our proposed system.

### 2.1 Related work

#### 2.1.1 Pattern Prediction Over Event Streams

Several approaches have been proposed to formalize the task of event patterns prediction over time-evolving data streams. One common way to formalize this task is to assume that the stream is a time-series of numerical values, and the goal is to predict at each time point  $t$  the future observation at some future points  $t + 1$ ,  $t + 2$ , etc., (or even the output of some function of future values) [27].

Another way to formalize the prediction task is to view streams as sequences of events, i.e., tuples with multiple, possibly categorical, attributes, such as *id*, *event type*, *timestamp* etc., and the goal is to predict future events or patterns of events. In this thesis, we focus on the latter definition of forecasting (event patterns prediction).

A significant body of work has been established in the field of temporal pattern mining that is related to the task of event patterns detection, where events are defined as 2-tuples of the form (*EventType*, *Timestamp*). The goal is to extract patterns of events in the form either of association rules [1] or frequent episode rules [24]. These methods have been extended in order to be able to learn rules for predicting event patterns. For instance, in [36], an association rule mining technique is introduced, by first extract sets of event types that frequently lead to a target event (i.e., a rare event) within a time window of fixed size. And then use them to build a rule-based prediction model. Moreover, Weiss and Hirsh [37] proposed another rule-based method to predict rare events in a stream, using a genetic algorithm to find all predictive patterns to form prediction rules.

On the other hand, Laxman et al. [20] have proposed a probabilistic model for calculating the probability of the immediately next event in the stream. Which is achieved by combining each frequent episode that presents a partially-ordered

## 2 RELATED WORK AND BACKGROUND

set of event types [23], with a Hidden Markov Model (HMM). In addition, Fahed et al. [12] proposed episode rules mining algorithm to predict distant events. By generating a set of episode rules in the form  $P \rightarrow Q$  where  $P$  and  $Q$  are two episodes, while these rules have a minimal antecedent (in number of events) and temporally distant consequent.

In [40] a mining method is presented that find the frequent sequential patterns in an event stream, which are used to generate prediction rules. The event stream is processed into batches, where in each batch the events are consumed to find the prefix matches from the discovered frequent patterns, to predict future events using different strategies of prediction scoring.

Event pattern prediction has also attracted some attention from the field of complex event processing (CEP), where the CEP system consumes a stream of low-level events, and the target is to detect patterns of events (composite events), defined using pattern-based languages that provide logic, sequence, and iteration operators such as SQL-like languages [10]. One such early approach is presented in [28], which is based on converting the complex event patterns to automata, and subsequently, Markov chains are used in order to estimate when a pattern is expected to be fully matched.

Moreover, Alevizos et al. [3] have recently presented a similar approach, where again automata and Markov chains are employed in order to provide (future) time intervals during which a match is expected with a probability above a confidence threshold. In this thesis, we leverage this method as the base prediction model for each input event stream (see Section 3.1.2).

### 2.1.2 Distributed Online Learning

In recent years, there have been many research efforts on the problem of distributed online learning over multiple data streams [35, 38, 8, 39, 11, 18]. In contrast to the centralized learning approach in which all records of the streams are processed at a central single machine, the data streams are processed in a distributed fashion on  $k$  local learners. Each of which learner processes a single stream and use a local learning algorithm to provide a real-time prediction based service like Classification [8]. However, this setting requires to exchange the parameters of underlying learning algorithm among the learners to construct a strong global model, in order to preserve the predictive performance as similar as the centralized setting [18]. Different communication schemes between the distributed learners have been proposed in the literature.

For instance, Dekel et al. [11] proposed a distributed online mini-batch prediction approach over multiple data streams. Their approach is based on a static synchronization method. The distributed learners/predictors periodically communicate their local models with a central coordinator unit after consuming a fixed number of input samples/events (i.e., batch size  $b$ ), in order to create a global model parameters and share them between all learners. This work has been ex-

tended in [18] by introducing a dynamic synchronization scheme that reduces the required communication to the exchange of information between learners. The protocol relies on a dynamic synchronization operator that controls when the local learners communicate their models, which is based on only synchronizing the local models of the learners if they diverge from a reference model.

This protocol was introduced for linear models, and has been extended to handle kernelized online learning models [19]. In this work, we consider the event patterns prediction models over multiple event streams as learning algorithms, and we introduce to employ the communication-efficient distributed online learning protocol [18] to synchronize their parameters as illustrated in Section 3.2.2.

## 2.2 Technological Background

In the last years, many systems for large-scale and distributed stream processing have been proposed, including Spark Streaming [14], Apache Storm [16] and Apache Flink [15]. These frameworks can ingest and process real-time data streams, published from different distributed message queuing platforms, such as Apache Kafka [13] or Amazon Kinesis [5]. In this work, we implemented the proposed system in Apache Flink. Flink provides the distributed stream processing components of the distributed event pattern predictors. It works alongside Apache Kafka, which is used for streaming the input event streams and as a messaging platform to enable the distributed online learning functionalities.

### 2.2.1 Apache Flink

Apache Flink is an open source project that provides a large-scale, distributed, and stateful stream processing platform [9]. Flink is one of the most recent and pioneering Big Data processing frameworks. It provides processing models for both streaming and batch data, where the batch processing model is treated as a special case of the streaming one (i.e., finite stream). Flink’s software stack includes the *DataStream* and *DataSet* APIs for processing infinite and finite data, respectively. These two core APIs are built on top of Flink’s core dataflow engine and provide operations on data streams or sets such as mapping, filtering, grouping, etc.

The two main data abstractions of Flink are *DataStream* and *DataSet*, they represent read-only collections of data elements. The list of elements is bounded (i.e., finite) in *DataSet*, while it is unbounded (i.e., infinite) in the case of *DataStream*. Flink’s core is a distributed streaming dataflow engine. Each Flink program is represented by a data-flow graph (i.e., directed acyclic graph - DAG) that gets executed by Flink’s dataflow engine [9]. The data flow graphs are composed of stateful operators and intermediate data stream partitions. The execution of each operator is handled by multiple parallel instances whose number is determined by the *parallelism* level. Each parallel operator instance is executed in an independent

task slot on a machine within a cluster of computers [15].

### 2.2.2 Apache Kafka

Apache Kafka is a scalable, fault-tolerant, and distributed streaming framework/messaging system [13]. It allows to publish and subscribe to arbitrary data streams, which are managed in different categories (i.e., *topics*) and partitioned in the Kafka cluster. The Kafka Producer API provides the ability to publish a stream of messages to a topic. These messages can then be consumed by applications, using the Consumer API that allows them to read the published data stream in the Kafka cluster. In addition, the streams of messages are distributed and load balanced between the multiple receivers within the same consumer group for the sake of scalability.

# 3 Method and Theoretical Analysis

## 3.1 Pattern Prediction Over a Single Event Stream

For our work presented in this paper, we use the approach presented in [3]. For the sake of self-containment, we briefly describe this approach in the following, first assuming that only a single stream is consumed and then adjusting for the case of multiple streams. We follow the terminology of [34, 22, 2, 40] to formalize the problem we tackle.

### 3.1.1 Problem formulation

We define an input event and a stream of input events as follows:

**Definition 1.** *Each event is defined as a tuple of attributes  $e_i = (id, type, \tau, a_1, a_2, \dots, a_n)$ , where  $type$  is the event type attribute that takes a value from a set of finite event types/symbols  $\Sigma$ ,  $\tau$  represents the time when the event tuple was created, the  $a_1, a_2, \dots, a_n$  are spatial or other contextual features (e.g., speed); these features are varying from one application domain to another. The attribute  $id$  is a unique identifier that connects the event tuple to an associated domain object.*

**Definition 2.** *A stream  $s = \langle e_1, e_3, \dots, e_t, \dots \rangle$  is a time-ordered sequence of events.*

A user-defined pattern  $\mathcal{P}$  is given in the form of a regular expression (i.e., using operators for *sequence*, *disjunction*, and *iteration*) over  $\Sigma$  (i.e., event types) [3]. More formally, a pattern is given through the following grammar:

**Definition 3.**  $\mathcal{P} := E \mid \mathcal{P}_1; \mathcal{P}_2 \mid \mathcal{P}_1 \vee \mathcal{P}_2 \mid \mathcal{P}_1^*$ , where  $E \in \Sigma$  is a constant event type.  $;$  stands for sequence,  $\vee$  for disjunction and  $*$  for Kleene  $-$ . The pattern  $\mathcal{P} := E$  is matched by reading an event  $e_i$  iff  $e_i.type = E$ . The other cases are matched as in standard automata theory.


The problem at hand may then be stated as follows: given a stream  $s$  of low-level events and a pattern  $\mathcal{P}$ , the goal is to estimate at each new event arrival the number of future events that we will need to wait for until the pattern is satisfied (and therefore a full match is detected).

### 3.1.2 Proposed approach

As a first step, event patterns are converted to deterministic finite automata (DFA) through standard conversion algorithms. As an example, see Figure ?? for the DFA of the simple sequential pattern  $\mathcal{P} = a; c; c$  and an alphabet  $\Sigma = \{a, b, c\}$  (note that the DFA has no dead states since we need to handle streams and not strings). The next step is to derive a Markov chain that will be able to provide a probabilistic description of the DFA's run-time behavior.

Towards this goal, we use Pattern Markov Chains, as was proposed in [29]. Under the assumption that the input events are independent and identically distributed (i.i.d.), it can be shown that there is a direct mapping of the states of the DFA to states of a Markov chain and the transitions of the DFA to transitions of the Markov chain.

The transition probabilities of the Markov chain are the occurrence probabilities of the various event types. On the other hand, if the occurrence probabilities of the events are dependent on some of the previous events seen in the stream (i.e., the stream is generated by an  $m^{\text{th}}$  order Markov process), we might need to perform a more complex transformation (see [29] for details) in order to obtain a "proper" Markov chain. The transition probabilities are then conditional probabilities on the event types. In any case, we call such a derived Markov chain a Pattern Markov Chain (PMC) of order  $m$  and denote by  $PMC_{\mathcal{P}}^m$ , where  $\mathcal{P}$  is the initial pattern and  $m$  the assumed order. As an example, see Figure ??, which depicts the PMC of order 1 for the generated DFA of Figure ??.

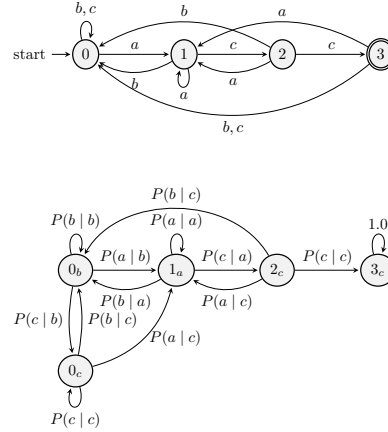


**Figure 3.1:** DFA and PMC for  $\mathcal{P} = a; c; c$ ,  $\Sigma = \{a, b, c\}$ , and order  $m = 1$  [3].

After constructing a PMC, we can use it to calculate the so-called *waiting-time* distributions. Given a specific state of the PMC, a *waiting-time* distribution gives us the probability of reaching a set of absorbing states in  $n$  transition from now (absorbing states are states with self-loops and probability equal to 1.0). By mapping the final states of the initial DFA to absorbing states of the PMC



(see again Figure 3.1), we can therefore calculate the probability of reaching a final state, or, in other words, of detecting a full match of the original regular expression in  $n$  events from now.

In order to estimate the final forecasts, another step is required, since our aim is not to provide a single future point with the highest probability but an interval. Predictions are given in the form of intervals, like  $I = (start, end)$ . The meaning of such an interval is that the DFA is expected to reach a final state sometime in the future between  $start$  and  $end$  with probability at least some constant threshold  $\theta_{fc}$  (provided by the user). These intervals are estimated by a single-pass algorithm that scans a waiting-time distribution and finds the smallest (in terms of length) interval that exceeds this threshold. An example is shown in Figure 3.2, where the DFA in Figure ?? is in state 1, the *waiting-time* distributions for all of its non-final states are shown in Figure ?? and the distribution, along with the prediction interval, for state 1 are depicted in green.



**Figure 3.2:** Example of how prediction intervals are produced.  $\mathcal{P} = a;b;b;b$ ,  $\Sigma = \{a, b\}$ ,  $m = 1$ ,  $\theta_{fc} = 0.5$  [3].

The above described method assumes that we know the (possibly conditional) occurrence probabilities of the various event types appearing in a stream (as would be the case with synthetically generated streams). However, this is not always the case in real-world situations. Therefore, it is crucial for a system implementing this method to have the capability to learn the values of the PMC's transition matrix. One way to do this is to use some part of the stream to obtain the maximum-likelihood estimators for the transition probabilities as illustrated in Section ??.

Executing this learning step on a single node might require a vast amount of time until we arrive at a sufficiently good model. In this paper, we present a distributed method for learning the transition probability matrix.

## 3.2 Pattern Prediction on multiple Streams

### 3.2.1 Problem Formulation

Let  $O = \{o_1, \dots, o_k\}$  be a set of  $K$  objects (i.e., moving objects) and  $S = \{s_1, \dots, s_k\}$  a set of real-time streams of events, where  $s_i$  is generated by the object  $o_i$ . Let

$\mathcal{P}$  be a user-defined pattern which we want to apply to every stream  $s_i$ , i.e., each object will have its own DFA.

The setting that is considered in this work is then described in the following: we have  $K$  input event streams  $S$  and a system consisting of  $K$  distributed predictor nodes  $n_1, n_2, \dots, n_k$ , each of which consumes an input event stream  $s_i \in S$ . The goal is to provide timely predictions and be able to do this at large-scale. Each node  $n_i$  handles a single event stream  $s_i$  associated with a moving object  $o_i \in O$ . In addition, it maintains a local prediction model  $f_i$  for the user-defined pattern  $\mathcal{P}$ . The  $f_i$  model provides the online prediction about the future full match of the pattern  $\mathcal{P}$  in  $s_i$  for each new arriving event tuple.

In short, we have multiple running instances of an online prediction algorithm on distributed nodes for multiple input event streams. More specifically, the input to our system consists of massive streams of events that describe trajectories of moving vessels in the context of maritime surveillance, where there is one predictor node for each vessel's event stream.

#### 3.2.2 The Proposed Approach

We designed and developed a scalable and distributed patterns prediction system over a massive input event streams of moving objects. As the base prediction model, we use the PMC forecasting method [3]. Moreover, we propose to enable the information exchange between the distributed predictors/learners of the input event streams, by adapting the distributed online prediction protocol of [18] to synchronize the prediction models, i.e., the transitions probabilities matrix of the PMC predictors.

Algorithm 1 presents the distributed online prediction protocol by dynamic model synchronization on both the predictor nodes and the coordinator. We refer to the PMC's transition matrix  $\Pi_i$  on predictor node  $n_i$  by  $f_i$ . That is, when a predictor  $n_i : i \in [k]$  observes an event  $e_j$  it revises its internal model state (i.e.,  $f_i$ ) and provides a prediction report. Then it checks the local conditions (batch size  $b$  and local model divergence from a reference model  $f_r$ ) to decide whether there is a need to synchronize its local model with the coordinator [or not].  $f_r$  is maintained in the predictor node as a copy of the last computed aggregated model  $\hat{f}$  from the previous full synchronization step, which is shared between all local predictors/learners. By monitoring the local condition  $\|f_i - f_r\|^2 > \Delta$  on all local predictors, we have a guarantee that if none of the local conditions is violated, the divergence (i.e., variance of local models  $\delta(f) = \frac{1}{k} \sum_{j=1}^k \|f_i - \hat{f}\|^2$ ) does not exceed the threshold  $\Delta$  [18].

On the other hand, the coordinator receives the prediction models from the predictor nodes that requested for model synchronization (violation). Then it tries to keep incrementally querying other nodes for their local prediction models until reaching out all nodes, or the variance of the aggregated model  $\hat{f}$  that is computed from the already received models less or equal than the divergence threshold  $\Delta$ .

Finally, the aggregated model  $\hat{f}$  is sent back to the predictor nodes that sent their models after the violation or have been queried by the coordinator.

---

**Algorithm 1:** Communication-efficient Distributed Online Learning [18].
 

---

**Predictor** node  $n_i$ : at observing event  $e_j$   
 update the prediction model parameters  $f_i$  and provide a prediction service ;  
**if**  $j \bmod b = 0$  *and*  $\|f_i - f_r\|^2 > \Delta$  **then**  
     send  $f_i$  to the Coordinator (violation) ;

**Coordinator:**  
 receive local models with violation  $B = \{f_i\}_{i=1}^m$  ;  
**while**  $|B| \neq k$  *and*  $\frac{1}{|B|} \sum_{f_i \in B} \|f_i - \hat{f}\|^2 > \Delta$  **do**  
     add other nodes have not reported violation for  
     their models  $B \leftarrow \{f_l : f_l \notin B \text{ and } l \in [k]\}$  ;  
     receive models from nodes add to  $B$ ;  
 compute a new global model  $\hat{f}$  ;  
 send  $\hat{f}$  to all the predictors in  $B$  and set  $f_1 \dots f_m = \hat{f}$  ;  
**if**  $|B| = k$  **then**  
     set a new reference model  $f_r \leftarrow \hat{f}$  ;

---

We use this protocol for the pattern prediction model, which is internally based on the PMC  $PMC_P^m$ . This allows the distributed  $PMC_P^m$  predictors for multiple event streams to synchronize their models (i.e., the transition probability matrix of each predictor) within the system in a communication-efficient manner.

We propose a *synchronization operation* for the parameters of the models ( $f_i = \Pi_i : i \in [k]$ ) of the  $k$  distributed PMC predictors. The operation is based on distributing the maximum-likelihood estimation [4] for the transition probabilities of the underlying  $PMC_P^m$  models described by:

$$\hat{\pi}_{i,j} = \frac{\sum_{k \in K} n_{k,i,j}}{\sum_{k \in K} \sum_{l \in L} n_{k,i,l}} \quad (3.1)$$

Moreover, we measure the divergence of local models from the reference model  $\|f_k - f_r\|^2$  by calculating the sum of square difference between the transition probabilities  $\Pi_i$  and  $\Pi_r$ :

$$\|f_k - f_r\|^2 = \sum_{i,j} (\hat{\pi}_{k,i,j} - \hat{\pi}_{r,i,j})^2$$

In general, our approach relies on enabling the collaborative learning between the prediction models of the input event streams. By doing so, we assume that the underlying event streams belong to the same distribution and share the same

behavior (e.g., mobility patterns). We claim this assumption is reasonable in many application domains: for instance, in the context of maritime surveillance, vessels travel through standard routes, defined by the International Maritime Organization (IMO). Additionally, vessels have similar mobility patterns in specific areas such as moving with low speed and multiple turns near the ports [31, 21]. That allows our system to construct a coherent global prediction model dynamically for all input event streams based on merging their local prediction models.

### 3.3 Theoretical Analysis of Proposed Approach

In this section, we present preliminaries of Markov chain and Maximum like-hood estimator, and we describe the theoretical properties of our proposed synchronization operator and its relation with ML estimator.

#### Preliminaries

The theoretical definitions presented in this section are based on the work described in [6, 7, 4, 17].

**Definition 4.** Let  $\{s_0, s_1, \dots, s_n\}$  be a sequence of random variables as **Markov chain**, where  $s_i$  belongs to a finite state space  $\mathbf{S} = \{1, \dots, m\}$  and represents the observed state of the chain at time  $i$ . Let the transition probabilities of the Markov chain  $p_{ij}(t+1)$  such that  $i, j \in S$  and  $t = 0, \dots, n$ , where  $p_{ij}(t+1)$  is the probability of the state  $j$  at time  $t+1$ , given state  $i$  at time  $t$ , where the sequence  $\{s_0, s_1, \dots, s_n\}$  satisfies the **Markov property**

$$P(s_{t+1} = j | s_t = i, s_{t-1} = i_{t-1}, \dots, s_0 = i_0) = P(s_{t+1} = j | s_t = i) \quad \forall i, j, i_{t-1}, i_0 \in S \quad (3.2)$$

Thus, the probability of moving to a future state only depends on the current state (first-order Markov chain). While for higher order  $m$  Markov chains the conditional probabilities can be modeled to be dependent on the last  $m$  states.

When the conditional probabilities  $P(s_{t+1} = j | s_t = i)$  are independent of the time  $t$ , the Markov chain is called **homogeneous** such that  $p_{ij} := P(s_{t+1} = j | s_t = i)$ .

The transition probabilities of the Markov chain are represented by a  $m \times m$  matrix that called **transition probability matrix**  $\mathbf{\Pi}$  with  $p_{ij}$  elements

$$\mathbf{\Pi} = \begin{pmatrix} p_{1,1} & p_{1,2} & \cdot & \cdot & \cdot & p_{1,m} \\ p_{2,1} & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ p_{m,1} & p_{m,2} & \cdot & \cdot & \cdot & p_{m,m} \end{pmatrix} \quad (3.3)$$

where  $0 \leq p_{i,j} \leq 1$  and the rows sum up to one

$$\sum_{j=1}^m p_{i,j} = 1 \quad i = 1, 2 \dots m \quad (3.4)$$

**Learning the Transition Probability Matrix.** In practice the underlying transition probability matrix is unknown, and desirable to estimate or learn it from the observed sequence  $\{s_0, s_1, \dots s_n\}$ . The maximum likelihood estimator (MLE) is a common method to estimate the transition probability matrix [4].

**Definition 5.** Let  $\Pi$  is the transition probability matrix of a Markov chain with a set of states  $S$ ,  $\pi_{i,j}$  the transition probability from state  $i$  to state  $j$ ,  $n_{i,j}$  the number of observed transitions from state  $i$  to state  $j$ , then the maximum likelihood estimator finds  $\hat{\Pi}$  as an estimate for  $\Pi$ , where its elements  $\hat{p}_{i,j}$  are

$$\hat{p}_{i,j} = \frac{n_{i,j}}{\sum_{l \in S} n_{i,l}} = \frac{n_{i,j}}{n_i} \quad (3.5)$$

The maximum likelihood estimates of transition probabilities are obtained based on the observed transitions between the states of the chain. That is, the maximum likelihood estimates are basically the count of transitions from  $i$  to  $j$  divided by the total count of the chain being in state  $i$ .

Anderson and Goodman [4] have shown that

$$\sqrt{n} (\hat{p}_{i,j} - p_{i,j}) \xrightarrow{d} \mathcal{N}(\mu, \sigma_{mle}^2) \quad \text{as } n \rightarrow \infty \quad (3.6)$$

Thus, the random variable  $\sqrt{n} (\hat{p}_{i,j} - p_{i,j})$  has asymptotically normal distribution with mean  $\mu = 0$ , and for some  $\sigma_{mle}^2$ . Therefore, the MLE is an asymptotically normal.

$$\sigma_{mle}^2 = \text{Var}(\sqrt{n} (\hat{p}_{i,j} - p_{i,j})) \quad (3.7)$$

In next, we will show that our proposed approach of distributing the maximum likelihood estimator is still preserving a similar asymptotic behavior.

#### 3.3.1 Proprietors of Proposed Approach

The synchronization operator in Equation 3.1 is basically aggregating the maximum likelihood estimates over  $k$  observed sequences (i.e., sequences of the DFA states based on the consumed event streams), the operator estimates the maximum likelihood values of the probabilities for the  $k$  arranged in serial order as large chain with length  $N = k \times n$  where we assume that all  $k$  sequences have  $n$

observations, then it follows that

$$\hat{\pi}_{i,j} = \frac{\sum_{k \in K} n_{k,i,j}}{\sum_{k \in K} \sum_{l \in L} n_{k,i,l}} = \hat{p}_{i,j}(N) \quad (3.8)$$

where  $N = k \times n$ .

Thus, our proposed synchronization operation of the  $k$  transition matrices has the same proprieties as maximum likelihood estimator over a combined sequence (i.e., a serial sequence of all  $k$  sequences) of  $k$  sequences of the transition matrices, but with skipping  $k - 1$  transitions between any two different sequences, which is a small number can be neglected comparing to the total transitions count  $k \times n$ . Therefor, the estimates of global model of our proposed operation within the distributed online learning protocol has the same proprieties as maximum likelihood estimates, in particular, the the random variable  $\sqrt{N} (\hat{\pi}_{i,j} - p_{i,j})$  has asymptotically normal distribution with mean  $\mu = 0$  following Equation 3.6

$$\lim_{n \rightarrow \infty} \sqrt{N} (\hat{\pi}_{i,j} - p_{i,j}) \sim \mathcal{N}(\mu, \sigma^2). \quad (3.9)$$


### 3.3.2 Computing the Transition Matrix From the Matrix of $PMC_{\mathcal{P}}^m$

In order to study the asymptotic behavior of our synchronization operator, we should introduce how is possible to compute the transition probability matrix of a Markov chain giben the transition matrix of  $PMC_{\mathcal{P}}^m$ .

# 4 System Overview

## 4.1 System Architecture

Our system consumes as an input<sup>1</sup> an aggregated stream of events coming from a large number of moving objects, which is continuously collected and fed into the system. It allows users to register a pattern  $\mathcal{P}$  to be monitored over each event stream of a moving object. The output stream consists of original input events and predictions of full matches of  $\mathcal{P}$ , displayed to the end users. Figure 4.1 presents the overview of our system architecture and its main components.

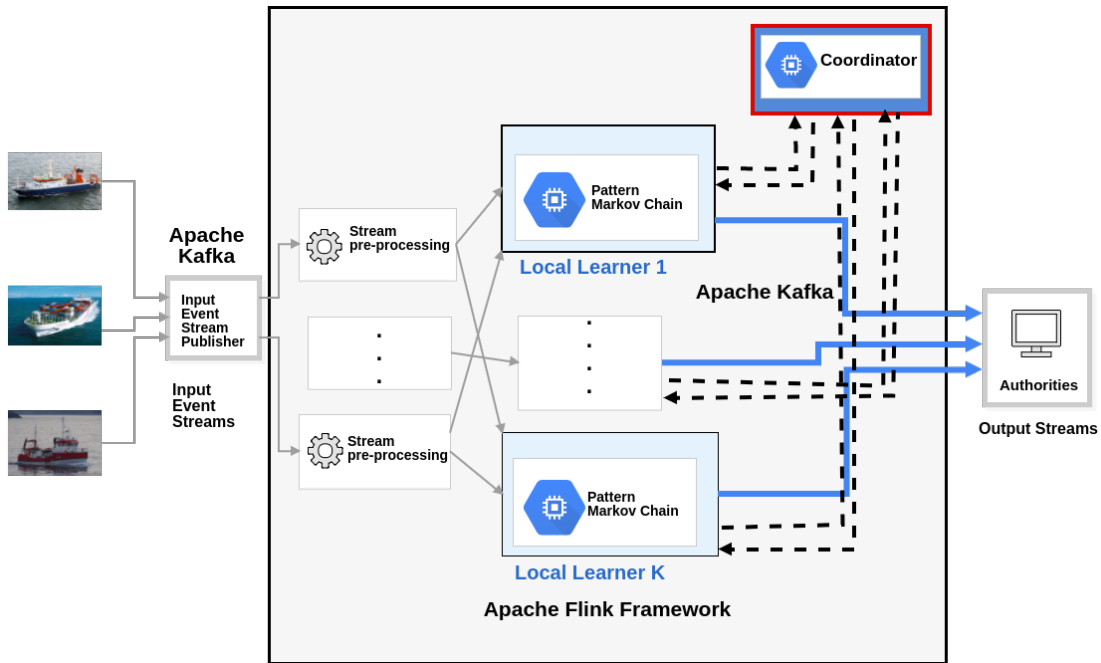

**Figure 4.1:** System architecture overview.

The system is composed of three processing units:

1. pre-processing operators that receive the input event stream and perform filtering and ordering operations, before partitioning the input event stream to multiple event streams based on the associated moving object

<sup>1</sup>In practice, the aggregated input events stream is composed of multiple event streams (partitions) from a set of moving objects.

2. predictor nodes (learners), which are responsible for maintaining a prediction model for the input event streams. Each prediction node is configured to handle an event stream from the same moving object, in order to provide online predictions for a predefined pattern  $\mathcal{P}$
3. a coordinator node that communicates through Kafka stream channels with the predictors to realize the distributed online learning protocol. It builds a global prediction model, based on the received local models, and then shares it among the predictors.

Our distributed system consists of multiple pre-processing operators, prediction nodes, and a central coordinator node. All units run concurrently and are arranged as a data processing pipeline, depicted in Figure 4.1. We leverage Apache Kafka as a messaging platform to ingest the input event streams and to publish the resulting streams. Also, it is used as the communication channel between the predictor nodes and the coordinator. Apache Flink is employed to execute the system’s distributed processing units over the input event streams: the pre-processing operators, the prediction units, and the coordinator node. Our system architecture can be modeled as a logical network of processing nodes, organized in the form of a DAG, inspired by the Flink runtime dataflow programs [9].

## 4.2 Implementation Details

In this section, we describe in detail the implementation of our system. It has been implemented on top of Apache Flink and Apache Kafka frameworks. Each of the three sub-modules, described in Section 4.1, have been implemented as Flink operations over the input events stream.

**Pre-processing and Prediction Operators.** Listing 4.1 shows how the main workflow of the system is implemented as Flink data flow program.

The system ingests the input events stream from a Kafka cluster that is mapped to a *DataStream* of events, which is then processed by an *EventTuplesMapper* to create tuples of  $(id, event)$ , where the *id* is associated to the identifier of the moving object. To handle events coming in out of order in a certain margin, the stream of event tuples is processed by a *TimestampAssigner*, it assigns the timestamps for the input events based on the extracted creation time. Afterwards, an ordered stream of event tuples is generated using a process function *EventSorter*.

```
DataStream<Event> eventsStream = env.addSource(kafkaConsumer);
// Create event tuples (id,event) and assign time stamp
DataStream<Tuple2<String,Event>> eventTuplesStream =
inputEventsStream.map(new EventTuplesMapper())
.assignTimestampsAndWatermarks(new EventTimeAssigner());
// Create the ordered keyed stream
```



```

keyedEventsStream = eventsStream.keyBy(0).process(new
    EventSorter()).keyBy(0);
//Initialize the predictor node
LocalPredictorNode predictorNode =new LocalPredictorNode<Event>(P);
// Process the keyedEventsStream by the predictor
DataStream<Event> processedEventsStream =
keyedEventsStream.map(predictorNode);

```

**Listing 4.1:** Flink pipeline for local predictors workflow

The ordered stream is then transformed to a *keyedEventsStream* by partitioning it, based on the ids values, using a *keyBy* operation. A local *predictor* node in a distributed environment is represented by a *map* function over the *keyedEventsStream*. Each parallel instance of the map operator (predictor) always processes all events of the same moving object (i.e., equivalent id), and maintains a bounded prediction model (i.e.,  $PMC_P^m$  predictor) using the Flink’s Keyed State <sup>2</sup>. The output streams of the moving objects from the parallel instances of the predictor map functions are sent to a new Kafka stream (i.e., same topic name). They then can be processed by other components like visualization or users notifier.

Moreover, the implementation of the *predictor* map function includes the communication with *coordinator* using Kafka streams. At the beginning of the execution, it sends a registration request to the coordinator. Also at the run-time, it sends its local prediction model as synchronization request, or as a response for a resolution request from the coordinator. These communication messages are published into different Kafka topics as depicted in Table 4.1.

**Table 4.1:** Messages to Kafka topics mapping.

Message	Kafka Topic
<i>RegisterNode</i> , <i>RequestSync</i> , and <i>ResolutionAnswer</i>	LocalToCoordinatorTopicId
<i>CoordinatorSync</i> and <i>RequestResolution</i>	CoordinatorToLocalTopicId

**Coordinator.** Listing 4.2 presents the workflow of the coordinator node that manages the distributed online learning protocol operations, which is implemented as Flink program. The coordinator receives messages from the local predictors

<sup>2</sup>Keyed State in Flink: <https://ci.apache.org/projects/flink/flink-docs-release-1.3/dev/stream/state.html#keyed-state>

through a Kafka Stream of a topic named *"LocalToCoordinatorTopicId"*. It is implemented as a single *map* function over the messages stream, by setting the *parallelism* level of the Flink program to *"1"*. Increasing the parallelism will scale up the number of parallel coordinator instances, for example, in order to handle different groupings of the input event streams. The map operator of the coordinator handles three message types from the predictors:

1. **RegisterNode** that contains a registration request for a new predictor node,
2. **RequestSync** to receive a local model after violation,
3. **ResolutionAnswer** to receive a resolution response from a local predictor node.

In addition, it sends **CoordinatorSync** messages for all predictors after creating a new global prediction model, or **RequestResolution** to ask the local predictors for their prediction models.

```
streamExecutionEnvironment.setParallelism(1);
// Read messages from local predictors
DataStream<TopicMessage> messagesStream = readKafkaStream(env,
    "LocalToCoordinatorTopicId");
// Initialize the coordinator node
CompunctionEfficientCoordinator coordinatorNode = new
    CompunctionEfficientCoordinator(configs);
// Ingest the messages stream by the coordinator
DataStream<CoordinatorMessage> coordinatorMessagesStream =
    messagesStream.map(coordinatorNode);
// Send the messages from the coordinator to the local predictors
writeKafkaStream(coordinatorMessagesStream,
    CoordinatorToLocalTopicId);
```

**Listing 4.2:** The coordinator Flink program.

# 5 Empirical Evaluation

## 5.1 Evaluation Over Synthetic Event Streams

## 5.2 Evaluation Over Real-word Event Streams

In this section, we evaluate our proposed system by analyzing the predictive performance and communication complexity using real-world event streams provided by the datAcron project in the context of maritime monitoring. The used event streams describe critical points (i.e., synopses) of moving vessels trajectories, which are derived from raw AIS messages as described in [33]. In particular, for our evaluation experiments we used a data set of synopses that contains 4,684,444 critical points of 5055 vessels sailing in the Atlantic Ocean during the period from 1 October 2015 to 31 March 2016.

We used the synopses data set to generate a simulated stream of event tuples i.e.,  $(id, timestamp, longitude, latitude, annotation, speed, heading)$ , which are processed by the system to attach an extra attribute *type* that represents the event value, where  $type \in \Sigma$ , and  $\Sigma = \Sigma_1 = \{VerySlow, Slow, Moving, Sailing, Stopping\}$ , which is based on a discretization of the speed values. Or  $\Sigma = \Sigma_2 = \{stopStart, stopEnd, changeInSpeedStart, changeInSpeedEnd, slowMotionStart, slowMotionEnd, gapStart, gapEnd, changeInHeading\}$ , which is derived based on the values of the *annotation* attribute that encodes the extracted trajectory movement events [33]. In our experiments, we monitor a pattern  $\mathcal{P}_1 = Sailing$  with  $\Sigma_1$  that detects when the vessel is underway (sailing). Likewise, we test a second pattern  $\mathcal{P}_2 = changeInHeading; gapStart; gapEnd; changeInHeading$  with  $\Sigma_2$ .

### Experimental setup

We ran our experiments on single-node standalone Flink cluster deployed on an Ubuntu Server 17.04 with Intel(R) Core(TM) i7-7700 CPU @ 3.60GHz X 8 processors and 32GB RAM. We used Apache Flink v1.3.2 and Apache Kafka v0.10.2.1 for our tests.

## Evaluation criteria

Our goal is to evaluate our distributed pattern prediction system, which enables the synchronization of prediction models (i.e., PMC models) on the distributed predictor nodes. Our proposed system can operate in three different modes of protocols/schemes of models synchronization:

1. static scheme based on synchronizing the prediction models periodically every  $b$  of input events in each stream,
2. continuous, full synchronization for each incoming event (hypothetical),
3. dynamic synchronization protocol based on making the predictors communicate their local prediction models periodically but only under condition that the divergence of the local models from a reference model exceeds a variance threshold  $\Delta$  (recommended).

We compare our proposed system against the isolated prediction mode, in which models are computed on single streams only, and compare the predictive performance in terms of :

1.  $precision = \frac{\# \text{ of correct predictions}}{\# \text{ of total predictions}}$  is the fraction of the produced predictions that are correct (i.e., a full match occurred within the prediction interval).
2.  $spread = end(I) - start(I)$  is the width of the prediction interval  $I$ .

Moreover, we study the communication cost by measuring the *cumulative communication* that captures the number of messages, which are required to perform the distributed online learning modes to synchronize the prediction models. Next, we present the experimental results for the patterns  $\mathcal{P}_1 = \textit{Sailing}$  with an order of  $m = 2$ , and  $\mathcal{P}_2 = \textit{changeInHeading}; \textit{gapStart}; \textit{gapEnd}; \textit{changeInHeading}$  with first order  $m = 1$ . All experiments are performed with setting the batch size to 100 ( $b = 100$ ), the variance threshold of 2 ( $\Delta = 2$ ), 80% as PMC prediction threshold ( $\theta_{fc} = 80\%$ ), and 200 for the maximum spread.

## Experimental results


Figure 5.1 depicts the average precision scores of predictions models (one prediction model per vessel) of all synchronization modes for the first pattern  $\mathcal{P}_1 = \textit{Sailing}$ , namely, isolated without synchronization, continuous (full-sync), static, and our recommended approach based on the dynamic synchronization scheme. It can be clearly seen that all methods of distributed learning outperform the isolated prediction models. The hypothetical method of full continuous synchronization has the highest precision rates, while the static and dynamic synchronization schemes have close precision scores. Consequently, dynamic synchronization is not much

weaker than the static synchronization, but requires much less communication, as explained below.


Figure 5.2 provides the amount of the accumulated communication that is required by the three modes of the distributed online learning, while the isolated approach does not require any communication between the predictors. These results are shown for  $\mathcal{P}_1$ . As expected, a larger amount of communication is required for the continuous synchronization comparing to the static and dynamic approaches. Also, it can be seen that we can reduce the communication overhead by applying the dynamic synchronization protocol (a reduction by a factor of 100) comparing to the static synchronization scheme, even with a small variance threshold  $\Delta = 2$ . Furthermore, the dynamic protocol is still preserving a close predictive performance to the static one (see Figure 5.1). Therefore, we will only consider the dynamic synchronization and the isolated approach in the evaluation of the second pattern.

In Figure 5.1, we also noted that the precision is going down in a first phase and stabilizes then. This seems to be counter-intuitive, as the models should improve when getting more data up to a certain point. For explanation, we have investigated the effect of the distributed synchronization of the prediction models on the average spread value, Figure 5.3 shows the spread results for all approaches. It can be seen that the spread is higher for the distributed learning based methods comparing to the isolated approach. Furthermore, the average spread is decreasing over time until convergence, as result of confidence increase in the models. This may explain the drop in the precision scores from the beginning until reaching the convergence. We will investigate further in the interrelation between precision and spread in future work.

For the second, more complex pattern ( $\mathcal{P}_2$ ), we have found that the precision was worse for a distributed model generated over all vessels than in the model created for each vessel in isolation. This indicates that there is no global model describing the behavior of all models consistently. However, when looking at specific groups of vessels, we achieved an improvement in terms of precision. As initial experiment, we only enable the synchronization of the prediction models associated with vessels that belong to the same vessel class. Currently, this change is technically performed by an extra filter step that passes only one type of vessels, while multiple runs of the system are required for all vessel types. For example, Figure 5.4 shows the precision scores for vessels of class *PLEASURE CRAFT*. An interesting observation is that the dynamic synchronization approach still has a higher precision scores than the isolated approach. We will further investigate the effect of groupings and more patterns in future work.

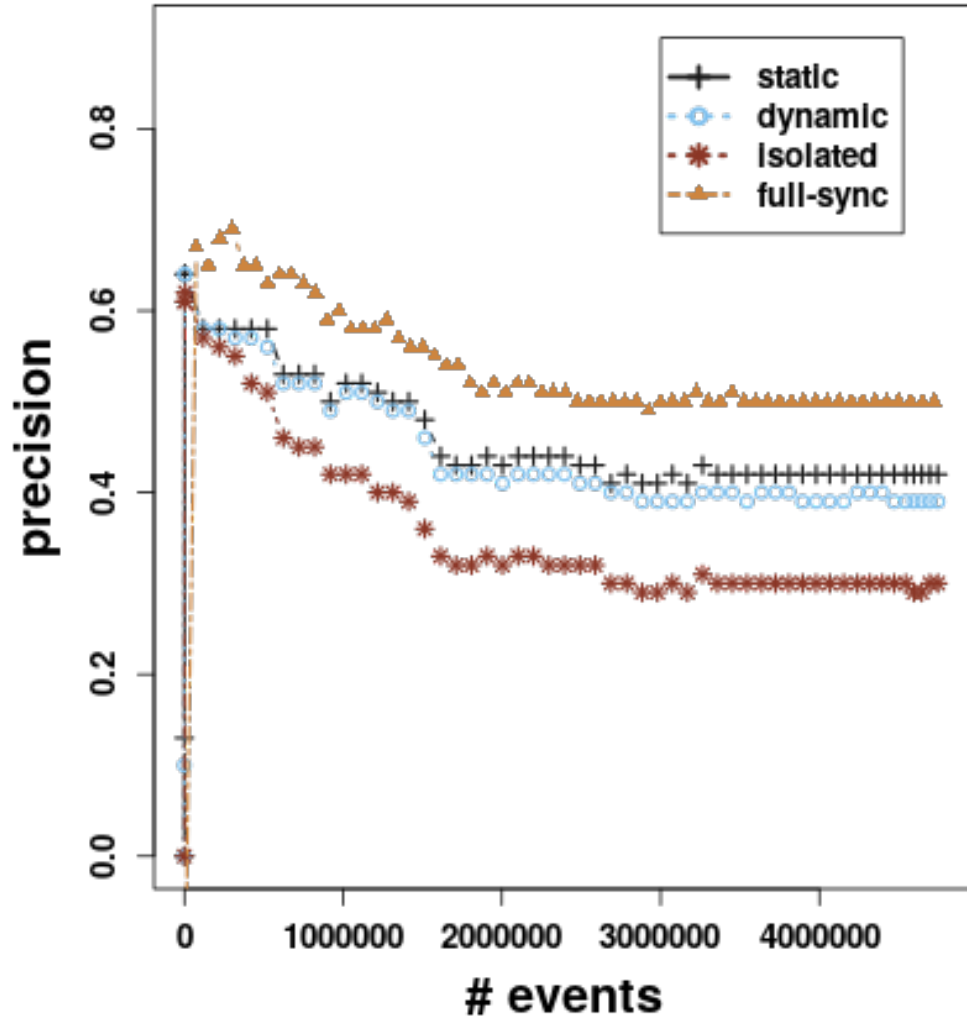

**Figure 5.1:** Precision scores with respect to the number of input events over time for  $\mathcal{P}_1$ .

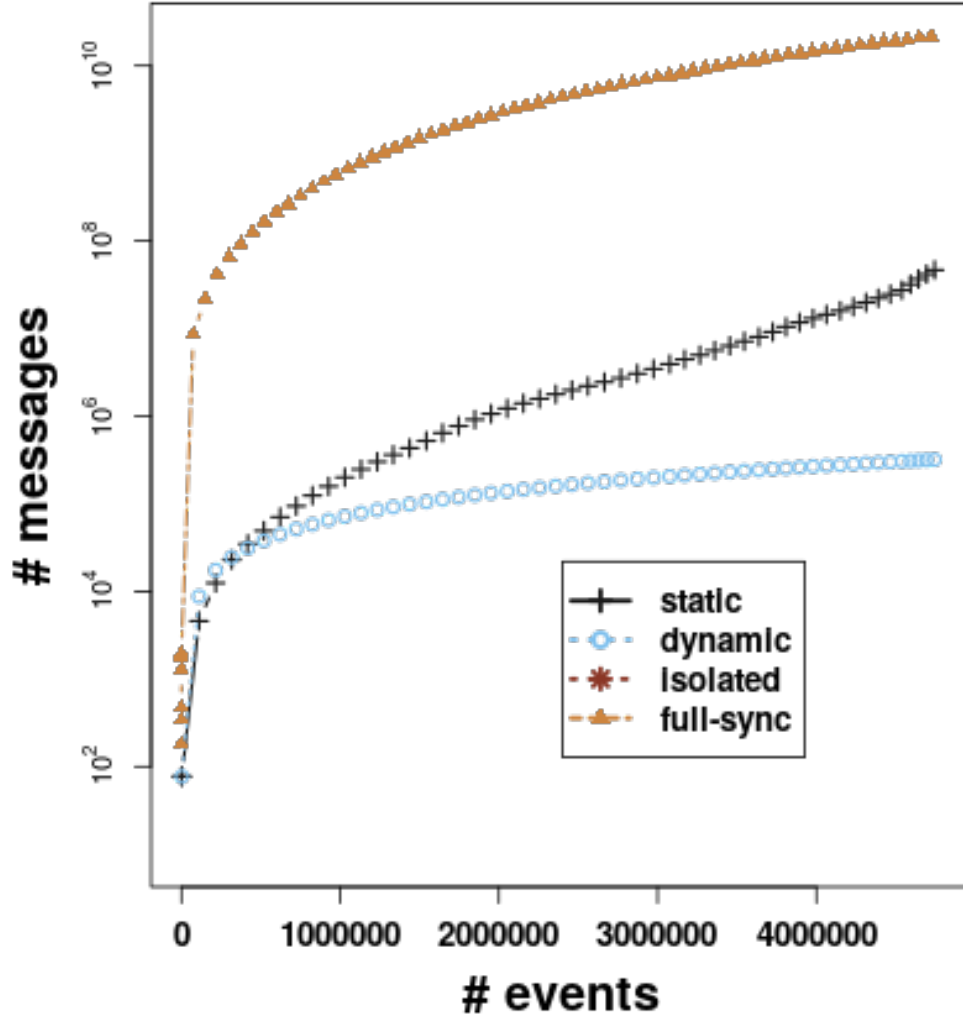

**Figure 5.2:** Commutative communication with respect to the number of input events over time for  $\mathcal{P}_1$ .

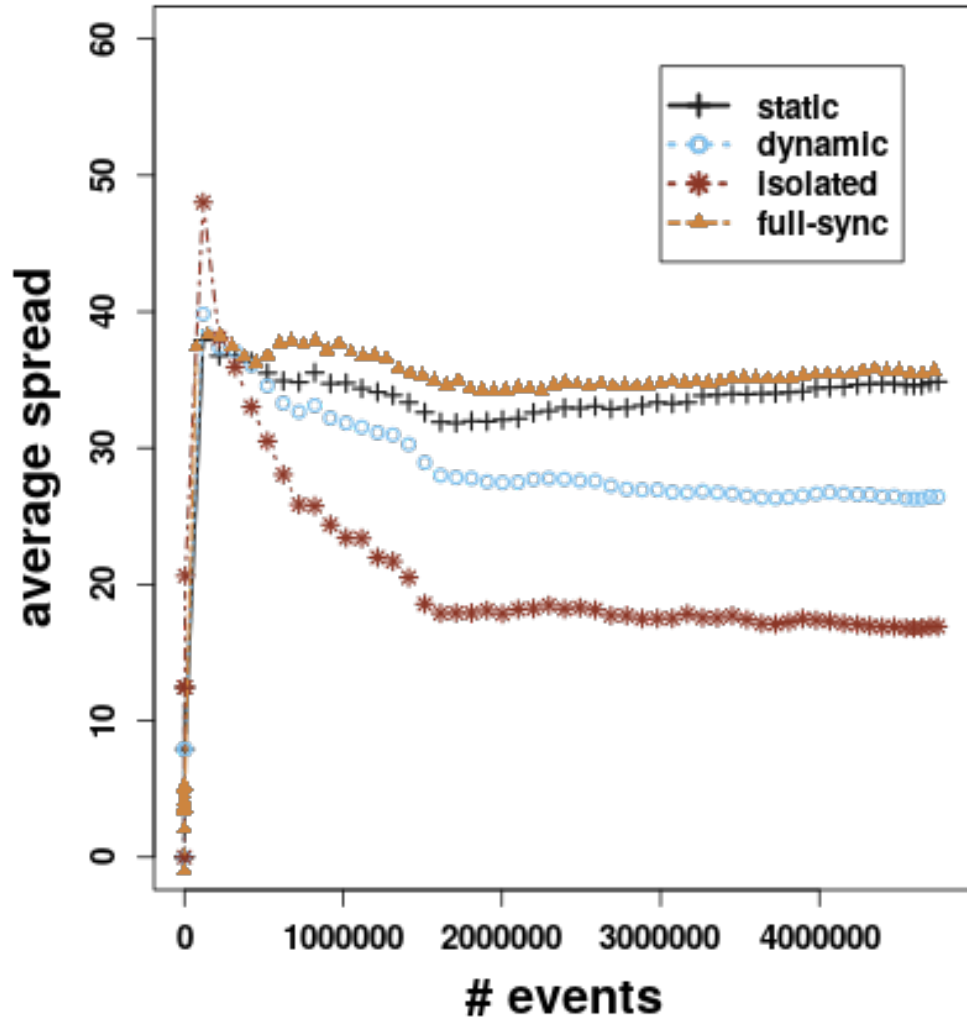


Figure 5.3: Average spread value for  $\mathcal{P}_1$ .



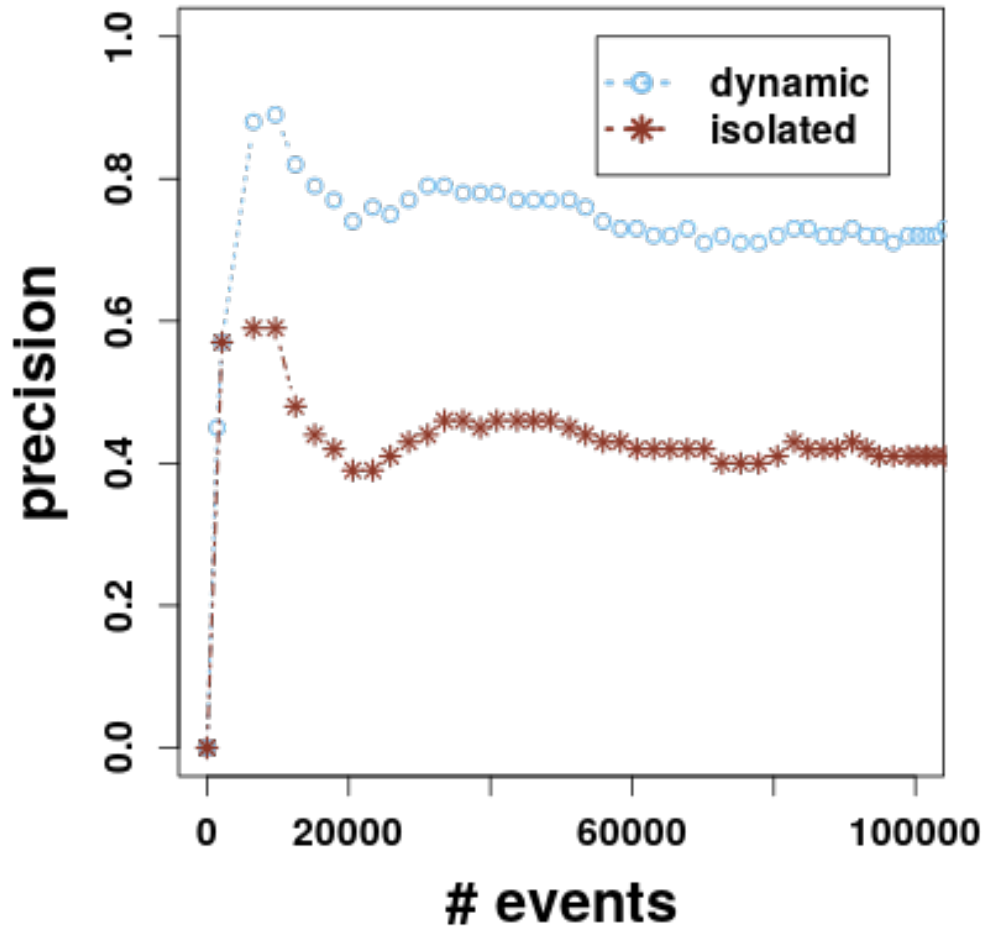


Figure 5.4: Precision scores of  $\mathcal{P}_2$  for *PLEASURE CRAFT* vessels.



## **6 Discussion**

### **6.1 Future Work**



## 7 Conclusion

In this paper, we have presented a system that provides a distributed pattern prediction over multiple large-scale event streams of moving objects (vessels). The system uses the event forecasting with Pattern Markov Chain (PMC) [3] as the base prediction model on each event stream, and it applies the protocol for distributed online prediction [18] to exchange information between the prediction models over multiple input event streams. Our proposed system has been implemented using Apache Flink and Apache Kafka, and empirically tested against large real-world event streams related to trajectories of moving vessels. As future work, we will investigate the effect of grouping the input event streams on the predictive performance of our proposed system. Furthermore, we will study the interrelation between precision and spread scores.



# Bibliography

- [1] Rakesh Agrawal, Tomasz Imieliński, and Arun Swami. Mining Association Rules Between Sets of Items in Large Databases. In *ACM SIGMOD*, 1993.
- [2] Elias Alevizos, Anastasios Skarlatidis, Alexander Artikis, and Georgios Paliouras. Complex event recognition under uncertainty: A short survey. *Event Processing, Forecasting and Decision-Making in the Big Data Era (EP-ForDM)*, pages 97–103, 2015.
- [3] Elias Alevizos, Alexander Artikis, and George Paliouras. Event forecasting with pattern markov chains. In *Proceedings of the 11th ACM International Conference on Distributed and Event-based Systems*, pages 146–157. ACM, 2017.
- [4] Theodore W Anderson and Leo A Goodman. Statistical inference about markov chains. *The Annals of Mathematical Statistics*, pages 89–110, 1957.
- [5] Amazon Web Services (AWS). Amazon Kinesis. <https://aws.amazon.com/de/kinesis/>, 2013.
- [6] Dimitri P Bertsekas and John N Tsitsiklis. *Introduction to probability*, volume 1. Athena Scientific Belmont, MA, 2002.
- [7] P Billingsley. Statistical Methods in Markov Chains. *The Annals of Mathematical Statistics*, 32(1):12–40, 1961. ISSN 00034851. doi: 10.1214/aoms/1177705148. URL <http://www.jstor.org/stable/2238700>.
- [8] Luca Canzian, Yu Zhang, and Mihaela van der Schaar. Ensemble of distributed learners for online classification of dynamic data streams. *IEEE Transactions on Signal and Information Processing over Networks*, 1(3):180–194, 2015.
- [9] Paris Carbone, Asterios Katsifodimos, Stephan Ewen, Volker Markl, Seif Haridi, and Kostas Tzoumas. Apache flink: Stream and batch processing in a single engine. *Bulletin of the IEEE Computer Society Technical Committee on Data Engineering*, 36(4), 2015.
- [10] Gianpaolo Cugola and Alessandro Margara. Processing flows of information: From data stream to complex event processing. *ACM Comput. Surv.*, 44(3):

- 15:1–15:62, June 2012. ISSN 0360-0300. doi: 10.1145/2187671.2187677. URL <http://doi.acm.org/10.1145/2187671.2187677>.
- [11] Ofer Dekel, Ran Gilad-Bachrach, Ohad Shamir, and Lin Xiao. Optimal distributed online prediction using mini-batches. *Journal of Machine Learning Research*, 13(Jan):165–202, 2012.
  - [12] Lina Fahed, Armelle Brun, and Anne Boyer. Efficient Discovery of Episode Rules with a Minimal Antecedent and a Distant Consequent. In *Knowledge Discovery, Knowledge Engineering and Knowledge Management*. Springer, 2014.
  - [13] The Apache Software Foundation. Apache Kafka. <https://kafka.apache.org/>, 2012.
  - [14] The Apache Software Foundation. Apache Spark Streaming. <http://spark.apache.org/streaming/>, 2013.
  - [15] The Apache Software Foundation. Apache Flink. <https://flink.apache.org/>, 2014.
  - [16] The Apache Software Foundation. Apache Storm. <http://storm.apache.org/>, 2014.
  - [17] Ronald A Howard. *Dynamic probabilistic systems: Markov models*, volume 1. Courier Corporation, 2012.
  - [18] Michael Kamp, Mario Boley, Daniel Keren, Assaf Schuster, and Izchak Sharfman. Communication-efficient distributed online prediction by dynamic model synchronization. In *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pages 623–639. Springer, 2014.
  - [19] Michael Kamp, Sebastian Bothe, Mario Boley, and Michael Mock. Communication-efficient distributed online learning with kernels. In *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pages 805–819. Springer, 2016.
  - [20] Srivatsan Laxman, Vikram Tankasali, and Ryen W. White. Stream Prediction Using a Generative Model Based on Frequent Episodes in Event Sequences. In *ACM SIGKDD*, 2008.
  - [21] Bo Liu, Erico N de Souza, Stan Matwin, and Marcin Sydow. Knowledge-based clustering of ship trajectories using density-based approach. In *Big Data (Big Data), 2014 IEEE International Conference on*, pages 603–608. IEEE, 2014.



- [22] David Luckham. The power of events: An introduction to complex event processing in distributed enterprise systems. In *International Workshop on Rules and Rule Markup Languages for the Semantic Web*, pages 3–3. Springer, 2008.
- [23] Heikki Mannila, Hannu Toivonen, and A Inkeri Verkamo. Discovery of frequent episodes in event sequences. *Data mining and knowledge discovery*, 1(3):259–289, 1997.
- [24] Heikki Mannila, Hannu Toivonen, and A. Inkeri Verkamo. Discovery of Frequent Episodes in Event Sequences. *Data Mining and Knowledge Discovery*, 1997.
- [25] Michael Mathioudakis and Nick Koudas. Twittermonitor: trend detection over the twitter stream. In *Proceedings of the 2010 ACM SIGMOD International Conference on Management of data*, pages 1155–1158. ACM, 2010.
- [26] Daniele Miorandi, Sabrina Sicari, Francesco De Pellegrini, and Imrich Chlamtac. Internet of things: Vision, applications and research challenges. *Ad Hoc Networks*, 10(7):1497–1516, 2012.
- [27] Douglas C Montgomery, Cheryl L Jennings, and Murat Kulahci. *Introduction to time series analysis and forecasting*. Wiley, 2015.
- [28] Vinod Muthusamy, Haifeng Liu, and Hans-Arno Jacobsen. Predictive Publish/Subscribe Matching. In *DEBS*. ACM, 2010.
- [29] Grégory Nuel. Pattern Markov Chains: Optimal Markov Chain Embedding through Deterministic Finite Automata. *Journal of Applied Probability*, 2008.
- [30] International Maritime Organization. Automatic identification systems. <http://www.imo.org/OurWork/Safety/Navigation/Pages/AIS.aspx>, 2001.
- [31] Giuliana Pallotta, Michele Vespe, and Karna Bryan. Vessel pattern knowledge discovery from ais data: A framework for anomaly detection and route prediction. *Entropy*, 15(6):2218–2245, 2013.
- [32] Kostas Patroumpas, Alexander Artikis, Nikos Katzouris, Marios Voudas, Yannis Theodoridis, and Nikos Pelekis. Event recognition for maritime surveillance. In *EDBT*, pages 629–640, 2015.
- [33] Kostas Patroumpas, Elias Alevizos, Alexander Artikis, Marios Voudas, Nikos Pelekis, and Yannis Theodoridis. Online event recognition from moving vessel trajectories. *GeoInformatica*, 21(2):389–427, 2017.

- [34] Nicholas Poul Schultz-Møller, Matteo Migliavacca, and Peter Pietzuch. Distributed complex event processing with query rewriting. In *Proceedings of the Third ACM International Conference on Distributed Event-Based Systems*, page 4. ACM, 2009.
- [35] Cem Tekin, Simpson Zhang, and Mihaela van der Schaar. Distributed online learning in social recommender systems. *IEEE Journal of Selected Topics in Signal Processing*, 8(4):638–652, 2014.
- [36] R. Vilalta and Sheng Ma. Predicting rare events in temporal domains. In *ICDM*, 2002.
- [37] Gary M Weiss and Haym Hirsh. Learning to predict rare events in event sequences. In *KDD*, pages 359–363, 1998.
- [38] Feng Yan, Shreyas Sundaram, SVN Vishwanathan, and Yuan Qi. Distributed autonomous online learning: Regrets and intrinsic privacy-preserving properties. *IEEE Transactions on Knowledge and Data Engineering*, 25(11):2483–2493, 2013.
- [39] Yu Zhang, Daby Sow, Deepak Turaga, and Mihaela van der Schaar. A fast online learning algorithm for distributed mining of bigdata. *ACM SIGMETRICS Performance Evaluation Review*, 41(4):90–93, 2014.
- [40] Cheng Zhou, Boris Cule, and Bart Goethals. A pattern based predictor for event streams. *Expert Systems with Applications*, 2015.