

DDD_SchoolManagement



Colección completa para gestionar estudiantes, asignaturas, profesores y cursos.

php -S localhost:8000 -t public

Student

POST Crea Student

<http://localhost:8000/api/students>

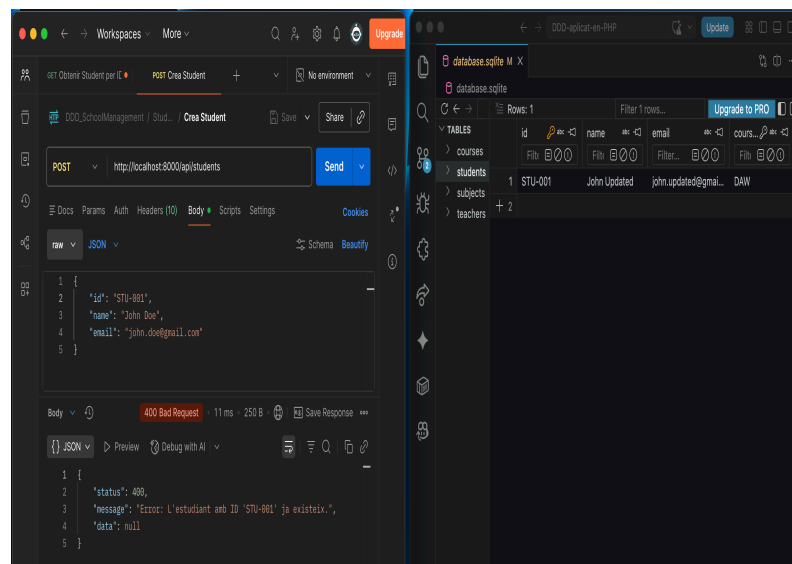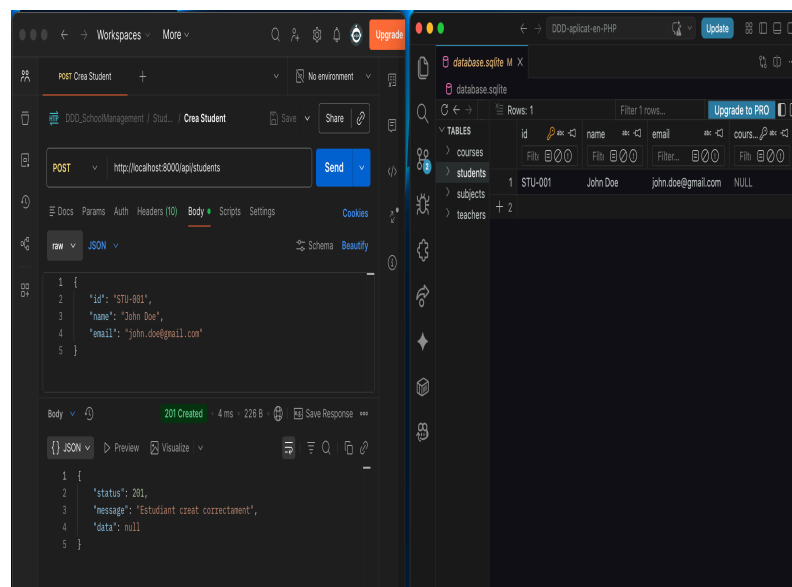

HEADERS


Content-Type application/json

Body raw

```
{
  "id": "STU-001",
  "name": "John Doe",
  "email": "john.doe@gmail.com"
}
```

GET Obtenir Student per ID

http://localhost:8000/api/students/STU-001

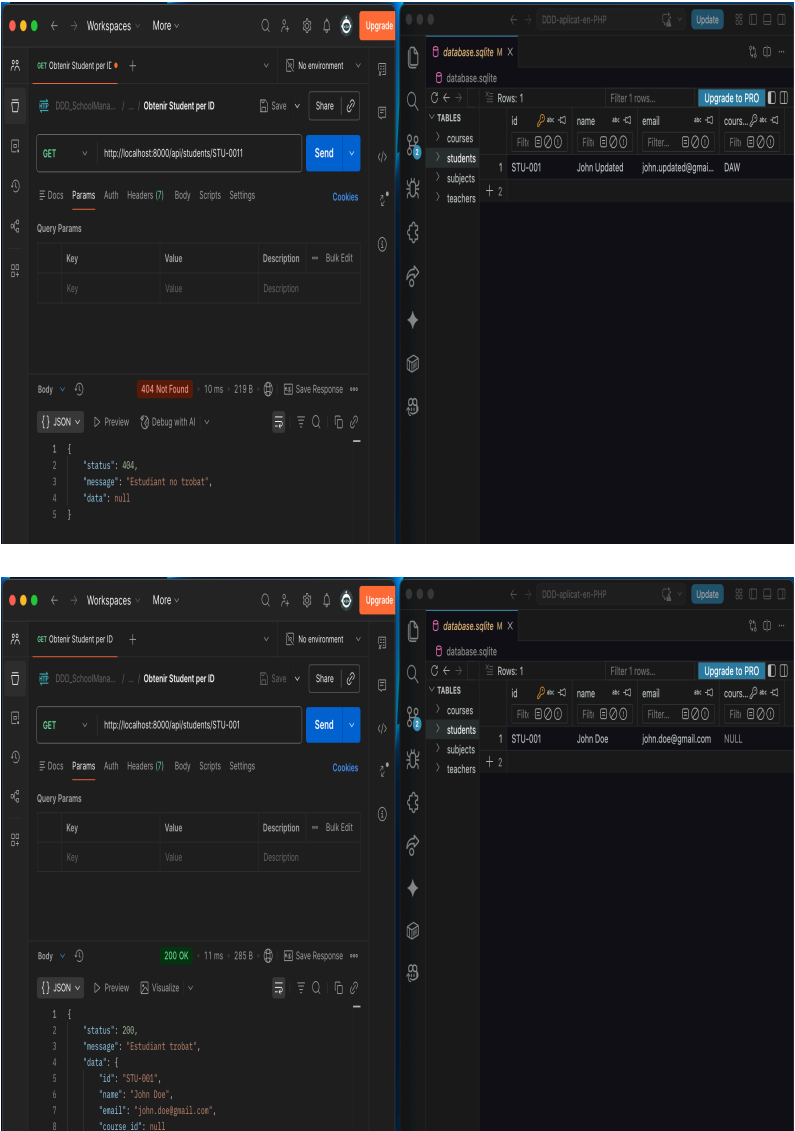



```
9 | }  
10 | }
```


GET Llista de Students

<http://localhost:8000/api/students>

PUT Actualizar Student

<http://localhost:8000/api/students/STU-001>

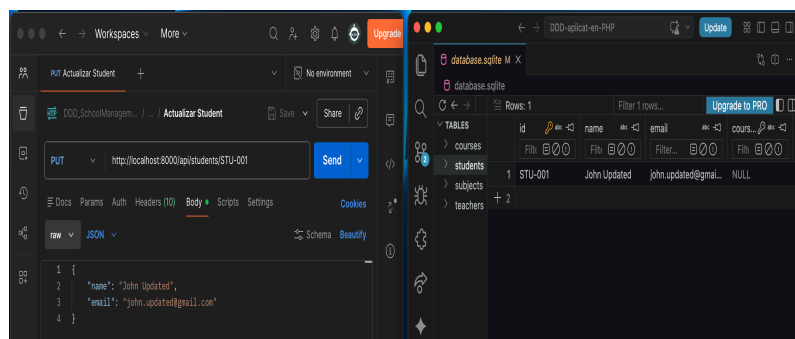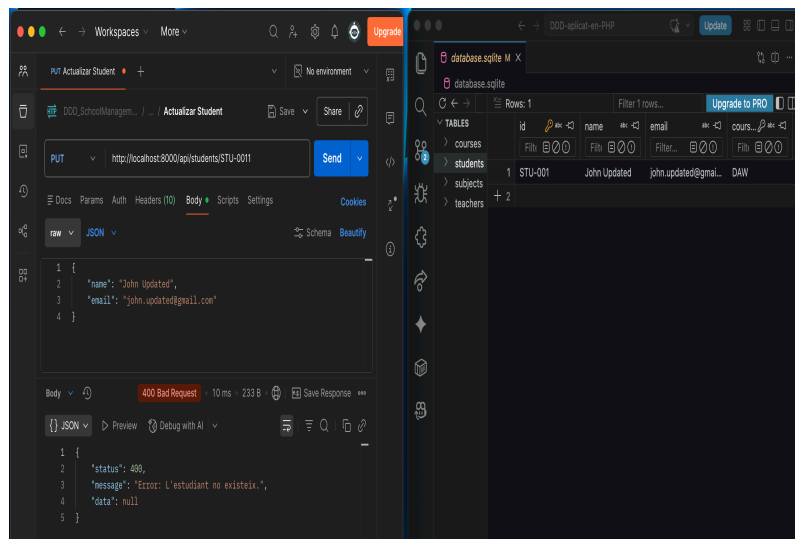

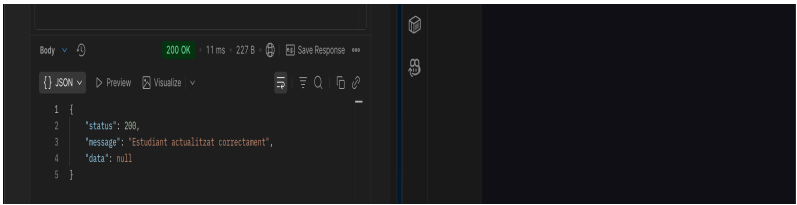

HEADERS



Content-Type application/json


Body raw

```
{
  "name": "John Updated",
  "email": "john.updated@gmail.com"
}
```

POST Enroll Student a Subject

<http://localhost:8000/api/students/STU-001/enroll>

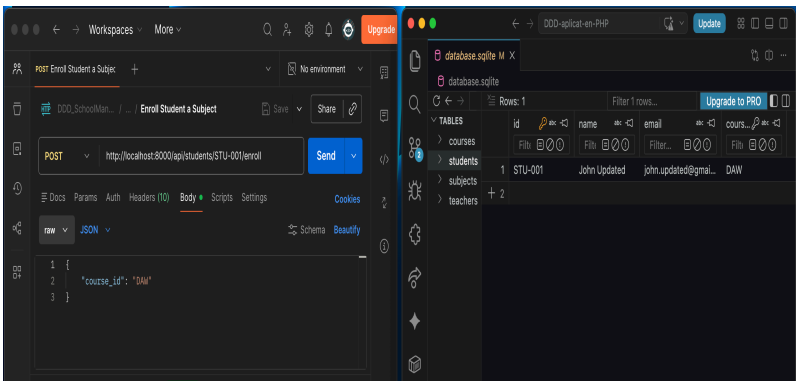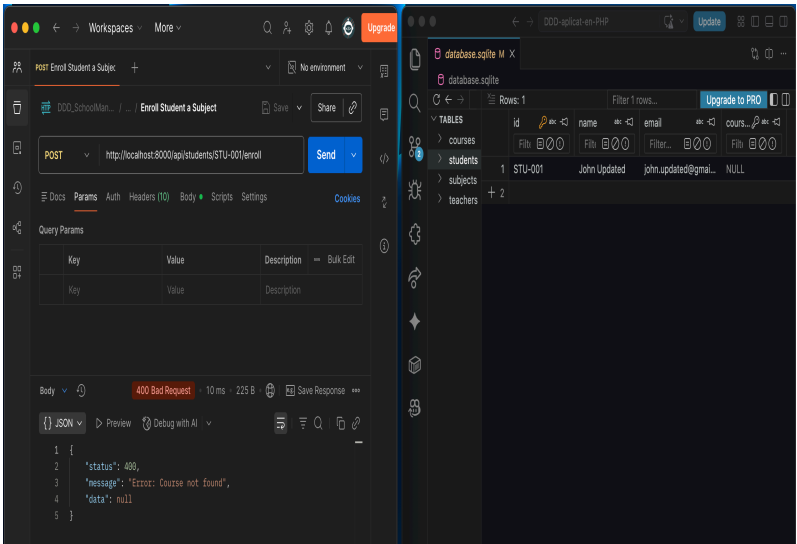

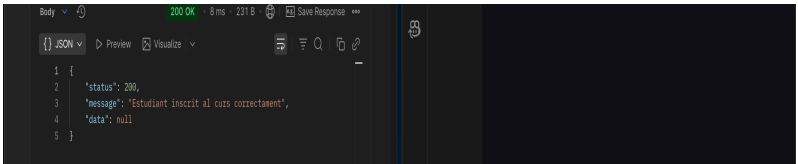

HEADERS



Content-Type application/json

Body raw

```
{
  "course_id": "DAW"
}
```

POST Unenroll Student de Subject

http://localhost:8000/api/students/STU-001/unenroll

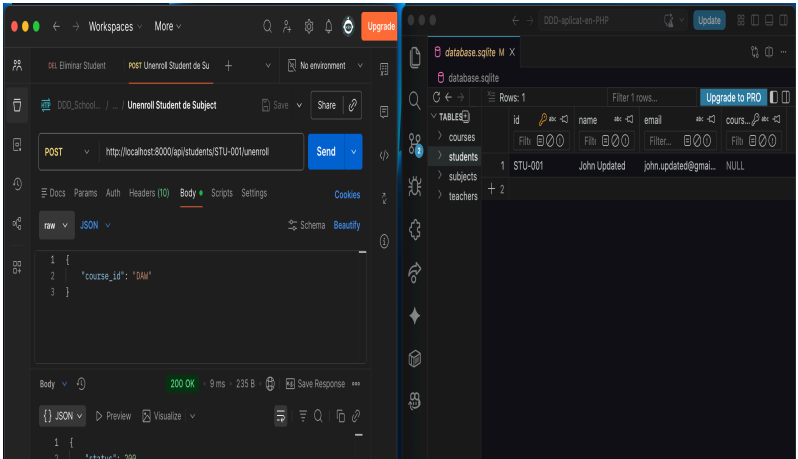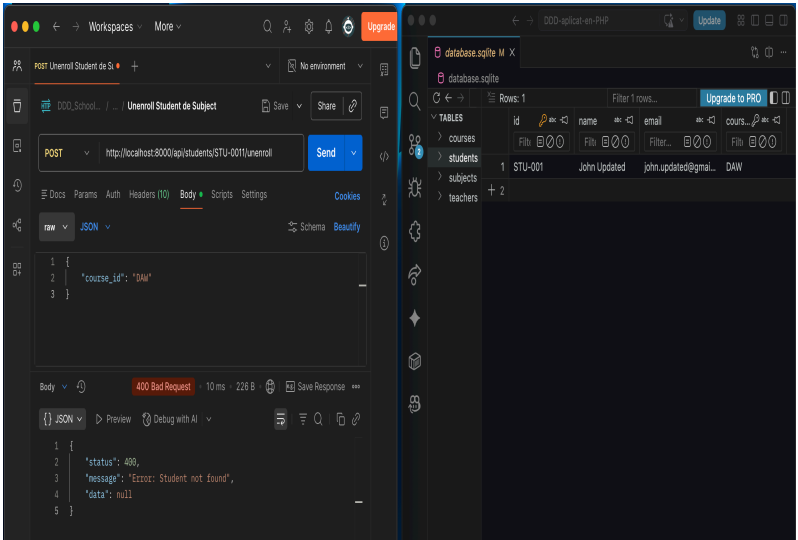

```
1 {
2   "status": 400,
3   "message": "Estudiant desinscrit del curs correctament",
4   "data": null
5 }
```

HEADERS



Content-Type application/json

Body *raw*

```
{
  "course_id": "DAW"
}
```

DELETE Eliminar Student



http://localhost:8000/api/students/STU-001

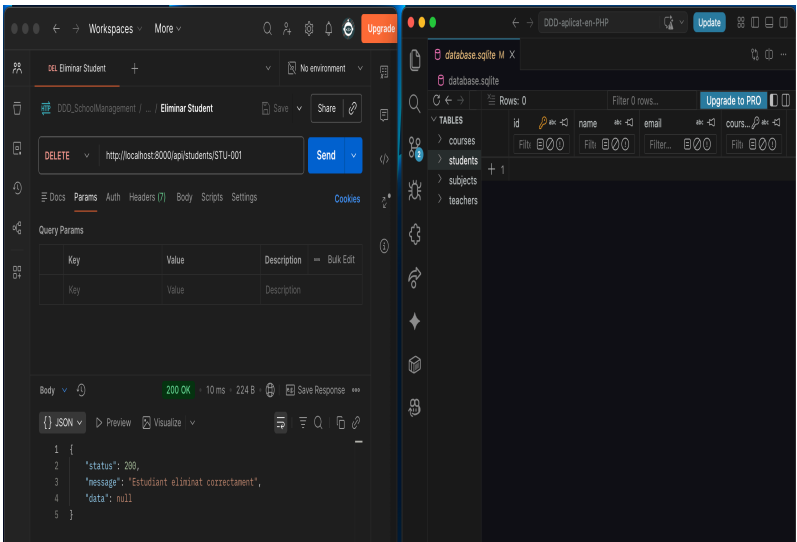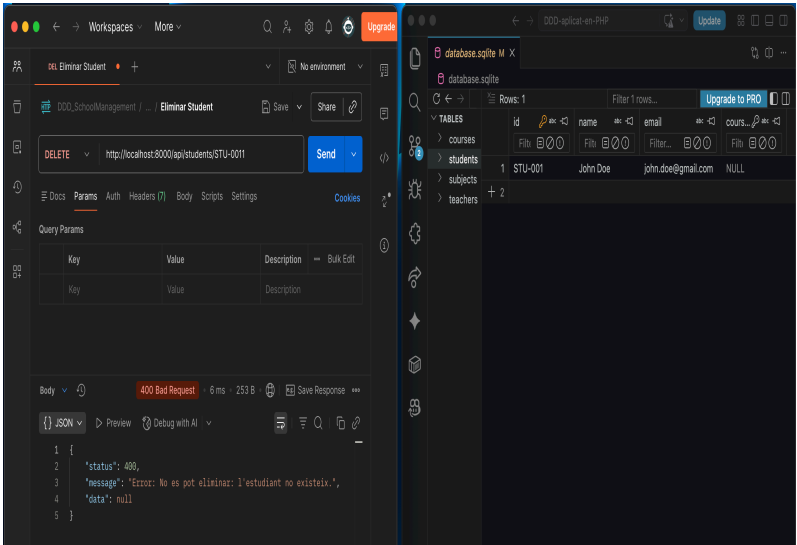

Subject

POST Crear Subject

http://localhost:8000/api/subjects

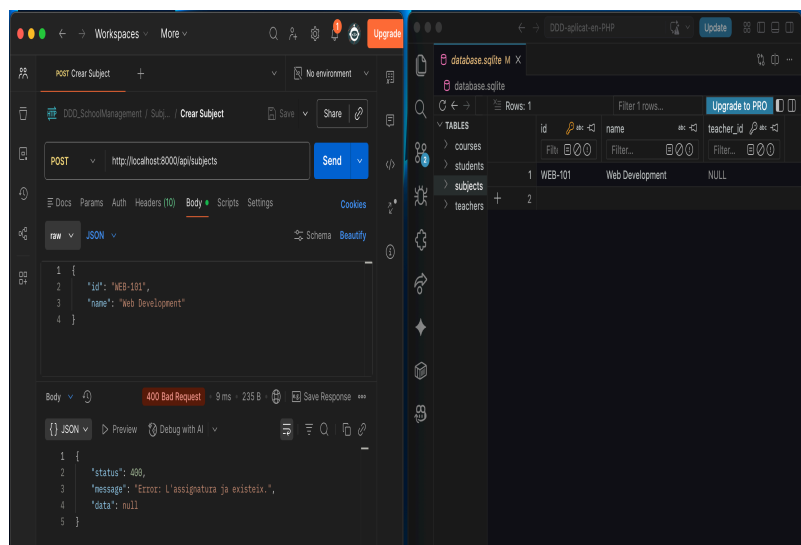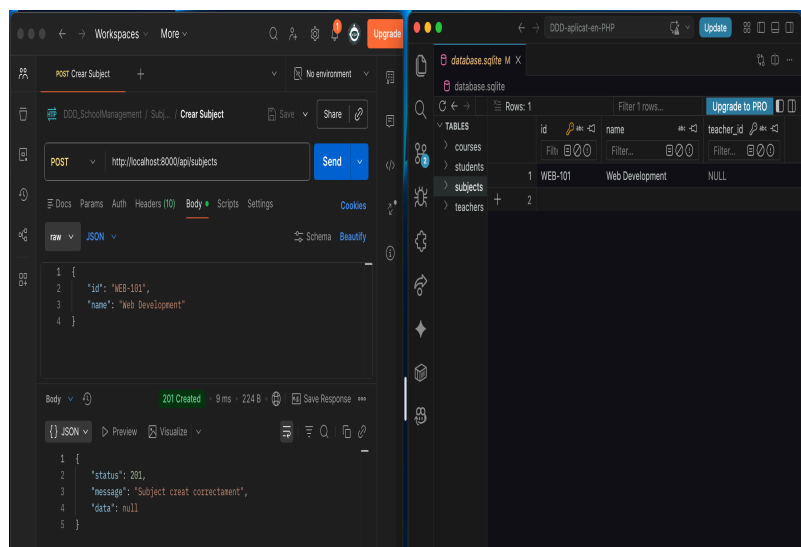

HEADERS

Content-Type application/json



Body raw

```
{
```

```
"id": "WEB-101",  
"name": "Web Development"  
}
```


GET Obter Subject por ID


<http://localhost:8000/api/subjects/WEB-101>

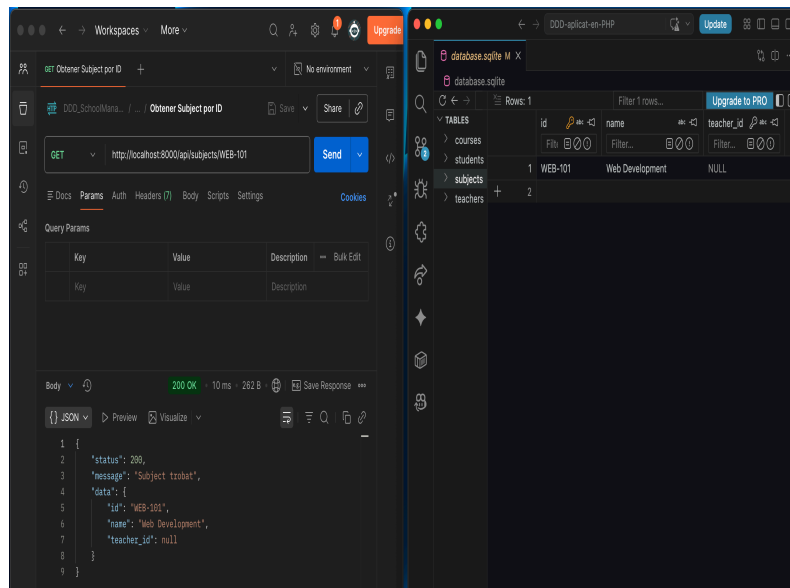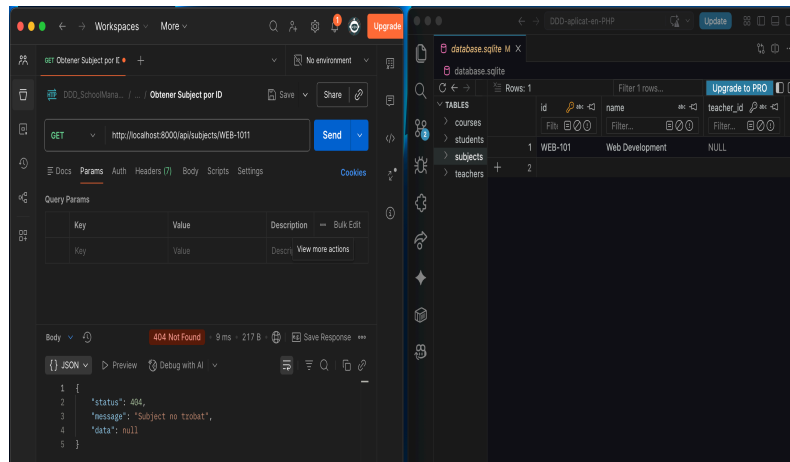

GET Lista de Subjects



<http://localhost:8000/api/subjects>

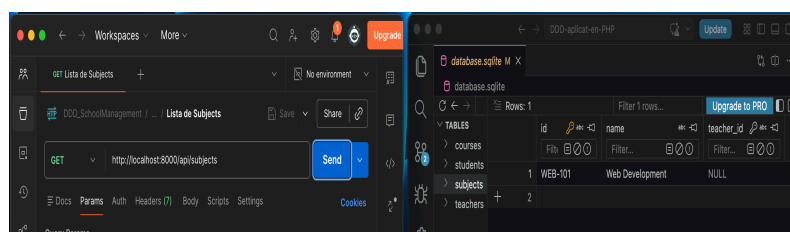

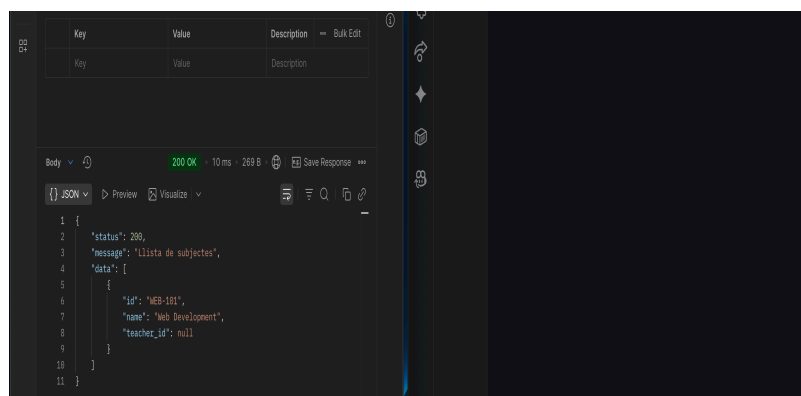

PUT Actualizar Subject

<http://localhost:8000/api/subjects/WEB-101>

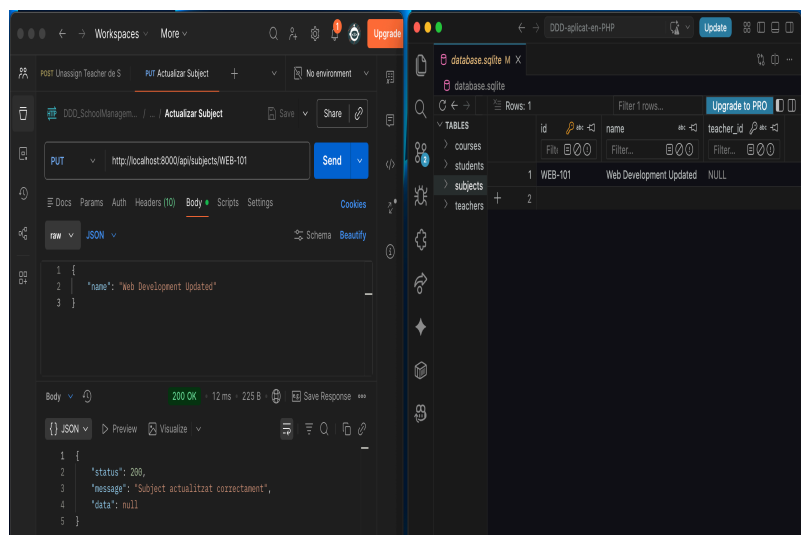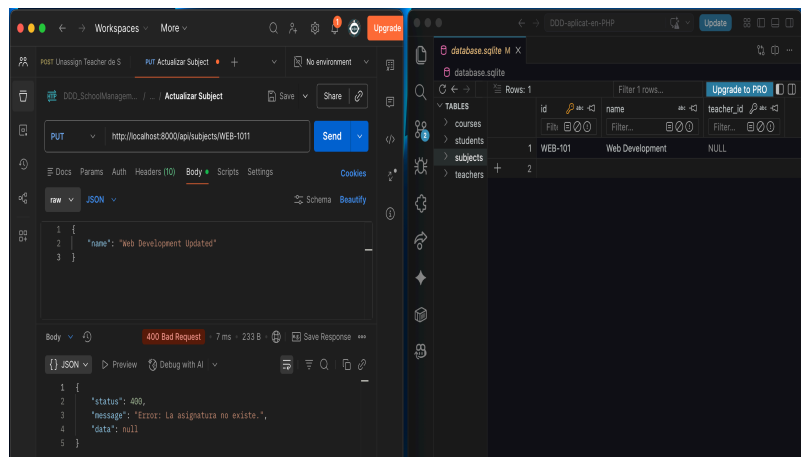

HEADERS

Content-Type



application/json

Body raw

```
{  
  "name": "Web Development Updated"  
}
```

POST Assign Teacher a Subject

http://localhost:8000/api/subjects/WEB-101/assign-teacher

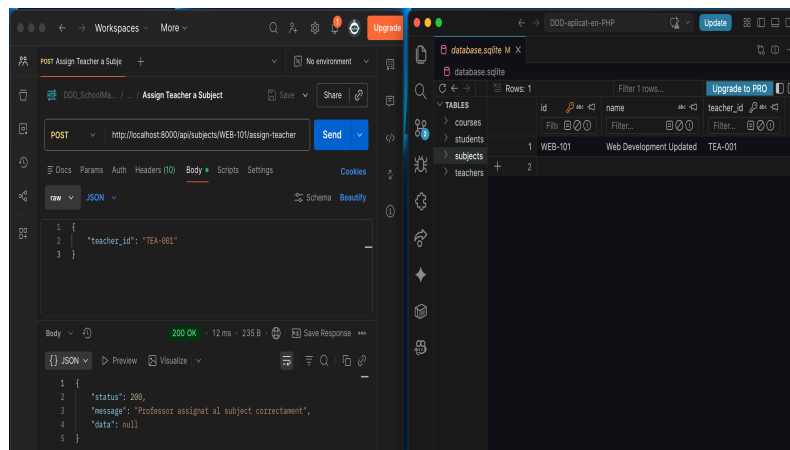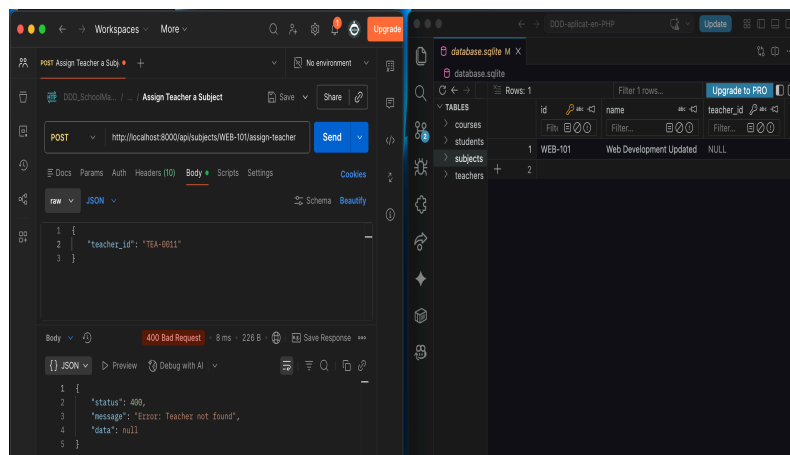

HEADERS


Content-Type application/json

Body raw

```
{  
  "teacher_id": "TEA-001"  
}
```

POST Unassign Teacher de Subject

http://localhost:8000/api/subjects/WEB-101/unassign-teacher

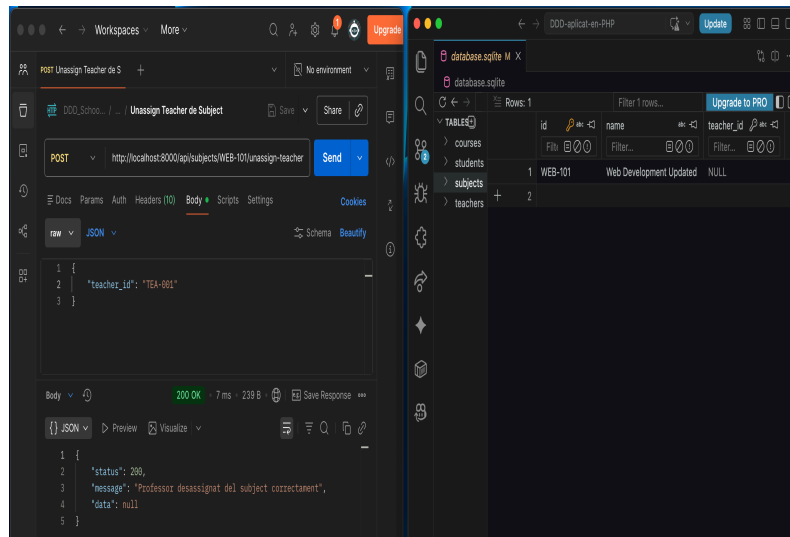

HEADERS


Content-Type application/json



Body raw

```
{  
  "teacher_id": "TEA-001"  
}
```

DELETE Eliminar Subject

http://localhost:8000/api/subjects/WEB-101

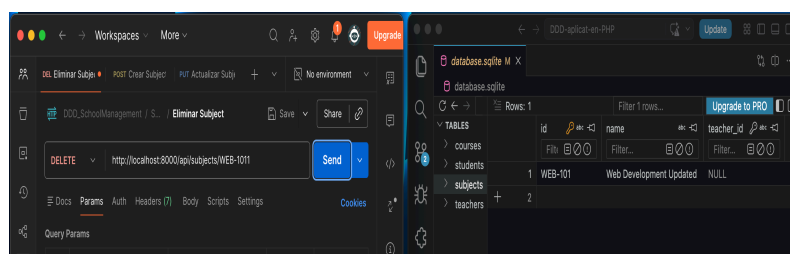


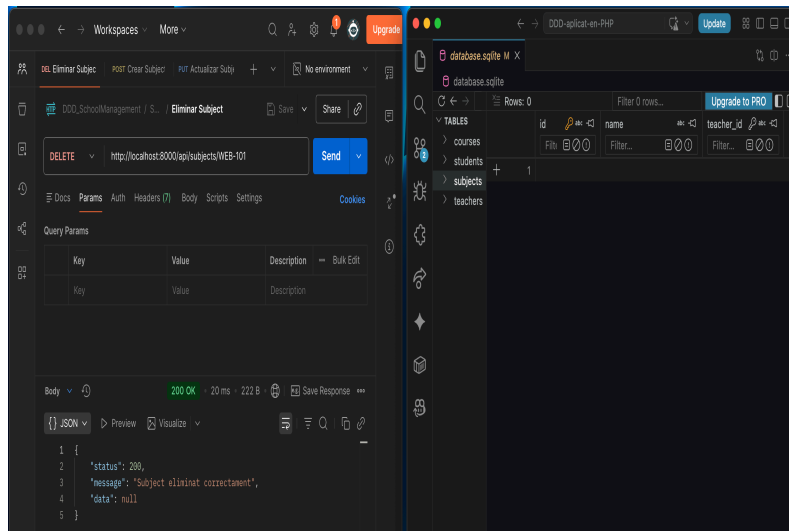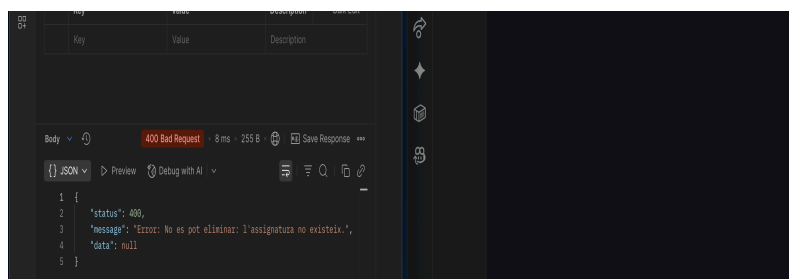


Teacher

POST Crear Teacher

<http://localhost:8000/api/teachers>

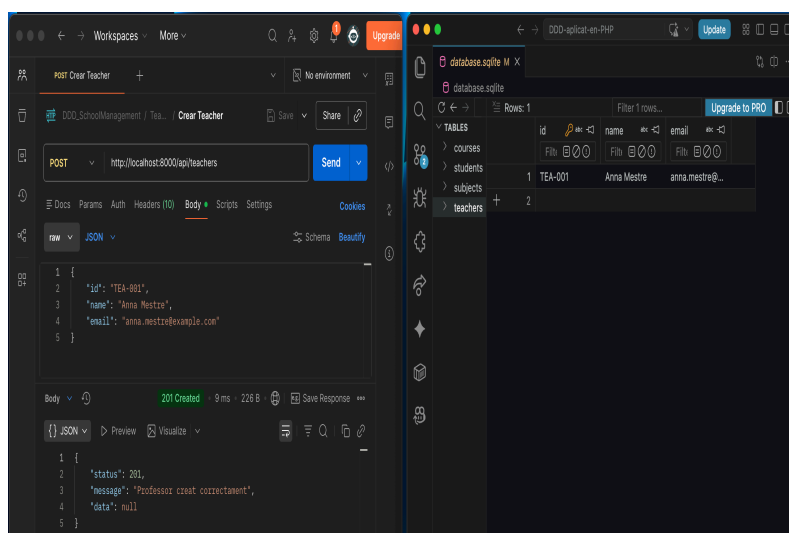

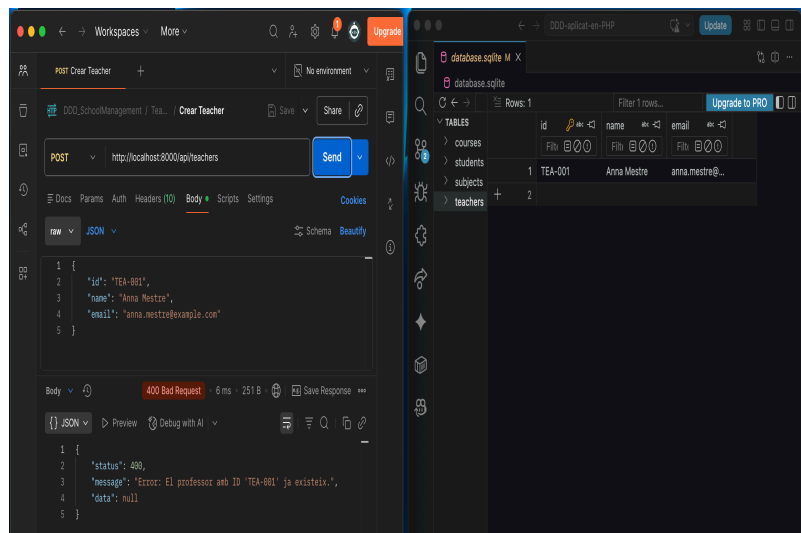

HEADERS


Content-Type application/json


Body raw

```
{  
  "id": "TEA-001",  
  "name": "Anna Mestre",  
  "email": "anna.mestre@example.com"  
}
```

GET Obtenir Teacher por ID


http://localhost:8000/api/teachers/TEA-001

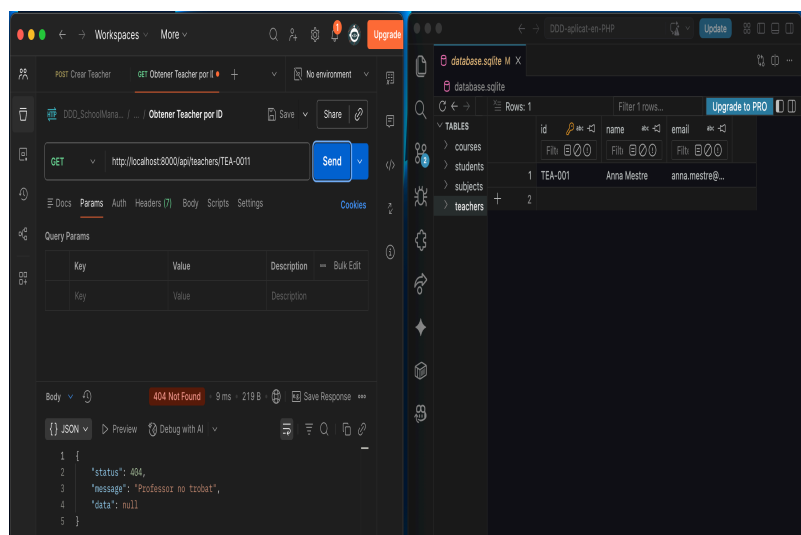

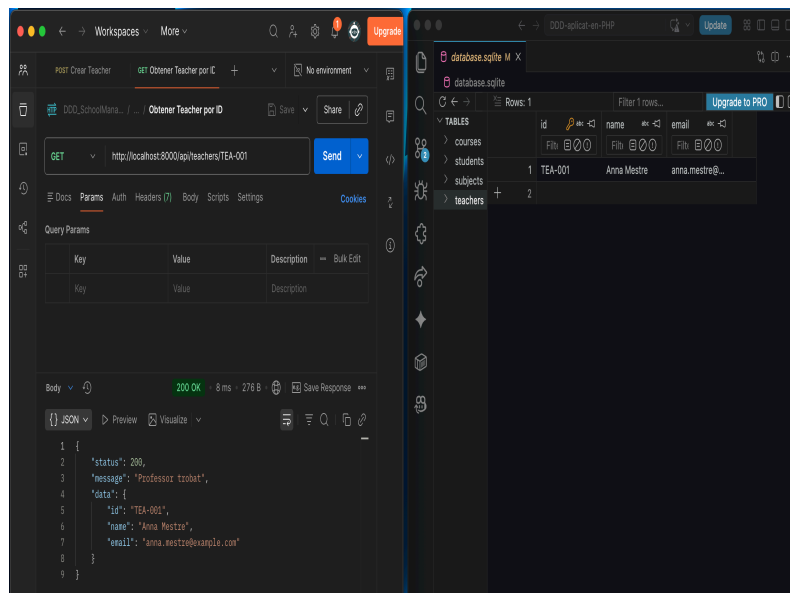


GET Lista de Teachers



`http://localhost:8000/api/teachers`

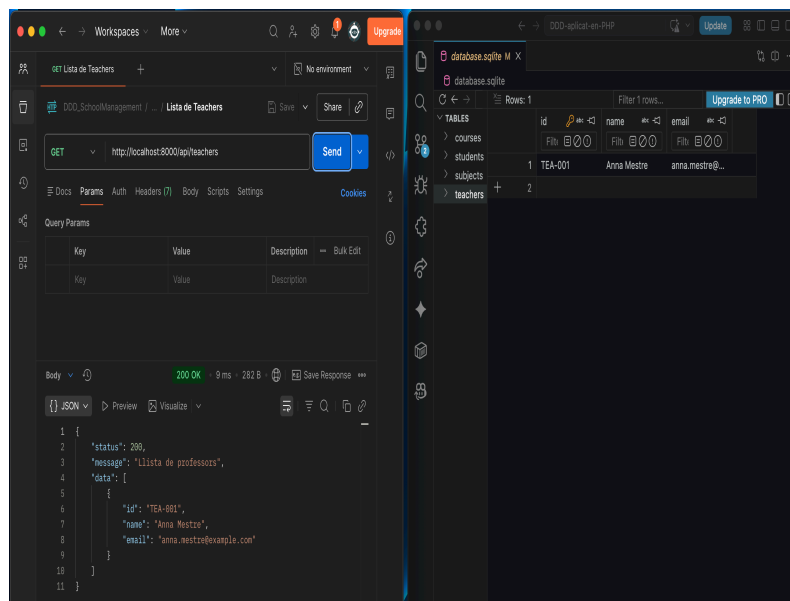

PUT Actualizar Teacher

`http://localhost:8000/api/teachers/TEA-001`

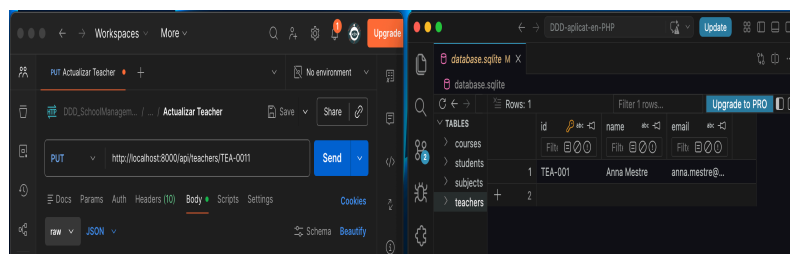

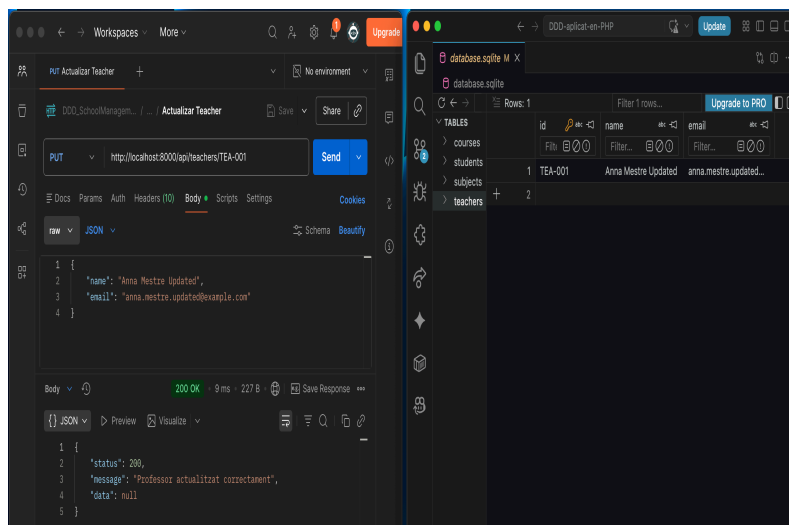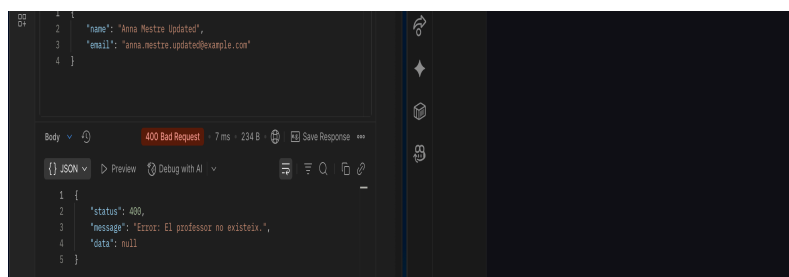

HEADERS



Content-Type `application/json`

Body raw

```
{  
  "name": "Anna Mestre Updated",  
  "email": "anna.mestre.updated@example.com"  
}
```

DELETE Eliminar Teacher


`http://localhost:8000/api/teachers/TEA-001`

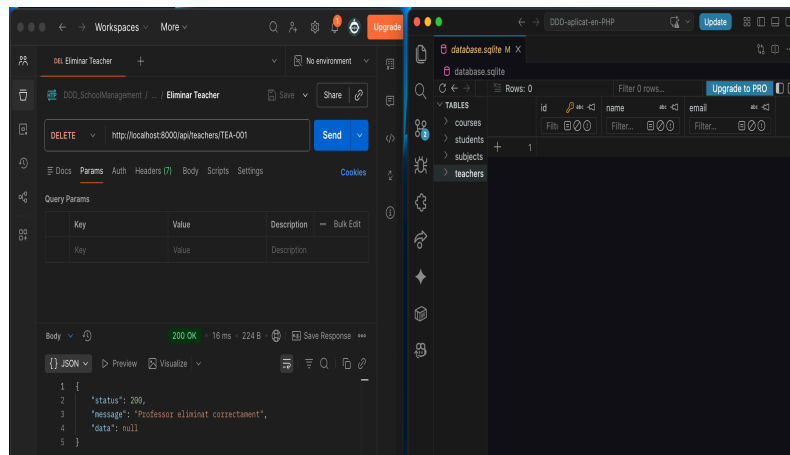
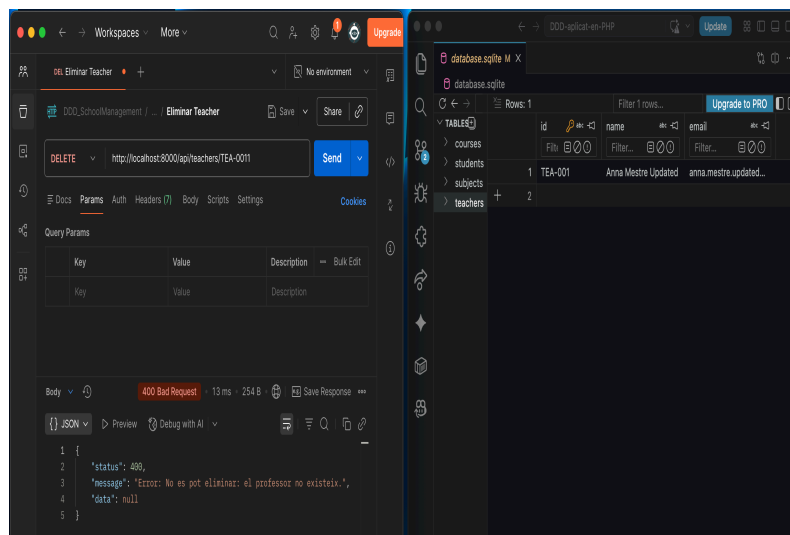


Course

POST Crear Course

`http://localhost:8000/api/courses`

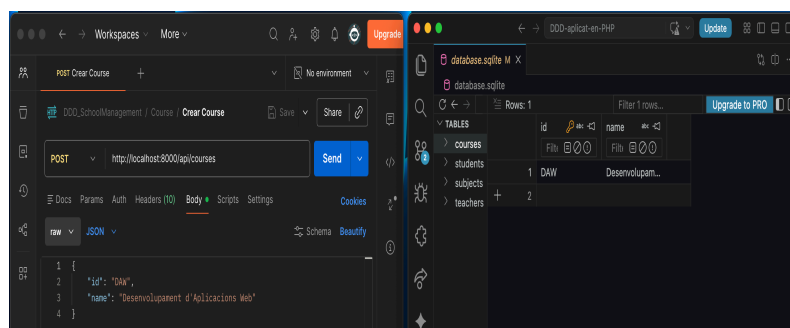

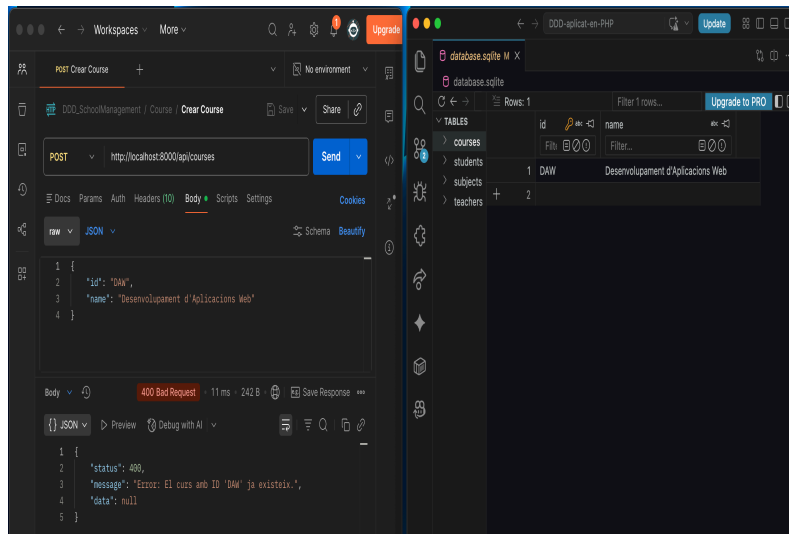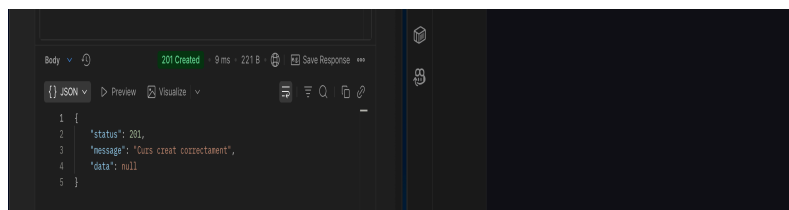

HEADERS


Content-Type application/json

Body raw

```
{  
  "id": "DAW",  
  "name": "Desenvolupament d'Aplicacions Web"  
}
```

GET Obtener Course por ID

http://localhost:8000/api/courses/DAW

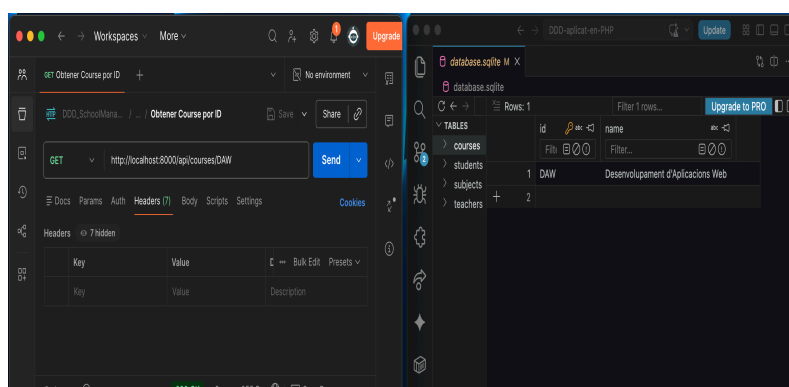

```
{ JSON } Preview Visualize
1 {
2   "status": 200,
3   "message": "Curs trobat",
4   "data": {
5     "id": "DAW",
6     "name": "Desenvolupament d'Aplicacions Web"
7   }
8 }
```

GET Lista de Courses

<http://localhost:8000/api/courses>

The screenshot shows the VS Code interface with a REST client extension. A GET request is sent to `http://localhost:8000/api/courses`. The response is a 200 OK with a JSON body:

```
{
  "status": 200,
  "message": "Llista de cursos",
  "data": [
    {
      "id": "DAW",
      "name": "Desenvolupament d'Aplicacions Web"
    }
  ]
}
```

On the right, a database table named `courses` is visible with the following data:

id	name
1	DAW
2	Desenvolupament d'Aplicacions Web

PUT Actualizar Course

<http://localhost:8000/api/courses/DAW>

The first screenshot shows a PUT request to `http://localhost:8000/api/courses/DAW` resulting in a 400 Bad Request response with the following JSON body:


```
{
  "status": 400,
  "message": "Error: El curs no existeix.",
  "data": null
}
```

The second screenshot shows the same PUT request, but the response is a 200 OK with a JSON body:

```
{
  "status": 200,
  "message": "Curs actualitzat",
  "data": {
    "id": "DAW",
    "name": "Desenvolupament d'Aplicacions Web"
  }
}
```

On the right, the database table `courses` is visible with the following data:

id	name
1	DAW
2	Desenvolupament d'Aplicacions Web

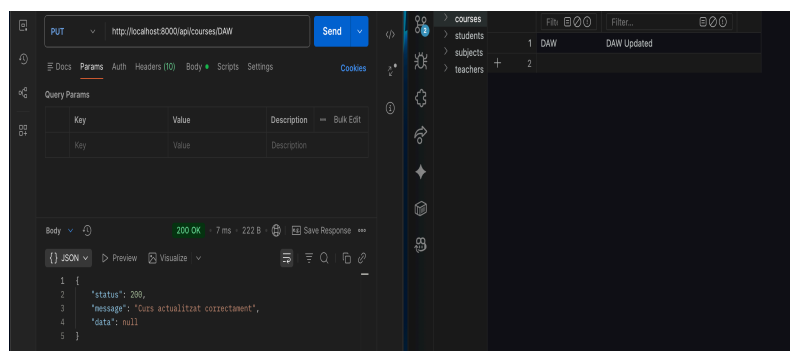

HEADERS

Content-Type application/json

Body raw

```
{  
  "name": "DAW Updated"  
}
```

DELETE Eliminar Course

http://localhost:8000/api/courses/DAW

