

## 3.3 Inheritance Qualifiers

Sue has just completed writing a class which is derived off of a base class. While using inheritance proved to be much simpler than duplicating all the functionality from the base class, there is an unfortunate side-effect. In order to make the methods of the derived class as efficient as possible, it is necessary for them to work with the base class' data rather than the publically exposed properties. How can this be done without exposing this data to the client as well?

### Objectives

By the end of this chapter, you will be able to:

- Explain why inheritance qualifiers strengthens encapsulation by allowing the programmer to fine-tune access to class data
- Describe protected and list scenarios when it would be handy to use it
- For a given base class and derived class, explain why access to a given method or member variable is allowed or not allowed

### Prerequisites

Before reading this chapter, please make sure you are able to:

- Explain the differences between `public` and `private` qualifiers (Chapter 2.2)
- Create a UML class diagram representing an “is-a” relation (Chapter 3.0)
- Create a class definition matching a given UML class diagram (Chapter 3.0)

## What are inheritance qualifiers and why you should care

Access qualifiers such as `public` and `private` indicate the scope in which a given member variable or method is accessible. As you may recall, the `public` access qualifier indicates that a given member variable or method is accessible to both the client and the member functions within a class. The `private` access qualifier indicates that only a member function has access to a given method or member variable. A third access qualifier, `protected`, is used to indicate that a given member variable or method is accessible to either members of the class or classes which derive off of the base class. We use the `#` sign to signify this in a UML class diagram:

ClassName
+ publicVariable
# protectedVariable
- privateVariable
+ publicMethod
# protectedMethod
- privateMethod

## Protected

The `protected` qualifier signifies a degree of access somewhere between `public` and `private`. There are three ways in which a given method or member variable might need to be accessed:

- Within: From within the class where the method or member variable is defined
- Derived: From within the class derived from a class where the method or variable is defined
- Object: From an object instantiated from the class where the method or variable is defined

While the `public` access modifier allows access from all three, and `private` restricts access within a class, `protected` is between:

	private	protected	public
Within: from within a class	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Derived: from within a derived class		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Object: from an object instantiated from a class			<input checked="" type="checkbox"/>

When the `protected` keyword works exactly like `private` when there is no derived class:

```
class Base
{
    public:
        int basePublic;
        void basePublicMethod();
    protected:
        int baseProtected;
    private:
        int basePrivate;
};
```

The access an object has to member variables within `Base` is restricted to the `public` member variables.

```
{
    Base base;

    base.basePublic = 1;           // legal. basePublic is public so we have access from
                                   // the client.
    base.baseProtected = 1;       // ERROR! Only methods within Base (there are none) or
                                   // methods in the derived class have access
    base.basePrivate = 1;         // ERROR! No access to privates from the object
}
```

However, the method `Base::basePublicMethod()` has access to all the member variables:

```
void Base :: basePublicMethod()
{
    basePublic = 1;               // public member variables are accessible to methods
    baseProtected = 1;           // protected member variables are also accessible
    basePrivate = 1;             // privates are accessible here only
}
```

When working with a single class, `protected` and `private` work exactly the same. Why, then, would one want to make a member variable or member function `protected`? The answer is: because we would want to give a derived class access to a given member variable or method. In other words, we don't want to reveal details of our class implementation to the client but we might want to reveal those details to a derived class. The `protected` access modifier allows for this.

Consider the following class which derives off of Base:

```
class Derived : public Base
{
    public:
        void derivedPublicMethod();
        int derivedPublic;
    protected:
        int derivedProtected;
    private:
        int derivedPrivate;
};
```

The access an object has to member variables within Base and Derived is restricted to the public member variables.

```
{
    Derived derived;           // six member variables

    derived.basePublic = 1;     // legal because basePublic is public.
    derived.baseProtected = 1;  // ERROR: no access to protected items from the object
    derived.basePrivate = 1;    // ERROR: no access to privates from the object

    derived.derivedPublic = 1;  // legal because derivedPublic is public
    derived.derivedProtected = 1; // ERROR: no access to protected items
    derived.derivedPrivate = 1; // ERROR: no access to privates
}
```

Therefore, only public items are accessible from the object. From a member function, however, we have access to the base classes' public and protected items.

```
void Derived :: derivedPublicMethod()
{
    derivedPublic = 1;           // all member variables and member functions defined
    derivedProtected = 1;        // in a class are accessible from a method
    derivedPrivate = 1;          // belonging to that class.

    basePublic = 1;              // we have access to the base class's publics
    baseProtected = 1;           // we also have access to the protected items
    basePrivate = 1;             // ERROR! no access to privates from the
}                                // derived class
```

From this example, we can see that methods within the derived class have more access to the member variables in the base class than does the client. The client (objects created from the class) only has access to public methods and variables. Methods in the derived class have access to public and protected methods and variables. Methods and variables under the private designation are only access to methods within the same class.

### Sam's Corner



The access qualifiers of public, protected, and private are compile-time checks. They only serve to help the programmer catch errors as the class is compiled rather than provide any run-time checks. Therefore they are early-binding constructs. This means that there is no performance penalty to using protected or any other access qualifier.

# Inheritance indicators

Recall the syntax for defining a class that inherits off another class:

This is called an inheritance indicator. We specify not only which class from which we inherit, but also how the inheritance occurs

```
class Derived : public Base
{
    ... code removed for brevity ...
};
```

An **inheritance indicator** is the part of the class definition where the programmer specifies which if any class is the base class. Up until this point, we always inherited as `public`. As you may have guessed, we can also inherit as `protected` or as `private`.

## Public inheritance

When a derived class inherits a base class as `public`, all the access qualifiers from the base class remain unchanged. Therefore, if a method or member variable is `public` in the base class, then it will remain `public` in the derived class. This is desirable when the programmer wishes to allow access to the public methods of the base class exactly as if the object was made from the base class. All the examples up to this point used public inheritance indicators.

## Protected inheritance

When a derived class inherits a base class as `protected`, then all the access qualifiers in the base class that were `public` are treated as if they were `protected`. This serves to allow the derived class methods to access the `public` and `protected` items in the base class, but objects instantiated from the derived class cannot:

```
class DerivedProtected : protected Base // using the same Base class as before
{
    public:
        void derivedProtectedMethod();    // only one method in a class. That is silly!
};
```

Objects instantiated from `DerivedProtected` will not be able to access `Base` member variables:

```
{
    DerivedProtected derived;

    derived.basePublic = 1;           // ERROR: was public but now is protected
                                     // because Base is inherited as protected
    derived.baseProtected = 1;       // ERROR: was protected and now is still
                                     // protected so no access is allowed
    derived.basePrivate = 1;         // ERROR: no access to privates
}
```

Though there is no access to `Base`'s member variables from an object, there is from `DerivedProtected()`'s methods.

```
void DerivedProtected :: derivedProtectedMethod()
{
    basePublic = 1;                   // legal! basePublic is now protected
    baseProtected = 1;               // legal! was protected and now still is
    basePrivate = 1;                 // ERROR: basePrivate is still private
}
```

We can only further restrict access with the inheritance indicator, we cannot remove restrictions.

## Private inheritance

When a derived class inherits a base class as `private`, then all the access qualifiers in the base class that were `public` or `protected` are treated as if they were `private`. This means that all the member variables and methods in the base class are only visible to the methods in the derived class. The client or other classes deriving off the derived class have no indication that a base class exists.

```
class DerivedPrivate : private Base    // using the same Base class as before
{
    public:
        void derivedPrivateMethod();    // only one method in a class. That is silly!
};
```

Objects instantiated from `DerivedPrivate` will not be able to access `Base` member variables:

```
{
    DerivedPrivate derived;

    derived.basePublic = 1;            // ERROR: everything from the base class is now
    derived.baseProtected = 1;        // private so there is no access from the
    derived.basePrivate = 1;          // object to any of the methods or variables
}
```

From within the method `derivedPrivateMethod()`, everything from `Base` now appears as `private`:

```
void DerivedPrivate :: derivedPrivateMethod()
{
    basePublic = 1;                    // legal! basePublic is now private
    baseProtected = 1;                // legal! baseProtected is now private
    basePrivate = 1;                  // ERROR: basePrivate is still private
}
```

Up until this point, there is no difference between inheriting as `protected` and `private`. The only difference appears when another class is derived off it:

```
class DerivedDerived : public DerivedPrivate
{
    public:
        void derivedDerivedMethod()
        {
            basePublic = 1;            // ERROR: To DerivedPrivate these are now
            baseProtected = 1;        // private so anyone deriving off of
            basePrivate = 1;          // DerivedPrivate will have no access to them
        }
};
```

## One simple rule

This may all seem terribly complex with so many cases. However, there is a simple rule to explain it all:

*Inheritance indicators can only add access restrictions, they cannot release them*



### Sue's Tips

In almost all cases, we use the `public` inheritance indicator when deriving off of a base class. It is extremely rare to need to restrict access to the base class.

### Example 3.3 – Inheritance Qualifiers

Demo

This example is completely contrived and does not relate to any real-world problem. The purpose here is to demonstrate all possible inheritance variations. Many lines are commented out. In those cases, the corresponding compile errors are presented below in a comment. Feel free to remove the comment and see the compile errors for yourself.

The base class from which everything is derived is the following:

```
class Base
{
    public:
        void pub() {} // Has access to all members of Base
    protected:
        void prot() {} // Also has access to all members of Base
    private:
        void priv() {} // Also has access to all members of Base
};
```

If we derive off of Base using the public inheritance indicator, we get the following compile errors:

```
class DerivedPub : public Base
{
    public:
        void derivedPublic()
        {
            pub();    // Was public in the Base, now public from DerivedPub
            prot();   // Was protected in Base, now still protected so no change
            priv();
        }
    protected:
        // Same rules apply here as for derivedPublic() with regards to access
        // to Base. Of course, we have access to all members of DerivedPub
        void derivedProtected() {}
    private:
        // Same rules apply here as for derivedProtected() and derivedPublic()
        void derivedPrivate() {}
};
```

3-3-qualifiers.cpp: In member function "void DerivedPub::derivedPublic()":  
3-3-qualifiers.cpp:19: error: "void Base::priv()" is private  
3-3-qualifiers.cpp:32: error: within this context

Solution

Now if we try to access these methods from the object, some restrictions apply:

```
int main()
{
    Base base;
    base.pub();           // legal. Base::pub() is public
    base.prot();          3-3-qualifiers.cpp:17: error: "void Base::prot()" is protected
    base.priv();          3-3-qualifiers.cpp:29: error: "void Base::priv()" is private

    DerivedPub derivedPub;
    derivedPub.pub();     // legal. Base::pub() is still public
    derivedPub.prot();    3-3-qualifiers.cpp:17: error: "void Base::prot()" is protected
    derivedPub.priv();    3-3-qualifiers.cpp:19: error: "void Base::priv()" is private

    derivedPub.derivedPublic(); // legal. Derived::derivedPublic() is public
    derivedPub.derivedProtected(); 3-3-qualifiers.cpp:42: error: "derived Protec()" is protected
    derivedPub.derivedPrivate(); 3-3-qualifiers.cpp:45: error: "derivedPrivate()" is private
}
```

See Also

The complete solution is available at [3-3-qualifiers.html](http://3-3-qualifiers.html) or:

```
/home/cs165/examples/3-3-qualifiers.cpp
```


## Example 3.3 – Circle

Demo

This next example will demonstrate how to use inheritance to more easily have access to the base class' private member variables without the data being exposed to the client.

Problem

Write a class called `Circle` which inherits off of `Point`. Both `Circle` and `Point` implement the usual getters and setters as well as the insertion and extraction operators.

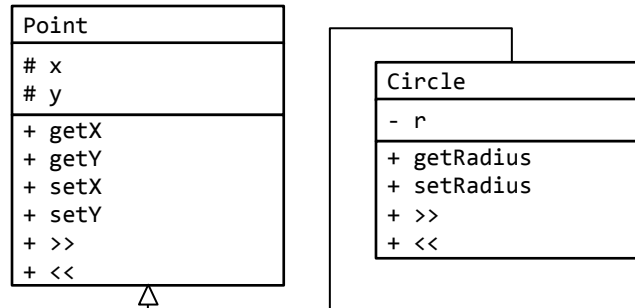

Solution

With the protected inheritance qualifiers used for the `Point` member variables, the class definition is:

```

class Point
{
    ... code removed for brevity ...
protected:
    int x;
    int y;
};
  
```

This allows for `Circle`'s friend functions to have access to `Point`'s member variables:

```

ostream & operator << (ostream & out, const Circle & circle)
{
    out << '(' << circle.x           // access to Point's privates
    << ", " << circle.y
    << ", r=" << circle.r           // access to Circle's privates
    << ')';
    return out;
}
  
```

```

istream & operator >> (istream & in, Circle & circle)
{
    in >> circle.x >> circle.y >> circle.r; // access to Point's privates
    return in;
}
  
```

Challenge

As a challenge, modify the code so `Circle` inherits `Point` as protected instead of public. Does this change anything? Do the same as a private. Why would one want to use the protected or private inheritance indicator instead of public? Hint: what happens when `main()` attempts to access `getX()` or `getY()`? What happens when another class is derived off of `Circle`?

See Also

The complete solution is available at [3-3-circle.html](http://3-3-circle.html) or:

```
/home/cs165/examples/3-3-circle.cpp
```



## Problem 1

Given the following class definition:

```
class Base
{
    public:    void pub();
    protected: void prot();
    private:  void priv();
};

class DerivedPub : public Base
{
    public:    void derivedPublic();
    protected: void derivedProtected();
    private:  void derivedPrivate();
};

class DerivedPro : protected Base
{
    public:    void derivedPublic();
    protected: void derivedProtected();
    private:  void derivedPrivate();
};

class DerivedPriv : private Base
{
    public:    void derivedPublic();
    protected: void derivedProtected();
    private:  void derivedPrivate();
};
```

Which of the following lines will yield a compile error?

```
void DerivedPub :: derivedPublic()
{
    pub();                (a): _____
    prot();               (b): _____
    priv();               (c): _____
}

void DerivedPro :: derivedPublic()
{
    pub();                (d): _____
    prot();               (e): _____
    priv();               (f): _____
}

void DerivedPriv :: derivedPublic()
{
    pub();                (g): _____
    prot();               (h): _____
    priv();               (i): _____
}
```

*Please see page 236 for a hint.*



## Problem 2

Given the following class definitions:

```
class Base
{
    public:    void pub() { }
    protected: void prot() { }
    private:  void priv() { }
};

class DerivedPub : public Base
{
    public:    void derivedPublic() { }
    protected: void derivedProtected() { }
    private:  void derivedPrivate() { }
};

class DerivedPro : protected Base
{
    public:    void derivedPublic() { }
    protected: void derivedProtected() { }
    private:  void derivedPrivate() { }
};

class DerivedPriv : private Base
{
    public:    void derivedPublic() { }
    protected: void derivedProtected() { }
    private:  void derivedPrivate() { }
};
```

Which of the following lines will yield a compile error?

```
{
    Base base;
    base.pub();           (a): _____
    base.prot();          (b): _____
    base.priv();          (c): _____

    DerivedPub derivedPub;
    derivedPub.pub();      (d): _____
    derivedPub.prot();     (e): _____
    derivedPub.priv();     (f): _____
    derivedPub.derivedPublic(); (g): _____
    derivedPub.derivedProtected(); (h): _____
    derivedPub.derivedPrivate(); (i): _____

    DerivedPro derivedPro;
    derivedPro.pub();      (j): _____
    derivedPro.prot();     (k): _____
    derivedPro.priv();     (l): _____
    derivedPro.derivedPublic(); (m): _____
    derivedPro.derivedProtected(); (n): _____
    derivedPro.derivedPrivate(); (o): _____

    DerivedPriv derivedPriv;
    derivedPriv.pub();      (p): _____
    derivedPriv.prot();     (q): _____
    derivedPriv.priv();     (r): _____
    derivedPriv.derivedPublic(); (s): _____
    derivedPriv.derivedProtected(); (t): _____
    derivedPriv.derivedPrivate(); (u): _____
}
```

Please see page 236 for a hint.

## Challenge 3-5

The game of battleship is played on two 10x10 grids where ships can take anywhere from 2 to 5 squares. The game is played by each player trying to guess the location of the opponent's ships by calling out shots such as "D4."

3. Create a UML class diagram to represent a location on the grid. Call the class `Coordinate`.
4. From our `Coordinate` class, create a class to represent a ship in the Battleship game. The ship resides on the board and has a length from 2 to 5 points. Also, each ship has a name such as Carrier, Battleship, etc.
5. There are several derivations of ship in the game Battleship: the Aircraft Carrier (size 5), the Battleship (size 4), the Submarine (size 3), the Cruiser (size 3) and the Destroyer (size 2). Create a class to represent the Submarine.

Please see page 237 for a hint.