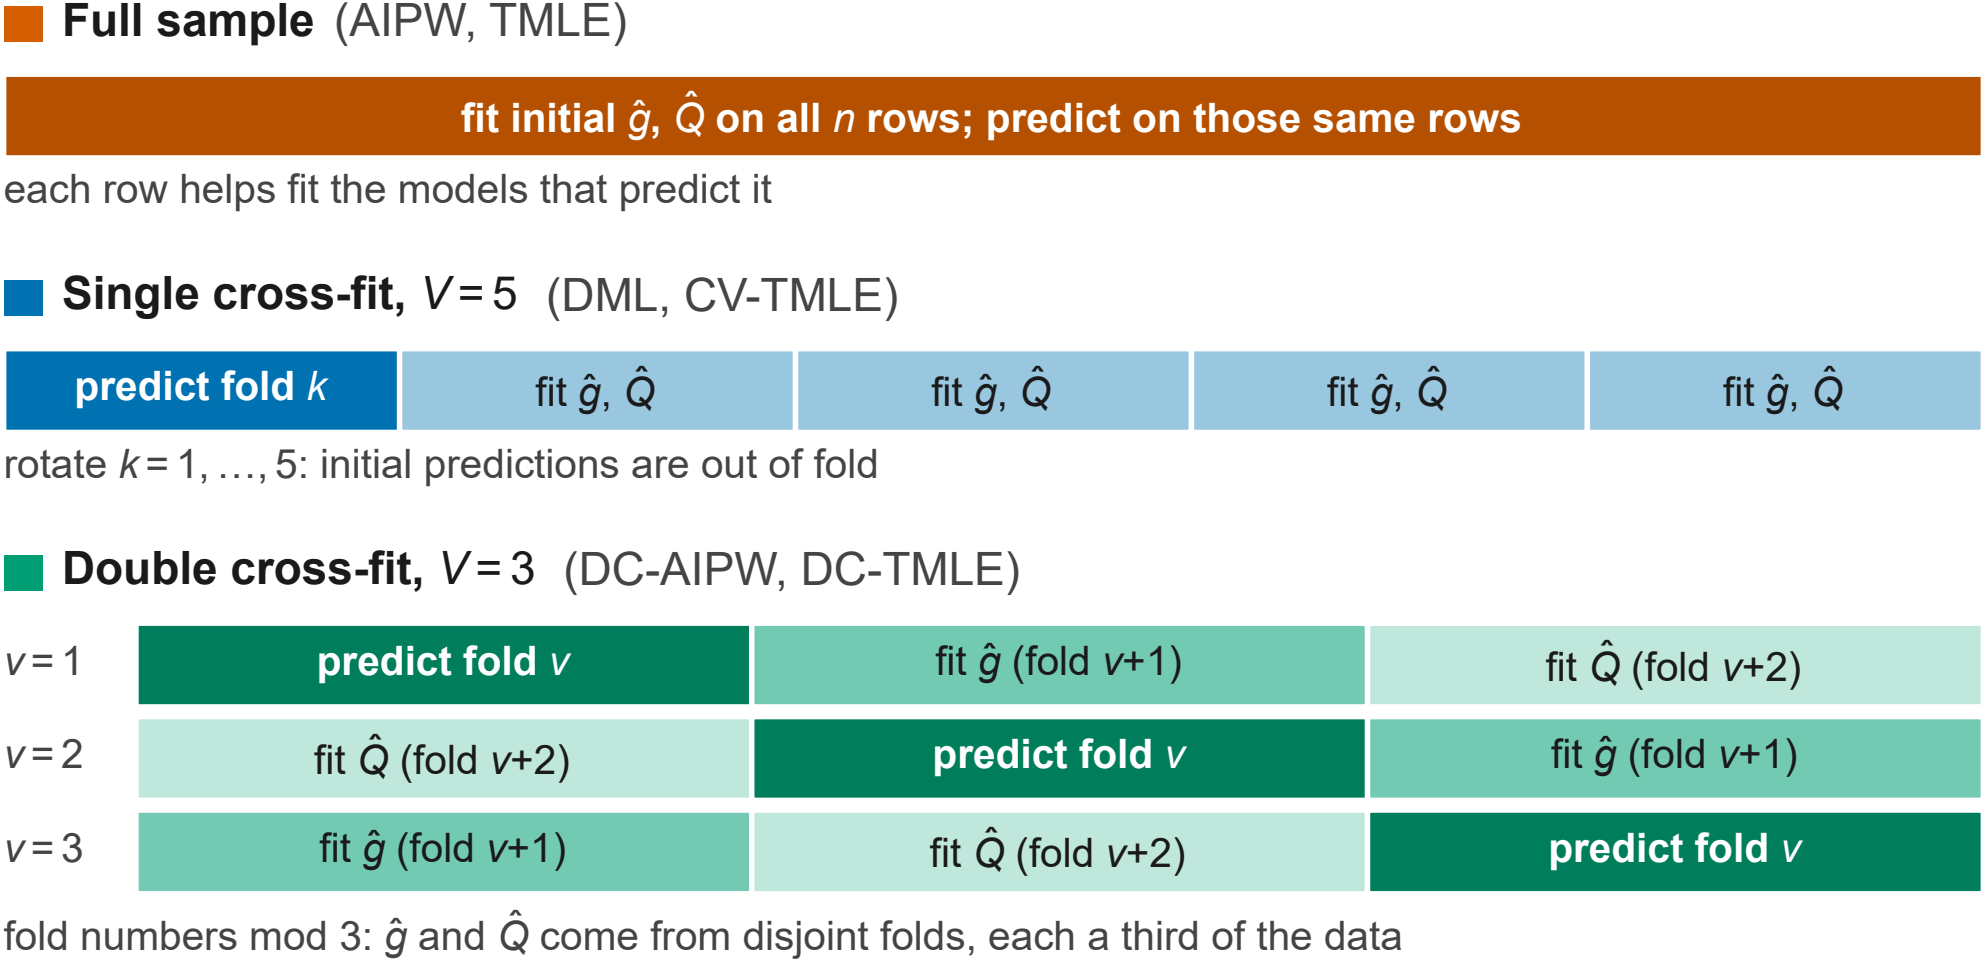
Full sample (AIPW, TMLE)
fit initial ĝ, Q̂ on all n rows; predict on those same rows
each row helps fit the models that predict it
Single cross-fit, V = 5 (DML, CV-TMLE)
predict fold k
fit ĝ, Q̂
fit ĝ, Q̂
fit ĝ, Q̂
fit ĝ, Q̂
rotate k = 1, …, 5: initial predictions are out of fold
Double cross-fit, V = 3 (DC-AIPW, DC-TMLE)
v = 1
predict fold v
fit ĝ (fold v+1)
fit Q̂ (fold v+2)
v = 2
fit Q̂ (fold v+2)
predict fold v
fit ĝ (fold v+1)
v = 3
fit ĝ (fold v+1)
fit Q̂ (fold v+2)
predict fold v
fold numbers mod 3: ĝ and Q̂ come from disjoint folds, each a third of the data