

Is There a Competitive Advantage to Using Multivariate Statistical or Machine Learning Methods Over the Bross Formula in the hdPS Framework for Bias and Variance Estimation?

--Manuscript Draft--

Manuscript Number:	PONE-D-25-00468
Article Type:	Research Article
Full Title:	Is There a Competitive Advantage to Using Multivariate Statistical or Machine Learning Methods Over the Bross Formula in the hdPS Framework for Bias and Variance Estimation?
Short Title:	High-Dimensional Propensity Score
Corresponding Author:	Mohammad Ehsanul Karim The University of British Columbia Vancouver, BC CANADA
Keywords:	Machine learning; Propensity score; Causal Inference; Confounding; Plasmode simulation; Inverse-probability weighting; Epidemiological methods; Health data science
Abstract:	**Purpose**: We aim to evaluate various proxy selection methods within the context of high-dimensional propensity score (hdPS) analysis. This study aimed to systematically evaluate and compare the performance of traditional statistical methods and machine learning approaches within the hdPS framework, focusing on key metrics such as bias, standard error (SE), and coverage, under various exposure and outcome prevalence scenarios. **Methods**: We conducted a plasmode simulation study using data from the National Health and Nutrition Examination Survey (NHANES) cycles from 2013 to 2018. We compared methods including the kitchen sink model, Bross-based hdPS, Hybrid hdPS, LASSO, Elastic Net, Random Forest, XGBoost, and Genetic Algorithm (GA). The performance of each inverse probability weighted method was assessed based on bias, MSE, coverage probability, and SE estimation across three epidemiological scenarios: frequent exposure and outcome, rare exposure and frequent outcome, and frequent exposure and rare outcome. **Results**: XGBoost consistently demonstrated strong performance in terms of MSE and coverage, making it effective for scenarios prioritizing precision. However, it exhibited higher bias, particularly in rare exposure scenarios, suggesting it is less suited when minimizing bias is critical. In contrast, GA showed significant limitations, with consistently high bias and MSE, making it the least reliable method. Bross-based hdPS, and Hybrid hdPS methods provided a balanced approach, with low bias and moderate MSE, though coverage varied depending on the scenario. Rare outcome scenarios generally resulted in lower MSE and better precision, while rare exposure scenarios were associated with higher bias and MSE. Notably, traditional statistical approaches such as forward selection and backward elimination performed comparably to more sophisticated machine learning methods in terms of bias and coverage, suggesting that these simpler approaches may be viable alternatives due to their computational efficiency. **Conclusion**: The results highlight the importance of selecting hdPS methods based on the specific characteristics of the data, such as exposure and outcome prevalence. While advanced machine learning methods such as XGBoost can enhance precision, simpler methods such as forward selection or backward elimination may offer similar performance in terms of bias and coverage with fewer computational demands. Tailoring the choice of method to the epidemiological scenario is essential for optimizing the balance between bias reduction and precision.
Order of Authors:	Mohammad Ehsanul Karim Yang Lei
Opposed Reviewers:	
Additional Information:	

Question	Response
Financial Disclosure Enter a financial disclosure statement that describes the sources of funding for the work included in this submission. Review the submission guidelines for detailed requirements. View published research articles from PLOS ONE for specific examples. This statement is required for submission and will appear in the published article if the submission is accepted. Please make sure it is accurate. Funded studies Enter a statement with the following details: • Initials of the authors who received each award • Grant numbers awarded to each author • The full name of each funder • URL of each funder website • Did the sponsors or funders play any role in the study design, data collection and analysis, decision to publish, or preparation of the manuscript? Did you receive funding for this work?	Yes
Please add funding details. as follow-up to "Financial Disclosure Enter a financial disclosure statement that describes the sources of funding for the work included in this submission. Review the submission guidelines for detailed requirements. View published research articles from PLOS ONE for specific examples. This statement is required for submission and will appear in the published article if the submission is accepted. Please make sure it is accurate.	This work was supported by MEK's Natural Sciences and Engineering Research Council of Canada (NSERC) Discovery Grant (PG#: 20R01603) and Discovery Launch Supplement (PG#: 20R12709).

Funded studies Enter a statement with the following details: • Initials of the authors who received each award • Grant numbers awarded to each author • The full name of each funder • URL of each funder website • Did the sponsors or funders play any role in the study design, data collection and analysis, decision to publish, or preparation of the manuscript?	
Did you receive funding for this work?"	
Please select the country of your main research funder (please select carefully as in some cases this is used in fee calculation). as follow-up to "Financial Disclosure Enter a financial disclosure statement that describes the sources of funding for the work included in this submission. Review the submission guidelines for detailed requirements. View published research articles from PLOS ONE for specific examples. This statement is required for submission and will appear in the published article if the submission is accepted. Please make sure it is accurate. Funded studies Enter a statement with the following details: • Initials of the authors who received each award • Grant numbers awarded to each author • The full name of each funder • URL of each funder website • Did the sponsors or funders play any role in the study design, data collection and analysis, decision to publish, or preparation of the manuscript? Did you receive funding for this work?"	CANADA - CA
Competing Interests	MEK is currently supported by grants from Canadian Institutes of Health Research and

Use the instructions below to enter a competing interest statement for this submission. On behalf of all authors, disclose any competing interests that could be perceived to bias this work—acknowledging all financial support and any other relevant financial or non-financial competing interests. This statement is required for submission and will appear in the published article if the submission is accepted. Please make sure it is accurate and that any funding sources listed in your Funding Information later in the submission form are also declared in your Financial Disclosure statement. View published research articles from PLOS ONE for specific examples. NO authors have competing interests Enter: <i>The authors have declared that no competing interests exist.</i> Authors with competing interests Enter competing interest details beginning with this statement: <i>I have read the journal's policy and the authors of this manuscript have the following competing interests: [insert competing interests here]</i> * typeset	MS Canada. MEK has previously received consulting fees from Biogen Inc. for consulting unrelated to this current work. MEK was also previously supported by the Michael Smith Foundation for Health Research Scholar award.
Ethics Statement Enter an ethics statement for this submission. This statement is required if the study involved: • Human participants • Human specimens or tissue • Vertebrate animals or cephalopods • Vertebrate embryos or tissues	The analysis conducted on secondary and de-identified data is exempt from research ethics approval requirements. Ethics for this study was covered by item 7.10.3 in University of British Columbia's Policy #89: Research and Other Studies Involving Human Subjects 19 and Article 2.2 in of the Tri-Council Policy Statement: Ethical Conduct for Research Involving Humans (TCPS2).

- Field research

Write "N/A" if the submission does not require an ethics statement.

General guidance is provided below.

Consult the [submission guidelines](#) for detailed instructions. **Make sure that all information entered here is included in the Methods section of the manuscript.**

Format for specific study types

Human Subject Research (involving human participants and/or tissue)

- Give the name of the institutional review board or ethics committee that approved the study
- Include the approval number and/or a statement indicating approval of this research
- Indicate the form of consent obtained (written/oral) or the reason that consent was not obtained (e.g. the data were analyzed anonymously)

Animal Research (involving vertebrate animals, embryos or tissues)

- Provide the name of the Institutional Animal Care and Use Committee (IACUC) or other relevant ethics board that reviewed the study protocol, and indicate whether they approved this research or granted a formal waiver of ethical approval
- Include an approval number if one was obtained
- If the study involved *non-human primates*, add *additional details* about animal welfare and steps taken to ameliorate suffering
- If anesthesia, euthanasia, or any kind of animal sacrifice is part of the study, include briefly which substances and/or methods were applied

Field Research

Include the following details if this study involves the collection of plant, animal, or other materials from a natural setting:

- Field permit number
- Name of the institution or relevant body that granted permission

Data Availability

Authors are required to make all data underlying the findings described fully available, without restriction, and from the time of publication. PLOS allows rare exceptions to address legal and ethical concerns. See the [PLOS Data Policy](#) and [FAQ](#) for detailed information.

Yes - all data are fully available without restriction

A Data Availability Statement describing where the data can be found is required at submission. Your answers to this question constitute the Data Availability Statement and **will be published in the article**, if accepted.

Important: Stating 'data available on request from the author' is not sufficient. If your data are only available upon request, select 'No' for the first question and explain your exceptional situation in the text box.

Do the authors confirm that all data underlying the findings described in their manuscript are fully available without restriction?

Describe where the data may be found in full sentences. If you are copying our sample text, replace any instances of XXX with the appropriate details.

- If the data are **held or will be held in a public repository**, include URLs, accession numbers or DOIs. If this information will only be available after acceptance, indicate this by ticking the box below. For example: *All XXX files are available from the XXX database (accession number(s) XXX, XXX).*
- If the data are all contained **within the manuscript and/or Supporting Information files**, enter the following: *All relevant data are within the manuscript and its Supporting Information files.*
- If neither of these applies but you are able to provide **details of access elsewhere**, with or without limitations, please do so. For example:

Data cannot be shared publicly because of [XXX]. Data are available from the XXX Institutional Data Access / Ethics Committee (contact via XXX) for researchers who meet the criteria for access to confidential data.

The data underlying the results presented in the study are available from (include the name of the third party

NHANES data is publicly accessible and can be retrieved from the NHANES website. The datasets generated and/or analyzed during the current study are available in the NHANES repository: <https://www.cdc.gov/nchs/nhanes/index.htm>. Additionally, all simulation results can be interactively reviewed through a Shiny web application at <https://ehsanx.shinyapps.io/hdPS-Alternatives/>.

<i>and contact information or URL).</i> • This text is appropriate if the data are owned by a third party and authors do not have permission to share the data. * typeset	
Additional data availability information:	



THE UNIVERSITY OF BRITISH COLUMBIA

School of Population and Public Health
2206 East Mall
Vancouver, BC Canada V6T 1Z3

Dec 11, 2024
Editorial Office, PLOS ONE

Phone 604 822 2772
Fax 604 822 4994
info@spph.ubc.ca
www.spph.ubc.ca

Dear Editors,

I am pleased to submit our manuscript, titled "Is There a Competitive Advantage to Using Multivariate Statistical or Machine Learning Methods Over the Bross Formula in the hdPS Framework for Bias and Variance Estimation?", for consideration as a research article in PLOS ONE.

This study evaluates and compares traditional statistical methods and advanced machine learning approaches within the high-dimensional propensity score (hdPS) framework, focusing on metrics such as bias, mean squared error (MSE), and coverage under diverse epidemiological scenarios. Using a plasmode simulation design and real-world data from the National Health and Nutrition Examination Survey (NHANES), our findings highlight the strengths and limitations of different methods, with implications for selecting appropriate techniques based on the characteristics of the data and research objectives.

Key highlights of our work include:

- A comprehensive comparison of methods, including the kitchen sink model, Bross-based hdPS, LASSO, Elastic Net, Random Forest, and XGBoost, for propensity score estimation and confounding adjustment.
- Demonstrating the advantages and limitations of machine learning approaches in terms of precision and computational efficiency.
- Practical recommendations for selecting hdPS methods tailored to epidemiological scenarios.

This research provides novel insights into the use of statistical and machine learning methods in high-dimensional data settings, offering guidance to researchers in epidemiology, public health, and causal inference.

We believe this manuscript aligns with the scope of PLOS ONE as it contributes to advancing methods for robust and reproducible data analysis in health research. It emphasizes interdisciplinary relevance by bridging statistical innovation and applied public health analysis.

We confirm that:

- The manuscript is original, has not been published elsewhere, and is not under consideration by another journal.
- All authors have read and approved the manuscript and have no conflicts of interest to declare.
- The data supporting our findings are publicly accessible and referenced in the manuscript.

Thank you for considering our submission. We look forward to the opportunity to contribute to PLOS ONE and are happy to address any questions or provide additional information as needed.

Sincerely,

M Ehsan Karim (Ehsan), MSc., PhD
Assistant Professor in Health Data Science,
School of Population and Public Health,
University of British Columbia;
Email: ehsan.karim@ubc.ca; Web: <https://ehsank.com/>

Is There a Competitive Advantage to Using Multivariate Statistical or Machine Learning Methods Over the Bross Formula in the hdPS Framework for Bias and Variance Estimation?

Mohammad Ehsanul Karim ¹ , ² *, Yang Lei ³

¹ School of Population and Public Health, University of British Columbia, 2206 East Mall, Vancouver, V6T 1Z3, BC, Canada

² St. Paul's Hospital, 588 - 1081 Burrard Street, Vancouver, V6Z 1Y6, BC, Canada

³ Department of Statistics, University of British Columbia, Room 3182 Earth Sciences Building, 2207 Main Mall, Vancouver, V6T 1Z4, BC, Canada

* Corresponding author: ehsan.karim@ubc.ca

Abstract

Purpose: We aim to evaluate various proxy selection methods within the context of high-dimensional propensity score (hdPS) analysis. This study aimed to systematically evaluate and compare the performance of traditional statistical methods and machine learning approaches within the hdPS framework, focusing on key metrics such as bias, standard error (SE), and coverage, under various exposure and outcome prevalence scenarios. **Methods:** We conducted a plasmode simulation study using data from the National Health and Nutrition Examination Survey (NHANES) cycles from 2013 to 2018. We compared methods including the kitchen sink model, Bross-based hdPS, Hybrid hdPS, LASSO, Elastic Net, Random Forest, XGBoost, and Genetic Algorithm (GA). The performance of each inverse probability weighted method was assessed based on bias, MSE, coverage probability, and SE estimation across three epidemiological scenarios: frequent exposure and outcome, rare exposure and frequent outcome, and frequent exposure and rare outcome. **Results:** XGBoost consistently demonstrated strong performance in terms of MSE and coverage, making it effective for scenarios prioritizing precision. However, it exhibited higher bias, particularly in rare exposure scenarios, suggesting it is less suited when minimizing bias is critical. In contrast, GA showed significant limitations, with consistently high bias and MSE, making it the least reliable method. Bross-based hdPS, and Hybrid hdPS methods provided a balanced approach, with low bias and moderate MSE, though coverage varied depending on the scenario. Rare outcome scenarios generally resulted in lower MSE and better precision, while rare exposure scenarios were associated with higher bias and MSE. Notably, traditional statistical approaches such as forward selection and backward elimination performed comparably to more sophisticated machine learning methods in terms of bias and coverage, suggesting that these simpler approaches may be viable alternatives due to their computational efficiency. **Conclusion:** The results highlight the importance of selecting hdPS methods based on the specific characteristics of the data, such as exposure and outcome prevalence. While advanced machine learning methods such as XGBoost can enhance precision, simpler methods such as forward selection or backward elimination may offer similar performance in terms of bias and coverage with fewer computational demands. Tailoring the choice of method to the epidemiological scenario is essential for optimizing the balance between bias reduction and precision.

Background

High-dimensional Propensity Score (hdPS) Algorithm: Propensity scores are a crucial tool in causal inference for addressing confounding. A propensity score is the conditional probability of receiving a particular treatment or exposure, given a set of observed covariates. Traditional propensity score models rely on “investigator-specified” or manually selected covariates based on domain knowledge, prior literature, or theoretical frameworks.

In epidemiology, proxy variables are commonly used as substitutes for confounders that are difficult or impossible to measure directly, such as socioeconomic status, lifestyle factors, or health behaviors [1]. These variables are not directly identified as confounders but serve as surrogates for unmeasured or poorly measured confounders. The hdPS is a pharmacoepidemiological method designed to reduce confounding bias in large healthcare databases [2]. HdPS automatically ranks a wide array of proxy variables from healthcare records—such as diagnosis codes, medications, and procedures—using the Bross formula [3,4]. The Bross formula ranks these variables based on their marginal associations with both exposure and outcome. These selected proxy variables serve as surrogates for unmeasured or poorly measured confounders, helping reduce bias in treatment effect estimates. The hdPS algorithm further refines the selection by prioritizing variables based on their prevalence and potential for confounding, defined by their association with both exposure and outcome [2].

Multivariate Machine Learning Extensions: Although the Bross formula performs well in certain contexts, it has limitations in capturing complex interactions, nonlinearities, and higher-order associations between variables, especially in high-dimensional settings where it does not account for the multivariate structure of other covariates [5,6]. To address these model-specification-related limitations, multivariate machine learning methods such as LASSO, Elastic Net, and Random Forests have been applied within the hdPS framework. These methods are better suited for high-dimensional data, where they can more effectively handle complex relationships and improve the selection of proxy variables, thus enhancing the precision of treatment effect estimates [6–8]. Simulation studies and empirical research have shown that these machine learning-based methods, or hybrid approaches combining the Bross formula with machine learning, can reduce confounding more effectively and increase efficiency compared to the Bross formula alone in certain settings [6–8].

Assessing the Simulation Performance: Other than bias, previous studies have primarily focused on Mean Squared Error (MSE) as a key metric for evaluating the performance of hdPS and its machine learning extensions [6,8–11]. However, in high-dimensional settings with singly robust methods, such as hdPS and machine learning approaches such as LASSO, MSE may not always be the most reliable measure. MSE combines both bias and variance into a single metric, which makes interpretation challenging when variance estimation is unstable—a common issue in these methods. In contrast, coverage, which measures the proportion of confidence intervals that capture the true treatment effect, provides a more direct and meaningful assessment of a model’s reliability. In realistic observational studies, where model misspecification is often inevitable, coverage—along with related metrics such as bias-eliminated coverage and relative error in standard error (SE; which compares model-based SE with empirical SE)—can reveal whether confidence intervals or SEs are too narrow (underestimating uncertainty) or too wide (overestimating uncertainty). This insight is crucial in determining whether the model delivers valid estimates despite misspecification. Even a model with poor MSE but good coverage may still be valuable, as it produces realistic confidence intervals. By shifting the focus to coverage, rather than relying solely on MSE, we can achieve a more comprehensive understanding of method performance, especially in cases where unstable variance estimation might distort conclusions drawn

from MSE alone.

Aim: This research aims to systematically evaluate and compare various proxy selection methods within the hdPS framework for inverse probability weighted estimators, using a diverse range of simulation performance metrics, including bias, MSE, and coverage. The study focuses on assessing how these alternative statistical and machine learning methods perform in selecting proxy variables for confounding adjustment, compared to the traditional Bross formula.

Methods

Data and Simulation

Motivating Example: We revisited the association between obesity and the risk of diabetes using data from three cycles of the National Health and Nutrition Examination Survey (NHANES) covering the years 2013-2014, 2015-2016, and 2017-2018 [5]. To identify relevant investigator-specified covariates, we constructed a causal diagram based on literature [12–15] and established causal inference principles [16]. The covariates included in our analysis were carefully selected and categorized into demographic, behavioral, health history, access-related, and laboratory variables. While most of these variables were binary or categorical, the Laboratory variables were continuous. The secondary, de-identified data used in this study were accessed from the NHANES database on 1/5/2024-31/8/2024. The authors did not have access to any information that could identify individual participants during or after data collection. NHANES data are fully anonymized and publicly available, ensuring that individual privacy is protected.

Plasmode simulation: To rigorously assess the performance of the methods under consideration, we employed a plasmode simulation framework, which is particularly well-suited for reflecting real-world data structures and complexities [17]. This approach was inspired by the analytic dataset derived from NHANES and involved resampling from the observed covariates and exposure information (i.e., obesity) without altering them. By mirroring key aspects of an actual epidemiological study, this simulation framework offers a substantial advantage over traditional Monte Carlo simulations, which often rely on hypothetical assumptions.

Simulation scenarios under consideration: Our plasmode simulation was conducted over 500 iterations. For the base simulation scenario, we set the prevalence of exposure (obesity) and the event rate (diabetes) at 30%, with a true odds ratio (OR) parameter of 1, corresponding to a risk difference (RD) of 0. Each simulated dataset had a sample size of 3,000 participants. The description of other scenarios under consideration is provided in Table 1.

True Data Generating Mechanism Used in Plasmode Simulation: The primary goal of this plasmode simulation study is to evaluate various variable selection methods under realistic conditions. To achieve this, we formulated the outcome data based on a specific model specification that incorporates both exposure and covariates, including investigator-specified and proxy variables. The model specification consists of three key components (See Appendices §A and B for further details):

1. *Investigator-Specified Covariates (demographic, behaviour and health history / access variables):* We retained the original investigator-specified covariates, which were either binary or categorical, reflecting how real-world studies typically operate. These covariates were not included in the pool of proxy variables or subjected to any variable selection or ranking processes. Instead, they were always included in the analysis as a separate set of variables based on prior knowledge and

Table 1. Overview of Plasmode Simulation Scenarios Reflecting Varying Exposure and Outcome Prevalences Based on National Health and Nutrition Examination Survey (NHANES) Data Cycles (2013-2018)

Plasmode Simula- tion Scenario	Exposure Prevalence	Outcome Prevalence	True Odds Ratio	Sample Size
(i) Frequent Expo- sure and Outcome (Base)	30%	30%	1	3,000
(ii) Rare Exposure and Frequent Out- come	5%	30%	1	3,000
(iii) Frequent Expo- sure and Rare Out- come	30%	5%	1	3,000

causal reasoning. This ensured that these known confounders were appropriately accounted for, independent of the proxy variable selection framework.

- Investigator-Specified Covariates (Transformation of Laboratory Variables):* In real-world studies, it is common for analysts to lack precise knowledge of the true model specification. To simulate this uncertainty, we transformed the continuous laboratory variables using complex functions such as logarithmic, exponential, square root, polynomial transformations, and interactions. This reflects the challenges analysts face in correctly specifying models when dealing with continuous data.
- Inclusion of Proxy Variables:* Real-world studies often deal with unmeasured confounding, which researchers attempt to mitigate by adding proxy variables. However, when a large number of proxies are added, some may act as noise variables, contributing little or nothing to the analysis. To simulate this, we selected only those binary proxy covariates (referred to as recurrence covariates in hdPS terminology) that had a relative risk (RR) of less than 0.8 or greater than 1.2 concerning the outcome. Proxy variables were defined based on their association with the outcome because unmeasured confounders must influence the outcome to induce confounding. By prioritizing variables with strong outcome associations, we aimed to ensure that the proxies reflect at least part of the confounding structure. While not explicitly enforced, many of the selected proxy variables are expected to have some degree of association with the exposure.

Out of 142 proxy covariates, 94 met this criterion and were summed in calculating a simple comorbidity burden measure [18]. This score represents the individual’s overall comorbidity burden, reflecting the cumulative presence of conditions. The remaining 48 covariates were excluded from this calculation and considered noise. This comorbidity burden measure (one variable) was then incorporated into our model specification for generating the outcome data.

Performance Measures: From this simulation, we derived several performance metrics to evaluate the effectiveness of the methods under consideration: (1) bias, (2) average model-based SE (the average of estimated SEs obtained from a model over repeated samples), (3) empirical SE (the standard deviation of estimated treatment effects across repeated samples), (4) MSE, (5) coverage probability of 95% confidence intervals, (6) bias-corrected coverage, and (7) Zip plot [19,20].

Inverse probability weighted estimators under consideration 134

The comparison between the data generation process and the analysis process reveals 135
two key differences: (i) The data generation used transformed laboratory variables, 136
whereas the analysis was conducted using only the original laboratory variables. (ii) The 137
data generation employed a simple sum of selected proxy variables (sum of 94 proxy 138
covariates), while the analysis included all proxy variables (142 binary proxies), with 48 139
of these acting as noise variables. These differences help us assess how the proxy variable 140
selection methods handle model misspecification and the presence of noise variables. 141

We estimated propensity scores using the following models separately. Propensity 142
scores were then used to construct weights for each individual, defined as the inverse of 143
the probability of their observed exposure status. The primary causal estimand of 144
interest in this study is the average treatment effect (ATE), which represents the 145
difference in expected outcomes between treated and untreated individuals if all had 146
been exposed to either treatment condition. 147

1. **Kitchen sink model:** This is a base model for comparison, where no variable 148
selection approaches were used. All investigator-selected features and all proxy 149
variables were used to model [6]. 150
2. **hdPS using Bross formula:** The Bross formula is a statistical method used to 151
calculate the bias introduced by not adjusting for a covariate [4]. In hdPS 152
analysis, this formula was originally applied to each proxy variable to measure and 153
rank the potential bias if the covariate were not adjusted for. In our analysis, the 154
100 proxies with the highest bias rankings are selected for further modeling [2,3]. 155
3. **Least Absolute Shrinkage and Selection Operator (LASSO):** LASSO is a 156
variable selection technique that limits the number of variables by adding a 157
penalty term to the regression model. Cross-validation (CV) is used in LASSO to 158
identify variables with non-zero coefficients in the best model by optimizing the 159
penalty value [6–8]. 160
4. **Hybrid of hdPS and LASSO:** Instead of relying solely on LASSO for variable 161
selection, a hybrid approach combines the Bross formula and LASSO. First, proxy 162
variables are selected using the hdPS algorithm (e.g., the top 100), and then 163
LASSO is applied to further refine the selection [6,8]. 164
5. **Elastic Net:** Elastic Net is an extension of LASSO that includes an additional 165
penalty term to handle multicollinearity by grouping correlated features and 166
selecting the most representative ones [6]. 167
6. **Random Forest:** The Random Forest algorithm is an ensemble learning method 168
that constructs multiple decision trees to perform classification [21]. It calculates 169
the importance of each proxy variable based on the decrease in impurity or Gini 170
importance, providing a ranking of the proxies. The top 100 variables from this 171
ranking are manually selected for further modeling [7]. 172
7. **XGBoost:** XGBoost is a gradient boosting algorithm used to optimize machine 173
learning models [22]. It builds decision trees that make splits based on maximum 174
impurity reduction, and it assigns an importance score to each proxy variable by 175
calculating the mean decrease in impurity [23]. 176
8. **Stepwise:** Stepwise selection is a progressive feature selection method that can 177
proceed in two directions—forward or backward—based on the maximum adjusted 178
R-squared. We have implemented two versions: (a) Forward selection (FS) starts 179
with an initial model (e.g., including all investigator-selected features) and adds 180

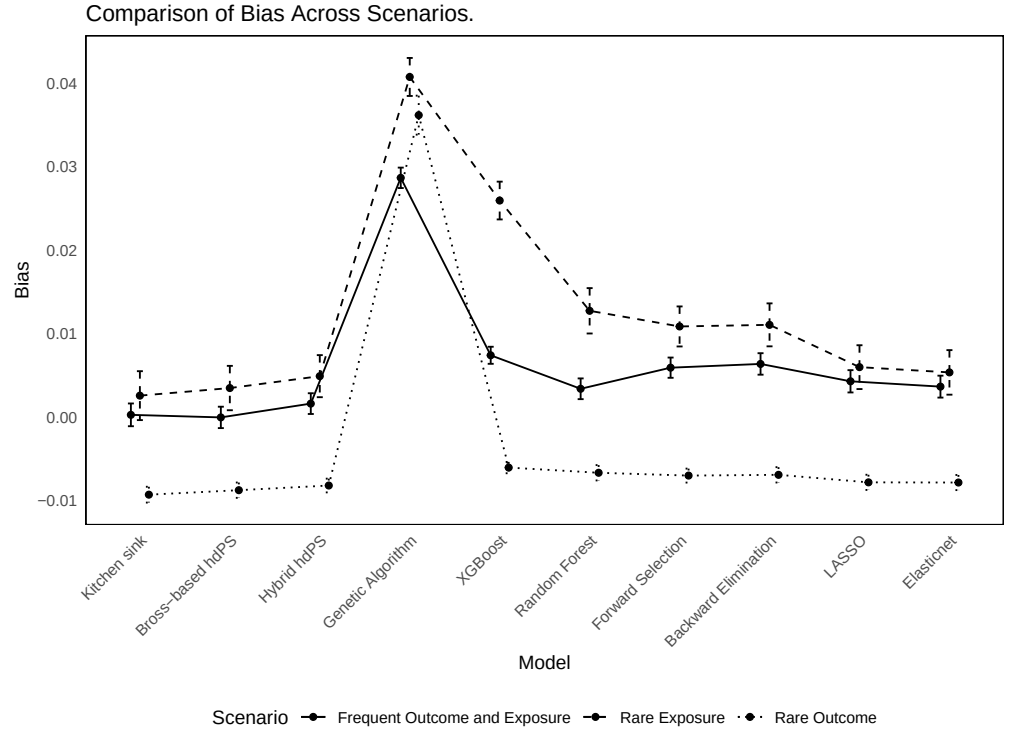


Fig 1. Comparison of Bias Across Different Methods in hdPS Analysis

proxies to the model one at a time. (b) Backward elimination (BE) starts with a full model (e.g., all investigator-selected features and all proxy variables) and removes features one at a time based on their contribution to the model.

9. **Genetic algorithm:** Genetic algorithm is an evolutionary algorithm inspired by the theory of natural selection [24]. It operates by evolving offspring from a population of the fittest individuals over several generations, evaluating and selecting the best combination of features or variables that maximize prediction accuracy.

Results

The results for each method under the different scenarios are summarized below. See Figures 1 and 2 for an overview of the performance in terms of bias and coverage, respectively. All simulation results can be reviewed interactively through a Shiny web application available at <https://ehsanx.shinyapps.io/hdPS-Alternatives/>, providing a convenient platform for exploring the performance of each method across various scenarios.

(i) Frequent Exposure and Outcome (base) scenario:

1. *Bias:* Cross-based hdPS exhibited the smallest bias (-0.0001), and the kitchen sink model (0.0002) was the second. Genetic algorithm shows the highest bias (0.0287), indicating a substantial deviation from the true effect. Among the other methods, Hybrid hdPS (0.0016), and Elastic Net (0.0036) demonstrated low bias. XGBoost (0.0074) had slightly higher bias than Random Forest (0.0034).

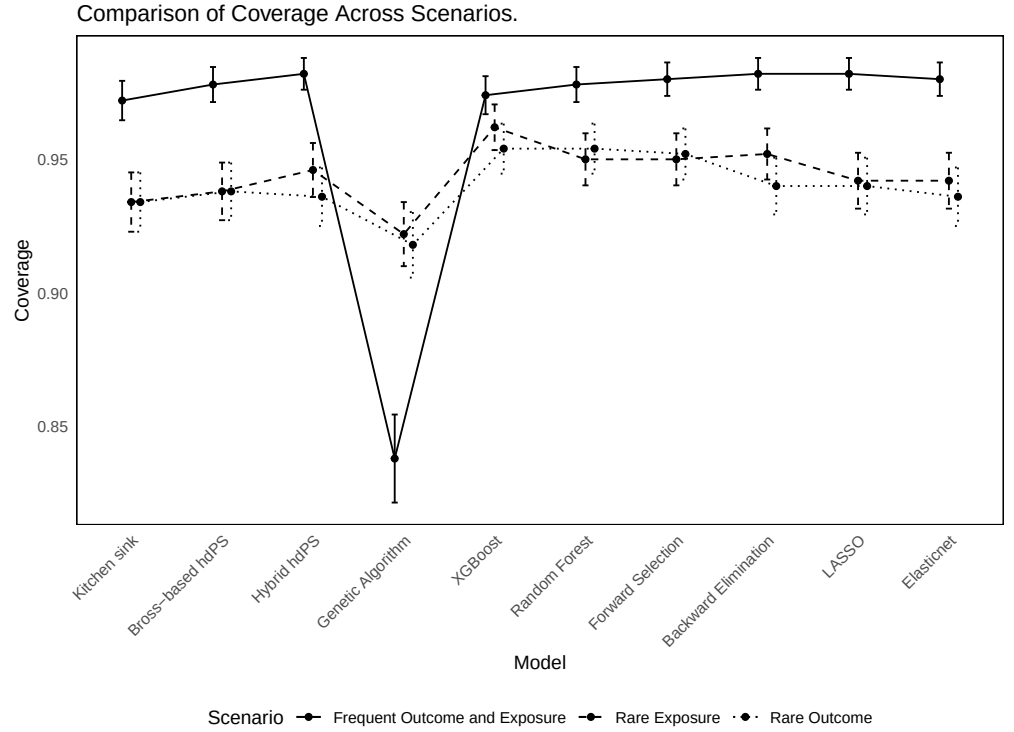


Fig 2. Comparison of Coverage Probability Across Different Methods in hdPS Analysis

2. *Coverage*: The coverage for most methods was high, with Hybrid hdPS, Forward Selection, Backward Elimination, LASSO, and Elastic Net achieving values around 98%, indicating well-calibrated confidence intervals. However, Genetic algorithm had noticeably lower coverage (83.8%), indicating that its confidence intervals might be too narrow or biased, potentially missing the true effect. After applying bias elimination (as there were substantial bias associated with this method), Genetic algorithm's coverage improved to 96%.

3. *MSE*: XGBoost achieved the lowest MSE (0.0006). Genetic algorithm maintained the highest MSE (0.0016), reflecting its higher bias and variability. The kitchen sink model (0.0009), Bross-based hdPS (0.0008), Hybrid hdPS (0.0008), and Elastic Net (0.0009) all had relatively similar and moderate MSE values.

4. *SE*: XGBoost exhibited the lowest Empirical SE (0.0229), indicating high precision in its estimates. The kitchen sink model had the highest Empirical SE (0.0305), suggesting greater variability. Other methods, including Genetic algorithm (0.0274), Hybrid hdPS (0.0278), and Bross-based hdPS (0.0287), showed moderate variability. LASSO (0.0299) and Elastic Net (0.0294) had slightly higher variability. The Model-based SE followed a similar pattern, with XGBoost (0.0268) showing the lowest variability and the kitchen sink model (0.0333) the highest, indicating less precision in its estimates. When comparing relative error in SE estimation, XGBoost performed the worst. See Appendix §C for further details.

(ii) Rare Exposure and Frequent Outcome:

1. *Bias*: The kitchen sink model showed a relatively low bias (0.0025), while Genetic algorithm continued to exhibit the highest bias (0.0408), indicating a significant

deviation from the true effect. XGBoost had a bias of 0.0259, which, while still higher than other methods, but was lower than Genetic algorithm. Other methods, such as Bross-based hdPS (0.0035), Hybrid hdPS (0.0049), and Elastic Net (0.0053), demonstrated moderate bias. Random Forest (0.0127) and Forward Selection (0.0108) had slightly higher bias but remained within an acceptable range.

2. *Coverage*: Coverage levels remained high for most methods, with XGBoost achieving the highest coverage at 96.2%, indicating well-calibrated confidence intervals despite its higher bias. The Genetic algorithm method had lower coverage (92.2%), suggesting that its confidence intervals might be narrower, potentially missing the true effect. Other methods such as RF, Forward Selection, Backward Elimination, and Hybrid hdPS maintained coverage values around 94-95%, suggesting adequate interval calibration. Bias-eliminated coverage for Genetic algorithm improved to 94.2%, but it was still slightly lower than other methods (e.g., forward selection).
3. *MSE*: Forward selection demonstrated the lowest MSE (0.0030), and then Hybrid hdPS and XGBoost. The Genetic algorithm method had a higher MSE (0.0043), reflecting its substantial bias and variability. The kitchen sink model also had an MSE of 0.0043, similar to Genetic algorithm, while other methods such as Bross-based hdPS (0.0035), RF (0.0039), and Elastic Net (0.0036) exhibited moderate MSE values, indicating reasonable accuracy.
4. *SE*: The lowest Empirical SE was observed with XGBoost (0.0507) and Genetic algorithm (0.0510), reflecting high precision despite their higher bias. The kitchen sink model had the highest Empirical SE (0.0656), indicating greater variability. Hybrid hdPS (0.0564), Bross-based hdPS (0.0595), and RF (0.0609) showed moderate variability. Forward Selection (0.0537) and Backward Elimination (0.0576) had lower variability compared to the kitchen sink model. In terms of Model-based SE, XGBoost (0.0531) and Genetic algorithm (0.0533) continued to show low variability, while the kitchen sink model had the highest Model-based SE (0.0623), indicating less precision in its estimates. When comparing relative error in SE estimation, XGBoost and kitchen sink model performed the worst (in other direction).

(iii) Frequent Exposure and Rare Outcome:

1. *Bias*: In this scenario, the kitchen sink model exhibited a moderate negative bias (-0.0093), similar to the Bross-based hdPS method (-0.0088). Genetic algorithm showed a significantly higher bias (0.0362), indicating a substantial deviation from the true effect. Among other methods, XGBoost demonstrated the lowest bias (-0.0061), while methods such as Hybrid hdPS (-0.0082), Forward Selection (-0.0070), and Backward Elimination (-0.0070) had slightly higher but still moderate biases. Elastic Net and LASSO both had biases of -0.0079, reflecting slightly larger deviations compared to XGBoost but still within acceptable limits.
2. *Coverage*: Most methods achieved good coverage, with XGBoost, RF, and Forward Selection each achieving a coverage rate of 95.4%, indicating well-calibrated confidence intervals. The Genetic algorithm method, however, had slightly lower coverage (91.8%), indicating that its confidence intervals might be narrower, potentially excluding the true effect. Bross-based hdPS and the kitchen sink model had slightly lower coverage values of 93.8% and 93.4%, respectively. After accounting for bias, the bias-eliminated coverage for most methods, except

Genetic algorithm, remained high, with values ranging from 98.4% to 99.0%, indicating that most methods effectively adjusted for bias in their coverage estimates. Genetic algorithm’s bias-eliminated coverage was lower at 93.4%, reflecting its higher inherent bias.

3. *MSE*: XGBoost exhibited the lowest MSE (0.0003). Genetic algorithm had the highest MSE (0.0040), reflecting its substantial bias and variability. The kitchen sink model (0.0005), Bross-based hdPS (0.0005), and other methods such as Hybrid hdPS (0.0004) and Elastic Net (0.0005) all had relatively similar MSE values, indicating moderate accuracy.
4. *SE*: The lowest Empirical SE was observed with XGBoost (0.0152), reflecting high precision in its estimates. The Genetic algorithm method exhibited the highest Empirical SE (0.0523), indicating greater variability and less precision. Methods such as Hybrid hdPS (0.0184), Forward Selection (0.0187), and Elastic Net (0.0203) showed moderate variability, while Bross-based hdPS (0.0206) and the kitchen sink model (0.0212) had slightly higher variability. In terms of Model-based SE, XGBoost (0.0179) again showed the lowest variability, consistent with its low Empirical SE, indicating that it provided the most stable estimates. The kitchen sink model had a slightly higher Model-based SE (0.0219), indicating less precision in its estimates. When comparing relative error in SE estimation, XGBoost performed the worst.

Real-world analysis

Summary results: The dataset comprises 7,585 individuals. Among these, the prevalence of the exposure is 48.8%, while the prevalence of the outcome is 23.7%.

See Figure 3 for the results from analyzing the NHANES (2013-2018) dataset. The methods are arranged according to the number of selected proxy variables. Among all variable selection algorithms, Random Forest and XGBoost demonstrate the highest ORs, with values of 1.59 and 1.56, respectively. The ORs for the remaining methods cluster around 1.52. Additionally, with the exception of RF and the Bross formula hdPS, a general pattern emerges where methods selecting a larger number of proxy variables yield lower ORs. For RD, RF and XGBoost also exhibit the highest value 0.08, while the remaining methods converge around 0.077. The trend observed in the OR results appears to persist in the RD analysis.

Table 2 presents a pairwise comparison of the number of proxy features shared between different variable selection methods used in the analysis. Each cell in the table indicates the count of common proxy variables selected by the method in the corresponding row and column. The diagonal cells, where the row and column methods are the same, represent the total number of proxy variables selected exclusively by each method. The first column displays the number of proxy variables shared between each method and the kitchen sink (KS) model. Given that the KS model includes all proxy variables, the values in the first column are identical to those in the diagonal cells for each row, which also presents the total number of proxy variables selected by the method in the corresponding row.

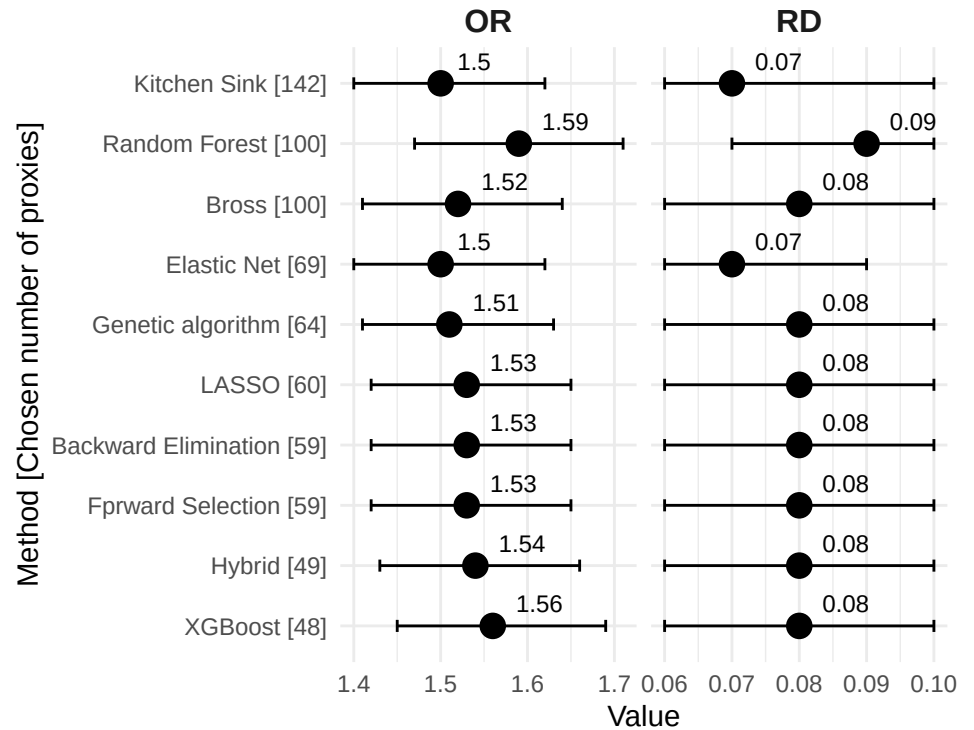


Fig 3. Figure presenting a comparison of Risk Differences (RD) and Odds Ratios (OR) with 95% confidence intervals for different methods used to evaluate the association between obesity and diabetes risk. The analysis is based on data from the National Health and Nutrition Examination Survey (NHANES) for the years 2013-2018. Methods are arranged by the number of variables used in the models.

Table 2. Comparison of variable overlap of selected proxies across different methods used to evaluate the association between obesity and diabetes from the National Health and Nutrition Examination Survey (NHANES) for the years 2013-2018.

	KS	Bross	Hybrid	LASSO	EN	RF	XGB	FS	BE	GA
Kitchen sink (KS)	142									
Bross formula	100	100								
Hybrid (Bross and LASSO)	49	49	49							
LASSO	60	47	47	60						
Elastic Net (EN)	69	54	48	60	69					
Random Forest (RF)	100	71	38	46	52	100				
XGBoost (XGB)	48	38	24	28	30	37	48			
Forward selection (FS)	59	45	41	51	54	45	25	59		
Backward elimination (BE)	59	45	41	51	54	45	25	59	59	
Genetic algorithm (GA)	64	44	28	36	40	49	25	35	35	64

Table 3 presents a comparison of the count and percentage of common proxy variables selected by different methods in comparison with the Bross formula hdPS. The first column shows the total number of proxy variables selected by each method, while the second column lists the number of common features selected by both the respective method and the Bross formula. The third column reports the percentage of common features out of the total number of features selected by each method.

We observe that, aside from the Bross formula hdPS and Random Forest models, where the number of proxies was manually set to 100, and the kitchen sink (KS) model, which includes all proxies by design, the number of proxy variables selected by other models ranges between 49 and 69. As expected, the hybrid method combining Bross and LASSO hdPS selects exactly 49 proxy variables, all of which are selected by both methods, resulting in a common feature rate of 1.00. For other models, the common feature percentage is generally clustered around 74%, with XGBoost showing the highest common percentage at 79%, while the Genetic Algorithm (GA) displays the lowest common percentage at 69%.

Table 3. Comparison of the count and percentage of proxy variables selected by each methods in common with that by the Bross formula-based high-dimensional propensity score to evaluate the association between obesity and diabetes from the National Health and Nutrition Examination Survey (NHANES) for the years 2013-2018.

Method	Total Count	Common Count	Rate in Common
Kitchen sink	142	-	-
Bross formula	100	-	-
Hybrid (Bross and LASSO)	49	49	1.00
LASSO	60	47	0.78
Elastic Net	69	54	0.78
Random Forest	100	71	0.71
XGBoost	48	38	0.79
Forward selection	59	45	0.76
Backward elimination	59	45	0.76
Genetic algorithm	64	44	0.69

Computing time:

Figure 4 presents the computing time for each method. All methods, aside from RF and GA, exhibit relatively fast computing times. RF and GA are generally much slower.

Discussion

Summary of the simulation findings

Comparison of methods:

Across the three scenarios, XGBoost consistently achieved the lowest MSE and high coverage, making it one of the most reliable methods in terms of precision. However, it consistently exhibited some degree of bias, particularly when compared to methods such as the kitchen sink model, Bross-based hdPS, and Hybrid hdPS, which often showed lower bias in scenarios with frequent outcomes. In contrast, GA displayed the highest bias and MSE, along with lower coverage and greater variability, making it the least reliable method for accurate effect estimation. Methods such as Bross-based hdPS, Hybrid hdPS, and Elastic Net performed moderately well across all scenarios, balancing bias, coverage, and MSE. However, these methods did not outperform XGBoost in

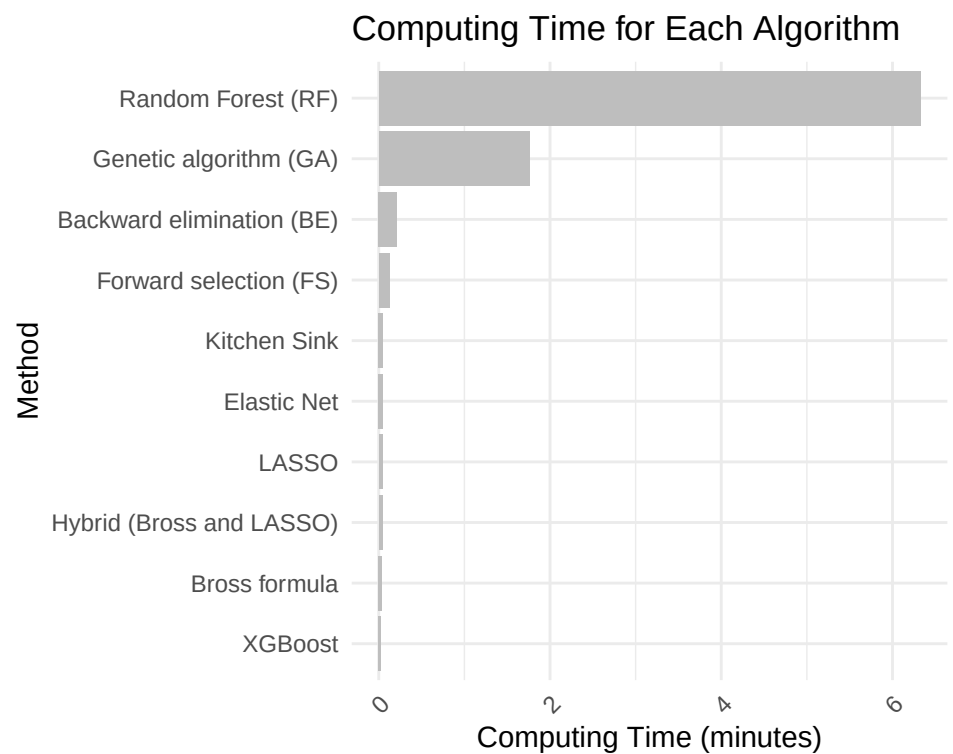


Fig 4. Computing time for the real-world analysis for each algorithm under consideration. The analysis is based on data from the National Health and Nutrition Examination Survey (NHANES) for the years 2013-2018.

terms of overall precision, especially with respect to MSE, though they often resulted in lower bias. The kitchen sink model performed comparably to Bross-based hdPS in terms of bias and coverage but lagged in SE estimation and MSE.

Comparison of scenarios:

In scenarios with rare exposure, higher bias was observed, particularly for methods such as GA and XGBoost, whereas frequent outcomes generally led to lower bias across most methods. Overcoverage was more common in the scenario with frequent exposure and outcome, with several methods producing confidence intervals that were too wide, suggesting an overestimation of uncertainty. The other scenarios exhibited more balanced or slightly under-coverage. Scenarios with frequent exposure also displayed higher relative error in SE estimation, making it more difficult to precisely estimate effects. In contrast, rare exposure scenarios were associated with higher MSE, reflecting the challenge of estimating effects when the exposure is uncommon. Rare outcome scenarios exhibited the lowest MSE across most methods (except GA), indicating that these scenarios provided a better balance between bias and precision for most methods.

Contextualizing the literature

Previous studies have shown that LASSO performs well within the hdPS framework, particularly in terms of bias reduction and MSE [6,8], with similar results for Elastic Net [6]. Our findings largely support these conclusions, as both methods demonstrated moderate bias and MSE across the scenarios. However, their performance was inconsistent in some cases, with higher bias observed in rare exposure scenarios, as noted in previous studies [6,8]. MSE also increased in rare exposure scenarios. The Hybrid hdPS method, combining Bross-based hdPS and LASSO, showed promising results, especially in terms of MSE, suggesting it may serve as a suitable alternative to traditional hdPS methods. Random Forest also performed similarly in our study, yielding relatively low bias, which is consistent with previous findings [6]. However, none of the earlier works emphasized coverage or examined methods such as GA, XGBoost, forward selection, or backward elimination, which were evaluated here.

Data analysis findings

The real-world dataset, with frequent exposure (48.8%) and a moderate outcome rate (23.7%), produced ORs of 1.59 and 1.56 for RF and XGBoost, respectively, while other methods clustered around an OR of 1.52. A general trend emerged, showing that methods selecting fewer proxy variables yielded lower ORs, except for RF and the Bross formula hdPS. In terms of risk difference (RD), estimates were relatively stable across methods. Regarding variable overlap, most methods shared around 74% of their proxy variables with the Bross formula hdPS, with XGBoost showing the highest common rate (79%) and GA the lowest (69%). Computing time analysis showed that, aside from RF and GA, most methods had relatively fast computing times, with RF being significantly slower.

Strengths

Previous studies on singly robust methods have mainly focused on hdPS performance using MSE as the primary evaluation metric [6,8–11]. Our study extends this body of work by incorporating a broader range of performance metrics, allowing researchers to compare results in terms of both bias and variance estimation. This comprehensive comparison of statistical and machine learning methods across various scenarios has not been conducted before. For instance, we found that while XGBoost consistently demonstrated strong performance in terms of MSE and coverage, it did not always have

the lowest bias. Additionally, we observed that traditional variable selection methods such as forward selection and backward elimination performed similarly to more sophisticated methods such as LASSO and Random Forest across scenarios, both in terms of bias and coverage.

Our study also employed a complex plasmode simulation framework, closely replicating real-world data conditions [17]. This framework not only accounted for model misspecification, where the true relationships between covariates and outcomes were unknown, but also introduced noise variables, addressing the challenge of dealing with irrelevant covariates in high-dimensional settings. By applying transformations to continuous variables and adding proxy variables that contributed minimally to the outcome, we rigorously evaluated how well each method handled both model uncertainty and non-informative variables, further strengthening the real-world relevance of our findings.

Future Direction

Double robust methods have demonstrated strong potential for achieving optimal statistical performance in hdPS analyses [9,25,26]. In addition, single robust methods, such as ensemble learners such as super learners, have shown promise in improving bias, MSE, area under the curve (AUC), and covariate balance in other contexts [10,27,28]. Deep learning methods, particularly supervised architectures, offer significant potential for improving propensity score estimation in high-dimensional settings by capturing complex, non-linear relationships and performing well in scenarios with rare exposures, while maintaining comparable bias and superior variance estimation compared to traditional methods [29]. Despite their theoretical advantages, the complexity and computational demands of these methods, especially in high-dimensional settings, have limited their adoption by practitioners. On the other hand, the simpler singly robust machine learning methods evaluated here have been applied in clinical research [30,31].

Future research should explore the application of double robust methods and super learners in hdPS analyses, particularly for handling rare outcomes and exposures, where the performance of traditional methods may be suboptimal. Additionally, investigating the impact of different hyperparameters on machine learning methods such as XGBoost could optimize their performance in hdPS analysis. Finally, future simulation studies should focus on evaluating coverage and other metrics in epidemiological scenarios such as time-varying exposures, which would provide valuable insights into the generalizability of our findings [32].

Conclusion

In conclusion, this analysis highlights the importance of carefully selecting appropriate methods for hdPS analysis based on the specific characteristics of the data, particularly the prevalence of exposure and outcome. These findings also emphasize the need to tailor method selection to the specific epidemiological scenario, ensuring that the chosen method aligns with the study's goals, whether minimizing bias or maximizing precision.

XGBoost consistently demonstrated strong performance in terms of MSE and coverage, making it an effective choice when precision is prioritized. However, it did not achieve the lowest bias, particularly in rare exposure scenarios, indicating that it may be less suited when minimizing bias is the primary objective. In contrast, the Genetic Algorithm (GA) exhibited significant limitations, with consistently high bias and MSE, making it less reliable for effect estimation.

The kitchen sink, Bross-based hdPS, and Hybrid hdPS methods provided a more balanced approach, offering low bias and moderate MSE, though coverage varied depending on the scenario. The analysis also revealed that rare outcomes were

associated with lower MSE and better precision, while rare exposures presented challenges, yielding higher bias and MSE. Interestingly, traditional statistical approaches such as forward selection and backward elimination performed comparably to more sophisticated machine learning methods across many scenarios. This suggests that simpler approaches can still be viable, particularly in terms of bias and coverage, and might be preferred due to their computational efficiency.

List of abbreviations

- hdPS: High-dimensional Propensity Score
- NHANES: National Health and Nutrition Examination Survey
- OR: Odds Ratio
- RD: Risk Difference
- SE: Standard Error
- MSE: Mean Squared Error
- KS: Kitchen Sink
- LASSO: Least Absolute Shrinkage and Selection Operator
- EN: Elastic Net; a regularized regression method that combines LASSO and Ridge regression
- RF: Random Forest
- XGBoost: Extreme Gradient Boosting
- FS: Forward Selection
- BE: Backward Elimination
- GA: Genetic Algorithm
- CV: Cross-Validation
- RR: Relative Risk

Declarations

Ethics approval and consent to participate

The analysis conducted on secondary and de-identified data is exempt from research ethics approval requirements. Ethics for this study was covered by item 7.10.3 in University of British Columbia’s Policy #89: Research and Other Studies Involving Human Subjects 19 and Article 2.2 in of the Tri-Council Policy Statement: Ethical Conduct for Research Involving Humans (TCPS2).

Consent for publication

The National Health and Nutrition Examination Survey (NHANES), conducted by the U.S. Centers for Disease Control and Prevention (CDC), involves collecting data through direct physical examinations, laboratory testing, and interviews. The CDC already obtains consent from participants when collecting this data. When researchers use NHANES data for their studies, they are typically using de-identified, publicly available data. This means that the information cannot be linked back to individual participants, and therefore, additional consent from participants is not required for researchers to use this data.

Availability of data and materials

NHANES data is publicly accessible and can be retrieved from the NHANES website. The datasets generated and/or analyzed during the current study are available in the

NHANES repository: <https://www.cdc.gov/nchs/nhanes/index.htm>. Additionally, all simulation results can be interactively reviewed through a Shiny web application at <https://ehsanx.shinyapps.io/hdPS-Alternatives/>.

Clinical trial number

Not applicable.

Competing interests

MEK is currently supported by grants from Canadian Institutes of Health Research and MS Canada. MEK has previously received consulting fees from Biogen Inc. for consulting unrelated to this current work. MEK was also previously supported by the Michael Smith Foundation for Health Research Scholar award.

Funding

This work was supported by MEK’s Natural Sciences and Engineering Research Council of Canada (NSERC) Discovery Grant (PG#: 20R01603) and Discovery Launch Supplement (PG#: 20R12709).

Authors’ contributions

MEK: Conceptualization, Writing – Original Draft, Review & Editing YL: Formal Analysis, Review & Editing

Acknowledgements

Not applicable.

References

1. VanderWeele TJ. Principles of confounder selection. *European journal of epidemiology*. 2019;34: 211–219.
2. Schneeweiss S, Rassen JA, Glynn RJ, Avorn J, Mogun H, Brookhart MA. High-dimensional propensity score adjustment in studies of treatment effects using health care claims data. *Epidemiology (Cambridge, Mass)*. 2009;20: 512.
3. Wyss R, Fireman B, Rassen JA, Schneeweiss S. Erratum: High-dimensional propensity score adjustment in studies of treatment effects using health care claims data. *Epidemiology*. 2018;29: e63–e64.
4. Bross ID. Spurious effects from an extraneous variable. *Journal of chronic diseases*. 1966;19: 637–647.
5. Karim ME. High-dimensional propensity score and its machine learning extensions in residual confounding control. *The American Statistician*. 2024; 1–38.

6. Karim ME, Pang M, Platt RW. Can we train machine learning methods to outperform the high-dimensional propensity score algorithm? *Epidemiology*. 2018;29: 191–198. 514
515
7. Schneeweiss S, Eddings W, Glynn RJ, Patorno E, Rassen J, Franklin JM. Variable selection for confounding adjustment in high-dimensional covariate spaces when analyzing healthcare databases. *Epidemiology*. 2017;28: 237–248. 516
517
8. Franklin JM, Eddings W, Glynn RJ, Schneeweiss S. Regularized regression versus the high-dimensional propensity score for confounding adjustment in secondary database analyses. *American journal of epidemiology*. 2015;182: 651–659. 518
519
9. Pang M, Schuster T, Filion KB, Schnitzer ME, Eberg M, Platt RW. Effect estimation in point-exposure studies with binary outcomes and high-dimensional covariate data—a comparison of targeted maximum likelihood estimation and inverse probability of treatment weighting. *The international journal of biostatistics*. 2016;12. 520
521
10. Wyss R, Schneeweiss S, Van Der Laan M, Lendle SD, Ju C, Franklin JM. Using super learner prediction modeling to improve high-dimensional propensity score estimation. *Epidemiology*. 2018;29: 96–106. 522
523
11. Simon V, Vadel J. Evaluating the performance of high-dimensional propensity scores compared with standard propensity scores for comparing antihypertensive therapies in the CPRD GOLD database. *Cardiology and Therapy*. 2023;12: 393–408. 524
525
12. Saydah S, Bullard KM, Cheng Y, Ali MK, Gregg EW, Geiss L, et al. Trends in cardiovascular disease risk factors by obesity level in adults in the united states, NHANES 1999–2010. *Obesity*. 2014;22: 1888–1895. 526
527
13. Liu J, Hay J, Faught BE, et al. The association of sleep disorder, obesity status, and diabetes mellitus among US adults—the NHANES 2009–2010 survey results. *International journal of endocrinology*. 2013;2013. 528
529
14. Kabadi SM, Lee BK, Liu L. Joint effects of obesity and vitamin d insufficiency on insulin resistance and type 2 diabetes: Results from the NHANES 2001–2006. *Diabetes care*. 2012;35: 2048–2054. 530
531
15. Ostchega Y, Hughes JP, Terry A, Fakhouri TH, Miller I. Abdominal obesity, body mass index, and hypertension in US adults: NHANES 2007–2010. *American journal of hypertension*. 2012;25: 1271–1278. 532
533
16. Greenland S, Pearl J, Robins JM. Causal diagrams for epidemiologic research. *Epidemiology*. 1999; 37–48. 534
535
17. Franklin JM, Schneeweiss S, Polinski JM, Rassen JA. Plasmode simulation for the evaluation of pharmacoepidemiologic methods in complex healthcare databases. *Computational statistics and data analysis*. 2014;72: 219–226. 536
537

18. Farley JF, Harley CR, Devine JW. A comparison of comorbidity measurements to predict healthcare expenditures. *American Journal of Managed Care*. 2006;12: 110–118. 538 539
19. Morris TP, White IR, Crowther MJ. Using simulation studies to evaluate statistical methods. *Statistics in medicine*. 2019;38: 2074–2102. 540 541
20. White IR, Pham TM, Quartagno M, Morris TP. How to check a simulation study. *International Journal of Epidemiology*. 2023; dyad134. 542 543
21. Breiman L. Random forests. *Machine learning*. 2001;45: 5–32. 544 545
22. Chen T, Guestrin C. Xgboost: A scalable tree boosting system. *Proceedings of the 22nd acm sigkdd international conference on knowledge discovery and data mining*. 2016. pp. 785–794. 546 547
23. Xiao Y, Chen Y, Huang R, Jiang F, Zhou J, Yang T. Interpretable machine learning in predicting drug-induced liver injury among tuberculosis patients: Model development and validation study. *BMC Medical Research Methodology*. 2024;24: 92. 548 549
24. Holland JH. *Adaptation in natural and artificial systems*. University of Michigan Press; 1975. 550 551
25. Pang M, Schuster T, Filion KB, Eberg M, Platt RW. Targeted maximum likelihood estimation for pharmacoepidemiologic research. *Epidemiology (Cambridge, Mass)*. 2016;27: 570. 552 553
26. Benasseur I, Talbot D, Durand M, Holbrook A, Matteau A, Potter BJ, et al. A comparison of confounder selection and adjustment methods for estimating causal effects using large healthcare databases. *Pharmacoepidemiology and Drug Safety*. 2022;31: 424–433. 554 555
27. Guertin JR, Rahme E, Dormuth CR, LeLorier J. Head to head comparison of the propensity score and the high-dimensional propensity score matching methods. *BMC medical research methodology*. 2016;16: 1–10. 556 557
28. Ju C, Combs M, Lendle SD, Franklin JM, Wyss R, Schneeweiss S, et al. Propensity score prediction for electronic healthcare databases using super learner and high-dimensional propensity score methods. *Journal of Applied Statistics*. 2019;46: 2216–2236. 558 559
29. Karim ME. Can supervised deep learning architecture outperform autoencoders in building propensity score models for matching? *BMC Medical Research Methodology*. 2024;24: 167. 560 561

30. Hossain MB, Johnston JC, Cook VJ, Sadatsafavi M, Wong H, Romanowski K, et al. Role of latent tuberculosis infection on elevated risk of cardiovascular disease: A population-based cohort study of immigrants in british columbia, canada, 1985–2019. *Epidemiology & Infection*. 2023;151: e68. 562
563
31. Basham CA, Karim ME, Cook VJ, Patrick DM, Johnston JC. Post-tuberculosis airway disease: A population-based cohort study of people immigrating to british columbia, canada, 1985–2015. *EClinicalMedicine*. 2021;33. 564
565
32. Neugebauer R, Schmittdiel JA, Zhu Z, Rassen JA, Seeger JD, Schneeweiss S. High-dimensional propensity score algorithm in comparative effectiveness research with time-varying interventions. *Statistics in medicine*. 2015;34: 753–781. 566
567





[Click here to access/download](#)

Other

[PLOSOne_Human_Subjects_Research_Checklist.docx](#)

