

前端项目部署

1 主页部署流程

1.1 前期配置

由于将网站部署在子路径下，所以先修改config目录下的index.js中assetsPublicPath为 './':

```
build: {  
  // Template for index.html  
  index: path.resolve(__dirname, '../dist/index.html'),  
  
  // Paths  
  assetsRoot: path.resolve(__dirname, '../dist'),  
  assetsSubDirectory: 'static',  
  assetsPublicPath: './',  
}
```

为解决图片资源访问路径问题，配置build下util.js中的generateLoaders中的返回值：


```
// Extract CSS when that option is specified  
// (which is the case during production build)  
if (options.extract) {  
  return ExtractTextPlugin.extract({  
    use: loaders,  
    fallback: 'vue-style-loader',  
    //用于解决图片路径问题  
    publicPath: '../..' // 这里需要修改为相对路径  
  })  
} else {  
  return ['vue-style-loader'].concat(loaders)  
}
```

1.2 项目打包

执行命令：npm run build，会在项目目录下生成一个dist文件夹，里面存放打包之后的文件。


```
PS C:\Users\32192\OneDrive\Code\agricultureMarket\frontEnd\agriMarket> npm run build

> agrimarket@1.0.0 build C:\Users\32192\OneDrive\Code\agricultureMarket\frontEnd\agriMarket
> node build/build.js
```

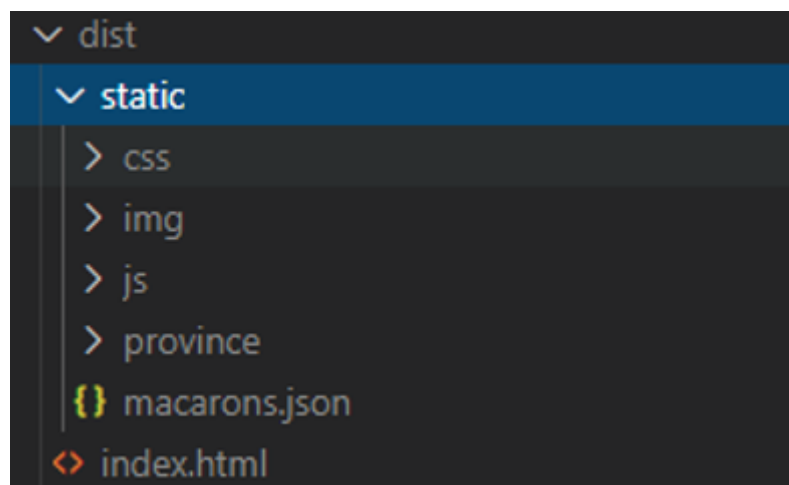

1.3 部署到服务器

打开xshell连接到相应服务器，通过xftp进行文件的传输。

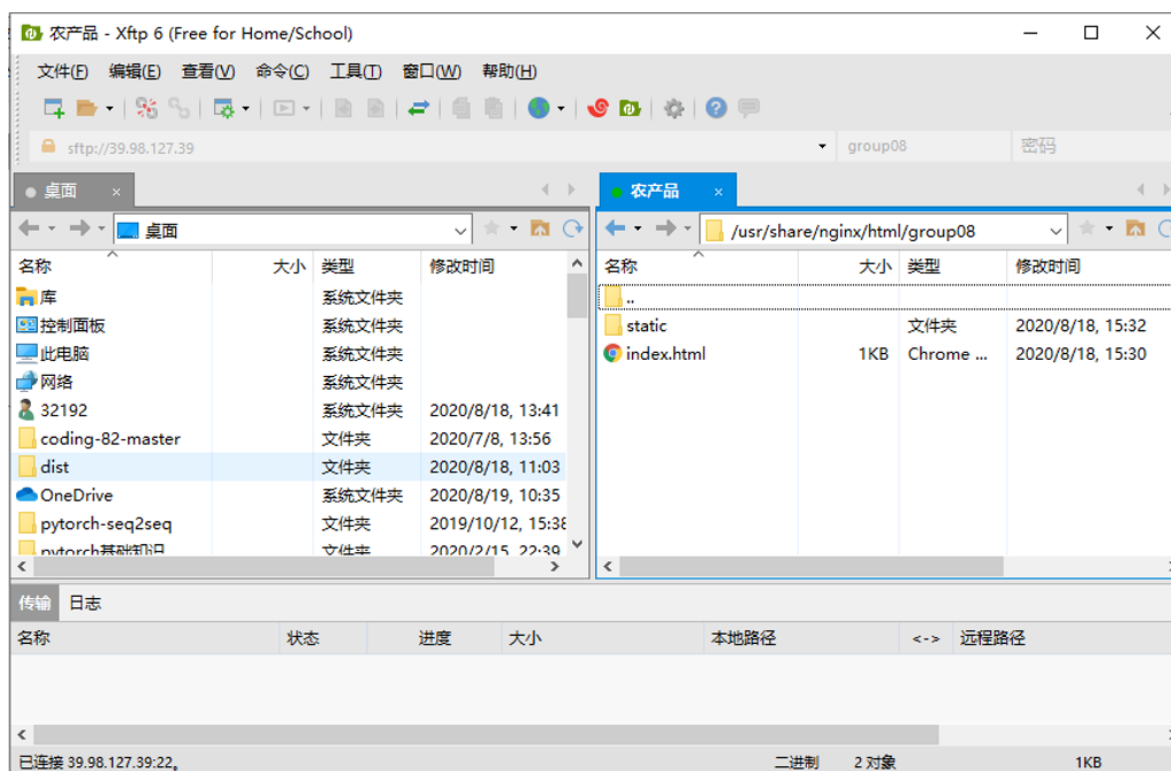

在相应的目录下将打包之后的dist文件传入即可。

2 管理员部署流程

2.1 前期配置

同主页配置，将vue.config.js文件里的publicPath改为 '!/'。

```
module.exports = {  
  /**  
   * You will need to set publicPath if you plan to deploy your site under a sub path,  
   * for example GitHub Pages. If you plan to deploy your site to https://foo.github.io/bar/,  
   * then publicPath should be set to "/bar/".  
   * In most cases please use '/' !!!  
   * Detail: https://cli.vuejs.org/config/#publicpath  
   */  
  publicPath: './',  
  outputDir: 'dist',  
}
```

2.2 项目打包

执行指令：npm run build:prod 在生产环境下打包

```
PS C:\Users\32192\OneDrive\Code\agricultureMarket\frontEnd\agriManage> npm run build:prod  
  
> vue-admin-template@4.4.0 build:prod C:\Users\32192\OneDrive\Code\agricultureMarket\frontEnd\agriManage  
> vue-cli-service build  
  
- Building for production...
```

2.3 部署到服务器


同主页部署

后端项目部署


1 接口服务程序部署流程

1.1 项目打包

Maven --> agri_market --> Lifecycle --> package

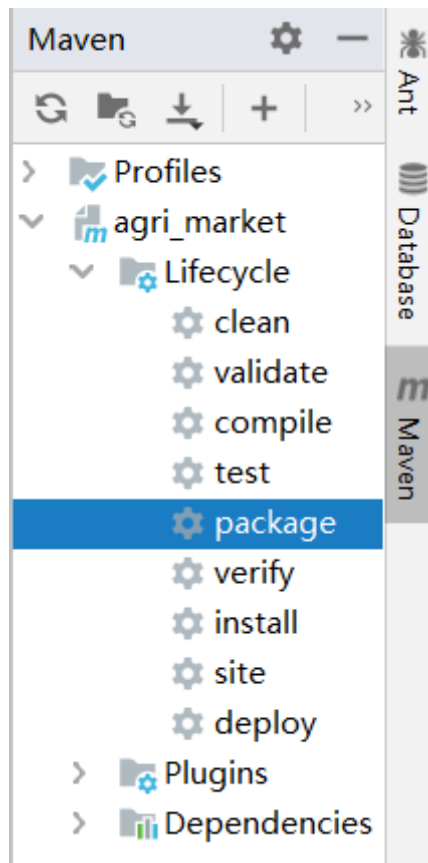


打包成功:

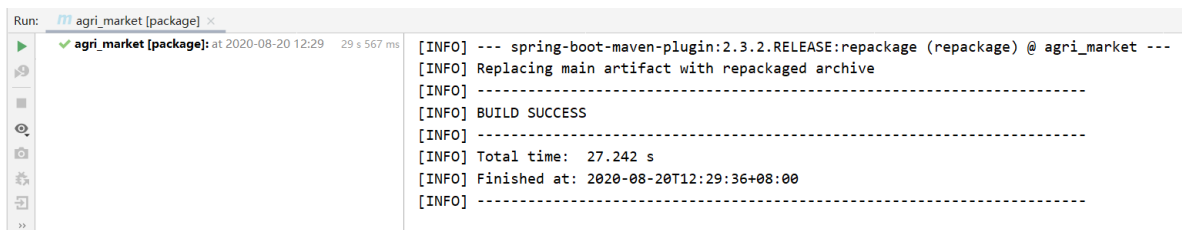

1.2 部署到服务器

使用WinSCP将jar包上传至服务器

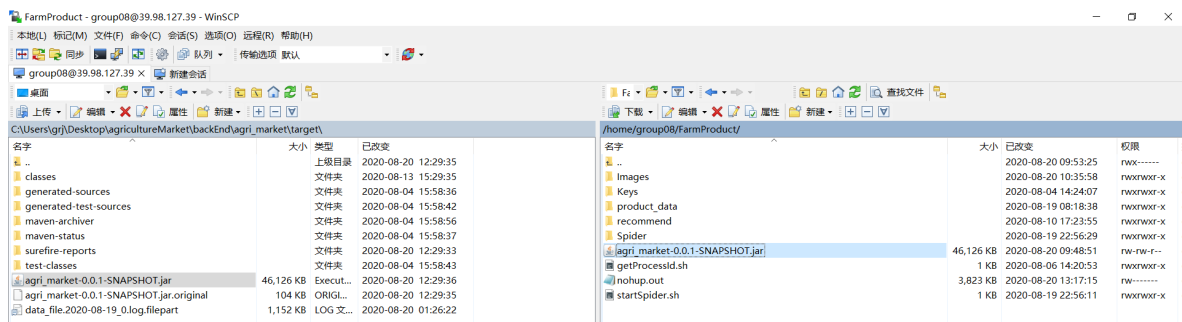

使用XShell远程登录，运行jar包

```
1 [group08@chinahitech FarmProduct]$ pwd
2 /home/group08/FarmProduct
3 [group08@chinahitech FarmProduct]$ nohup java -jar
  agri_market-0.0.1-SNAPSHOT.jar &
```



2 爬虫程序部署流程

2.1 项目打包

同上

2.2 部署到服务器

使用WinSCP将jar包上传至服务器

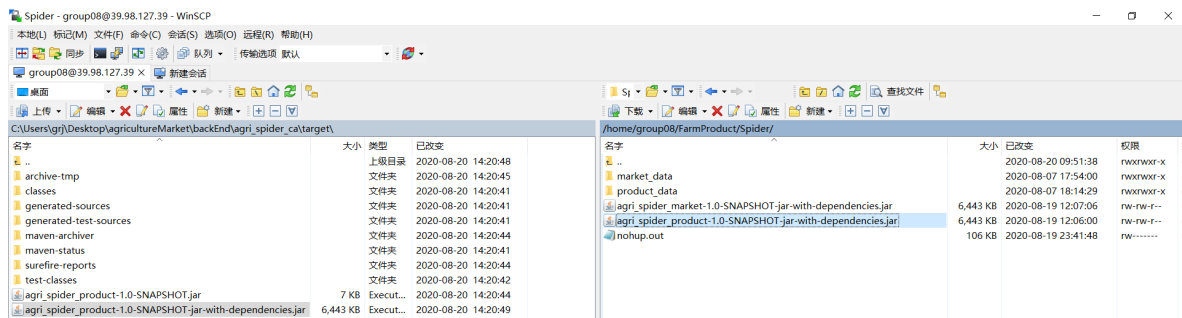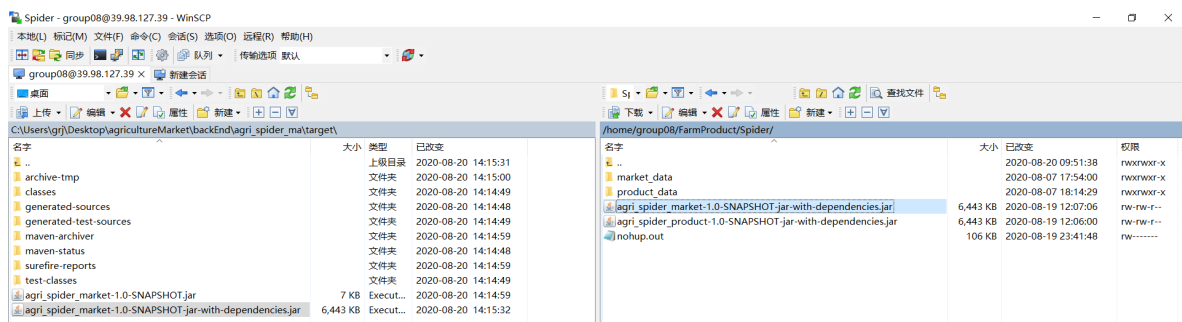

使用XShell远程登录，运行jar包，需传入正整数参数指定爬取多少页数据

```

1 [group08@chinahitech spider]$ pwd
2 /home/group08/FarmProduct/Spider
3 [group08@chinahitech spider]$ nohup java -jar
  agri_spider_market-1.0-SNAPSHOT-jar-with-dependencies.jar 20 &
4 [group08@chinahitech spider]$ nohup java -jar
  agri_spider_product-1.0-SNAPSHOT-jar-with-dependencies.jar 20
  &

```


3 推荐程序部署流程

3.1 项目打包

同上

3.2 部署到服务器

使用WinSCP将jar包上传至服务器

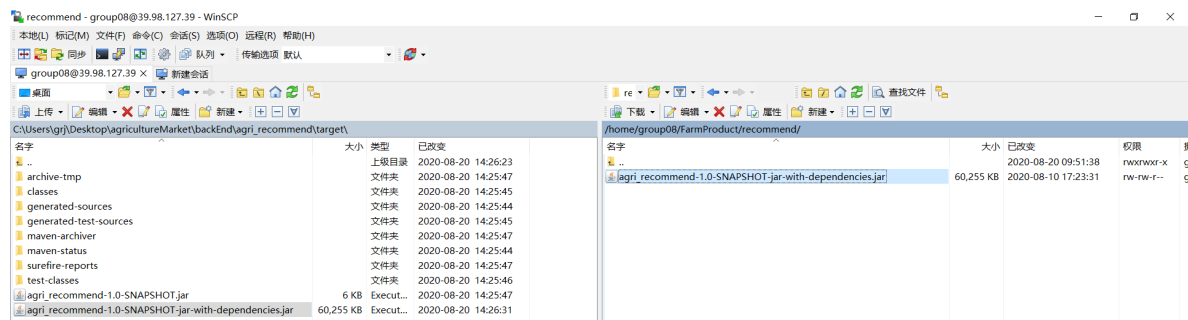

使用XShell远程登录，运行jar包

```

1 [group08@chinahitech recommend]$ pwd
2 /home/group08/FarmProduct/recommend
3 [group08@chinahitech recommend]$ java -jar agri_recommend-1.0-
  SNAPSHOT-jar-with-dependencies.jar

```

设置定时任务，每天05:00执行

```

1 $ crontab -e
2 0 5 * * * java -jar
  /home/group08/FarmProduct/recommend/agri_recommend-1.0-
  SNAPSHOT-jar-with-dependencies.jar

```

大数据分析相关部署

1 爬虫采集数据到Linux本地文件

2 Flume数据采集

2.1 编写Flume采集计划

配置文件位置： `/opt/model/flume-1.9.0/conf/flume-taildir-memory-hdfs.conf`

```
1 [hadoop@hadoop01 conf]$ pwd
2 /opt/model/flume-1.9.0/conf
3 [hadoop@hadoop01 conf]$ cat flume-taildir-memory-hdfs.conf
4 #给source(r1 r2)、channel(c1 c2)、sink(k1 k2)、agent(a1)命名
5 a1.sources = r1 r2
6 a1.sinks = k1 k2
7 a1.channels = c1 c2
8 #配置采集源source
9 #market
10 a1.sources.r1.type = taildir
11 a1.sources.r1.filegroups = f1
12 a1.sources.r1.filegroups.f1 =
13 /opt/data/spider/market_data/collect/.*\.log
14 a1.sources.r1.positionFile =
15 /opt/data/logs/flume_postion_market.json
16 #product
17 a1.sources.r2.type = taildir
18 a1.sources.r2.filegroups = f2
19 a1.sources.r2.filegroups.f2 =
20 /opt/data/spider/product_data/collect/.*\.log
21 a1.sources.r2.positionFile =
22 /opt/data/logs/flume_postion_product.json
23 #配置采集后存储的目标: sink
24 #market
25 a1.sinks.k1.type = hdfs
26 a1.sinks.k1.hdfs.path =
27 hdfs://hadoop01:9000/flume/agri/market/day=%Y-%m-%d
28 a1.sinks.k1.hdfs.rollInterval = 30
29 a1.sinks.k1.hdfs.rollSize = 1048576
30 a1.sinks.k1.hdfs.rollCount = 0
31 a1.sinks.k1.hdfs.filePrefix = log_file_%H%M
```

```

27 a1.sinks.k1.hdfs.fileSuffix = .log
28 a1.sinks.k1.hdfs.fileType = DataStream
29 a1.sinks.k1.hdfs.useLocalTimeStamp = true
30 #product
31 a1.sinks.k2.type = hdfs
32 a1.sinks.k2.hdfs.path =
    hdfs://hadoop01:9000/flume/agri/product/day=%Y-%m-%d
33 a1.sinks.k2.hdfs.rollInterval = 30
34 a1.sinks.k2.hdfs.rollSize = 1048576
35 a1.sinks.k2.hdfs.rollCount = 0
36 a1.sinks.k2.hdfs.filePrefix = log_file_%H%M
37 a1.sinks.k2.hdfs.fileSuffix = .log
38 a1.sinks.k2.hdfs.fileType = DataStream
39 a1.sinks.k2.hdfs.useLocalTimeStamp = true
40 #配置channel
41 a1.channels.c1.type = memory
42 a1.channels.c1.capacity = 1000
43 a1.channels.c1.transactionCapacity = 100
44 a1.channels.c2.type = memory
45 a1.channels.c2.capacity = 1000
46 a1.channels.c2.transactionCapacity = 100
47 #给source和sink 配置channel
48 a1.sources.r1.channels = c1
49 a1.sinks.k1.channel = c1
50 a1.sources.r2.channels = c2
51 a1.sinks.k2.channel = c2

```

2.2 编写shell脚本

- 注：使用nohup命令后台运行flume agent

```

1 [hadoop@hadoop01 custom_sh]$ pwd
2 /opt/data/agri/shell_scripts
3 [hadoop@hadoop01 custom_sh]$ cat start_flume_to_hdfs.sh
4 #!/bin/bash
5 nohup $FLUME_HOME/bin/flume-ng agent --conf $FLUME_HOME/conf -
    f $FLUME_HOME/conf/flume-taildir-memory-hdfs.conf -n a1 &

```

```

1 # 第2种
2 #!/bin/bash
3 $FLUME_HOME/bin/flume-ng agent --conf $FLUME_HOME/conf -f
    $FLUME_HOME/conf/flume-taildir-memory-hdfs.conf -n a1 -
    Dflume.root.logger=INFO,console

```


2.3 执行shell脚本

位置: `/opt/data/agri/shell_scripts`

```
1  【1】修改权限
2  [hadoop@hadoop01 shell_scripts]$ chmod +x
   start_flume_to_hdfs.sh
3  【2】执行采集计划
4  [hadoop@hadoop01 shell_scripts]$ ./start_flume_to_hdfs.sh
```

3 Hive数据仓库

3.1 启动相关服务

- start-dfs.sh
- start-yarn.sh
- metastore元数据服务

```
nohup hive --service metastore &
```

- hiveserver2

```
1  [hadoop@hadoop01 logs]$ pwd
2  /opt/model/hive-3.1.2/logs
3  [hadoop@hadoop01 logs]$ nohup hiveserver2
   1>>hiveserver2.log 2>>hiveserver2_error.log &
```

- zeppelin (网页端 hive interpreter, 按需启动)

```
zeppelin-daemon.sh start
```

查看启动的服务

```
1  [hadoop@hadoop01 logs]$ jps
2  5665 Jps
3  3749 ResourceManager
4  3016 NameNode
5  5368 RunJar
6  3418 SecondaryNameNode
7  3898 NodeManager
8  3179 DataNode
9  5195 RunJar
10 5612 ZeppelinServer
```

查看zeppelin是否真正启动成功:

```
tail -f $ZEPELIN_HOME/logs/zeppelin-hadoop-hadoop01.log
```

出现

```
Done, zeppelin server started
```

则说明真正启动成功

4 Sqoop数据迁移

4.1 将sqoop2的默认元数据库derby迁移到mysql

4.1.1 修改 /opt/model/sqoop2/conf/sqoop.properties

```
1 # MySQL configuration
2 org.apache.sqoop.repository.jdbc.handler=org.apache.sqoop.repo
  sitory.mysql.MySqlRepositoryHandler
3 org.apache.sqoop.repository.jdbc.transaction.isolation=READ_CO
  MMITTED
4 org.apache.sqoop.repository.jdbc.maximum.connections=10
5 org.apache.sqoop.repository.jdbc.url=jdbc:mysql://192.168.3.15
  9:3306/sqoop2
6 org.apache.sqoop.repository.jdbc.driver=com.mysql.cj.jdbc.Driv
  er
7 org.apache.sqoop.repository.jdbc.user=root
8 org.apache.sqoop.repository.jdbc.password=ROOTroot_1
```

4.1.2 修改MySQL配置

- MySQL root用户创建sqoop2数据库

```
mysql> create database sqoop2;
```

- 修改 /etc/my.cnf
- 追加: `sql_mode=ANSI_QUOTES`
- 重启mysql服务

```
sudo systemctl stop mysqld
```

```
sudo systemctl start mysqld
```

4.2 启动相关服务

- hdfs
- yarn
- jobhistory

- sqoop2-server

```

1 [hadoop@hadoop01 sqoop2]$ start-dfs.sh
2 [hadoop@hadoop01 sqoop2]$ start-yarn.sh
3 [hadoop@hadoop01 sqoop2]$ mr-jobhistory-daemon.sh start
  historyserver
4 [hadoop@hadoop01 sqoop2]$ sqoop2-server start

```

4.3 启动sqoop客户端并设置host和port

```

1 [hadoop@hadoop01 logs]$ sqoop2-shell
2 Setting conf dir: /opt/model/sqoop2/bin/../conf
3 Sqoop home directory: /opt/model/sqoop2
4 Sqoop Shell: Type 'help' or '\h' for help.
5
6 sqoop:000> set server --host hadoop01 --port 12000
7 Server is set successfully

```

4.4 创建link连接到hdfs

```

1 sqoop:000> create link -c hdfs-connector
2 Creating link for connector with name hdfs-connector
3 Please fill following values to create new link object
4 Name: link_from_hdfs_1
5
6 HDFS cluster
7
8 URI: hdfs://hadoop01:9000
9 Conf directory: /opt/model/hadoop-3.2.1/etc/hadoop
10 Additional configs::
11 There are currently 0 values in the map:
12 entry#
13 New link was successfully created with validation status OK
  and name link_from_hdfs_1
14 sqoop:000> show link
15 +-----+-----+-----+
16 |      Name      | Connector Name | Enabled |
17 +-----+-----+-----+
18 | link_from_hdfs_1 | hdfs-connector | true   |
19 +-----+-----+-----+

```

4.5 创建link连接到mysql

```

1 sqoop:000> create link -c generic-jdbc-connector
2 Creating link for connector with name generic-jdbc-connector
3 Please fill following values to create new link object
4 Name: link_to_mysql_1
5
6 Database connection
7
8 Driver class: com.mysql.cj.jdbc.Driver
9 Connection String:
  jdbc:mysql://39.98.127.39:3306/FarmProduct?
  serverTimezone=Asia/Shanghai
10 Username: agri
11 Password: *****
12 Fetch Size:
13 Connection Properties:
14 There are currently 0 values in the map:
15 entry#
16
17 SQL Dialect
18
19 Identifier enclose:
20 New link was successfully created with validation status
  WARNING and name link_to_mysql_1
21 sqoop:000> show link
22 +-----+-----+-----+
23 |      Name      | Connector Name | Enabled |
24 +-----+-----+-----+
25 | link_to_mysql_1 | generic-jdbc-connector | true   |
26 | link_from_hdfs_1 | hdfs-connector      | true   |
27 +-----+-----+-----+

```

4.6 创建job将hive数据表中的数据导入mysql数据库中的数据表

4.6.1 market表

```

1 sqoop:000> create job -f link_from_hdfs_1 -t link_to_mysql_1
2 Creating job for links with from name link_from_hdfs_1 and to
  name link_to_mysql_1
3 Please fill following values to create new job object
4 Name: job_agri_market
5
6 Input configuration
7

```

```
8 Input directory: /hive/warehouse/agri_db.db/market
9 Override null value:
10 Null value:
11
12 Incremental import
13
14 Incremental type:
15     0 : NONE
16     1 : NEW_FILES
17 Choose: 0
18 Last imported date:
19
20 Database target
21
22 Schema name: FarmProduct
23 Table name: t_market
24 Column names:
25 There are currently 0 values in the list:
26 element#
27 Staging table:
28 Clear stage table:
29
30 Throttling resources
31
32 Extractors:
33 Loaders:
34
35 Classpath configuration
36
37 Extra mapper jars:
38 There are currently 0 values in the list:
39 element#
40 New job was successfully created with validation status OK
    and name job_agri_market
```

4.6.2 product表

```
1 sqoop:000> create job -f link_from_hdfs_1 -t link_to_mysql_1
2 Creating job for links with from name link_from_hdfs_1 and to
  name link_to_mysql_1
3 Please fill following values to create new job object
4 Name: job_agri_product
5
6 Input configuration
7
```

```
8 Input directory: /hive/warehouse/agri_db.db/product
9 Override null value:
10 Null value:
11
12 Incremental import
13
14 Incremental type:
15     0 : NONE
16     1 : NEW_FILES
17 Choose: 0
18 Last imported date:
19
20 Database target
21
22 Schema name: FarmProduct
23 Table name: t_product
24 Column names:
25 There are currently 0 values in the list:
26 element#
27 Staging table:
28 Clear stage table:
29
30 Throttling resources
31
32 Extractors:
33 Loaders:
34
35 Classpath configuration
36
37 Extra mapper jars:
38 There are currently 0 values in the list:
39 element#
40 New job was successfully created with validation status OK
    and name job_agri_product
```

4.6.3 price表

```
1 sqoop:000> create job -f link_from_hdfs_1 -t link_to_mysql_1
2 Creating job for links with from name link_from_hdfs_1 and to
  name link_to_mysql_1
3 Please fill following values to create new job object
4 Name: job_agri_price
5
6 Input configuration
7
```

```

8 Input directory: /hive/warehouse/agri_db.db/price
9 Override null value:
10 Null value:
11
12 Incremental import
13
14 Incremental type:
15     0 : NONE
16     1 : NEW_FILES
17 Choose: 0
18 Last imported date:
19
20 Database target
21
22 Schema name: FarmProduct
23 Table name: t_price
24 Column names:
25 There are currently 0 values in the list:
26 element#
27 Staging table:
28 Clear stage table:
29
30 Throttling resources
31
32 Extractors:
33 Loaders:
34
35 Classpath configuration
36
37 Extra mapper jars:
38 There are currently 0 values in the list:
39 element#
40 New job was successfully created with validation status OK
    and name job_agri_price

```

4.6.4 supervise表

```

1 sqoop:000> create job -f link_from_hdfs_1 -t link_to_mysql_1
2 Creating job for links with from name link_from_hdfs_1 and to
  name link_to_mysql_1
3 Please fill following values to create new job object
4 Name: job_agri_supervise
5
6 Input configuration
7

```

```

8 Input directory: /hive/warehouse/agri_db.db/supervise
9 Override null value:
10 Null value:
11
12 Incremental import
13
14 Incremental type:
15     0 : NONE
16     1 : NEW_FILES
17 Choose: 1
18 Last imported date:
19
20 Database target
21
22 Schema name: FarmProduct
23 Table name: supervise
24 Column names:
25 There are currently 0 values in the list:
26 element#
27 Staging table:
28 Clear stage table:
29
30 Throttling resources
31
32 Extractors:
33 Loaders:
34
35 Classpath configuration
36
37 Extra mapper jars:
38 There are currently 0 values in the list:
39 element#
40 New job was successfully created with validation status OK
    and name job_agri_supervise

```

4.6.5 collection表

```

1 sqoop:000> create job -t link_to_mysql_1 -f link_from_hdfs_1
2 Creating job for links with from name link_from_hdfs_1 and to
  name link_to_mysql_1
3 Please fill following values to create new job object
4 Name: job_agri_collection
5
6 Input configuration
7

```



```
8 Input directory: /hive/warehouse/agri_db.db/collection
9 Override null value:
10 Null value:
11
12 Incremental import
13
14 Incremental type:
15     0 : NONE
16     1 : NEW_FILES
17 Choose: 0
18 Last imported date:
19
20 Database target
21
22 Schema name: FarmProduct
23 Table name: collection
24 Column names:
25 There are currently 0 values in the list:
26 element#
27 Staging table:
28 Clear stage table:
29
30 Throttling resources
31
32 Extractors:
33 Loaders:
34
35 Classpath configuration
36
37 Extra mapper jars:
38 There are currently 0 values in the list:
39 element#
40 New job was successfully created with validation status OK
    and name job_agri_collection
```

4.7创建job将MySQL数据表中的数据导入hdfs

4.7.1 collection表

```
1 sqoop:000> create job -f link_to_mysql_1 -t link_from_hdfs_1
2 Creating job for links with from name link_to_mysql_1 and to
  name link_from_hdfs_1
3 Please fill following values to create new job object
4 Name: job_mysql_to_hdfs
5
```

```
6 Database source
7
8 Schema name: FarmProduct
9 Table name: t_collection
10 SQL statement:
11 Column names:
12 There are currently 0 values in the list:
13 element#
14 Partition column:
15 Partition column nullable:
16 Boundary query:
17
18 Incremental read
19
20 Check column:
21 Last value:
22
23 Target configuration
24
25 Override null value:
26 Null value:
27 File format:
28 0 : TEXT_FILE
29 1 : SEQUENCE_FILE
30 2 : PARQUET_FILE
31 Choose: 0
32 Compression codec:
33 0 : NONE
34 1 : DEFAULT
35 2 : DEFLATE
36 3 : GZIP
37 4 : BZIP2
38 5 : LZ0
39 6 : LZ4
40 7 : SNAPPY
41 8 : CUSTOM
42 Choose: 0
43 Custom codec:
44 Output directory: /input/sqoop/t_collection
45 Append mode:
46
47 Throttling resources
48
49 Extractors:
50 Loaders:
```

```
51
52 Classpath configuration
53
54 Extra mapper jars:
55 There are currently 0 values in the list:
56 element#
57 New job was successfully created with validation status OK
   and name job_mysql_to_hdfs
```

5 Azkaban任务调度

5.1 编写hive脚本

- 详见 /backEnd/docs/hive_scripts 中的文件
- 注：hive实现自增列

jar包位置： /opt/model/hive-3.1.2/lib/hive-contrib-3.1.2.jar

放到hdfs /hive目录中：

```
hdfs dfs -put /opt/model/hive-3.1.2/lib/hive-contrib-3.1.2.jar
/hive
```

5.2 编写sqoop脚本

- 详见 /backEnd/docs/sqoop_scripts 中的文件

5.3 编写shell脚本

- 详见 /backEnd/docs/shell_scripts 中的文件
- 注1：Windows环境下编写.sh文件，需要设置 Eol (End of line) 符号为 \n
也可在Linux中通过 `sed -i 's/\r$//' fileName` 进行更改
- 注2：.sh文件放到Linux本地后需要修改权限为可执行

5.4 编写job脚本

- 详见 /backEnd/docs/job_scripts 中的文件

5.5 启动相关服务

5.5.1 Azkaban executor server

- 注1：必须在根目录下启动
- 注2：必须激活executor server

```
1 [hadoop@hadoop01 azkaban-exec-server]$ bin/start-exec.sh
2 [hadoop@hadoop01 azkaban-exec-server]$ curl -G
  "localhost:12321/executor?action=activate" && echo
3 {"status":"success"}
```

5.5.2 Azkaban web server

- 注：必须在根目录下启动

```
1 [hadoop@hadoop01 azkaban-web-server]$ bin/start-web.sh
```

查看已启动的服务

```
1 [hadoop@hadoop01 azkaban-web-server]$ jps
2 4672 JobHistoryServer
3 3169 NameNode
4 500481 AzkabanWebServer
5 3975 ResourceManager
6 3338 DataNode
7 504716 Jps
8 5295 AzkabanExecutorServer
9 3601 SecondaryNameNode
10 4849 RunJar
11 4115 NodeManager
12 183862 ZeppelinServer
13 88150 SqoopJettyServer
14 185594 RemoteInterpreterServer
15 50489 RunJar
16 499963 Application # flume
```

5.6 创建Azkaban项目

5.6.1 将job脚本打包为zip压缩包

- market相关，打包成 market.zip

-  collection_hdfs2mysql.job
-  collection_hive_add.job
-  collection_hive_analysis.job
-  collection_mysql2hdfs.job
-  hdfs_empty_directory.job
-  hive_create_product_old.job
-  hive_drop_product_old.job
-  market_hdfs2mysql.job
-  market_hive_add.job
-  market_hive_analysis.job
-  market_hive_clean.job
-  mysql_create_t_collection.job
-  mysql_delete_data.job
-  price_hdfs2mysql.job
-  price_hive_analysis.job
-  product_add_partition.job
-  product_hdfs2mysql.job
-  product_hive_add.job
-  product_hive_analysis.job
-  product_hive_clean.job
-  supervise_hdfs2mysql.job
-  supervise_hive_analysis.job


- agri_p1, 打包成 agri_p1.zip

 collection_hdfs2mysql.job
 collection_hive_add.job
 collection_hive_analysis.job
 collection_mysql2hdfs.job
 hdfs_empty_directory.job
 hive_create_product_old.job
 hive_drop_product_old.job
 market_hdfs2mysql.job
 market_hive_add.job
 market_hive_analysis.job
 market_hive_clean.job
 mysql_create_t_collection.job
 mysql_delete_data.job
 price_hdfs2mysql.job
 price_hive_analysis.job
 product_add_partition.job
 product_hdfs2mysql.job
 product_hive_add.job
 product_hive_analysis.job
 product_hive_clean.job
 supervise_hdfs2mysql.job
 supervise_hive_analysis.job

- agri_p2, 打包成 agri_p2.zip

 collection_hdfs2mysql.job
 collection_hive_add.job
 collection_hive_analysis.job
 collection_mysql2hdfs.job
 hdfs_empty_directory.job
 hive_create_product_old.job
 hive_drop_product_old.job
 market_hdfs2mysql.job
 market_hive_add.job
 market_hive_analysis.job
 market_hive_clean.job
 mysql_create_t_collection.job
 mysql_delete_data.job
 price_hdfs2mysql.job
 price_hive_analysis.job
 product_add_partition.job
 product_hdfs2mysql.job
 product_hive_add.job
 product_hive_analysis.job
 product_hive_clean.job
 supervise_hdfs2mysql.job
 supervise_hive_analysis.job

5.6.2 创建Azkaban项目并上传压缩包

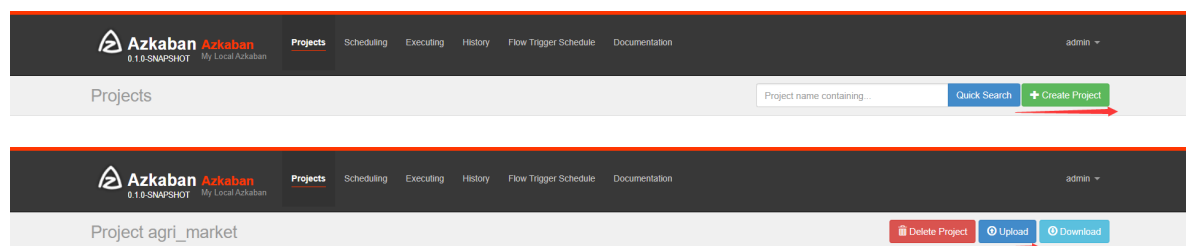

- 创建agri_market项目并上传market.zip

Create Project ✕

Name

agri_market

Description

import market data

Cancel

Create Project

Upload Project Files ✕

Job Archive

Choose File

agri_market.zip

Cancel

Upload

- 创建agri_p1项目并上传agri_p1.zip

Create Project ✕

Name

agri_p1

Description

schedule agri_p1

Cancel

Create Project

Upload Project Files

Job Archive

Choose File

agri_p1.zip

Cancel

Upload

- 创建agri_p2项目并上传agri_p2.zip

Create Project

Name

agri_p2

Description

schedule agri_p2

Cancel

Create Project

Upload Project Files

Job Archive

Choose File

agri_p2.zip

Cancel

Upload

Create Project

Name

agri_p2

Description

schedule agri_p2

Cancel

Create Project

Upload Project Files

Job Archive

Choose File

agri_p2.zip

Cancel

Upload

5.7 （定时）执行任务

5.7.1 首先执行agri_market项目

- 注：agri_market项目只需执行一次

Azkaban

0.10-SNAPSHOT

Azkaban

My Local Azkaban

Projects

Scheduling

Executing

History

Flow Trigger Schedule

Documentation

admin

Project agri_market

Delete Project

Upload

Download

Flows

Permissions

Project Logs

market_hdfs2mysql


Execute Flow

Executions

Summary

agri_market


Import market data

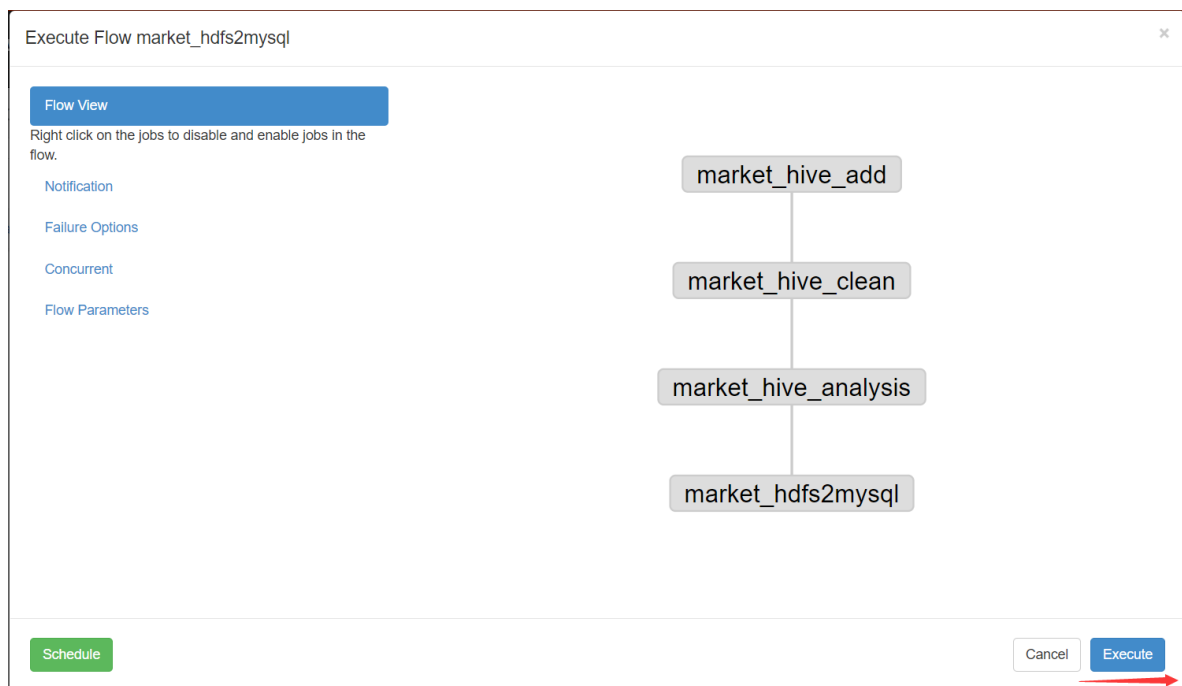

5.7.2 定时调度agri_p1、agri_p2项目

- 注1：由于时区不同，需要在希望每日执行的时间基础上减去8小时
例：希望每天23:00开始执行，则需要设置每天15:00开始执行
- 注2：如果agri_p1项目最后一个job执行失败，很可能是Azkaban的bug，可以去JobHistory查看最后一个job是否成功，一般情况下是成功的，所以可以忽略这个错误

agri_p1:

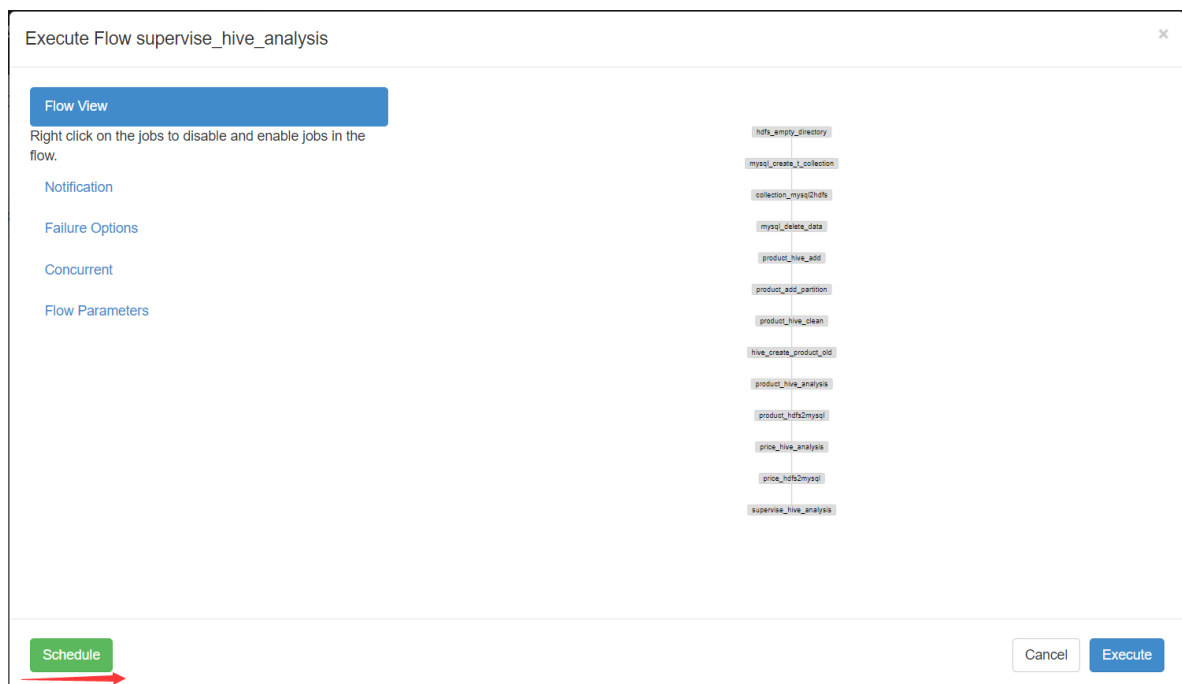

Schedule Flow Options




All schedules are based on the server timezone: Asia/Shanghai.

Warning: the execution will be skipped if it is scheduled to run during the hour that is lost when DST starts in the Spring. E.g. there is no 2 - 3 AM when PST switches to PDT.

Min

Hours

Day of Month 

Month

Day of Week

Year

Timezone

Special Characters:

- * any value
- , value list separators
- range of values
- / step values
- 0-59 allowed values

[Detailed instructions.](#)

0 00 15 ? * *

Reset

Next 10 scheduled executions for this cron expression only:


- 2020-08-20T15:00:00
- 2020-08-21T15:00:00
- 2020-08-22T15:00:00
- 2020-08-23T15:00:00
- 2020-08-24T15:00:00
- 2020-08-25T15:00:00
- 2020-08-26T15:00:00
- 2020-08-27T15:00:00
- 2020-08-28T15:00:00
- 2020-08-29T15:00:00

Cancel

Schedule



agri_p2:

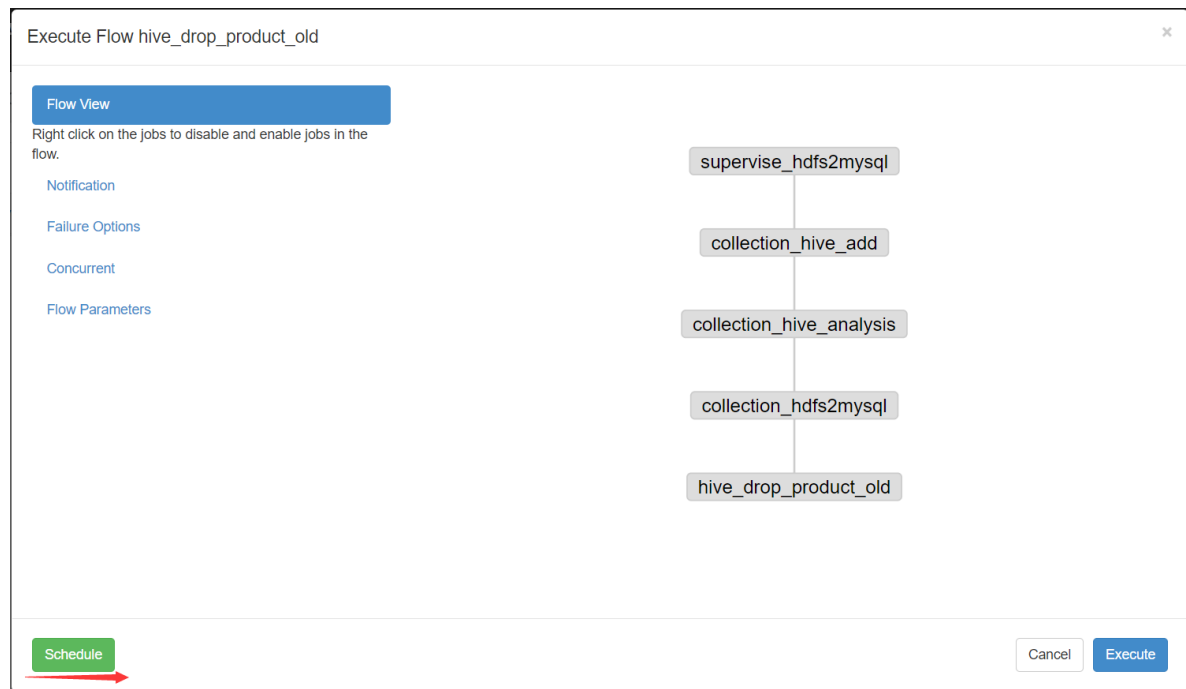

Schedule Flow Options



All schedules are based on the server timezone: Asia/Shanghai.

Warning: the execution will be skipped if it is scheduled to run during the hour that is lost when DST starts in the Spring. E.g. there is no 2 - 3 AM when PST switches to PDT.

Min

Hours

Day of Month 

Month

Day of Week

Year

TimeZone

Special Characters:

- * any value
- , value list separators
- range of values
- / step values
- 0-59 allowed values

[Detailed instructions.](#)

0 20 15 ? * *

Reset

Next 10 scheduled executions for this cron expression only:

- 2020-08-20T15:20:00
- 2020-08-21T15:20:00
- 2020-08-22T15:20:00
- 2020-08-23T15:20:00
- 2020-08-24T15:20:00
- 2020-08-25T15:20:00
- 2020-08-26T15:20:00
- 2020-08-27T15:20:00
- 2020-08-28T15:20:00
- 2020-08-29T15:20:00

Cancel

Schedule 

查看调度列表

Azkaban

0.1.0-SNAPSHOT

My Local Azkaban

Projects

Scheduling

Executing

History

Flow Trigger Schedule

Documentation

admin

Scheduled Flows

* Click column headers to sort.

#	ID	Flow	Project	Submitted By	First Scheduled to Run	Next Execution Time	Repeats Every	Cron Expression	Execution Options	Has SLA	Action
1	7	supervise_hive_analysis	agri_p1	admin	2020-08-20 11:14:52	2020-08-20 23:00:00	Not Applicable	0 00 15 ? * *	Show	false	Remove ScheduleSet SLA
2	8	hive_drop_product_old	agri_p2	admin	2020-08-20 11:17:30	2020-08-20 23:20:00	Not Applicable	0 20 15 ? * *	Show	false	Remove ScheduleSet SLA