

ECMA-376-4:2016

Office Open XML File Formats — Transitional
Migration Features

October 2016

10.2.1 Calculation Chain Part (Part 1, §12.3.1) 18

10.2.2 Chartsheet Part (Part 1, §12.3.2) 18

10.2.3 Comments Part (Part

14.12.11	Changed attribute for top element (Part 1, §17.6.21).....	194
14.12.12	Changed attribute for embedBold element (Part 1, §17.8.3.3).....	196
14.12.13	Changed attribute for embedBoldItalic element (Part 1, §17.8.3.4).....	196
14.12.14		

15.10.5 Changed attribute for controlPr element (Part 1, §18.3.1.20) 223

15.10.6 Changed attribute for customPr element (Part 1, §18.3.1.22)..... 223

15.10.7

16.6.17	Changed attribute for clrMap element (Part 1, §19.3.1.6).....	246
16.6.18	Changed attribute for cNvPicPr element (Part 1, §19.3.1.11).....	248
16.6.19		

17.4.23	Changed attribute for grpSpPr element (Part 1, §20.5.2.18)	275
17.4.24	Changed attribute for pos element (Part 1, §20.5.2.26)	275
17.4.25	Changed attribute for spPr element (Part 1, §20.5.2.30)	276
17.4.26	Changed attribute for xfrm element (Part 1, §20.5.2.36).....	276
18.	DrawingML - Components Reference Material.....	278

19.5.1

D.6.1	VML
-------	-----------

Foreword

Changes from the 4th edition were made to align this 5th edition Standard with ISO/IEC 29500:2016. Both this 5th edition and ISO/IEC 29500:2016 refer to the 1st edition. As such, this 5th edition does not cancel or replace the 1st edition. This 5th edition does, however, cancel and replace the 4th edition.

Some important differences between the 4th and 5th editions are as follows:

1. Scope

ECMA-376

2. Conformance

2.1 Document Conformance

A document of conformance class Office Open XML Transitional shall be a package of conformance class OPC, as specified in ECMA-376-

[*Note:* This note illustrates the third bullet above. Conforming applications might serve various functions.

3. Normative References

The followi

5. Notational Conventions

6. Acronyms and Abbreviations

This clause is informative.

7.

8. Additional Shared Parts

8.1 General

[*Example*

9. WordprocessingML

9.1

Namespace:	
Source	
Relationship:	

10. SpreadsheetML

10.1 General

The following parts, which are defined in subclauses within Par412(P338.591.04 Tf1 016 39.024 Tm 0 Tc[()] T340.991.04 Tf1

Relationship:	
---------------	--

[10.2.13](#) [Pivot Table Cache Records Part \(Part 1, §12.3.13\)](#)

Source Relationship:	http://schemas.openxmlformats.org/officeDocument/2006/relationships/tableSingleCells
----------------------	---

10.2.20 Styles Part (Part 1, §12.3.20)

Root Namespace:	http://schemas.openxmlformats.org/spreadsheetml/2006/main
-----------------	---

Source Relationship: <http://schemas.openxmlformats.org/officeDocument/2006/relationships/styles>

11.2.6 Presentation Part (Part 1, §13.3.6)

Root <http://schemas.openxmlformats.org/presentationml/2006/main>
Namespace:

14.4.5 right (

Attributes	Description
------------	-------------

Attributes	Description
Mask)	These properties are expressed using a string serialization of a binary bitmask for each of

14.4.11 Additional attribute for tbILook element (Part 1, §17.4.54)

The following additional attributes can be specified for a document of a transitional conformance class:

Attributes	Description
------------	-------------



Attributes	
------------	--



This revision to the field result would be stored as follows in the WordprocessingML:


Attributes	Description
------------	-------------

nfc Value	ST_NumberFormat enumeration equivalent
44	koreanDigital2



¶

[



end note]

[Example

[*Note*



Attributes	Description
------------	-------------

	Description
--	-------------

AttriRT1ial

Attributes	Description
	element (if any) followed by the SHA-1 algorithm (specified via the cryptAlgo...

[*Note*: These settings can also be expressed using the generic compatSetting element defined in ECMA-376-1.
end note]

[*Example*

[*Example:* Consider ate5210 1 539. 210 5(ces)o TJM-3(3(L)7(R1e)-4(f)12(f) d8(sin)5(g)u)13(mce)8ent wceth a defauceslt parR

end example]


```
<w:t>ab</w:t>  
</w:r>  
<w:r>  
  <w:t>
```


This is a ""test"".

end example]

Then all three characters are forced to the fixed width of character 0x4E00 from the font (or, in this case, the next available character), resulting in the characters in the font being forced to that fixed width, which results in the following output:

Notice from the highlighting that the characters have been compressed to the width of the single character and displayed at that fixed width. *end example*]

¢Klă ŠtŠYŠyŭă ŐzyŭŠyŭ YzŘŠt λ

¶

This example, while extreme, shows how the row i

The default presentation of this document results in that table being broken across two pages of content.

If this document contains a table with a single cell, containing some text and a single floating shape, the

- ¶ If the paragraph is not numbered, then it shall tightly wrap any floating object which precedes it on the same line, ignoring its own indentation settings. [*Example*

However, if this compatibility setting is turned on:

end example]

TKlă ŠtŠYŠyŮă ŮzyŮŠyŮ YzŘŠf lă ŘŠŧlyŠŘ oě ŮKS ŮzYyzy ōz2fŠl-yLJNzLJŠNŮě ŘŠŧlyŮŮzyŮy' t l-NŮ MΣ 3MTΦMTΦΠΦ

end example

However, if this compatibility setting is turned on:

```
<w:compat>  
  <w:footnoteLayoutLikeWW8 />  
</w:compat>
```


In the resulting output, the starting location of both lines is at the same place on the page, as the resulting width of both lines is identical when the tab stop is removed from the line width calculation. *end example*]

☐Klă ȘtȘYȘyŭă ŐzyŭȘyŭ YzŘȘf lă ŘȘfined by the common boolean property definition in Part 1, §17.17.4.

14.8.3.30

However, if this compatibility setting is turned on:

```
<w:compat>  
  <w:selectFldWithFirstOrLastChar />  
</w:compat>
```

- ¶ The paragraph containing the anchor element would be pushed to the next page if the wrapping settings were respected.

[Example

If this compatibility setting is turned on:

```
<w:compat>
  <w:shapeLayoutLikeWW8 />
</w:compat>
```

Then applications should ignore the wrapping setting and allow text to wrap below the

end example]

☿Klă ŠtŠYŠyŭă ŐzyŭŠyŭ YzŘŠt lă ŘŠŧlyŠŘ ōě ŭKŜ ŐZYmon boolean property definition in Part 1, §17.17.4.

☞ Klášť ŠťŠŸŠŸůůă ō2yůŠŸů

However, if this compatibility setting is turned on:

```
<w:compat>
  <w:splitPgBreakAndParaMark />
</w:compat>
```

Then even though it is followed by no additional content, the page break must immediately end the first page, pushing the end of the first paragraph onto the first line of the second page, resulting in the following output:

end example]

ckla ŠtŠYšyúā ŏzŭšyú YZŘŠť ě ŘŠťĦŠŘ öë úKŚ ŐZYȲzyō22İ̇ı·LJW2ŁSİüē RŞťlyūūzy'ly t l·NÚ mΣ ∑MΤΦMΤΦΠΦ

14.8.3.39 subFontBySize (Require Exact Size During Font Size Change)

For each run, the application determines if the substitute font produced by its font substitution algorithm can be displayed at the size specified by the `sz` and/or `szCs`

However, if this compatibility setting is turned on:

The first line from the following page was moved on the first page, as without being subjected to the line height constraint, it is possible to fit it at the bottom of the first page. *end example*]

¢Klă ŠtŠYŠyŭă ŌzyŭŠyŭ YzŘŠt lă ŘŠŧlyŠŘ ōě ůKŠ ŌzYŸzy ōz2tŠt-yLJNzLJŠNŭě ŘŠŧlyŭăzyŧy t l·Nŭ MΣ 3MTΦMTΦΠΦ

14.8.3.41 [suppressSpacingAtTopOfPage](#) (Ignore Minimum Line Height for First Line on Page)

```
<w:p>  
  <w:pPr>  
    <w:spacing w:line="500" w:lineRule="atLeast" />  
  </w:pPr>  
  λ  
</w:p>
```

The default presentation would have the necessary amount of space added between each line such that all lines in the paragraph are centered within 25 points of spacing (highlighting has been added to the image below in order to illustrate t


```
<w:p>  
  <w:pPr>  
    <w:spacing
```


Then no additional line spacing must be added above the first line on the page (although all other lines are unaffected), resulting in the following output:

end example]

¢Klă ŠtŠYŠyŮă Ů2yŮŠyŮ Y2ŘŠť ĺă ŘŠťŷŮŮ ōě ŮKS Ů2YŮ2yŮ22ťŠt-yLJN2LJŠNŮě ŘŠťŷŮŮŷŷŷ t l-ŮŮ MΣ 3MТΦMТΦпΦ

†λ

should be output in order to ensure that files with this content can be viewed correctly in previous word processors. *end guidance*]

[*Example*: Consider a WordprocessingML document with East Asian text.

However, if this compatibility setting is turned on:

end example]

[illegible]

14.8.3.55 useWord97LineBreakRules (


```

</w:r>
<w:r>
  <w:t>1</w:t>
</w:r>
</w:p>
<w:p>
  <w:pPr>
    <w:numPr>
      λ
    </w:numPr>
  </w:pPr>
  <w:r>
    <w:t> </w:t>
  </w:r>
</w:p>

```

Typically, if both the


```
<w:r>  
  <w:t> This is some text followed by a long number of trailing spaces.
```

```
    And some more text.</w:t>  
</w:r>
```

The default presentation would not wrap those trailing spaces, so the text at the end of the run would begin at the first character position on the second line:

However, if this compatibility setting is turned on:

```
<w:compat>  
  <w:wrapTrailSpaces />  
</w:compat>
```


That drawing object now contains a text box, and so uses the syntax for that text box:

```
<v:shape id="_x0000_s1026" type="#_x0000_t12" style="λ">  
  <v:textbox>  
    <w:txbxContent>  
      <w:p>  
        <w:pPr>  
          <w:jc w:val="center"/>  
        </w:pPr>  
      <w:r>
```


Language Code	Description (informative)	BCP 47 Code
---------------	---------------------------	-------------

Language Code	Description (informative)	
---------------	---------------------------	--

Language Code	Description (informative)	
---------------	---------------------------	--

Language Code	Description (informative)	BCP 47 Code
2144	Kashmiri (Devanagari)	ks-Deva-IN
2145	Nepali - India	ne-IN
2155	Quecha - Ecuador	quz-

Language Code	Description (informative)	BCP 47 Code
8193	Arabic - Oman	ar-OM
8201	English - Jamaica	

Sw

Switches

14.10.4.5 BIDIOUTLINE

Syntax:

BIDIOUTLINE

Descriptn:

`\b` brackets the single element in *eq-argument-list* in a size appropriate for that element. The default form of brackets is parentheses. The *field-specific-switches* below can be used:

<code>\bc \char</code>	Uses the character designated by <i>char</i> as both the left and right bracket character. However, if <i>char</i> is {, [, (, or <, that character is used for the left bracket, and },],), or >, respectively, is used for right bracket.
<code>\lc \char</code>	Uses the character designated by <i>char</i> as the left bracket character.
<code>\rc \char</code>	Uses the character designated by <i>char</i> as the right bracket character.

`\d` Controls where the next character following the EQ field is drawn (that is, the displacement). *eq-argument-list* shall have no arguments. The *field-specific-switches* below can be used:

$\text{EQ } \backslash o(0,0,0)$ $\text{EQ } \backslash o(0,+)$ $\text{EQ } \backslash o \backslash ar(0,|,_)$
 $\text{EQ } \backslash r(2)$ $\text{EQ } \backslash r(2,x)$
 $a \text{EQ } \backslash s \backslash$

ECMA-

Attributes	
------------	--



Attributes	Description
------------	-------------

ps

Attributes	Description
	The possible values for this attribute are defined by the ST_RelationshipId simple type (Part 1, §22.8.2.1).

14.12.18 Changed attribute for dataSource element (Part 1, §17.14.9)

Attributes

14.12.21

Attributes	
------------	--



15.

Attributes	Description
------------	-------------

```
// Read next input wchar_t  
wszInput++;
```

Attributes

Attributes	
------------	--

2,957,003.9999884. The base date for this system is midnight (00:00:00) on the morning of January 1

Attributes	Description
.../officeDocument /2006/relationships	The possible values for this attribute are defined by the ST_RelationshipId



Attributes	Description
------------	-------------



16.6.18	Changed attribute for cNvPicPr element (Part 1, §19.3.1.11).....	248
16.6.19	Changed attribute for cNvPr element (Part 1, §19.3.1.12).....	248
16.6.20	Changed attribute for cNvPr element (Part 1, §19.3.1.12).....	248





Attributes	
------------	--

Attributes

Attributes	Description
------------	-------------

16.4.1.2 [Additional attribute for oleObj element \(Part 1, §19.3.2.4\)](#)

16.6.5 Changed attribute for notesMasterId element (Part 1, §19.2.1.20)

Attributes	Description
------------	-------------

16.6.7

16.6.11 Changed attribute for SmartTags element (Part 1, §19.2.1.40)

Attributes

16.6.15 Changed attribute for bgRef element (Part 1, §19.3.1.3)

Attributes	Description
idx (Style Matrix Index)	

Attributes



[Note] $\frac{1}{\sqrt{2}}$ is located at [ST_TextFontScalePercent]

17.2.2.11

17.4.1 [Changed attribute for hlinkHover element \(Part 1, §20.1.2.2.23\)](#)

17.4.4 [Changed attribute for quickTimeFile element \(Part 1, §20.1.3.4\)](#)



Attributes		Description
------------	--	-------------

17.4.10

Attributes	
------------	--



Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

18.1.3.14 ST_OverlapByte (Overlap Byte)

This simple type specifies that its contents contain a whole number between -100 and 100, whose contents are a percentage.

Thi



Attributes

18.2.13 Changed attribute for grpSpPr element (Part 1, §21.3.2.14)

Attributes	Description
bwMode (Black and White Mode) Namespace: .../drawingml/2006/main	

Attributes	Description
/2006/relationships	

18.2.18 Changed attribute for spPr element (Part 1, §21.4.3.7)

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
z (Shape Depth)	

19. VML Reference Material

19.1 VML

VML is a language for defining graphical objects in cases where DrawingML does not apply, such as text boxes and shapes in WordprocessingML documents and comments and controls in SpreadsheetML documents. The `urn:schemas-microsoft-com:vml`

19.1.2.21 stroke (Line Stroke Settings)..... 637

19.1.2.22 textbox (Text Box)..... 650

19.1.2.23

Attributes	Description
------------	-------------

end example]

The possible values for this attribute are defined by the W3C XML Schema string datatype.





Attributes

Attributes

Attributes	Description
------------	-------------

Rule Alignment)

Namespace:

Attributes



Attributes	
------------	--

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes



Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

ECMA-



Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------



Attributes	
------------	--

Attributes	
------------	--



Attributes	Description
	<pre>size="25pt,15pt"> </v:fill></pre>




```
    fillcolor="#fff27f" stroked="f">
    <v:path arrowok="t"/>
  </v:shape>
  <v:shape id="light3"
    style='position:relative;left:302.625pt;top:274pt;
    width:23pt;height:23.625pt' coordsize="369,378"
    path="m0,59l226,,369,186,243,378,32,363,,59,,59xe"
    fillcolor="#fff27f" stroked="f">
    <v:path arrowok="t"/>
  </v:shape>
</v:group>
```

end example]

Attributes	Description
------------	-------------



Attributes

Attributes	Description
------------	-------------

end example]

The possible values dp7ble values dp7ble

Attributes	
------------	--

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	
------------	--

Attributes	Description
------------	-------------


```
<v:image src="myimage.gif"  
  style="position:relative;top:1;left:1;width:50;height:45"  
  cropbottom="10%" gamma="0.5" gain="2">
```






Attributes	
------------	--

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------



Attributes	Description
------------	-------------

Attributes	
------------	--

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
	¶ static - The element is positioned according to the normal flow of the page. The top and left properties

Attributes	Description
	shadow

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes





Attributes	
------------	--

Attributes



Attributes

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	
------------	--

Attributes

Attributes	Description
	origin.

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------



Attributes	Description
------------	-------------

Attributes	Description
bwmode (Black-and-White Mode)	(\$20.1.2.5).



Attributes	Description
cliptowrap (Clip to Wrapping Polygon) Namespace: urn:schemas-microsoft-com:office:office	

Attributes	Description
opacity (Fill Color Opacity)	Specifies the opacity of the primary fill color. Default is 1.0. This numeric value can also be specified in 1/65536-ths if a trailing "f" is supplied. [<i>Example</i> : A value of "52429f" represents 52429/65536 or 0.8. <i>end example</i>] [<i>Example</i>

Attributes	Description
------------	-------------

Attributes	Description
	distance-left



Attributes	Description
------------	-------------



Attributes	Description
------------	-------------



Attributes	Description
------------	-------------



end example]

Attributes	Description
allowincell (Allow in Table Cell) Namespace:	

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------





Attributes	Description
------------	-------------

[Note: The W3C XML Schema `RSTyMúZyZřÚKlăŠtŤYŤyúăÖzyŤyŮYzŘšřóCT_PolyLine`) is located in §A.7.1. end]

Attributes	Description
alt (	

Attributes	
------------	--



Attributes	Description
------------	-------------

Attributes	Description
(Coordinate Space Size)	



Attributes



Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	
------------	--

Attributes

ECMA-

ECMA-

Attributes	
------------	--





Attributes

Attributes	Description
mso-rotate	Specifies a specific rotation value for text in a textbox. Default is 0. Allowed values are:

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------



Attributes	Description
Namespace: urn:schemas- microsoft- com:office:office	ÖkÓÈÁÐÅ λ ïkÂïÒÄÄÒìÀÆÔÃïïïÒ"γÒÄÏγ λ , </v:shape> <i>end example]</i> The possible values for this attribute are defined by the W3C XML Schema string datatype.

borderrightcolor
(Border Right Color

Attributes	Description
microsoft-com:office:office	,ÖkÓÈÁĐĀ λ ĩkÂ×ÍĭÄĀ"ŸÁŎŎĬŸ ĩkÂ×ĐŎŎĀ"ŸÈÉÇÈĬÎŎŎÁÓŎŸ λ ,



1

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

The XML markup stored in this attribute shall be escaped as needed to contain only those characters legal in an attribute value.

The possible values



Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes



Attributes

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------


```
</v:shapetype>
<v:shape type="#mytype"
  style="position:absolute;top:10;left:10;width:50;height:50"/>
<v:shape type="#mytype" fillcolor="teal"
  style="position:absolute;top:10;left:75;width:75;height:50"/>
<v:shape type="#mytype"
  style="position:absolute;top:10;left:165;width:50;height:50">
  <v:fill type="solid"/>
</v:shape>
<v:shape type="#mytype" path="m 500,0 l 1000,1000 0,1000 x e"
  style="position:absolute;top:10;left:230;width:50;height:50"/>
```

end example]

Attributes	Description
------------	-------------



Attributes	Description
microsoft-com:office:office	</v:shape> <i>end example]</i>

Attributes	Description
------------	-------------



Attributes	Description
------------	-------------

Attributes	Description
------------	-------------



Attributes	Description	
	normal	Treated as non-bold.
	lighter	
	100	
	200	
	300	
	400	
	bold	Treated as bold.
	bolder	
	500	
	600	
	700	
	800	
	900	

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

¶

Attributes	Description
	<i>end example]</i>

Attributes



Attributes	Description
------------	-------------





Attributes	Description
------------	-------------

Attributes	
------------	--

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes

Attributes	
------------	--

Attributes	Description
	¶ text
	¶ line

Attributes	Description
	normal flow of the page, but the

Attributes	Description				
mso-rotate	Specifies a specific rotation value for text in a textbox. Default is 0. Allowed values are: <table data-bbox="722 359 808 430"><tr><td data-bbox="722 359 747 390">↶</td><td data-bbox="771 359 792 390">0</td></tr><tr><td data-bbox="722 394 747 426">↷</td><td data-bbox="771 394 808 426">90</td></tr></table>	↶	0	↷	90
↶	0				
↷	90				

Attributes	Description
------------	-------------

Enumeration Value	Description
medium (Medium Arrowhead)	Medium length
short (Short Arrowhead)	

Enumeration Value	Description

19.2.1 Table of Contents

This subclause is informative.

19.2.2

19.2.3.11 ST_ExtrusionPlane (Extrusion Planes)	808
19.2.3.12 ST_ExtrusionRender (Extrusion Rendering Types)	808
19.2.3.13 ST_ExtrusionType (Extrusion Type)	808
19.2.3.14 ST_FillType (Shape Fill Type)	809
19.2.3.15 ST_How (Alignment Type)	810
19.2.3.16 ST_HrAlign (Alignment Type)	811
19.2.3.17 ST_InsetMode (Inset Margin Type)	811
19.2.3.18 ST_OLEDrawAspect (Embedded Object Representations)	811
19.2.3.19 ST_OLELinkType (Embedded Object Alternate Image Request Types)	812
19.2.3.20 ST_OLEType (Embedded Connection Type)	

end example]



Attributes	
------------	--

Attributes	
------------	--

Attributes	
------------	--

Attributes	Description
------------	-------------

Attributes	Description
	<i>end example]</i>

Attributes	
------------	--



Attributes	Description
------------	-------------

</v:rect>

end example

Attributes	Description
------------	-------------

end example]

Attributes	
------------	--

end example]



Attributes	Description
------------	-------------



Attributes	Description
------------	-------------









Attributes	Description
------------	-------------



Attributes	Description
	</o:extrusion>

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

Attributes	Description
(Specularity)	specularly reflected light. Default is 0. Normal values are in the range 0 to 1. This numeric value can also be specified in 1/65536

Attributes	Description
------------	-------------

end example]

The possible values for this attribute are defined by the ST_ColorType





[Note 2 of a [{ŒŠYI· ŘŠŧyúú2y2ŧ úKlă ŠŧSYŠyúă ŒzyúŠyú Y2ŘŠŧ óCT_StrokeChild) is located in §A.7.2.
end note]



[*Note*

ECMA-



Attributes	Description
------------	-------------

Attributes	
------------	--

[*Example:*



Attributes

Attributes





Attributes

Attributes	
------------	--

Attributes	Description
------------	-------------

Attributes

Attributes	Description
------------	-------------

this property shall be absolute. Allowed values are:

¶

Attributes	
------------	--



Attributes	Description
------------	-------------

The signature line in the document might look like this:

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

19.2.2.32 [top \(Text Box Top Stroke\)](#)

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

AttrITs

Attributes	Description
------------	-------------

Attributes



Enumeration Value





19.3 VML - WordprocessingML Drawing

19.3.2.2

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------

[*Note*

Attributes	Description
------------	-------------

Attributes	Description
------------	-------------




```
<v:shape id="_x0000_s1025" type="#_x0000_t202" style='position:absolute;margin
```


end example]

The possible values for this element are defined by the ST_TrueFalseBlank simple type (§20.1.2.6).

[Note

Value	Description
1	Checked / selected

19.4.2.20 [Dismiss \(Dismiss Button\)](#)

This element specifies that the object is a dismiss

end example]

The possible values for this element are defined by the ST_TrueFalseBlank simple type (§20.1.2.6).

[Note

<x:ClientData> λ

[Note: $\Phi K \hat{S}^2 o / \cdot a [\{ \check{O} K \hat{S} Y I \cdot \check{R} \hat{S} \hat{y} \lambda \hat{u} \hat{z} y' 2 \hat{f} \hat{u} K \lambda \check{a} \hat{S} \hat{f} \hat{S} Y \hat{S} y \hat{u} \check{a} \check{O} z y \hat{u} \hat{S} y \hat{u} Y 2 \check{R} \hat{S} \hat{f} \hat{o}$

The possible values for this element are defined by the ST_TrueFalseBlank simple type (§20.1.2.6).

[*Note*

end example]

The possible values for this element are defined by the ST_TrueFalseBlank simple type (§20.1.2.6).

[Note: The element `ST_TrueFalseBlank` is located in §A.8.9.
end note]

19.4.2.49 RecalcAlways (Recalculation Toggle)

This element defines whether the object is always includef-ane

[Example:

```
<x:ClientData> λ  
  <x:SizeWithCells>True</x:SizeWithCells>  
</x:ClientData>
```

end example

20. Shared MLs Reference Material

20.1 Shared Simple Types

20.1.1 Table of Contents


```
< λ color="#5f2726" λ >
```

end example]

A color palette entry is specified using the name of the color in the palette.

[Example:

```
<
```


Annex A. (normative) Schemas z W3C XML Schema


```
86 <xsd:simpleType name="ST_SignedHpsMeasure">  
87   <xsd:union memberTypes="xsd:integer s:ST_UniversalMeasure"/>
```

```
139         <xsd:enumeration value="darkBlue"/>
140         <xsd:enumeration value="darkCyan"/>
141         <xsd:enumeration value="darkGreen"/>
142         <xsd:enumeration value="darkMagenta"/>
143         <xsd:enumeration value="darkRed"/>
144         <xsd:enumeration value="darkYellow"/>
145         <xsd:enumeration value="darkGray"/>
146         <xsd:enumeration value="lightGray"/>
147         <xsd:enumeration value="none"/>
148     </xsd:restriction>
149 </xsd:simpleType>
150 <xsd:complexType name="CT_Highlight">
    <xsd:attribute name="val" type="ST
```



```
298     <xsd:enumeration value="diamondsGray"/>
299     <xsd:enumeration value="doubleD"/>
300     <xsd:enumeration value="doubleDiamonds"/>
301     <xsd:enumeration value="earth1"/>
302     <xsd:enumeration value="earth2"/>
303     <xsd:enumeration value="earth3"/>
```



```
<xsd:enumeration value="whiteFlowers"/>
```

```
<xsd:enumeration value="pr13.08 rp/ r
```

```
510 <xsd:complexType name="CT_EastAsianLayout">
511   <xsd:attribute name="id" type="ST_DecimalNumber" use="optional"/>
512   <xsd:attribute name="combine" type="s:ST_OnOff" use="optional"/>
513   <xsd:attribute name="combineBrackets" type="ST_CombineBrackets" use="optional"/>
514   <xsd:attribute name="vert" type="s:ST_OnOff" use="optional"/>
515   <xsd:attribute name="vertCompress" type="s:ST_OnOff" use="optional"/>
516 </xsd:complexType>
<
```

```
<xsd:attribute name="hAnchor" type="
```

```
616 </xsd:complexType>
617 <xsd:complexType name="CT_Ind">
618   <xsd:attribute name="start" type="ST_SignedTwipsMeasure" use="optional"/>
619   <xsd:attribute name="startChars" type="ST_DecimalNumber" use="optional"/>
620   <xsd:attribute name="end" type="ST_SignedTwipsMeasure" use="optional"/>
   <xsd:attribute name="endChars" type="
```

669
670

```
<xsd:enumeration value="web"/>  
</xsd:restriction>
```

```
722     <xsd:attribute name="hashValue" type="xsd:base64Binary" use="optional"/>
723     <xsd:attribute name="saltValue" type="xsd:base64Binary" use="optional"/>
724     <xsd:attribute name="spinCount" type="ST_DecimalNumber" use="optional"/>
725 </xsd:attributeGroup>
726 <xsd:attributeGroup name="AG_TransitionalPassword">
    <xsd:attribute name="cryptProviderType" type="s:ST_CryptProv"/>
```




<xsd:complexContent>

```

987 <xsd:complexType name="CT_ParaRPrChange">
988   <xsd:sequence base="CT_TrackChange">
989     <xsd:element name="rPr" type="CT_ParaRPrOriginal" minOccurs="1"/>
990   </xsd:sequence>
991 </xsd:complexType>

```



1093

<xsd:sequence>

```
</xsd:complexType>
```

```
</xsd:sequence>
```





```
<xsd:enumeration value="taiwaneseDigital"/>
```



```
1517         <xsd:enumeration value="period"/>
1518         <xsd:enumeration value="colon"/>
1519         <xsd:enumeration value="emDash"/>
1520         <xsd:enumeration value="enDash"/>
1521     </xsd:restriction>
1522 </xsd:simpleType>
```

```
1570         <xsd:enumeration value="linesAndChars"/>
1571         <xsd:enumeration value="snapToChars"/>
1572     </xsd:restriction>
1573 </xsd:simpleType>
<xsd:complexType name="CT_DocGrid">
```



```
<xsd:enumeration value="right"/>
```




```
<xsd:element name="shadow" type="
```

1888

1889

<xsd:complexType name="CT_MathCtrlIns">
<xsd:complexContent>
<xsd:extension base="CT_TrackChange/06 3(C)-9(h)3(a)3(n)3(g)-9(e)3(/06 3(C)-9(h)3(0 1 54 698.26 Tm0 g[(


```
<xsd:complexType name="CT_SdtListItem">
```


2100

```
</xsd:complexType>
```


2206

`<xsd:sequence>`

```
<xsd:complexType name="CT_Height">
```

```
<xsd:restriction base="xsd:string">
```

```
</xsd:complexType>
```

```
</xsd:complexType>
```




```
2577 <xsd:simpleType name="ST_RestartNumber">
2578   <xsd:restriction base="xsd:string">
2579     <xsd:enumeration value="continuous"/>
2580     <xsd:enumeration value="eachSect"/>
```

```
<xsd:complexType name="CT_E0 1 72. A
```



```
<xsd:element name="useSingleBorderforContiguousCells" type="CT_OnOff"
```

```
<xsd:element name="allowSpaceOfSameStyleInTable" type="CT_OnOff
```

```
2842     </xsd:sequence>
2843 </xsd:complexType>
2844 <xsd:complexType name="CT_PPrDefault">
2845     <xsd:sequence>
        <xsd:element name="pPr" type="CT_PPrGeneral" minOccurs="0"/>
    </xsd:sequence>
</xsd:complexType>
```


3001

```
</xsd:complexType>
```

3054	</xsd:sequence>
3055	</xsd:complexType>

3160 `<xsd:attribute name="tentative" type="s:ST_OnOff" use="optional"/>`

3213

```
<xsd:enumeration value="firstCol"/>  
<xsd:enumeration value="lastCol" />
```

```
3266     <xsd:element name="tblStylePr" type="CT_TblStylePr" minOccurs="0" maxOccurs="unbounded"/>
3267 </xsd:sequence>
    <xsd:attribute name="type" type="ST_StyleType" use="optional"/>
```

```
3319         <xsd:enumeration value="variable"/>
3320         <xsd:enumeration value="default"/>
3321     </xsd:restriction>
3322 </xsd:simpleType>
3323 <xsd:complexType name="CT_Pitch">
```


3478
3479

```
<xsd:enumeration value="text2"/>  
</xsd:restriction>
```



```
<xsd:element name="docPartBody" type="
```

```
<xsd:extension base="CT_DocumentBase">
```

```
<xsd:element name="colorFilter" type="CT_ColorFilter" minOccurs="0" maxOccurs="1"/>
```

82

```
</xsd:simpleType>
```



```
453     <xsd:attribute name="htmlFormat" use="optional" type="ST_HtmlFmt" default="none"/>
454     <xsd:attribute name="editPage" use="optional" type="s:ST_Xstring"/>
455 </xsd:complexType>
456 <xsd:simpleType name="ST_HtmlFmt">
457     <xsd:restriction base="xsd:string">
458         <xsd:enumeration value="none"/>
459         <xsd:enumeration value="rtf"/>
460         <xsd:enumeration value="all"/>
461     </xsd:restriction>
462 </xsd:simpleType>
```



```
612 <xsd:attribute name="serverField" type="xsd:boolean" use="optional" default="false"/>
613 <xsd:attribute name="uniqueList" type="xsd:boolean" use="optional" default="true"/>
614 <xsd:attribute name="numFmtId" type="ST_NumFmtId" use="optional"/>
615 <xsd:attribute name="formula" type="s:ST_Xstring" use="optional"/>
616 <xsd:attribute name="sqlType" type="xsd:int" use="optional" default="0"/>
617 <xsd:attribute name="hierarchy" type="xsd:int" use="optional" default="0"/>
618 <xsd:attribute name="level" type="xsd:unsignedInt" use="optional" default="0"/>
619 <xsd:attribute name="databaseField" type="xsd:boolean" default="true"/>
    <xsd:attribute name="mappingCountata
```

665

```
</xsd:complexType>
```

```
718 <xsd:attribute name="cp" type="xsd:unsignedInt"/>
719 <xsd:attribute name="in" type="xsd:unsignedInt" use="optional"/>
720 <xsd:attribute name="bc" type="ST UnsignedIntHex" use="optional"/>
721 <xsd:attribute name="fc" type="ST UnsignedIntHex" use="optional"/>
722 <xsd:attribute name="i" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="un" ty
```

771

```
<xsd:attribute name="b" type="xsd:boolean" use="optional" default="false"/>
</xsd:comm4 refmFl(e)3(f)3(s)TfmF3(p)3(e)3(=)] TJETBT1 0 0 1 461.35 612.26 Tm[(<)] TJETqq0 g48.12 714.3 5148
```



```
930     </xsd:complexType>
931     <xsd:complexType name="CT_GroupLevels">
932         <xsd:sequence>
933             <xsd:element name="groupLevel" maxOccurs="unbounded" type="CT_GroupLevel"/>
934         </xsd:sequence>
```


983 `<xsd:attribute name="culture" use="optional" type="s:ST_Xstring"/>`

1036

```
<xsd:enumeration value="descendingAlpha"/>
```

```
<xsd:element name="rowFields" type="CT_RowFields" minOccurs="0"/>
```

```
1142 <xsd:attribute name="pageWrap" type="xsd:unsignedInt" default="0"/>  
1143 <xsd:attribute name="pageOverThenDown" type="xsd:boolean" default="false"/>  
1144 <xsd:attribute name="subtotalHiddenItems" type="xsd:boolean" default="false"/>
```

```
1195 <xsd:attribute name="showDropDowns" type="xsd:boolean" default="true"/>
1196 <xsd:attribute name="hiddenLevel" type="xsd:boolean" default="false"/>
      <xsd:attribute name="uniqueMemberProperty" type="s:ST_Xstring"/>
```


1301 <xsd:element name="i" maxOccurs="unbounded" type="CT_I"/>

```
1354     </xsd:sequence>  
1355     <xsd:attribute name="count" type="xsd:unsignedInt" default="0"/>  
    </xsd:complexType>
```



```
<xsd:complexType name="CT_PivotHierarchy">
```

1460

<xsd:sequence>

```
1513 <xsd:sequence>
1514     <xsd:element name="filter" minOccurs="0" maxOccurs="unbounded" type="CT_PivotFilter"/>
1515 </xsd:sequence>
1516 <xsd:attribute name="count" type="xsd:unsignedInt" default="0"/>
```


1619

1620

1621

TJETQBT/F1 8.04 Tf1 0 0 1 38 698 14 m[()] METq 878 g 48 5 687 400 6514.9 12.12 ref*BT/F11 9 Tf1 0 0 1 54 687402 6m0 g[()] TJETBT1 0 0 1 108.02 687402 6m0(<)3(x)3(s)3(d

<xsd:enumeration value="today"/>

<xsd:enumeration value="yesterday"/>

<xsd:enumeration value="nextw(u)3(m)382.1nk3(")-3/


```
<xsd:attribute name="sb" type="xsd:unsignedInt" use="required"/>
```




```
1990 </xsd:complexType>  
1991 <xsd:complexType name="CT_RevisionCustomView">  
      <xsd:attribute name="guid" type="s:ST_Guid" use="required"/> s:ST_Guid
```

2043

```
<xsd:complexType name="CT_RevisionAutoFormatting">
```

```
<xsd:attribute name="ref" type="ST_Ref
```

```
<xsd:element name="sheetProtection" type="CT_SheetProtection" minOccurs="0"
```

2202	<xsd:element name="sheetViews" type="CT_SheetViews" minOccurs="0" maxOccurs="1"/>
2203	<xsd:element name="sheetFormatPr" type="CT_SheetFormatPr" minOccurs="0" maxOccurs="1"/>
2204	<xsd:element name="cols" type="CT_Cols" minOccurs="0" maxOccurs="unbounded"/>
2205	<xsd:element name="sheetData" type="CT_SheetData" minOccurs="1" maxOccurs="1"/>




```
2361 <xsd:complexType name="CT_SheetViews">
2362   <xsd:sequence>
2363     <xsd:element name="sheetView" type="CT_SheetView" minOccurs="1" maxOccurs="unbounded"/>
2364     <xsd:element name="extLst" type="CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
2365   </xsd:sequence>
2366 </xsd:complexType>
```

```
2414 <xsd:attribute name="dimension" type="xsd:unsignedInt" default="0"/>
2415 <xsd:attribute name="start" type="xsd:unsignedInt" default="0"/>
2416 <xsd:attribute name="min" type="xsd:unsignedInt" default="0"/>
2417 <xsd:attribute name="max" type="xsd:unsignedInt" default="0"/>
2418 <xsd:attribute name="activeRow" type="xsd:unsignedInt" default="0"/>
2419 <xsd:attribute name="activeCol" type="xsd:unsignedInt" default="0"/>
```



```
2519 <xsd:element name="cellSmartTags" type="CT_CellSmartTags" minOccurs="1"
2521 </xsd:sequence>
2522 </xsd:complexType>
2523 <xsd:complexType name="CT_CellSmartTags">
2524 <xsd:sequence>
2525 <xsd:element name="cellSmartTag" type="CT_CellSmartTag" minOccurs="1"
2526 maxOccurs="unbounded"/>
2527 </xsd:sequence>
2528 <xsd:attribute name="r" type="ST_CellRef" use="required"/>
```

```
2572         <xsd:element name="customSheetView" minOccurs="1" maxOccurs="unbounded"
2573           type="CT_CustomSheetView"/>
2574       </xsd:sequence>
2575     </xsd:complexType>
2576     <xsd:complexType name="CT_CustomSheetView">
```

```
<xsd:attribute name="type" type="
```




2784	</xsd:complexType>
2785	<xsd:complexType name="CT_Hyperlink">

2890

```
</xsd:simpleType>  
<xsd:simpleType name="ST_CellComments">
```

```
<xsd:attribute name="deleteColumns" type="xsd:boolean" use="optional" default="true"/>
```

2996

```
</xsd:complexType>  
<xsd:complexType name="CT_Chartsheet">
```

ECMA-

3102

```
<xsd:attribute name="dvAspect" type="ST_DvAspect" use="optional" default="DVASPECT_CONTENT"/>  
<xsd:attribute name="link" type="
```


3261	<xsd:attribute name="edit" type="xsd:boolean" use="optional" default="false"/>
3262	<xsd:attribute name="delete" type="xsd:boolean" use="optional" default="false"/>

```
<xsd:complexType name="CT_MdxMetadata">
```

```
3367         <xsd:enumeration value="a"/>
3368         <xsd:enumeration value="d"/>
3369         <xsd:enumeration value="aa"/>
3370         <xsd:enumeration value="ad"/>
3371         <xsd:enumeration value="na"/>
3372         <xsd:enumeration value="nd"/>
3373     </xsd:restriction>
3374 </xsd:simpleType>
3375 <xsd:complexType name="CT_MdxMemeberProp">
3376     <xsd:attribute name="n" type="xsd:unsignedInt" use="required"/>
3377
3378 </xsd:complexType>
<xsd:complexType name="CT_MdxKPI">
```



```
3791 <xsd:complexType name="CT_VerticalAlignFontProperty">
3792   <xsd:attribute name="val" type="s:ST_VerticalAlignRun" use="required"/>
3793 </xsd:complexType>
3794 <xsd:complexType name="CT_FontScheme">
3795   <xsd:attribute name="val" type="ST_FontScheme" use="required"/>
3796 </xsd:complexType>
3797 <xsd:simpleType name="ST_FontScheme">
3798   <xsd:restriction base="xsd:string">
3799     <xsd:enumeration value="none"/>
3800     <xsd:enumeration value="major"/>
3801     <xsd:enumeration value="minor"/>
3802   </xsd:restriction>
3803 </xsd:simpleType>
3804 <xsd:complexType name="CT_UnderlineProperty">
3805   <xsd:attribute name="val" type="ST_UnderlineValues" use="optional" default="single"/>
3806 </xsd:complexType>
3807 <xsd:simpleType name="ST_UnderlineValues">
   <xsd:restriction base="xsd:string">
```

```
3844 </xsd:simpleType>
3845 <xsd:attributeGroup name="AG_AutoFormat">
3846     <xsd:attribute name="autoFormatId" type="xsd:unsignedInt"/>
3847     <xsd:attribute name="applyNumberFormats" type="xsd:boolean"/>
3848     <xsd:attribute name="applyBorderFormats" type="xsd:boolean"/>
```


3950

```
<xsd:complexType name="CT_DdeValue">
```

3951

```
<xsd:sequence>BT1 0 0 1 256.49 686.14 Tm0.373 g0.373 Gm(u)3(e)-9(q)09(q)c98 12.194.3r(s)-9(e-9(
```

```
<xsd:element name="val" type="s:ST_Xstring
```

```
4003 <xsd:attribute name="published" type="xsd:boolean" use="optional" default="false"/>
4004 <xsd:attribute name="headerRowDxfId" type="ST_DxfId" use="optional"/>
4005 <xsd:attribute name="dataDxfId" type="ST_DxfId" use="optional"/>
4006 <xsd:attribute name="totalsRowDxfId" type="ST_DxfId" use="optional"/>
      <xsd:attribute name="headerRowBorderDxfId" type="ST_DxfId" use="optional"/>
```



```
4162     <xsd:element name="extLst" type="CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
4163   </xsd:sequence>
4164   <xsd:attribute name="conformance" type="s:ST_ConformanceClass"/>
4165 </xsd:complexType>
```

```
<xsd:attribute name="guid" type="
```



```
4321     <xsd:attribute name="url" type="s:ST_Xstring" use="optional"/>
4322   </xsd:complexType>
4323   <xsd:complexType name="CT_FileRecoveryPr">
4324     <xsd:attribute name="autoRecover" type="xsd:boolean" use="optional" default="true"/>
     <xsd:attribute name="crashSave" type="xsd:boolean" use="optional" default="false"/>
```




```
<xsd:attribute name="revisionsAlgorithmName" type="s:ST_Xstring" use="optional"/>
```



```
<xsd:attribute name="dir" type="ST_TransitionCornerDirectionType
```



```

147     </xsd:choice>
148     <xsd:attribute name="type" type="ST_IterateType" use="optional" default="el"/>
149     <xsd:attribute name="backwards" type="xsd:boolean" use="optional" default="false"/>
150 </xsd:complexType>
151 <xsd:complexType name="CT_TLSubShapeId">
152     <xsd:attribute name="spid" type="a:ST_ShapeID" use="required"/>
153 </xsd:complexType>
154 <xsd:complexType name="CT_TLTextTargetElement">
155     <xsd:choice minOccurs="0" maxOccurs="1">
156         <xsd:element name="charRg" type="CT_IndexRange"/>
        <xsd:element name="pRg" type="CT_In(n)-9(d)3(12 597.34 0.48 12.12 ree)] TJETBT1 0 0 1 335.59 601.3 Tm0

```



```
253         <xsd:enumeration value="exit"/>
254         <xsd:enumeration value="emph"/>
255         <xsd:enumeration value="path"/>
256         <xsd:enumeration value="verb"/>
257         <xsd:enumeration value="mediacall"/>
258     </xsd:restriction>
259 </xsd:simpleType>
<xsd:simpleType name="ST_TLTimeNodeRestartType">
```



```
306     <xsd:element name="iterate" type="CT_TLIterateData" minOccurs="0" maxOccurs="1"/>
307     <xsd:element name="childTnLst" type="CT_TimeNodeList" minOccurs="0" maxOccurs="1"/>
308     <xsd:element name="subTnLst" type="CT_TimeNodeList" minOccurs="0" maxOccurs="1"/>
309 </xsd:sequence>
310 <xsd:attribute name="id" type="ST_TLTimeNodeID" use="optional"/>
```



```

412     <xsd:attribute name="by" type="xsd:string" use="optional"/>
413     <xsd:attribute name="rctx" type="xsd:string" use="optional"/>
414     <xsd:attribute name="override" type="ST_TLBehaviorOverrideType" use="optional"/>
    </xsd:complexType> <xerrideTe

```

465
466

```
</xsd:restriction>  
</xsd:simpleType>  
<xsd:complexType name="CT_TLAnimateBehavior">
```


571

```
<xsd:sequence>  
  <xsd:element name="cBhvr" type="
```

```
<xsd:attribute name="spid" type="
```

677

```
<xsd:enumeration value="cust"/>
```




836

```
</xsd:simpleType>  
<xsd:complexType name="CT_OleObjectEmbed">
```

```
<xsd:element name="sldId" type="CT_SlideIdListEntry
```



```
<xsd:attribute name="cryptAlgorithmClass" type="s:ST_AlgClass
```

<xsd:sequence>


```
<xsd:attribute name="orient" type="ST_Direction" use="optional" default="horz"/>
```



```
1366 <xsd:element name="pic" type="CT_Picture"/>  
1367 <xsd:element name="contentPart" type="CT_Rel"/>
```



```
1472 <xsd:complexType name="CT_SlideLayout">
1473   <xsd:sequence minOccurs="1" maxOccurs="1">
1474     <xsd:element name="cSld" type="CT_CommonSlideData" minOccurs="1" maxOccurs="1"/>
     <xsd:group ref="EG_ChildSlide" minOccurs="0" maxOccurs="1"/>
1474   </xsd:sequence>
1472 </xsd:complexType>
```



```
1578         <xsd:enumeration value="minimized"/>
1579         <xsd:enumeration value="restored"/>
1580         <xsd:enumeration value="maximized"/>
1581     </xsd:restriction>
```



```
1684 <xsd:element name="normalViewPr" type="CT_NormalViewProperties" minOccurs="0"  
1685     maxOccurs="1"/>  
1686 <xsd:element name="slideViewPr" type="CT_SlideViewProperties" minOccurs="0"
```

```
27 <xsd:sequence>
28   <xsd:element name="extLst" type="CT_OfficeArtExtensionList" minOccurs="0" maxOccurs="1"/>
29 </xsd:sequence>
30 <xsd:attribute ref="r:link" use="required"/>
```



```
186     <xsd:attribute name="uri" type="xsd:token" use="required"/>  
187 </xsd:complexType>
```



```
292 <xsd:complexType name="CT_InverseTransform"/>  
293 <xsd:complexType name="CT_GrayscaleTransform"/>  
294 <xsd:complexType name="CT_GammaTransform"/>
```

```

345     </xsd:sequence>
346     <xsd:attribute name="hue" type="ST_PositiveFixedAngle" use="required"/>
347     <xsd:attribute name="sat" type="ST_Percentage" use="required"/>
348     <xsd:attribute name="lum" type="ST_Percentage" use="required"/>
349 </xsd:complexType>
350 <xsd:simpleType name="ST_SystemColorVal">
351     <xsd:restriction base="xsd:token">
352         <xsd:enumeration value="scrollBar"/>
        f*scrollB5973(d)(")-9(/)3(>)] TJETBT5973(d)(")86.25 625.54 Tm[( )] TJETqq0 g48.12 621.58 0.

```

```
398      <xsd:enumeration value="accent2"/>
399      <xsd:enumeration value="accent3"/>
400      <xsd:enumeration value="accent4"/>
401      <xsd:enumeration value="accent5"/>
402      <xsd:enumeration value="accent6"/>
403      <xsd:enumeration value="hlink"/>
404      <xsd:enumeration value="folHlink"/>
405      <xsd:enumeration value="phClr"/>
406      <xsd:enumeration value="dk1"/>
```





```
610     </xsd:restriction>
611 </xsd:simpleType>
612 <xsd:complexType name="CT_PresetColor">
613     <xsd:sequence>
614         <xsd:group ref="EG_ColorTransform" minOccurs="0" maxOccurs="unbounded"/>
615     </xsd:sequence>
616     <xsd:attribute name="val" type="ST_PresetColorVal" use="required"/>
617 </xsd:complexType>
```

```
663     </xsd:complexType>
664     <xsd:complexType name="CT_SphereCoords">
665         <xsd:attribute name="lat" type="ST_PositiveFixedAngle" use="required"/>
        <xsd:attribute name="lon" type="ST_PositiveFixedAngle" use="required"/>
```



```
<xsd:simpleType name="ST_ChartBuildStep">
```



1140

```
<xsd:restriction base="xsd:token">
```

```
1193         <xsd:element name="backdrop" type="CT_Backdrop" minOccurs="0" maxOccurs="1"/>
1194         <xsd:element name="extLst" type="CT_OfficeArtExtensionList" minOccurs="0" maxOccurs="1"/>
1195     </xsd:sequence>
1196 </xsd:complexType>
1197 <xsd:complexType name="CT_Backdrop">
1198     <xsd:sequence>
1199         <xsd:element name="anchor" type="CT_Point3D" minOccurs="1" maxOccurs="1"/>
```

1246

`<xsd:sequence>`

```
1299     <xsd:attribute name="useA" type="xsd:boolean" use="optional" default="true"/>
1300   </xsd:complexType>
1301   <xsd:complexType name="CT_ColorReplaceEffect">
1302     <xsd:sequence>
1303       <xsd:group ref="EG_ColorChoice" minOccurs="1" maxOccurs="1"/>
1304     </xsd:sequence>
1305   </xsd:complexType>
1306   <xsd:complexType name="CT_DuotoneEffect">
```

1352	<xsd:enumeration value="shdw2"/>
1353	<xsd:enumeration value="shdw3"/>
1354	<xsd:enumeration value="shdw4"/>
1355	<xsd:enumeration value="shdw5"/>
1356	<xsd:enumeration value="shdw6"/>
1357	<xsd:enumeration value="shdw7"/>
1358	<xsd:enumeration value="shdw8"/>

```
1405     <xsd:attribute name="hue" type="ST_PositiveFixedAngle" use="optional" default="0"/>
1406     <xsd:attribute name="amt" type="ST_FixedPercentage" use="optional" default="0%"/>
1407 </xsd:complexType>
1408 <xsd:complexType name="CT_TransformEffect">
1409     <xsd:attribute name="sx" type="ST_Percentage" use="optional" default="100%"/>
1410     <xsd:attribute name="sy" type="ST_Percentage" use="optional" default="100%"/>
1411     <xsd:attribute name="kx" type="ST_FixedAngle" use="optional" default="0"/>
1412     <xsd:attribute name="ky" type="ST_FixedAngle" use="optional" default="0"/>
1413     <xsd:attribute name="tx" type="ST_Coordinate" use="optional" default="0"/>
1414     <xsd:attribute name="ty" type="ST_Coordinate" use="optional" default="0"/>
1415 </xsd:complexType>
1416 <xsd:complexType name="CT_NoFillProperties"/>
1417 <xsd:complexType name="CT_SolidColorFillProperties">
1418     <xsd:sequence>
```



1563

```
<xsd:enumeration value="narVert"/>  
<xsd:enumeration value="dashHorz"/>
```

1616

```
<xsd:element name="pattFill" type="CT_PatternFillProperties" minOccurs="1" maxOccurs="1"/>  
<xsd:element name="grpFill" type="CT_GroupFillProperties
```

1669	<xsd:element name="fill" type="CT_FillEffect" minOccurs="1" maxOccurs="1"/>
1670	<xsd:element name="fillOverlay" type="CT_FillOverlayEffect" minOccurs="1" maxOccurs="1"/>
1671	<xsd:element name="glow" type="CT_GlowEffect" minOccurs="1" maxOccurs="1"/>


```
1775      <xsd:enumeration value="noSmoking"/>
1776      <xsd:enumeration value="rightArrow"/>
1777      <xsd:enumeration value="leftArrow"/>
1778      <xsd:enumeration value="upArrow"/>
1779      <xsd:enumeration value="downArrow"/>
1780      <xsd:enumeration value="stripedRightArrow"/>
1781      <xsd:enumeration value="notchedRightArrow"/>
1782      <xsd:enumeration value="bentUpArrow"/>
1783      <xsd:enumeration value="leftRightArrow"/>
```

1828	<xsd:enumeration value="straightConnector1"/>
1829	<xsd:enumeration value="bentConnector2"/>

1881

```
<xsd:enumeration value="flowChartSort"/>
```

1934

```
<xsd:enumeration value="textArchDown"/>
```


1987

```
</xsd:simpleType>
```

```
2040 </xsd:complexType>
2041 <xsd:complexType name="CT_Path2DMoveTo">
2042   <xsd:sequence>
2043     <xsd:element name="pt" type="CT_AdjPoint2D" minOccurs="1" maxOccurs="1"/>
2044   </xsd:sequence>
2045 </xsd:complexType>
2046 <xsd:complexType name="CT_Path2DLineTo">
2047   <xsd:sequence>
2048     <xsd:element name="pt" type="CT_AdjPoint2D" minOccurs="1" maxOccurs="1"/>
```






```
<xsd:complexType name="CT_DefaultShapeDefinition">
```



```
2517     </xsd:sequence>
2518     <xsd:attribute name="b" type="ST_OnOffStyleType" use="optional" default="def"/>
2519     <xsd:attribute name="i" type="ST_OnOffStyleType" use="optional" default="def"/>
2520 </xsd:complexType>
2521 <xsd:complexType name="CT_TableCellBorderStyle">
2522     <xsd:sequence>
        <xsd:element name="left" type="CT_ThemeableLineStyle
```



```
2782     </xsd:restriction>
2783 </xsd:simpleType>
2784 <xsd:simpleType name="ST_TextBulletSizeDecimal">
2785     <xsd:restriction base="ST_PercentageDecimal">
2786         <xsd:minInclusive value="25000"/>
2787         <xsd:maxInclusive value="400000"/>
2788     </xsd:restriction>
2789 </xsd:simpleType>
2790 <xsd:complexType name="CT_TextBulletSizeFollowText"/>
2791 <xsd:complexType name="CT_TextBulletSizePercent">
2792     <xsd:attribute name="val" type="ST_TextBulletSizePercent" use="required"/>
2793 </xsd:complexType>
2794 <xsd:complexType name="CT_TextBulletSizePoint">
2795     <xsd:attribute name="val" type="ST_TextFontSize" use="required"/>
```


2941

```
<xsd:group ref="EG_EffectProperties" minOccurs="0" maxOccurs="1"/>
<xsd:element name="highlight" type="CT_Color" minOccurs="0" maxOccurs="1"/>
```

```
2994     </xsd:complexType>
2995     <xsd:complexType name="CT_TextSpacingPoint">
2996         <xsd:attribute name="val" type="ST_TextSpacingPoint" use="required"/>
2997     </xsd:complexType>
2998     <xsd:simpleType name="ST_TextMargin">
2999         <xsd:restriction base="ST_Coordinate32Unqualified">
```

```
3047     </xsd:restriction>
3048 </xsd:simpleType>
```

</xsd:schema>


```
100         </xsd:choice>
101     </xsd:sequence>
102 </xsd:group>
103 <xsd:simpleType name="ST_PositionOffset">
104     <xsd:restriction base="xsd:int"/>
```

153

```
<xsd:enumeration value="insideMargin"/>
```



```
115         </xsd:choice>
116     </xsd:sequence>
117 </xsd:group>
118 <xsd:complexType name="CT_Rel">
119     <xsd:attribute ref="r:id" use="required"/>
120 </xsd:complexType>
121 <xsd:simpleType name="ST_ColID">
122     <xsd:restriction base="xsd:int">
123         <xsd:minInclusive value="0"/>
124     </xsd:restriction>
125 </xsd:simpleType>
126 <xsd:simpleType name="ST_RowID">
127     <xsd:restriction base="xsd:int">
128         <xsd:minInclusive value="0"/>
129     </xsd:restriction>
130 </xsd:simpleType>
131 <xsd:complexType name="CT_Marker">
132     <xsd:sequence>
133         <xsd:element>
```



```
30     <xsd:sequence>  
31         <xsd:any processContents="lax"/>  
32     </xsd:sequence>
```

83

```
<xsd:complexType name="CT_StrRef">
```

```
136     <xsd:element name="strRef" type="CT_StrRef" minOccurs="1" maxOccurs="1"/>
137     <xsd:element name="v" type="s:ST_Xstring" minOccurs="1" maxOccurs="1"/>
    </xsd:choice>
```

```
189 <xsd:simpleType name="ST_RotX">
190   <xsd:restriction base="xsd:byte">
191     <xsd:minInclusive value="-90"/>
192     <xsd:maxInclusive value="90"/>
193   </xsd:restriction>
194 </xsd:simpleType>
195 <xsd:complexType name="CT_RotX">
```

```
<xsd:complexType name="CT_DepthPercent">
```



```
348         <xsd:enumeration value="area"/>
349         <xsd:enumeration value="w"/>
350     </xsd:restriction>
351 </xsd:simpleType>
<xsd:complexType name="CT_SizeRepresents">
```

```
401     </xsd:simpleType>
402     <xsd:simpleType name="ST_SecondPieSizePercent">
403         <xsd:restriction base="xsd:string">
            <xsd:pattern value="0*([5-9])|([1-
```



```
<xsd:element name="showCatName" type="CT_Boolean
```

```
507         <xsd:enumeration value="x"/>
508         <xsd:enumeration value="auto"/>
509     </xsd:restriction>
510 </xsd:simpleType>
511 <xsd:complexType name="CT_MarkerStyle">
    <xsd:attribute name="val" type="
```


719

```
<xsd:sequence>  
  <xsd:group ref="EG_SerShared
```



```
825         <xsd:enumeration value="smooth"/>
826         <xsd:enumeration value="smoothMarker"/>
827     </xsd:restriction>
828 </xsd:simpleType>
829 <xsd:complexType name="CT_ScatterStyle">
830     <xsd:attribute name="val" type="ST_ScatterStyle" default="marker"/>
831 </xsd:complexType>
```



```
931     </xsd:sequence>
932 </xsd:group>
933 <xsd:complexType name="CT_AreaChart">
934     <xsd:sequence>
935         <xsd:group ref="EG_AreaChartShared" minOccurs="1" maxOccurs="1"/>
936         <xsd:element name="axId" type="CT_UnsignedInt" minOccurs="2" maxOccurs="2"/>
          <xsd:element name="extLst" type="CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
</xsd:complexType>
```

```
984 </xsd:complexType>
985 <xsd:complexType name="CT_OfPieChart">
986   <xsd:sequence>
```

<xsd:sequence>

```
1090     </xsd:restriction>
1091 </xsd:simpleType>
```

1143	<code></xsd:simpleType></code>
1144	<code><xsd:complexType name="CT_PictureFormat"></code>

1249	<xsd:complexType name="CT_CatAx">
1250	<xsd:sequence>


```
1302 <xsd:element name="scatterChart" type="CT_ScatterChart" minOccurs="1" maxOccurs="1"/>
1303 <xsd:element name="pieChart" type="CT_PieChart" minOccurs="1" maxOccurs="1"/>
1304 <xsd:element name="pie3DChart" type="CT_Pie3DChart" minOccurs="1" maxOccurs="1"/>
```

```
1355     </xsd:sequence>
1356   </xsd:group>
1357   <xsd:complexType name="CT_LegendEntry">
```

```
1408         <xsd:minInclusive value="1"/>
1409         <xsd:maxInclusive value="48"/>
1410     </xsd:restriction>
1411 </xsd:simpleType>
1412 <xsd:complexType name="CT_Style">
    <xsd:attribute name="val" type="ST_Style" use="required"/>
```

<xsd:element

```
1 <xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
2   xmlns:a="http://schemas.openxmlformats.org/drawingml/2006/main"
3   xmlns="http://schemas.openxmlformats.org/drawingml/2006/chartDrawing"
4   targetNamespace="http://schemas.openxmlformats.org/drawingml/2006/chartDrawing"
5   elementFormDefault="qualified">
```

g[(<)3(x):


```
<xsd:import namespace="http://schemas.openxmlformats.org/drawingml/2006/main" schemaLocation="dml-
```



```
169     <xsd:attribute name="step" type="ST_Ints" use="optional" default="1"/>
170 </xsd:attributeGroup>
171 <xsd:attributeGroup name="AG_ConstraintAttributes">
172     <xsd:attribute name="type" type="ST_ConstraintType" use="required"/>
173     <xsd:attribute name="for" type="ST_ConstraintRelationship" use="optional" default="self"/>
174     <xsd:attribute name="forName" type="xsd:string" use="optional" default=""/>
175     <xsd:attribute name="ptType" type="ST_ElementType" use="optional" default="all"/>
176 </xsd:attributeGroup>
177 <xsd:attributeGroup name="AG_ConstraintRefAttributes">
```

222 <xsd:union memberTypes="a:ST_ShapeType ST_OutputShapeType"/>


```
<xsd:element name="ruleLst" type="CT_Rules
```

```
381      <xsd:attribute name="defStyle" type="xsd:string" use="optional" default=""/>
      </xsd:complexType>
```

434

```
</xsd:sequence>
```



```
699      <xsd:enumeration value="userD"/>
700      <xsd:enumeration value="userE"/>
701      <xsd:enumeration value="userF"/>
702      <xsd:enumeration value="userG"/>
703      <xsd:enumeration value="userH"/>
704      <xsd:enumeration value="userI"/>
705      <xsd:enumeration value="userJ"/>
706      <xsd:enumeration value="userK"/>
707      <xsd:enumeration value="userL"/>
708      <xsd:enumeration value="userM"/>
709      <xsd:enumeration value="userN"/>
710      <xsd:enumeration value="userO"/>
711      <xsd:enumeration value="userP"/>
```

```
<xsd:restriction base="xsd:token">
```

```
805 <xsd:enumeration value="dstNode"/>  
806 <xsd:enumeration value="begPts"/>
```

```
858 <xsd:restriction base="xsd:token">  
859   <xsd:enumeration value="horz"/>
```



```
911         <xsd:enumeration value="none"/>
912         <xsd:enumeration value="fNode"/>
913     </xsd:restriction>
914 </xsd:simpleType>
915 <xsd:simpleType name="ST_BendPoint" final="restriction">
916     <xsd:restriction base="xsd:token">
917         <xsd:enumeration value="beg"/>
```


1070	<xsd:enumeration value="bR"/>
1071	<xsd:enumeration value="bCtrCh"/>
1072	<xsd:enumeration value="bCtrDes"/>

xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships" xmlns:x="urn:schemas


```
112     <xsd:attributeGroup ref="AG_OfficeCoreAttributes" />
113   </xsd:attributeGroup>
114   <xsd:attributeGroup name="AG_AllShapeAttributes">
115     <xsd:attributeGroup ref="AG_ShapeAttributes" />
```



```
271 <xsd:attribute ref="o:althref"/>
272 <xsd:attribute name="size" type="xsd:string" use="optional"/>
273 <xsd:attribute name="origin" type="xsd:string" use="optional"/>
274 <xsd:attribute name="position" type="xsd:string" use="optional"/>
275 <xsd:attribute name="aspect" type="ST_ImageAspect" use="optional"/>
276 <xsd:attribute name="colors" type="xsd:string" use="optional"/>
277 <xsd:attribute name="angle" type="xsd:decimal" use="optional"/>
278 <xsd:attribute name="alignshape" type="s:ST_TrueFalse" use="optional"/>
279 <xsd:attribute name="focus" type="xsd:string" use="optional"/>
280 <xsd:attribute name="focussize" type="xsd:string" use="optional"/>
281 <xsd:attribute name="focusposition" type="xsd:string" use="optional"/>
282 <xsd:attribute name="method" type="ST_FillMethod" use="optional"/>
283 <xsd:attribute ref="o:detectmouseclick"/>
284 <xsd:attribute ref="o:title"/>
285 <xsd:attribute ref="o:opacity2"/>
286 <xsd:attribute name="recolor" type="s:ST_TrueFalse" use="optional"/>
    <xsd:attribute name="rotate" type="s:ST_TrueFalse" use="optional"/>
```

324	<xsd:attribute ref="o:oleid"/>
325	<xsd:attribute ref="o:detectmouseclick"/>

377

```
</xsd:choice>
```


536

```
<xsd:enumeration value="narrow"/>
```

```
<xsd:attribute name="target" type="xsd:string" use="optional" fixed="false"/>
```



```
68 <xsd:element name="ink" type="CT_Ink"/>
69 <xsd:element name="diagram" type="CT_Diagram"/>
    <xsd:element name="equationxml" type="
```

```
121     </xsd:complexType>
122     <xsd:complexType name="CT_IdMap">
```

```
<xsd:any namespace="##any"/>
```



```
<xsd:attribute name="grouping" type="
```



```
386     </xsd:simpleType>
387     <xsd:simpleType name="ST_InsetMode">
      <xsd:restriction base="xsd:string" length="3"/>
```



```
<xsd:element name="MultiLine" type="
```



```
69         <xsd:enumeration value="match"/>
70     </xsd:restriction>
71 </xsd:simpleType>
    <xsd:complexType name="CT_Shp">
```

```
122         <xsd:enumeration value="bi"/>
123     </xsd:restriction>
124 </xsd:simpleType>
125 <xsd:complexType name="CT_Style">
126     <xsd:attribute name="val" type="ST_Style"/>
127 </xsd:complexType>
```



```
<xsd:element name="ctrlPr" type="
```




440 <xsd:element name="aInScr" type="CT_On0ff" minOccurs="0"/>

493

`</xsd:group>`

<xsd:sequence> 546f*48.12Q



58

```
</xsd:schema>
```

```
48         <xsd:enumeration value="bool"/>
49         <xsd:enumeration value="cy"/>
50         <xsd:enumeration value="error"/>
51     </xsd:restriction>
52 </xsd:simpleType>
<xsd:simpleType name="l3(u)3(2612.2612.2612T0TT0_261C")3(/)3(>)]ETBT1 0 0 1 266.45 615.26 Tm[((<)3(x)3ETqq0 g48
```

101

```
<xsd:element ref="uint"/>  
<xsd:element ref="r4"/>
```


8 `<xsd:complexType name="CT_DatastoreSchemaRef">`

11 <xsd:attribute name="link" type="ST_RelationshipId"/>
 <xsd:attribute name="dm" type="ST_Relatr0.015 -0.12006 612.1 792.11 rew* nBT/ "/>


```
89 <xsd:simpleType name="ST_TrueFalseBlank">
90   <xsd:restriction base="xsd:string">
91     <xsd:enumeration value="t"/>
92     <xsd:enumeration value="f"/>
93     <xsd:enumeration value="true"/>
94     <xsd:enumeration value="false"/>
95     <xsd:enumeration value=""/>
96     <xsd:enumeration value="True"/>
97     <xsd:enumeration value="False"/>
98   </xsd:restriction>
99 </xsd:simpleType>
```

142

```
<xsd:restriction base="xsd:string">  
  <xsd:pattern value="-?[0-9]+(\\"/>
```



```
18 w_CT_Empty = empty
19 w_CT_OnOff = attribute w:val { s_ST_OnOff }?
20 w_ST_LongHexNumber = xsd:hexBinary { length = "4" }
   w_CT_LongHexNumber = attributem" }
```


--

3(3/F11 9)3(h)3

.015 -0.12

```
124 | string "thick"  
125 | string "double"  
126 | string "dotted"  
127 | string "dashed"  
128 | string "dotDash"  
129 | string "dotDotDash"  
130 | string "triple"  
131 | string "thinThickSmallGap"  
132 | string "thickThinSmallGap"  
133 | string "thinThickThinSmallGap"
```

1389.18

```
177 | string "christmasTree"  
178 | string "circlesLines"  
    | string "circlesRectangles"
```

```
230 | string "heebieJeebies"  
231 | string "holly"  
232 | string "houseFunky"
```



```
336 | string "thinHorzStripe"  
337 | string "thinVertStripe"  
338 | string "thinReverseDiagStripe"  
339 | string "thinDiagStripe"  
340 | string "thinHorzCross"  
341 | string "thinDiagCross"  
342 | string "pct5"
```

```

389     attribute w:bidi { s_ST_Lang }?
390 w_ST_CombineBrackets =
391     string "none"
392     | string "round"
393     | string "square"
394     | string "angle"
395     | string "curly"
396 w_CT_EastAsianLayout =
397     attribute w:id { w_ST_DecimalNumber }?,
398     attribute w:combine { s_ST_OnOff }?,
399     attribute w:combineBrackets { w_ST_CombineBrackets }?,
400     attribute w:vert { s_ST_OnOff }?,
401     attribute w:vertCompress { s_ST_OnOff }?
402 w_ST_HeightRule = string "auto" | string "exact" | string "atLeast"
403 w_ST_Wrap =
404     string "auto"
405     | string "notBeside"
406     | string "around"
407     | string "tight"
408     | string "through"
409     | string "none"

```

442

```
| string "hyphen"  
| string "underscore"
```



```
| string "tbRl"
```

```
654     element trPr { w_CT_TrPrBase }
655 w_CT_TblGridChange =
656     w_CT_Markup,
657     element tblGrid { w_CT_TblGridBase }
w_CT_TblPrChange =
```



```
760     element textboxTightWrap { w_CT_TextboxTightWrap }?,  
761     element outlineLvl { w_CT_DecimalNumber }?,  
762     element divId { w_CT_DecimalNumber }?,
```



```
919 | string "ideographLegalTraditional"  
920 | string "taiwaneseCountingThousand"  
921 | string "taiwaneseDigital"  
922 | string "chineseCounting"  
923 | string "chineseLegalSimplified"  
924 | string "chineseCountingThousand"  
925 | string "koreanDigital"  
926 | string "koreanCounting"  
927 | string "koreanLegal"  
928 | string "koreanDigital2"  
929 | string "vietnameseCounting"  
930 | string "russianLower"  
    | string "russianUpper"
```




1131 | element endnoteRef { w_CT_Empty }?
| element separator { w_CT_Empty }?

1237 element ins { w_CT_TrackChange }?,
 element del { w_CT_TrackChange }?,


```
1343     w_EG_PContent*  
1344     w_ST_Direction = string "ltr" | string "rtl"  
1345     w_CT_SdtContentRun = w_EG_PContent*  
1346     w_EG_ContentBlockContent =  
        element customXml { w_CT_CustomXmlBlock }
```

```
1396     attribute w:uri { s_ST_String }?,  
1397     attribute w:element { s_ST_XmlName },  
1398     element customXmlPr { w_CT_CustomXmlPr }?,
```



```
1608 | string "sectEnd"  
1609 | string "docEnd"  
1610 w_CT_FtnPos = attribute w:val { w_ST_FtnPos }
```

```
1661 | string "document1"
```

1714 element noColumnBalance { w_CT_OnOff }?,


```
1820     attribute w:accent4 { w_ST_WmlColorSchemeIndex }?,  
1821     attribute w:accent5 { w_ST_WmlColorSchemeIndex }?,  
1822     attribute w:accent6 { w_ST_WmlColorSchemeIndex }?,  
1823     attribute w:hyperlink { w_ST_WmlColorSchemeIndex }?,  
1824     attribute w:followedHyperlink { w_ST_WmlColorSchemeIndex }?  
1825 w_CT_ReadingModeInkLockDown =
```

```
1873     element defaultTabStop { w_CT_TwipsMeasure }?,  
1874     element autoHyphenation { w_CT_OnOff }?,
```



```

1979 w_CT_FrameScrollbar = attribute w:val { w_ST_FrameScrollbar }
1980 w_CT_OptimizeForBrowser =
1981     w_CT_OnOff,
1982     attribute w:target { s_ST_String }?
1983 w_CT_Frame =
1984     element sz { w_CT_String }?,
1985     element name { w_CT_String }?,
     element title { w_CT_String element name { wFrFrq

```



```
2085 | string "character"  
2086 | string "table"  
2087 | string "numbering"  
2088 w_CT_Style =  
    attribute w:type { w_ST_StyleType }?,
```

2138


string "roman"

2191

w_EG_BlockLevelChunkElt*

```
attribute w:decorated { s_ST_OnOff }?
```


Part
the file Wordprocessing

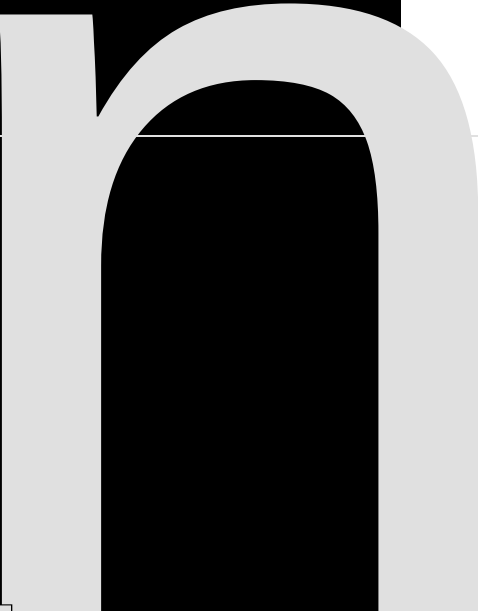

B.2.1.6 Footnotes Part

This schema is available in the file [https://www.dropbox.com/s/1f1d5407e20067d/4b45902307.52a1y3\(N36D\)F90412300Un12251T5i33.C](https://www.dropbox.com/s/1f1d5407e20067d/4b45902307.52a1y3(N36D)F90412300Un12251T5i33.C)

```
1 include "wml.rnc"
2 include "shared-relationshipReference.rnc"
3
4 include "dml-main.rnc"
5 include "dml-diagram.rnc"
6 include "shared-commonSimpleTypes.rnc"
7 include "dml-lookedCanvas.rnc"
8
9 include "dml-chart.rnc"
```



```
9   include "dml-chart.rnc"  
10  include "dml-chartDrawing.rnc"  
11  include "dml-picture.rnc"  
12  include "vml-presentationDrawing.rnc"  
13  include "xml.rnc"  
14  include "shared-customXmlSchemaProperties.rnc"  
15  include "vml-officeDrawing.rnc"  
16  include "vml-main.rnc"  
17  include "vml-spreadsheetDrawing.rnc"  
   include "vml-
```

12 "http://schemas.openxmlformats.org/drawingml/2006/spreadsheetDrawing"
13

65

```
## default value: true
```



224

```
attribute s { xsd:boolean }?,
```

277	
278	## default value: false
279	sd0.878416100614912534%{BTXSt:0000an54074.02 Tm0 g61*3 Tc[()] TJETBT1 0 0 1 63.84 674.02 Tm 0 T61*3 Tc()3(d)-9(e)3(f)3(a)3(u)-9(l)3(t)3()3(v)-9(a)3(l)3


```

330     attribute DataBindingLoadMode { xsd:unsignedInt },
331     sml_CT_DataBinding_any
332 sml_CT_DataBinding_any =
333     element * - (o:* | v:* | w10:* | x:*) {
334         anyAttribute*,
335         mixed { anyElement* }
336     }
337 sml_connections = element connections { sml_CT_Connections }
338 sml_CT_Connections = element connection { sml_CT_Connection }+
339 sml_CT_Connection =
340     attribute id { xsd:unsignedInt },

```

3 (A) B4(769

```
383     attribute singleSignOnId { s_ST_Xstring }?,  
384     element dbPr { sml_CT_DbPr }?,  
    element olapPr { sml_CT_OlapPr }?,
```

436

437

438

```
## default value: false  
attribute consecutive { xsd:boolean }?,
```



```
542  
543     ## default value: 1  
544 5 n? attribute count { xsd:unsignedInt }?,
```

```

595  ## default value: 0
596  attribute createdVersion { xsd:unsignedByte }?,
597
598  ## default value: 0
599  attribute refreshedVersion { xsd:unsignedByte }?,
600
601  ## default value: 0
602  attribute minRefreshableVersion { xsd:unsignedByte }?,
603  attribute recordCount { xsd:unsignedInt }?,
604
605  ## default value: false
    attribute upgradeOnRefigne(b)3(u)3(t)igne(b)3(u)3(b(n)3(t)o3(V)3(e)3(r)a3(i)3(g))3(,)TJETBT1 0 0 1 276.77 613.

```

```
648  
649   ## default value: 0  
650   attribute level { xsd:unsignedInt }?,
```

```
701     attribute ref { sml_ST_Ref }?,  
702     attribute name { s_ST_Xstring }?,  
    attribute sheet { s_ST_Xstring }?,
```



```
attribute i { xsd:boolean }?,
```



```
860  ## default value: true
861  attribute autoEnd { xsd:boolean }?,
862
863  ## default value: range
864  attribute groupBy { sml_ST_GroupBy }?,
```

attribute value { s_ST_Xstring },


```
sml_CT_FieldsUsage =
```

1019 | element s { sml_CT_String })+

```
1072 attribute parent { s_ST_Xstring }?,
1073
1074 ## default value: 0
1075
1076
1077 ## default value: false
1078 attribute set { xsd:boolean }?,
1079 element extLst { sml_CT_ExtensionList }?
1080 sml_CT_pivotTableDefinition =
1081 attribute name { s_ST_Xstring },
1082 attribute cacheId { xsd:unsignedInt },
```



```
1178  ## default value: false
```



```
1284
1285   ## default value: true
1286   attribute compact { xsd:boolean }?,
1287
1288   ## default value: false
1289   attribute allDrilled { xsd:boolean }?,
1290   attribute numFmtId { sml_ST_NumFmtId }?,
```


1549






```
1867 ## default value: true
1868 attribute headers { xsd:boolean }?,
1869
1870 ## default value: false
1871 attribute rowNumbers { xsd:boolean }?,
1872
1873 ## default value: false
1874 attribute disableRefresh { xsd:boolean }?,
1875
1876 ## default value: true
1877 attribute backgroundRefresh { xsd:boolean }?,
1878
1879 ## default value: false
1880 attribute firstBackgroundRefresh { xsd:boolean }?,
1881
1882 ## default value: false
1883 attribute refreshOnLoad { xsd:boolean }?,
1884
1885 ## default value: insertDelete
1886 attribute growShrinkType { sml_ST_GrowShrinkType }?,
1887
1888 ## default value: false
1889 attribute fillFormulas { xsd:boolean }?,
```

1920

```
## default value: 0  
attribute minimumVersion { xsd:unsignedByte }?,
```

```
1973 | string "fullwidthKatakana"
1974 | string "Hiragana"
1975 | string "noConversion"
1976 sml_ST_PhoneticAlignment =
1977     string "noControl"
1978     | string "left"
1979     | string "center"
1980     | string "distributed"
1981 sml_CT_PhoneticRun =
1982     attribute sb { xsd:unsignedInt },
1983     attribute eb { xsd:unsignedInt },
```




```
2079     r_id,  
2080     attribute minRid { xsd:unsignedInt }?,  
2081     attribute maxRid { xsd:unsignedInt }?,  
2082     element sheetIdMap { sml_CT_SheetIdMap },  
2083     element reviewedList { sml_CT_ReviewedRevisions }?,  
2084     element extList { sml_CT_ExtensionList }?
```




element oc { sml_CT_Cell }?,

2344 element controls { sml_CT_Controls }?,


```
2450 ## default value: false
2451 attribute customFormat { xsd:boolean }?,
2452 attribute ht { xsd:double }?,
2453
2454 ## default value: false
```


2556
2557



015 -0.120

Q 4 0 . 0 3

2609
2610

```
## default value: split
```

```
2662
2663   ## default value: topLeft
2664   attribute pane { sml_ST_Pane }?,
2665   attribute activeCell { sml_ST_CellRef }?,
2666
2667   ## default value: 0
2668   attribute activeCellId { xsd:unsignedInt }?,
2669
2670   ## default value: A1
2671   attribute sqref { sml_ST_Sqref }?
2672 sml_ST_Pane =
```

```
2715     attribute showOutlineSymbols { xsd:boolean }?  
2716 sml_CT_PageSetUpPr =  
2717  
2718     ## default value: true
```

```
2768 sml_CT_CellSmartTag =  
2769     attribute type { xsd:unsignedInt },  
2770
```



```
2874     attribute disablePrompts { xsd:boolean }?,
2875     attribute xWindow { xsd:unsignedInt }?,
2876     attribute yWindow { xsd:unsignedInt }?,
2877     attribute count { xsd:unsignedInt }?,
2878     element dataValidation { sml_CT_DataValidation }+
2879 sml_CT_DataValidation =
2880
2881     ## default value: none
2882     attribute type { sml_ST_DataValidationType }?,
2883
2884     ## default value: stop
2885     attribute errorStyle { sml_ST_DataValidationErrorStyle }?,
2886
```

```
2927 | string "greaterThan"  
2928 | string "greaterThanOrEqual"  
2929 sml_ST_DataValidationErrorStyle =  
2930     string "stop" | string "warning" | string "information"  
2931 sml_ST_DataValidationImeMode =  
2932     string "noControl"  
      | string "off"
```




```
3086 ## default value: true
3087 attribute showValue { xsd:boolean }?,
```



```
3192
3193   ## default value: true
3194   attribute alignWithMargins { xsd:boolean }?,
3195   element oddHeader { s_ST_Xstring }?,
3196   element oddFooter { s_ST_Xstring }?,
3197   element evenHeader { s_ST_Xstring }?,
3198   element evenFooter { s_ST_Xstring }?,
3199   element firstHeader { s_ST_Xstring }?,
   element firstFooter { s_ST_Xstring }?
```



```
3298 sml_CT_Chartsheet =
3299     element sheetPr { sml_CT_ChartsheetPr }?,
3300     element sheetViews { sml_CT_ChartsheetViews },
3301     element sheetProtection { sml_CT_ChartsheetProtection }?,
3302     element customSheetViews { sml_CT_CustomChartsheetViews }?,
3303     element pageMargins { sml_CT_PageMargins }?,
3304     element pageSetup { sml_CT-CsPageSetup }?,
3305     element headerFooter { sml_CT_HeaderFooter }?,
3306     element drawing { sml_CT_Drawing },
3307     element legacyDrawing { sml_CT_LegacyDrawing }?,
    element legacyDrawingHF { sml_CT_LegacyDrawing }?,
```


3404

```
## default value: DVASPECT_CONTENT  
attribute dvAspect { sml_ST_DvAspect }?,
```

```
3457     attribute destinationFile { s_ST_Xstring },
3458     attribute title { s_ST_Xstring }?,
3459
3460     ## default value: false
3461     attribute autoRepublish { xsd:boolean }?
3462 sml_CT_Controls = element control { sml_CT_Control }+
3463 sml_CT_Control =
3464     attribute shapeId { xsd:unsignedInt },
3465     r_id,
3466     attribute name { xsd:string }?,
3467     element controlPr { sml_CT_ControlPr }?
3468 sml_CT_ControlPr =
3469
3470     ## default value: true
```

3510	string "chart"
3511	string "pivotTable"
	string "query"

3616

```
attribute splitFirst { xsd:boolean }?,
```

3669

```
smI_CT_Mdx =
```





```
388 [5] The ## default value: 0
```

0x8 0s(l)3(31 at 3(1)309(.5)12600g.]17JB34852]094578.48 3r.223-698h262 {m0 048 0f (32901(45))3(1)13: (T)3d(l)o0 g.12 b0


```

3987     ## default value: true
3988     attribute table { xsd:boolean }?,
3989     attribute count { xs:unsignedInt }?,
3990     element tableStyleElement { sml_CT_TableStyleElement }*
3991 sml_CT_TableStyleElement =
3992 589Q 12(1y 2%)4T13(1)3(SF9(T)5eStyleDef) 1geBT 100166116m [(,)]T ET 67 3998TQ q3(T)
3993
3994     ## default value: 1
3995 15BT/F1 8104011001 31001 2T m(1)1T5T10 589Q 12(1y 2%)4T13(1)3(SF9(T)5eStyleDef) 1geBT 100166116m [(,)]T ET 67 3998TQ q3(T)

```

```
attribute val { sml_ST_UnderlineValues }?
```

```
sml_CT_ExternalSheetDataSet =
```



```
4146     string "nil" | string "b" | string "n" | string "e" | string "str"  
4147 sml_CT_OleLink =  
4148     r_id,
```

```
4199     attribute totalsRowCellStyle { s_ST_Xstring }?,  
4200     attribute connectionId { xsd:unsignedInt }?,
```




```
4358     attribute changesSavedWin { xsd:boolean }?,  
4359  
4360     ## default value: false  
     attribute onlySync { xsd:boolean }?,
```


4464

```
## default value: false
```

```
4517 ## default value: false  
4518 attribute iterate { xsd:boolean }?,
```



```
4 include "shared-commonSimpleTypes.rnc"  
5 include "dml-spreadsheetDrawing.rnc"  
  include "dml-
```

```
7 include "dml-diagram.rnc"
8 include "dml-lockedCanvas.rnc"
9 include "dml-chart.rnc"
10 include "dml-chartDrawing.rnc"
11 include "dml-picture.rnc"
12 start = sml_connections
```

B.3.1.5 Custom XML Mappings Part

This schema is available in the file SpreadsheetML_Custom_XML_Mappings.rnc.

```
1 include "sml.rnc"
2 include "shared-relationshipReference.rnc"
3 include "any.rnc"
4 include "shared-commonSimpleTypes.rnc"
```



```
15 include "sml.rnc"  
16 include "shared-relationshipReference.rnc"  
17 include "any.rnc"  
18 include "shared-commonSimpleTypes.rnc"
```

```
include "any.rnc"
```



```
6 include "dml-main.rnc"  
7 include "dml-diagram.rnc"  
8 include "dml-lockedCanvas.rnc"  
9 include "dml-chart.rnc"  
include "dml-chartDrawing.rnc"
```


45

```
## default value: horz
```



```
151   attribute delay { p_ST_TLTime }?,  
152   (element tgtEl { p_CT_TLTimeTargetElement }  
153     | element tn { p_CT_TLTriggerTimeNodeID }  
154     | element rtn { p_CT_TLTriggerRuntimeNode })?  
p_CT_TLTimeConditionList = element cond { p_CT_TLTimeCondition }+
```




```
310 p_ST_TLAnimateMotionBehaviorOrigin = "parent" | "layout"
311 p_ST_TLAnimateMotionPathEditMode = "relative" | "fixed"
312 p_CT_TLPoint =
313     attribute x { a_ST_Percentage },
314     attribute y { a_ST_Percentage }
315 p_CT_TLAnimateMotionBehavior =
```


363 attribute isNarration { xsd:boolean }?,
 element cMedia

416

| "inByRing"

```
element tags { p_CT_TagsData }?)?
```

```
522 p_CT_OleObject =  
523     p_AG_Ole,
```


787

788

789

```
## default value: false
attribute frameSlides { xsd:boolean }?,
element extLst { p_CT_ExtensionList }?
```



```
893 p_CT_Shape =  
894     ## default value: false
```


"titleOnly"

r_id,

1105	"notesMasterView"
1106	"outlineView"
	"sldSorterView"

1158

```
p_CT_Guide =
```



```
include "shared-commonSimpleTypes.rnc"
```

11 `start = p_notesMaster`

B.4.1.5 Notes Slide Part

```
1 include "pml.rnc"
2
3 include "dml-main.rnc"
4 include "dml-diagram.rnc"
5 include "shared-FontSpecTypes.rnc"
6 include "dml-lockedCanvas.rnc"
```

```
include "any.rnc"
```

```
11 namespace x = "urn:schemas-microsoft-com:office:excel"
12
13 a_CT_AudioFile =
14     r_link,
15     attribute contentType { xsd:string }?,
16     element extLst { a_CT_OfficeArtExtensionList }?
```

```
element accent4 { a_CT_Color },
```


I




```
329 | "floralWhite"  
330 | "forestGreen"  
331 | "fuchsia"  
332 | "gainsboro"  
333 | "ghostWhite"  
334 | "gold"  
335 | "goldenrod"  
336 | "gray"  
337 | "grey"  
338 | "green"  
339 | "greenYellow"  
340 | "honeydew"  
341 | "hotPink"  
342 | "indianRed"  
343 | "indigo"  
344 | "ivory"  
345 | "khaki"  
346 3 4 | "lavender"
```



```
435 | "silver"  
436 | "skyBlue"  
437 | "slateBlue"  
438 | "slateGray"  
439 | "slateGrey"
```

```
488 a_CT_Point3D =  
489   attribute x { a_ST_Coordinate },
```

```
541     r_id?,  
542     attribute invalidUrl { xsd:string }?,
```


647 a_CT_ContentPartLocking =


```
753     element ln { a_CT_LineProperties }?,  
754     a_EG_EffectProperties?  
755 a_CT_GvmlUseShapeRectangle = empty  
756 a_CT_GvmlTextShape =  
757     element txBody { a_CT_TextBody },  
    (element useSpRect { a_CT_GvmlUseShapeRectangle }
```


1177 attribute kx { a_ST_FixedAngle }?,


```
| element biLevel { a_CT_BiLevelEffect }
```

1389	"trapezoid"
1390	"nonIsoscelesTrapezoid"
1391	"pentagon"
1392	"hexagon"
1393	"heptagon"
1394	"octagon"
1395	"decagon"
1396	"dodecagon"
1397	"star4"
1398	"star5"
8	"star6"

| "accentBorderCallout1"

1548 | "actionButtonEnd"
1549 | "actionButtonBeginning"
1550 | "actionButtonReturn"
1551 | "actionButtonDocument"
1552 | "actionButtonSound"
1553 | "actionButtonMovie"
1554 | "gear6"
1555 | "gear9"
1556 | "funnel"
1557 | "mathPlus"
1558 | "mathMinus"
1559 | "mathMultiply"
1560 | "mathDivide"
1561 | "mathEqual"
1562 | "mathNotEqual"
1563 | "cornerTabs"
1564 | "squareTabs"
1565 | "plaqueTabs"
1566 | "chartX"
1567 | "chartStar"
1568 | "chartPlus"

a_ST_T48 12.12.12.12.121 0 0 1 3*rtPaTJETpTa(h)3=T1 0 0 1 157.94 710.28 3[(g[(a)3(_qq0 g48.12 463.99 0.48 112.12

1601	"textDeflateInflate"
1602	"textDeflateInflateDeflate"
	"textFadeRight"

1654	a_CT_Path2DLineTo = element pt { a_CT_AdjPoint2D }
1655	a_CT_Path2DArcTo =

1707 a_ST_LineEndType =


```
1919  
1920 ## default value: false  
1921 attribute lastCol { xsd:boolean }?,  
1922  
## default value: false
```



```
a_ST_TextColumnCount =
```


2131 `a_CT_TextBulletColorFollowText = empty`

10 `start = a_tblStyleLst`

B.5.1.1.2 Theme Part

This schema is available in the file `DrawingML_Theme.rnc`.

`include "dml-main.rnc" B.5.1.1.2`

32

```
wp_CT_WrapPath =  
  attribute edited { xsd:boolean }?,
```



```
138 wp_CT_GraphicFrame =  
139     element cNvPr { a_CT_NonVisualDrawingProps },
```

```
10 namespace xdr =  
    ET ET ET ETdr =
```



```
40  element pt { dchrt_CT_NumVal }*,
```



```

146     ## default value: 100%
147     ## default value: 100%
148     ## default value: 100%
149     xsd:unsignedByte { minInclusive = "0" maxInclusive = "240" }
150     dchrt_CT_Perspective =

```

```
199     attribute val { dchrt_ST_Overlap }?  
200 dchrt_ST_BubbleScale =  
201     dchrt_ST_BubbleScalePercent | dchrt_ST_BubbleScaleUInt  
202 dchrt_ST_BubbleScalePercent =  
203     xsd:string {  
        pattern = "0*([0-9])|([1-9][0-9])|([1-2][0-9][0-9])|300)%" 203
```



```
element tx { dchrt_CT_SerTx }?,
```





```
dchrt_CT_Pie3DChart =
```


729 | dchrt_CT_DisUnits =



835 element spPr { a_CT_ShapeProperties }?,


```
1 | include "dml-chart.rnc"
```

```
39     element cNvPr { a_CT_NonVisualDrawingProps },  
40     element cNvPicPr { a_CT_NonVisualPictureProperties }  
41 cdr_CT_Picture =
```

```
92     element relSizeAnchor { cdr_CT_RelSizeAnchor }  
93     | element absSizeAnchor { cdr_CT_AbsSizeAnchor }  
94 cdr_CT_Drawing = cdr_EG_Anchor*
```

B.6.3 DrawingML - Diagrams

This schema is available in the file dml-

```
46  
47     attribute minVer { xsd:string }?,  
48     element title { ddgrm_CT_CTName }*,
```

```

99   attribute parTransId { ddgrm_ST_ModelId }?,
100
101   ## default value: 0
102   attribute sibTransId { ddgrm_ST_ModelId }?,
103   attribute presId { xsd:string }?,
104   element extLst { a_CT_OfficeArtExtensionList }?
105 ddgrm_CT_CxnList = element cxn { ddgrm_CT_Cxn }*
106 ddgrm_CT_DataModel =
107   element ptLst { ddgrm_CT_PtList },
108   element cxnLst { ddgrm_CT_CxnList }?,
109   element bg { a_CT_BackgroundFormatting }?,
   element whole { a_CT_WholeE2oFormattingattrf* 36 698.26 T2

```

```
152 ddgrm_CT_Constraint =  
153     ddgrm_AG_ConstraintAttributes,  
154     ddgrm_AG_ConstraintRefAttributes,  
155  
156     ## default value: none  
157     attribute op { ddgrm_ST_BoolOperator }?,  
158  
     ## default value: 0
```






```
364 | xsd:int
365 | xsd:double
366 | xsd:boolean
367 | xsd:string
368 | ddgrm_ST_ConnectorPoint
369 ddgrm_ST_ModelId = xsd:int | s_ST_Guid
370 ddgrm_ST_PrSetCustVal = s_ST_Percentage | xsd:int
371 ddgrm_CT_ElemPropSet =
372     attribute presAssocID { ddgrm_ST_ModelId }?,
373     attribute presName { xsd:string }?,
374     attribute presStyleLbl { xsd:string }?,
    attribute presStyleIdx { xsd:int }?,
```



```
523 | "root"  
524 | "none"  
5264. T}ddgrm_ST_AxisTypes = list { ddgrm_ST_AxisType* }
```





```
735 ddgrm_ST_FunctionValue =  
736     xsd:int
```

B.6.3.1.3

18 | v_AG_Fill =


```
124 | v_formulas
125 | v_handles
126 | v_fill
    | v_stroke
```

```
177 | v_arc
178 | v_curve
179 | v_image
180 | v_line
181 | v_oval
182 | v_polyline
183 | v_rect
184 | v_roundrect
185 | o_diagram)+
186 v_CT_Background =
187   v_AG_Id,
188   v_AG_Fill,
189   o_bwmode?,
190   o_bwpure?,
191   o_bwnormal?,
```

o_relid?,


```
336     v_EG_ShapeElements*
337     v_CT_Image =
338         v_AG_AllCoreAttributes,
339         v_AG_AllShapeAttributes,
340         v_AG_ImageAttributes,
```

```
| string "thickThin"
```

```
25  ## default value: straight
26  attribute o:connectortype { o_ST_ConnectorType }
    o_button = attribute o:button { s_ST_TrueFalse }
```

78

o_CT_ShapeDefaults =

49.88

TJ(iQBTAG1BX0,Tf1 0 0 1 36 698.14 Tm 0)) TJET49.78] TJ48.12 694.184.9 12.12 ref33.7/F11 9 Tf1 0 0 1 54 686742 710 g -0.03 TTJ6

attribute spidmax { x9(h)3t465t463(d)n(t)3(r)-9(D)g(e)3(f)r()3((D)}()?()] TJETBT1 0 0 1 10237.1786.14 Tm 0)

v_AG_Ext, 1499

```
343 string "544,376"  
344 | string "640,480"  
345 | string "720,512"  
346 | string "800,600"  
347 | string "1024,768"  
    | string "1152,862"
```




|

```
| element ScriptText { xsd:string }
```

```
7  include "dml-lockedCanvas.rnc"  
8  include "any.rnc"  
9  include "dml-chart.rnc"  
10 include "dml-chartDrawing.rnc"  
    include "dml-picture.rnc" -
```



```
60 | o_top  
61 | o_right
```


83 `element e { m_CT_OMathArg }`



B.8.3.1 Part Schemas

B.8.3.1.1 Custom File Properties Part

This schema is available in the file Shared_Custom_File_Properties.rnc.

```
1 include "shared-documentPropertiesCustom.rnc"  
2 include "shared-documentPropertiesVariantTypes.rnc"  
3 include "shared-commonSimpleTypes.rnc"
```

```
| string "ui1"
```

| vt_r8

ECMA-

```
1 | include "shared-customXmlDataProperties.rnc"  
  | include "shared-
```

```
46 | element Counsel { shrdBib_CT_NameType }  
47 | element Director { shrdBib_CT_NameType }  
   | element Editor { shrdBib_CT_NameType }
```

```
99 | element Tag { s_ST_String }
100 | element Theater { s_ST_String }
101 | element ThesisType { s_ST_String }
102 | element Title { s_ST_String }
103 | element Type { s_ST_String }
104 | element URL { s_ST_String }
105 | element Version { s_ST_String }
106 | element Volume { s_ST_String }
107 | element Year { s_ST_String }
108 | element YearAccessed { s_ST_String })*
1091] T
```

```
14 | string "gregorianMeFrench"
15 | string "gregorianArabic"
16 | string "hijri"
17 | string "hebrew"
18 | string "taiwan"
19 | string "japan"
20 | string "thai"
21 | string "korea"
22 | string "saka"
```




- ¶ The ST_JcTable simple type (Part 1, §17.18.45) was added
- ¶ The ST_LangCode simple type was removed
- ¶ The ST_MailMergeDataType simple type (Part 1, §17.18.54) was modified to allow any xsd:string
- ¶ The ST_ObjectDrawAspect simple type (Part 1, §17.18.60) was added
- ¶ The ST_ObjectUpdateMode simple type (Part 1, §17.18.61) was added
- ¶ The ST_StyleSort simple type (Part 1, §17.18.82) was added
- ¶ The ST_UnqualifiedPercentage simple type (§14.11.10)

¶ The content model of ST_PositiveFixedPercentage

