


# /npm install express ejs





```
C:\WINDOWS\system32\cmd.exe
                                                                                        ×
D:\marcelomos\laboratorios>mkdir registro-express-ejs-nodejs
D:\marcelomos\laboratorios>cd registro-express-ejs-nodejs
D:\marcelomos\laboratorios\registro-express-ejs-nodejs>npm init --yes
Wrote to D:\marcelomos\laboratorios\registro-express-ejs-nodejs\package.json:
  "name": "registro-express-ejs-nodejs",
"version": "1.0.0",
"description": "",
  "main": "index.js",
"scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
"keywords": [],
"author": "",
"license": "ISC"
D:\marcelomos\laboratorios\registro-express-ejs-nodejs>_
 C:\WINDOWS\system32\cmd.exe
                                                                                         ×
                                                                                                 ۸
D:\marcelomos\laboratorios\registro-express-ejs-nodejs>npm install express ejs
            created a lockfile as package-lock.json. You should commit this file.
npm WARN registro-express-ejs-nodejs@1.0.0 No description
npm WARN registro-express-ejs-nodejs@1.0.0 No repository field.
+ ejs@2.6.1
+ express@4.16.4
added 49 packages from 38 contributors and audited 122 packages in 14.036s
found 0 vulnerabilities
D:\marcelomos\laboratorios\registro-express-ejs-nodejs>
```

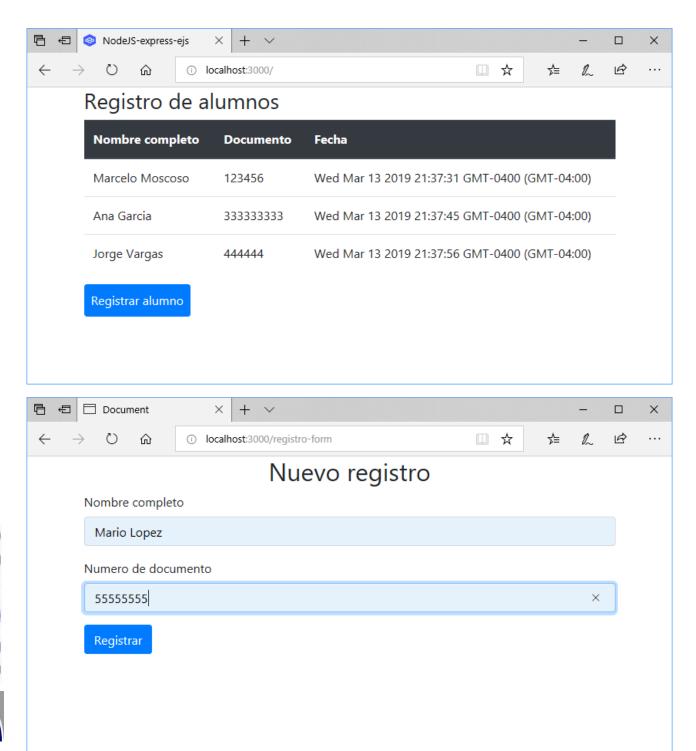

```
<u>File Edit Selection View Go Debug Terminal Help</u>
                                                                          package.json - registro-express-ejs-nodejs - Visual Studio Code
        EXPLORER
                                            {} package.json ×
0
      DOPEN EDITORS
                                                       "name": "registro-express-ejs-nodejs",
      ▲ REGISTRO-EXPRESS-EJS-NODEJS
                                                      "version": "1.0.0",
        node_modules
                                                      "description": "",
        "main": "index.js",
         "scripts": {
          Js index.js
                                                        "test": "echo \"Error: no test specified\" && exit 1",
⑻
                                                         "start": "node src/index.js"

✓ views

         index.ejs
                                                       "keywords": [],
registro-form.ejs
                                                      "author": "",
"license": "ISC",
"dependencies": [
         JS index.js
       package-lock.json
       {} package.json
                                                        "ejs": "^2.6.1",
                                                         "express": "^4.16.4"
```

### /src/index.js

```
const express = require('express');
const path = require('path');
// initializations
const app = express();
// settings
app.set('port', process.env.PORT || 3000);
app.set('views',path.join(__dirname,'views'));
app.set('view engine','ejs');
// middlewares
app.use(express.urlencoded({extended: false}));
app.use(express.json());
// routes
app.use(require('./rutas/index'));
// Start the server
app.listen(app.get('port'), () => {
    console.log("Server escuchando ", app.get('port'))
})
```



## /src/rutas/index.js

```
const { Router } = require('express');
const router = new Router();
let alumnos = [];
router.get("/", (req, res) => {
    res.render("index", { alumnos });
});
router.get('/registro-form', (req, res) => {
    res.render('registro-form');
});
router.post('/registro-form', (req, res) => {
    let { nombre, documento } = req.body;
    let nuevoRegistro = { nombre, documento, fecha: new Date() };
    alumnos.push(nuevoRegistro);
    res.redirect("/");
});
module.exports = router;
```



### /src/views/index.ejs

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <meta http-equiv="X-UA-Compatible" content="ie=edge">
   <link rel="stylesheet" href="https://stackpath.bootstra-</pre>
pcdn.com/bootstrap/4.3.1/css/bootstrap.min.css"
       integrity="sha384-
ggOyR0iXCbMQv3Xipma34MD+dH/1fQ784/j6cY/iJTQUOhcWr7x9JvoRxT2MZw1T"
        crossorigin="anonymous">
   <title>NodeJS-express-ejs</title>
</head>
<body>
   <div class="container">
       <h3>Registro de alumnos</h3>
       <%if (alumnos.length) {%>
       <thead class="thead-dark">
              Nombre completoDocumento
                  Fecha
              </thead>
           <% alumnos.forEach(function(alumno) { %>
              <%= alumno.nombre %><%= alumno.documento %>
              <%= alumno.fecha %>
           <%})%>
       <%} else {%>
       Sin registros
       <%}%>
       <a class="btn btn-primary p-2" href="/registro-form">Registrar alumno</a>
       </div>
</body>
</html>
```



## /src/views/registro-form.ejs

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta http-equiv="X-UA-Compatible" content="ie=edge">
    <link rel="stylesheet" href="https://stackpath.bootstra-</pre>
pcdn.com/bootstrap/4.3.1/css/bootstrap.min.css"
        integrity="sha384-
ggOyR0iXCbMQv3Xipma34MD+dH/1fQ784/j6cY/iJTQU0hcWr7x9JvoRxT2MZw1T" crossori-
gin="anonymous">
    <title>Document</title>
</head>
<body>
    <div class="container">
        <div class="col-xs-8 col-xs-offset-2">
            <h2 class="text-center">Nuevo registro</h2>
            <form method="post" role="form">
                <div class="form-group">
                    <label for="nombre">Nombre completo</label>
                    <input name="nombre" type="text" class="form-control"</pre>
                     placeholder="Nombre completo">
                </div>
                <div class="form-group">
                    <label for="documento">Numero de documento</label>
                    <input name="documento" type="text" class="form-control"</pre>
                    placeholder="Numero de documento" >
                </div>
                <div class="form-group">
                      <button class="btn btn-primary">Registrar/button>
                </div>
            </form>
        </div>
    </div>
</body>
</html>
```

node

# / Inpm start