


ISI-MAC corner-rate: SCT vs NPD vs NCG
 $h=0.3$, SNR=6 dB, Class C

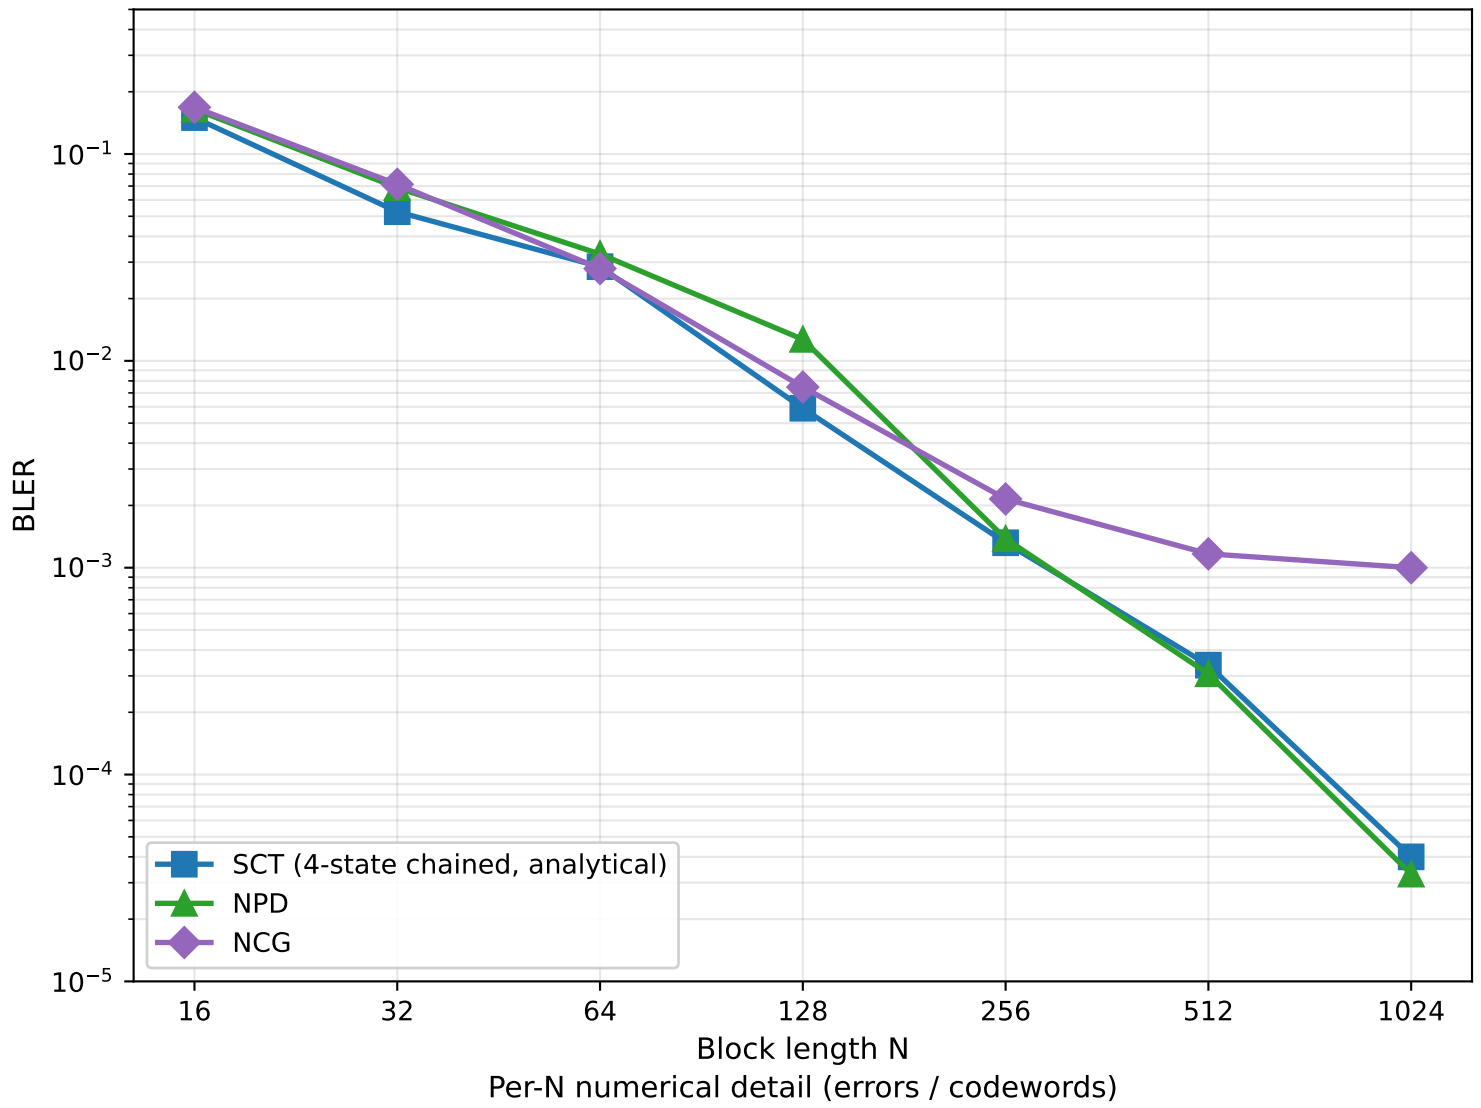

N	SCT BLER	SCT errs/CW	NPD BLER	NPD errs/CW	NCG BLER	NCG errs/CW
16	0.15	4,500 / 30,000	0.16472	16,472 / 100,000	0.16817	5,045 / 30,000
32	0.0526	1,578 / 30,000	0.06873	6,873 / 100,000	0.0714	2,142 / 30,000
64	0.02853	856 / 30,000	0.03284	1,642 / 50,000	0.02793	838 / 30,000
128	0.0059	177 / 30,000	0.0127	637 / 50,000	0.00747	224 / 30,000
256	0.00132	66 / 50,000	0.00138	69 / 50,000	0.00215	43 / 20,000
512	0.000338	27 / 80,000	0.000307	92 / 300,000	0.001167	35 / 30,000
1024	4e-05	2 / 50,000	3.3e-05	20 / 600,000	0.001	1 / 1,000

NCG numbers: $N \leq 128$ from native $N=128$ trained ckpt (truncated to smaller N), $N=256$ truncated from $N=128$, $N=512$ from iter15000 trained ckpt (warm-started from $N=128$), $N=1024$ from iter4000 trained ckpt (warm-started from $N=512$; training continues, only 1 error in 1K CW — very noisy).