

Flag 1 – Prepare Your Environment

Objective: Install Node.js.

Screenshot:

- The command/The installer required for installing Node.js
- Run :
node -v
npm -v

Download Node.js®

Get Node.js® v24.18.0 LTS for Windows using Docker with npm

Info Want new features sooner? Get the [latest Node.js version](#) instead and try the latest improvements!

```
1 # Docker has specific installation instructions for each operating system.
2 # Please refer to the official documentation at https://docker.com/get-started/
3
4 # Pull the Node.js Docker image:
5 docker pull node:24-slim
6
7 # Create a Node.js container and start a Shell session:
8 docker run -it --rm --entrypoint sh node:24-slim
9
10 # Verify the Node.js version:
11 node -v # Should print "v24.18.0".
12
13 # Verify npm version:
14 npm -v # Should print "11.16.0".
```

PowerShell

[Copy to clipboard](#)

Docker is a containerization platform. If you encounter any issues please visit [Docker's website](#)

Or get a prebuilt Node.js® for Windows running a x64 architecture.

[Windows Installer \(.msi\)](#)

[Standalone Binary \(.zip\)](#)

```
C:\Windows\system32\cmd.e. x + v
Microsoft Windows [Version 10.0.26200.8875]
(c) Microsoft Corporation. All rights reserved.


C:\Users\nielj>node -v
v24.18.0
```

Flag 2 — Unlock the Forge

Objective: Install Angular CLI.

Screenshot:

- The command to install the CLI
- Then run:
ng version

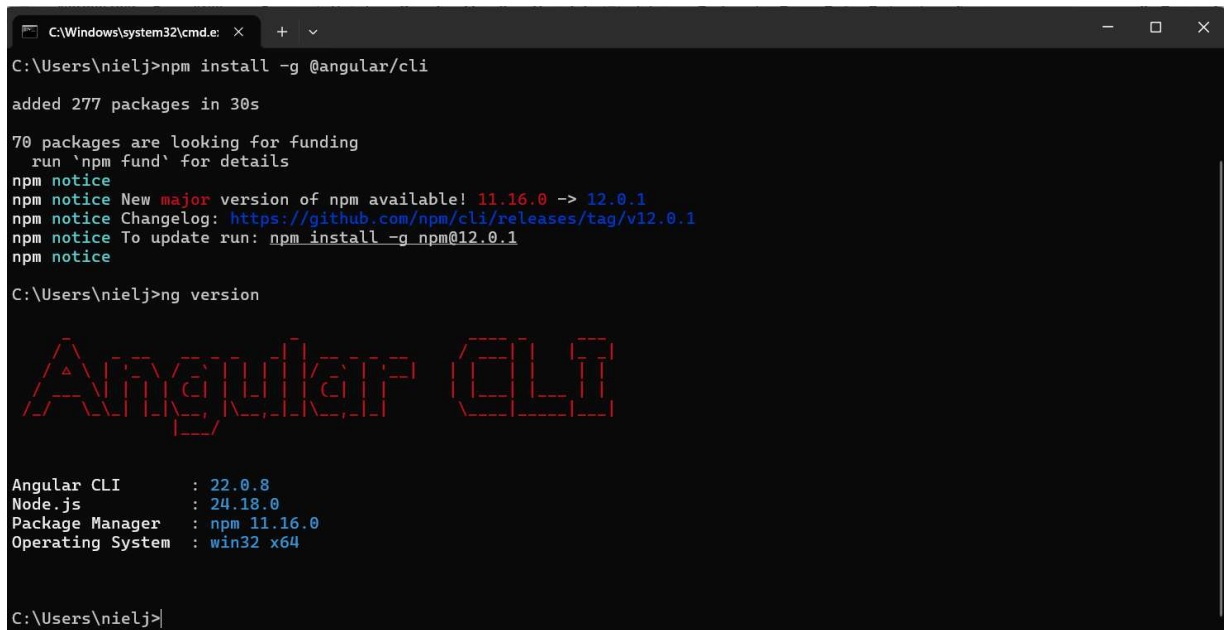

```
C:\Windows\system32\cmd.exe: X + v
C:\Users\nielj>npm install -g @angular/cli
added 277 packages in 30s

70 packages are looking for funding
  run `npm fund` for details
npm notice
npm notice New major version of npm available! 11.16.0 -> 12.0.1
npm notice Changelog: https://github.com/npm/cli/releases/tag/v12.0.1
npm notice To update run: npm install -g npm@12.0.1
npm notice
C:\Users\nielj>ng version

Angular CLI
Node.js
Package Manager
Operating System

Angular CLI      : 22.0.8
Node.js         : 24.18.0
Package Manager : npm 11.16.0
Operating System: win32 x64


C:\Users\nielj>
```

Flag 3 — Forge Your Project

Objective: Create your first Angular project.

Screenshot:

- The command to create the project

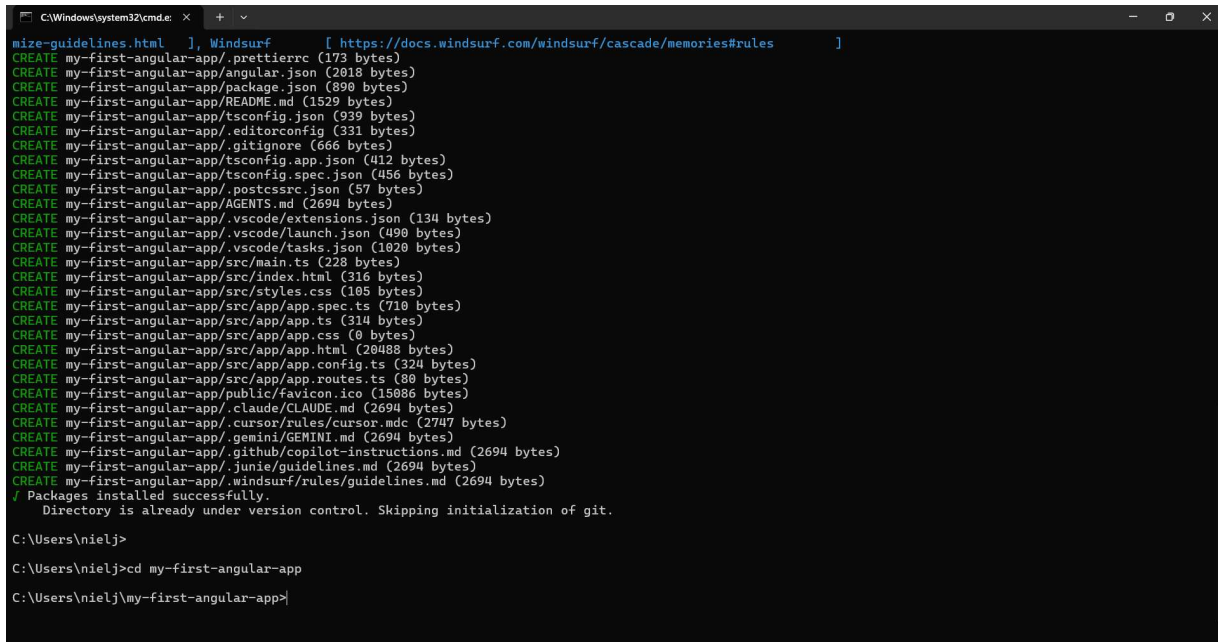

```
C:\Windows\system32\cmd.exe: X + v
mize-guidelines.html ], Windsurf [ https://docs.windsurf.com/windsurf/cascade/memories#rules ]
CREATE my-first-angular-app/.prettierrc (173 bytes)
CREATE my-first-angular-app/angular.json (2018 bytes)
CREATE my-first-angular-app/package.json (890 bytes)
CREATE my-first-angular-app/README.md (1529 bytes)
CREATE my-first-angular-app/tsconfig.json (939 bytes)
CREATE my-first-angular-app/.editorconfig (331 bytes)
CREATE my-first-angular-app/.gitignore (666 bytes)
CREATE my-first-angular-app/tsconfig.app.json (412 bytes)
CREATE my-first-angular-app/tsconfig.spec.json (456 bytes)
CREATE my-first-angular-app/.postcssrc.json (57 bytes)
CREATE my-first-angular-app/AGENTS.md (2694 bytes)
CREATE my-first-angular-app/.vscode/extensions.json (134 bytes)
CREATE my-first-angular-app/.vscode/launch.json (490 bytes)
CREATE my-first-angular-app/.vscode/tasks.json (1020 bytes)
CREATE my-first-angular-app/src/main.ts (228 bytes)
CREATE my-first-angular-app/src/index.html (316 bytes)
CREATE my-first-angular-app/src/styles.css (105 bytes)
CREATE my-first-angular-app/src/app/app.spec.ts (710 bytes)
CREATE my-first-angular-app/src/app/app.ts (314 bytes)
CREATE my-first-angular-app/src/app/app.css (0 bytes)
CREATE my-first-angular-app/src/app/app.html (20488 bytes)
CREATE my-first-angular-app/src/app/app.config.ts (324 bytes)
CREATE my-first-angular-app/src/app/app.routes.ts (80 bytes)
CREATE my-first-angular-app/public/favicon.ico (15086 bytes)
CREATE my-first-angular-app/.claude/CLAUDE.md (2694 bytes)
CREATE my-first-angular-app/.cursor/rules/cursor.mdc (2747 bytes)
CREATE my-first-angular-app/.gemini/GEMINI.md (2694 bytes)
CREATE my-first-angular-app/.github/copilot-instructions.md (2694 bytes)
CREATE my-first-angular-app/.junie/guidelines.md (2694 bytes)
CREATE my-first-angular-app/.windsurf/rules/guidelines.md (2694 bytes)
/ Packages installed successfully.
Directory is already under version control. Skipping initialization of git.


C:\Users\nielj>
C:\Users\nielj>cd my-first-angular-app
C:\Users\nielj\my-first-angular-app>
```

Flag 4 — Power Up

Objective: Open the project in VS Code.

Screenshot:

- Your VS Code containing the new project

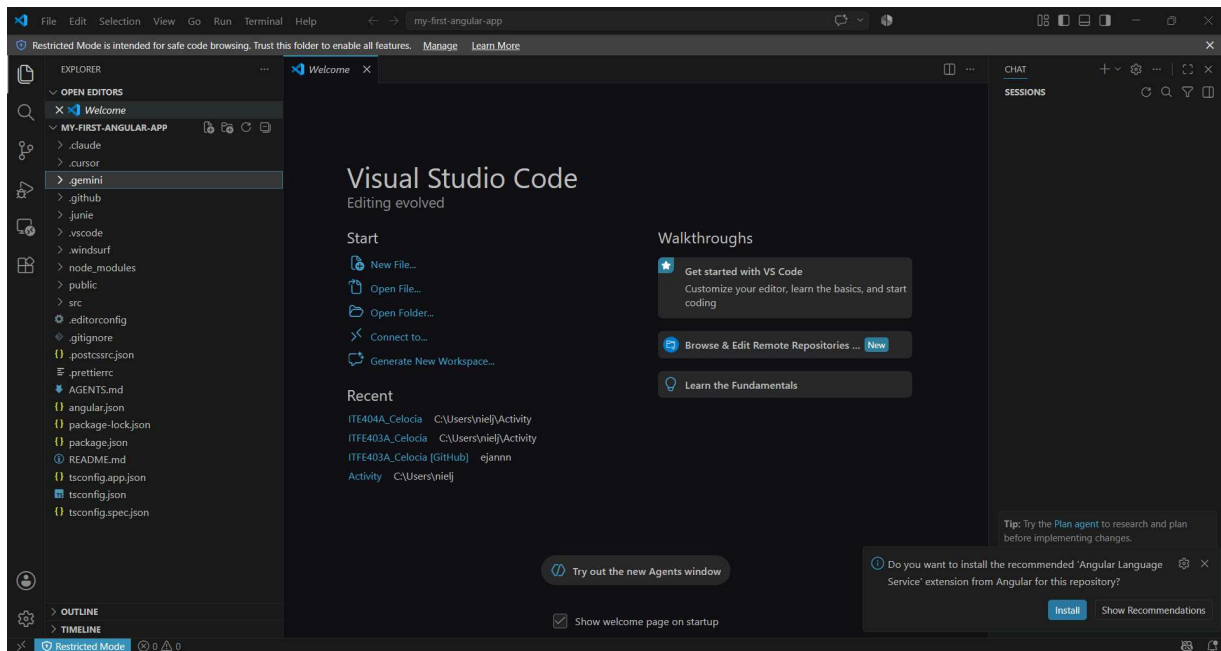


Flag 5 — Launch

Objective: Run the development server.

Screenshot:

- The command to run the development server
- The success message

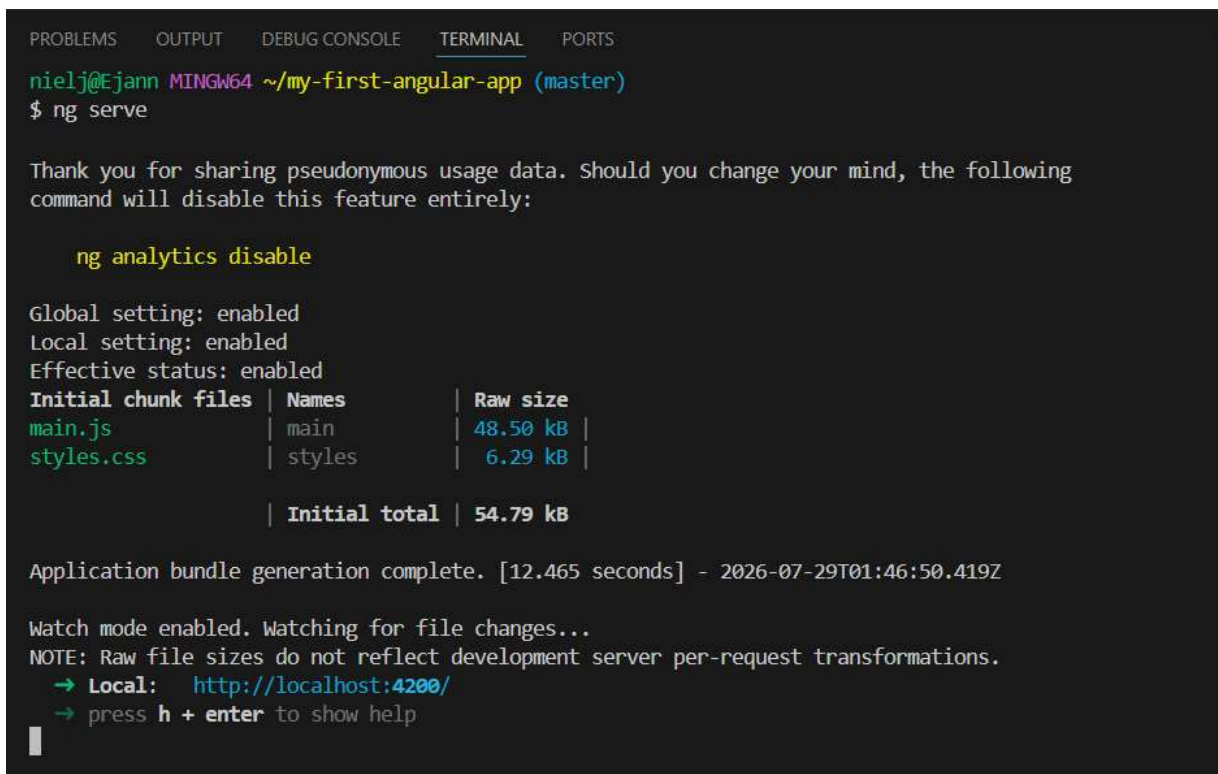

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
nielj@Ejann MINGW64 ~/my-first-angular-app (master)
$ ng serve

Thank you for sharing pseudonymous usage data. Should you change your mind, the following
command will disable this feature entirely:

  ng analytics disable

Global setting: enabled
Local setting: enabled
Effective status: enabled
Initial chunk files | Names      | Raw size
main.js             | main       | 48.50 kB |
styles.css          | styles     | 6.29 kB  |

| Initial total | 54.79 kB

Application bundle generation complete. [12.465 seconds] - 2026-07-29T01:46:50.419Z


Watch mode enabled. Watching for file changes...
NOTE: Raw file sizes do not reflect development server per-request transformations.
→ Local: http://localhost:4200/
→ press h + enter to show help
```

Flag 6 — I See It

Objective: Open the application.

Screenshot:

- The browser
- The port it opened

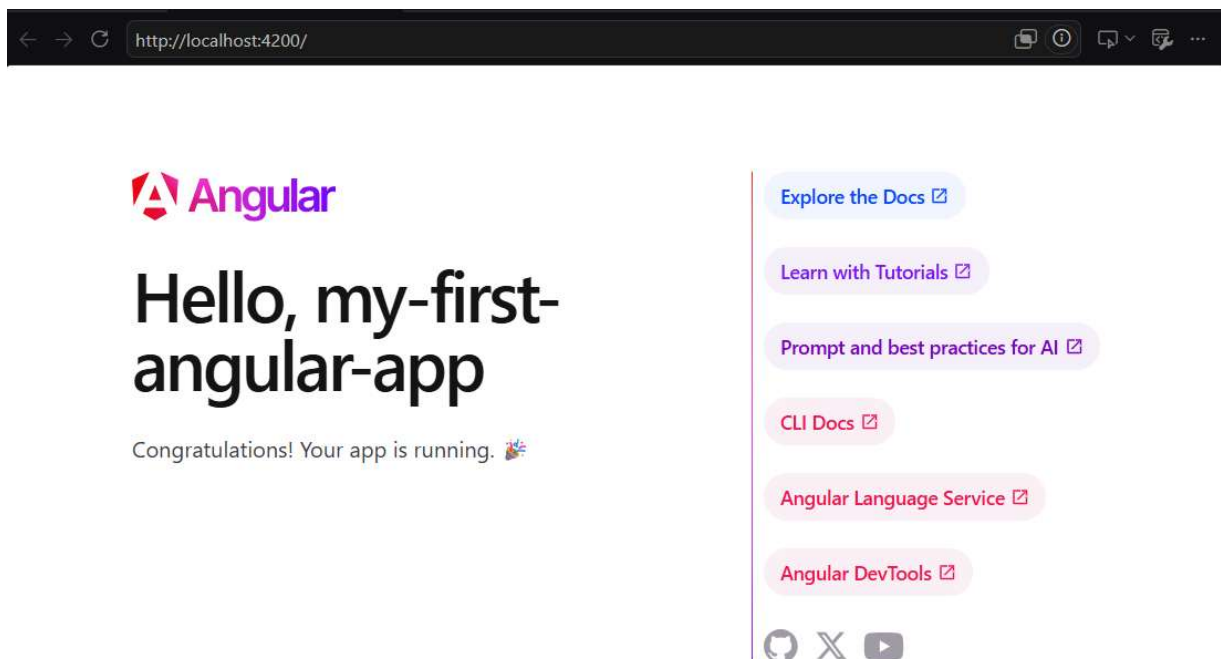


Flag 7 – Find the Entry Point

Objective: Figure out where the default Angular page comes from.

Screenshot:

- The location of the file where the default page is from

From the src/app/app.html

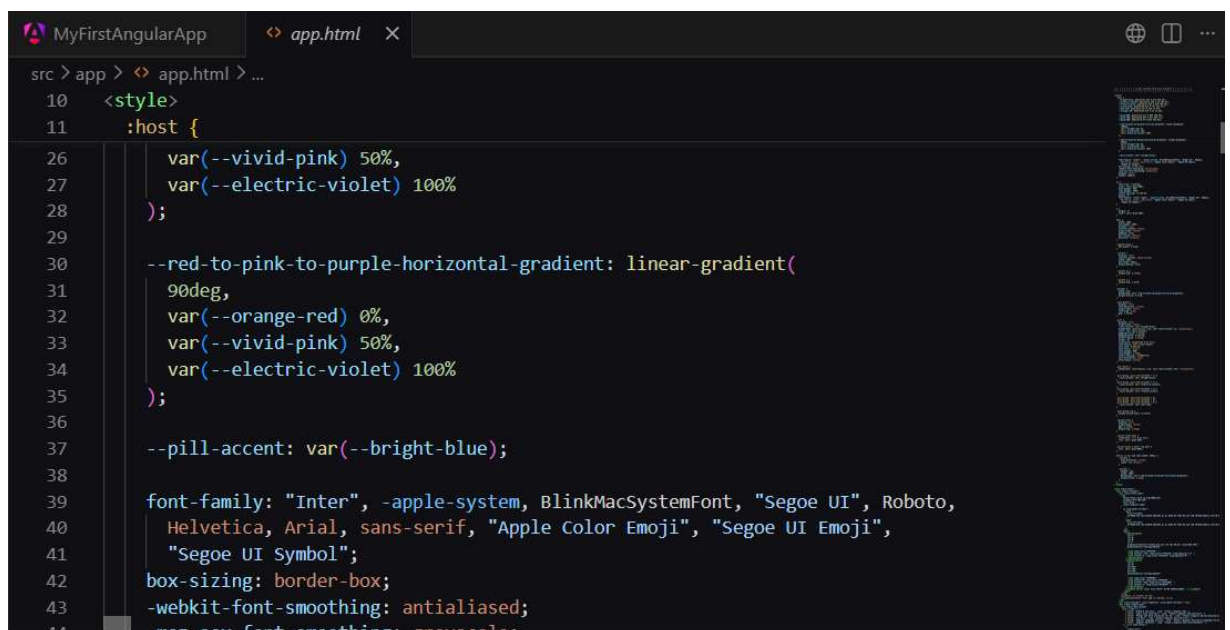

```
MyFirstAngularApp  app.html x
src > app > app.html > ...
10 <style>
11 :host {
26     var(--vivid-pink) 50%,
27     var(--electric-violet) 100%
28 };
29
30 --red-to-pink-to-purple-horizontal-gradient: linear-gradient(
31     90deg,
32     var(--orange-red) 0%,
33     var(--vivid-pink) 50%,
34     var(--electric-violet) 100%
35 );
36
37 --pill-accent: var(--bright-blue);
38
39 font-family: "Inter", -apple-system, BlinkMacSystemFont, "Segoe UI", Roboto,
40     Helvetica, Arial, sans-serif, "Apple Color Emoji", "Segoe UI Emoji",
41     "Segoe UI Symbol";
42 box-sizing: border-box;
43 -webkit-font-smoothing: antialiased;
44 moz-osx-font-smoothing: grayscale;
```


Flag 8 – Claim Your App

Replace the default content with:

- Your full name
- Your course & section
- "My First Angular Application"
- Today's date

Screenshot:

- Your updated content of the code
- The updated browser UI

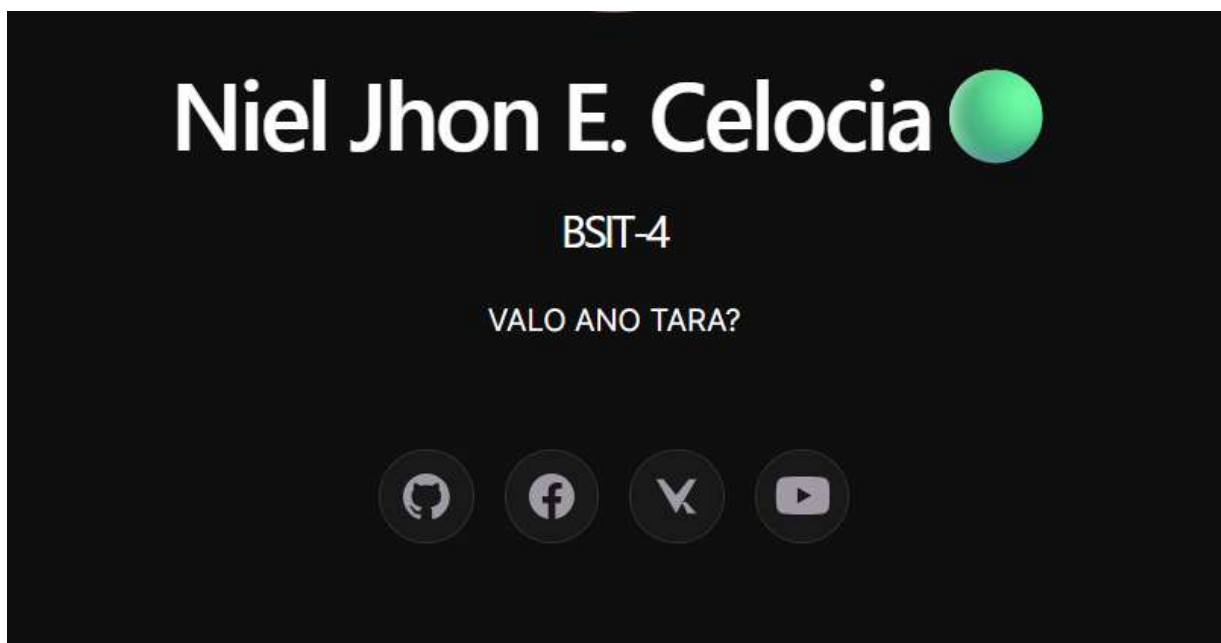

Flag 9 – Personalize It

Without following a step-by-step tutorial, make **at least three** visual changes by researching how.


Examples:

- Change the background colour.
- Change the text colour.
- Centre the content.
- Increase font size.
- Add a border or rounded card.

- Change the font.
- Add an emoji or icon.


Screenshot:

- The code changed for personalizing
- The updated browser UI

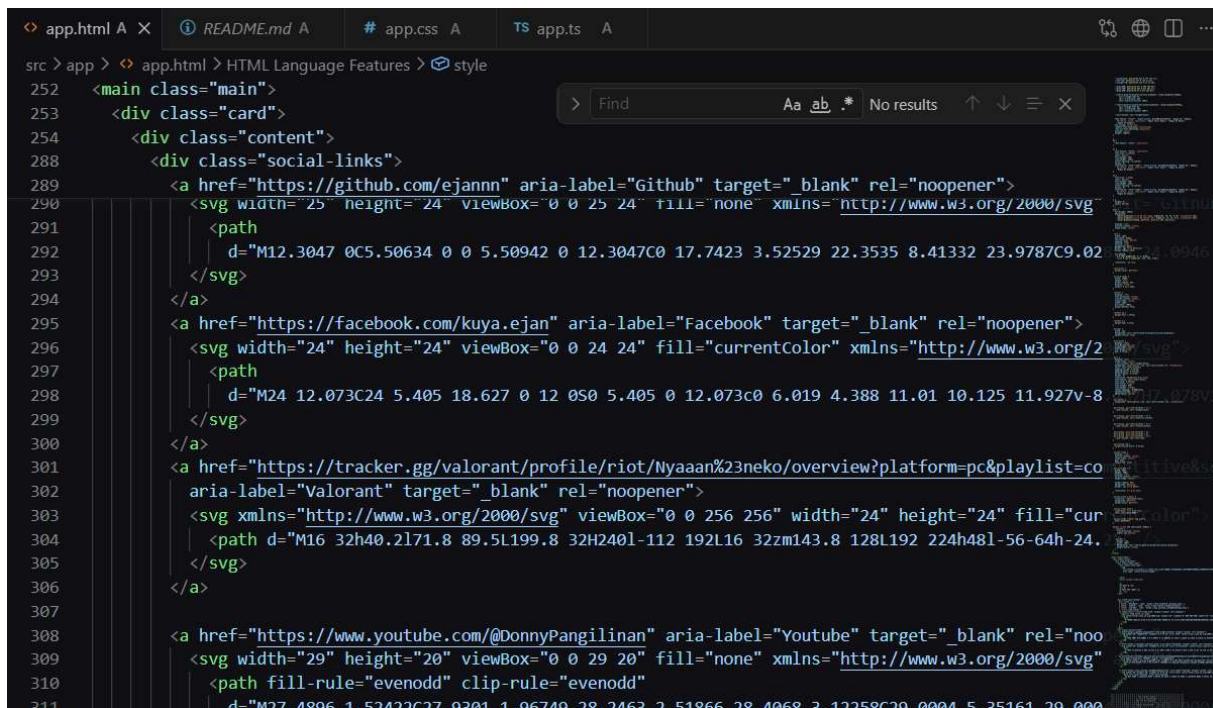A screenshot of a code editor with a dark theme. The editor shows a file named 'app.html' with the following HTML code:

```
src > app > app.html > HTML Language Features > style
252 <main class="main">
253   <div class="card">
254     <div class="content">
288       <div class="social-links">
289         <a href="https://github.com/ejannn" aria-label="Github" target="_blank" rel="noopener">
290           <svg width="25" height="24" viewBox="0 0 25 24" fill="none" xmlns="http://www.w3.org/2000/svg">
291             <path
292               d="M12.3047 0C5.50634 0 0 5.50942 0 12.3047C0 17.7423 3.52529 22.3535 8.41332 23.9787C9.02
293             </svg>
294           </a>
295         <a href="https://facebook.com/kuya.ejan" aria-label="Facebook" target="_blank" rel="noopener">
296           <svg width="24" height="24" viewBox="0 0 24 24" fill="currentColor" xmlns="http://www.w3.org/2000/svg">
297             <path
298               d="M24 12.073C24 5.405 18.627 0 12 0S0 5.405 0 12.073c0 6.019 4.388 11.01 10.125 11.927v-8
299             </svg>
300           </a>
301         <a href="https://tracker.gg/valorant/profile/riot/Nyaaan%23neko/overview?platform=pc&playlist=co
302           aria-label="Valorant" target="_blank" rel="noopener">
303           <svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 256 256" width="24" height="24" fill="cur
304             <path d="M16 32h40.2171.8 89.51199.8 32H240l-112 192L16 32zm143.8 128L192 224h48l-56-64h-24.
305             </svg>
306           </a>
307
308         <a href="https://www.youtube.com/@DonnyPangilinan" aria-label="Youtube" target="_blank" rel="noo
309           <svg width="29" height="20" viewBox="0 0 29 20" fill="none" xmlns="http://www.w3.org/2000/svg">
310             <path fill-rule="evenodd" clip-rule="evenodd"
311               d="M27.4896 1.52422C27.9301 1.96749 28.2463 2.51866 28.4068 3.12258C29.0004 5.35161 29.000
```

The editor interface includes a top bar with file tabs for 'app.html', 'README.md', 'app.css', and 'app.ts'. A search bar on the right shows 'Find' with 'No results'. The right sidebar displays a file explorer and a list of files.

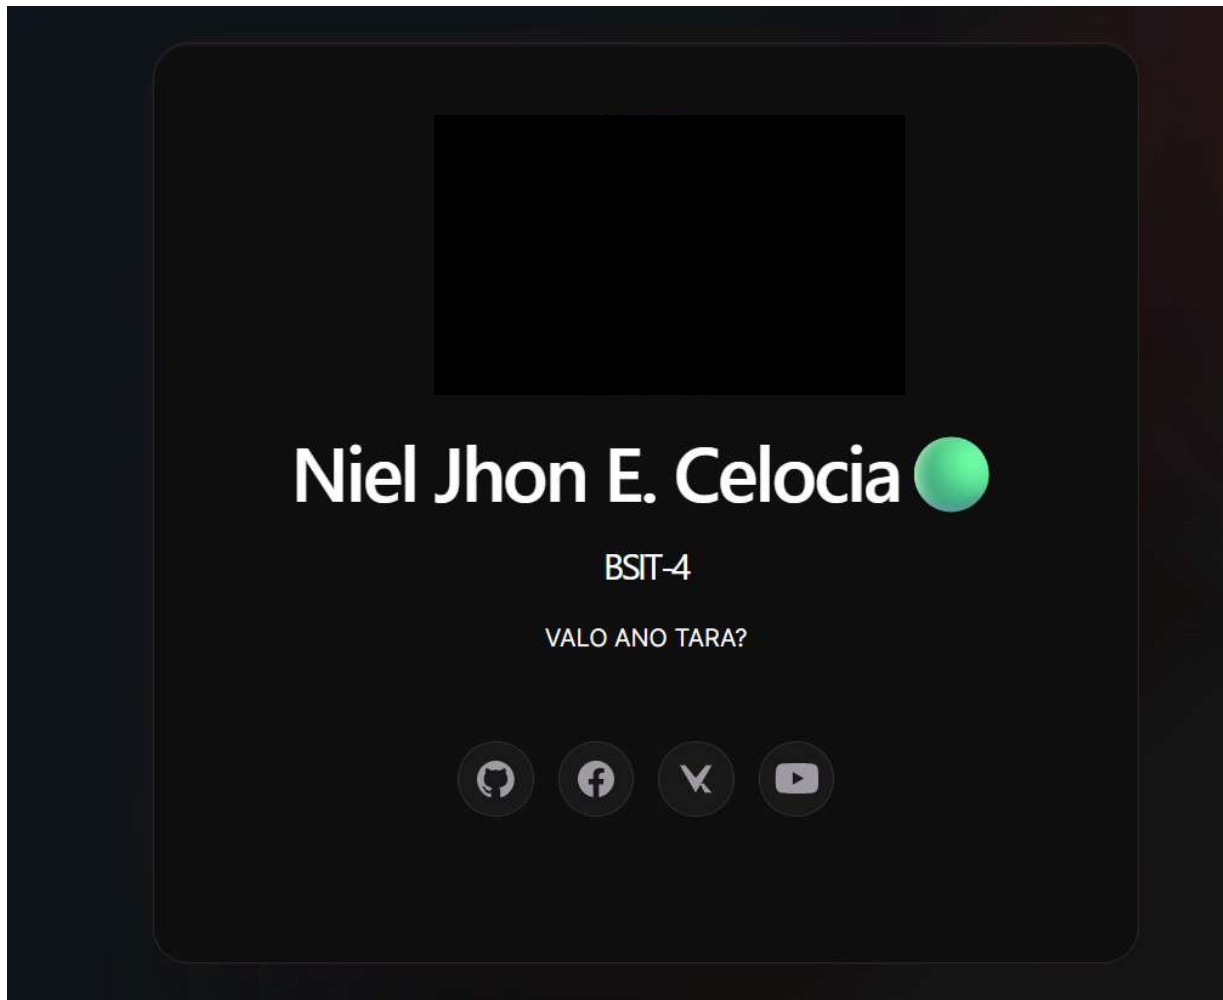

Flag 10 – Add an Image

Research how to display an image in Angular.

It can be:

- Your favourite programming logo.
- Your favourite animal.
- Your own avatar.
- Any royalty-free image.

Screenshot:

- The code changed when adding an image
- The updated

