

# CTF 6 — Active or Inactive?

Goal: Display different UI depending on a student's status using Angular's conditional rendering.

## School Request

"Some students are inactive."

Today's mission introduces `*ngIf`, one of Angular's most important directives. Instead of showing everything all the time, your Student Portal should decide what appears based on data.

You'll also prepare your app for real-world situations like empty lists and loading screens.

## Flag 1 — Prepare Your Mission


Objective: Create a new branch for today's challenge.

Create and switch to a new Git branch.

Branch name:

`feature/conditional-ui`

Screenshot:

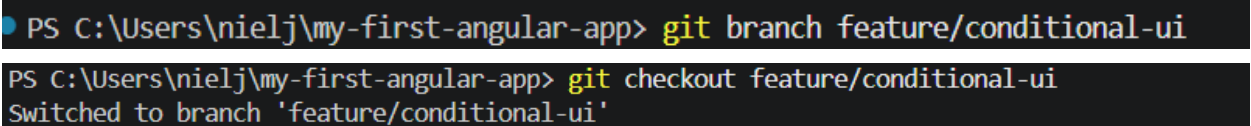- The command used to create and switch to the new branch.
- A terminal window showing the execution of two Git commands. The first command is 'git branch feature/conditional-ui' and the second is 'git checkout feature/conditional-ui'. The output shows the branch was created and the user was switched to it.
- Switched to branch 'feature/conditional-ui'

## Flag 2 — Give Students a Status

Objective: Add an `active` property to every student.

Each student object should now include a boolean status.

Example idea:

- true
- false

Make sure some students are active while others are inactive.

Screenshot:

- Your student data showing the new **active** property.

```
export class Students {
  students: { firstName: string; middleName: string; lastName: string; Course: string; YearLevel: string; isActive: boolean; isFavorited: boolean }[] = [
    { firstName: 'Juan', middleName: 'Dela', lastName: 'Cruz', Course: 'BSIT', YearLevel: '2nd Year', isActive: (property) isActive: boolean },
    { firstName: 'Maria', middleName: 'Santos', lastName: 'Reyes', Course: 'BSCS', YearLevel: '3rd Year', isActive: false, isFavorited: false },
    { firstName: 'Pedro', middleName: 'Gonzales', lastName: 'Lopez', Course: 'BSIT', YearLevel: '1st Year', isActive: false, isFavorited: false },
    { firstName: 'Niel', middleName: 'Jhon', lastName: 'Celocia', Course: 'BSIT', YearLevel: '4th Year', isActive: true, isFavorited: false },
  ]
}
```

## Flag 3 — Reveal Active Students


Objective: Display an "Active" badge only for active students.

Use Angular's **\*ngIf** directive.

Hint: The badge should only appear when a student's status is **true**.

Screenshot:

- An active student displaying the badge.

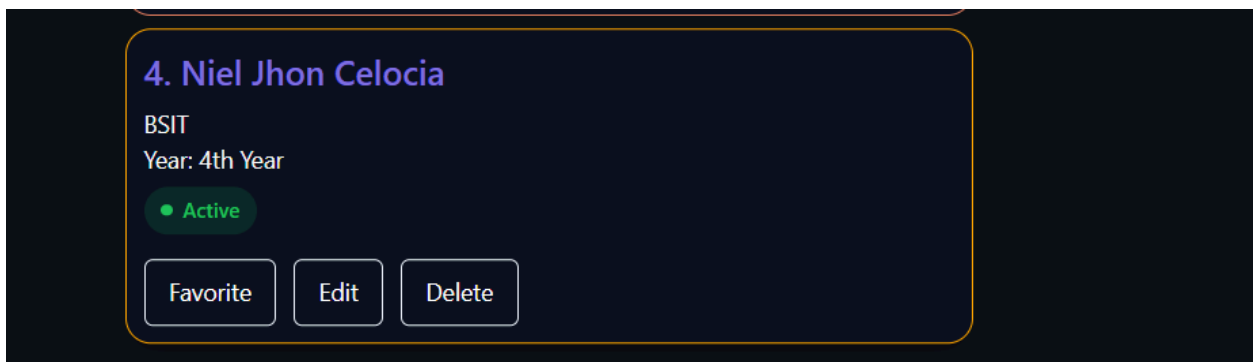

## Flag 4 — Expose Inactive Students

Objective: Show a different badge for inactive students.


If a student isn't active, display something like:

- Inactive
- Disabled
- Offline

Use Angular's `else` template with `*ngIf`.

Screenshot:

- One active student.
- 
- One inactive student.

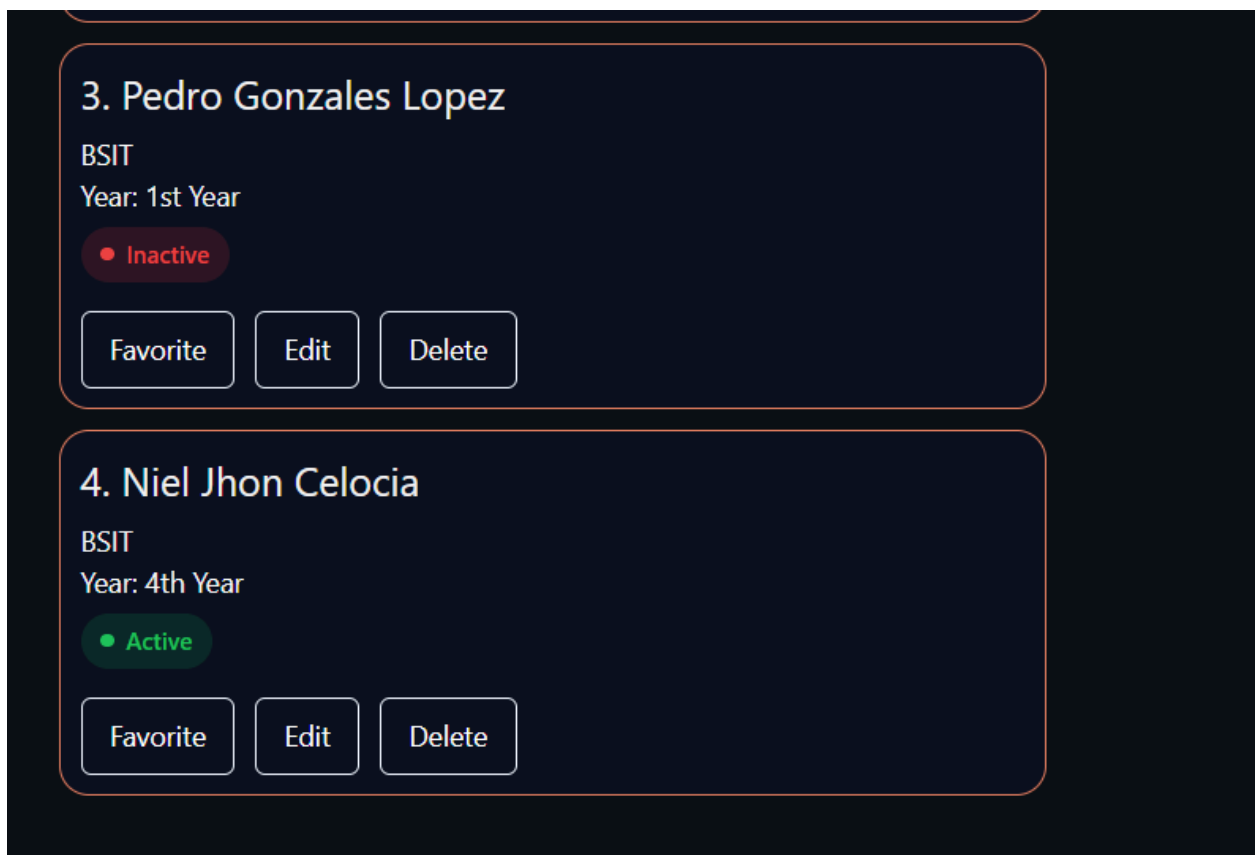

## Flag 5 — Lock Inactive Actions

Objective: Prevent inactive students from using actions.

Choose one action button such as:


- Edit
- Favorite
- Delete

Only show or enable that button when the student is active.

Hint: `*ngIf` can hide elements completely.

Screenshot:

- Active student with the button visible.
- 
- Inactive student with the button hidden or disabled.

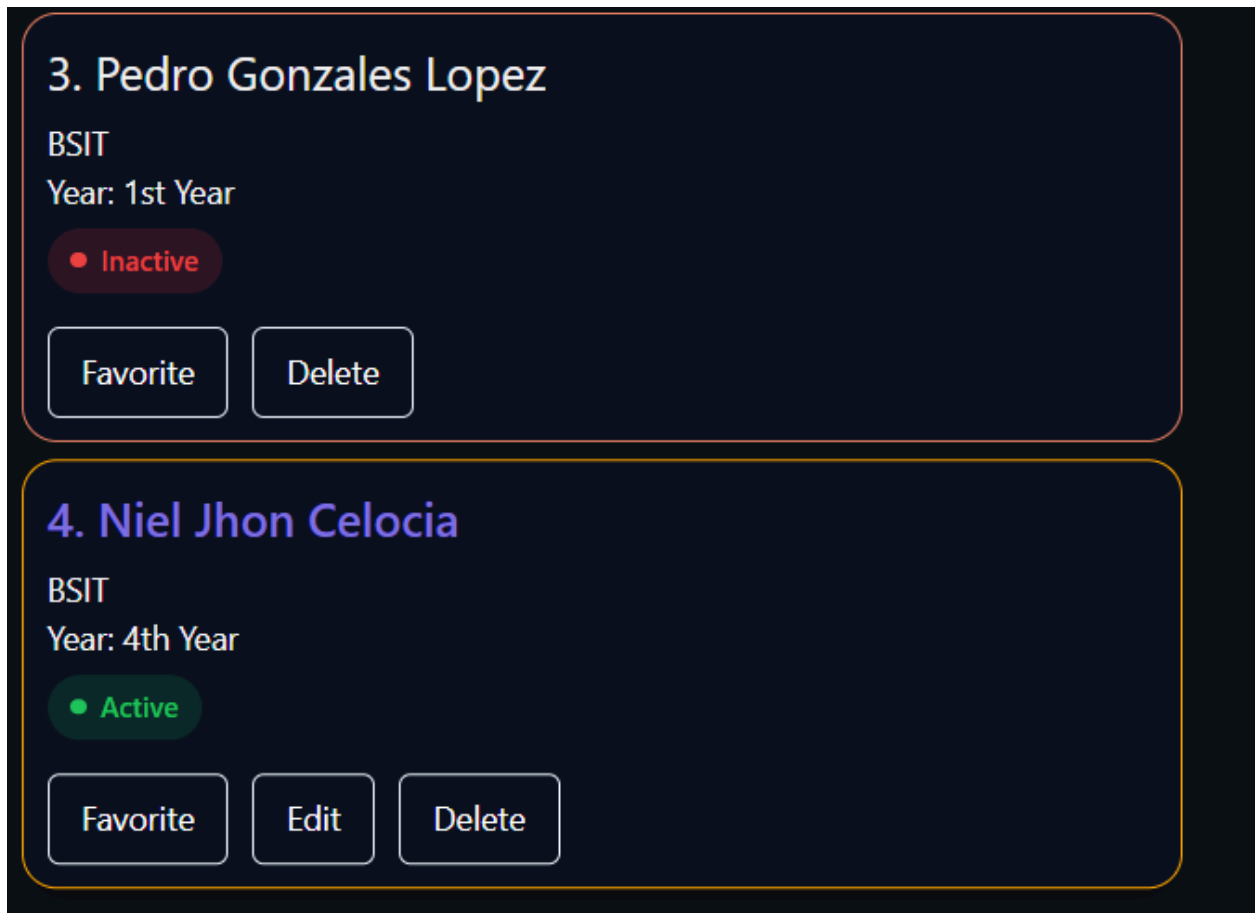

## Flag 6 — Build an Empty State

Objective: Prepare for when there are no students.

If the student list becomes empty, display a friendly message instead of blank space.

Example ideas:


No students found.

Add your first student.


Hint: Check the array's length with `*ngIf`.

Screenshot:

- Student list before becoming empty.

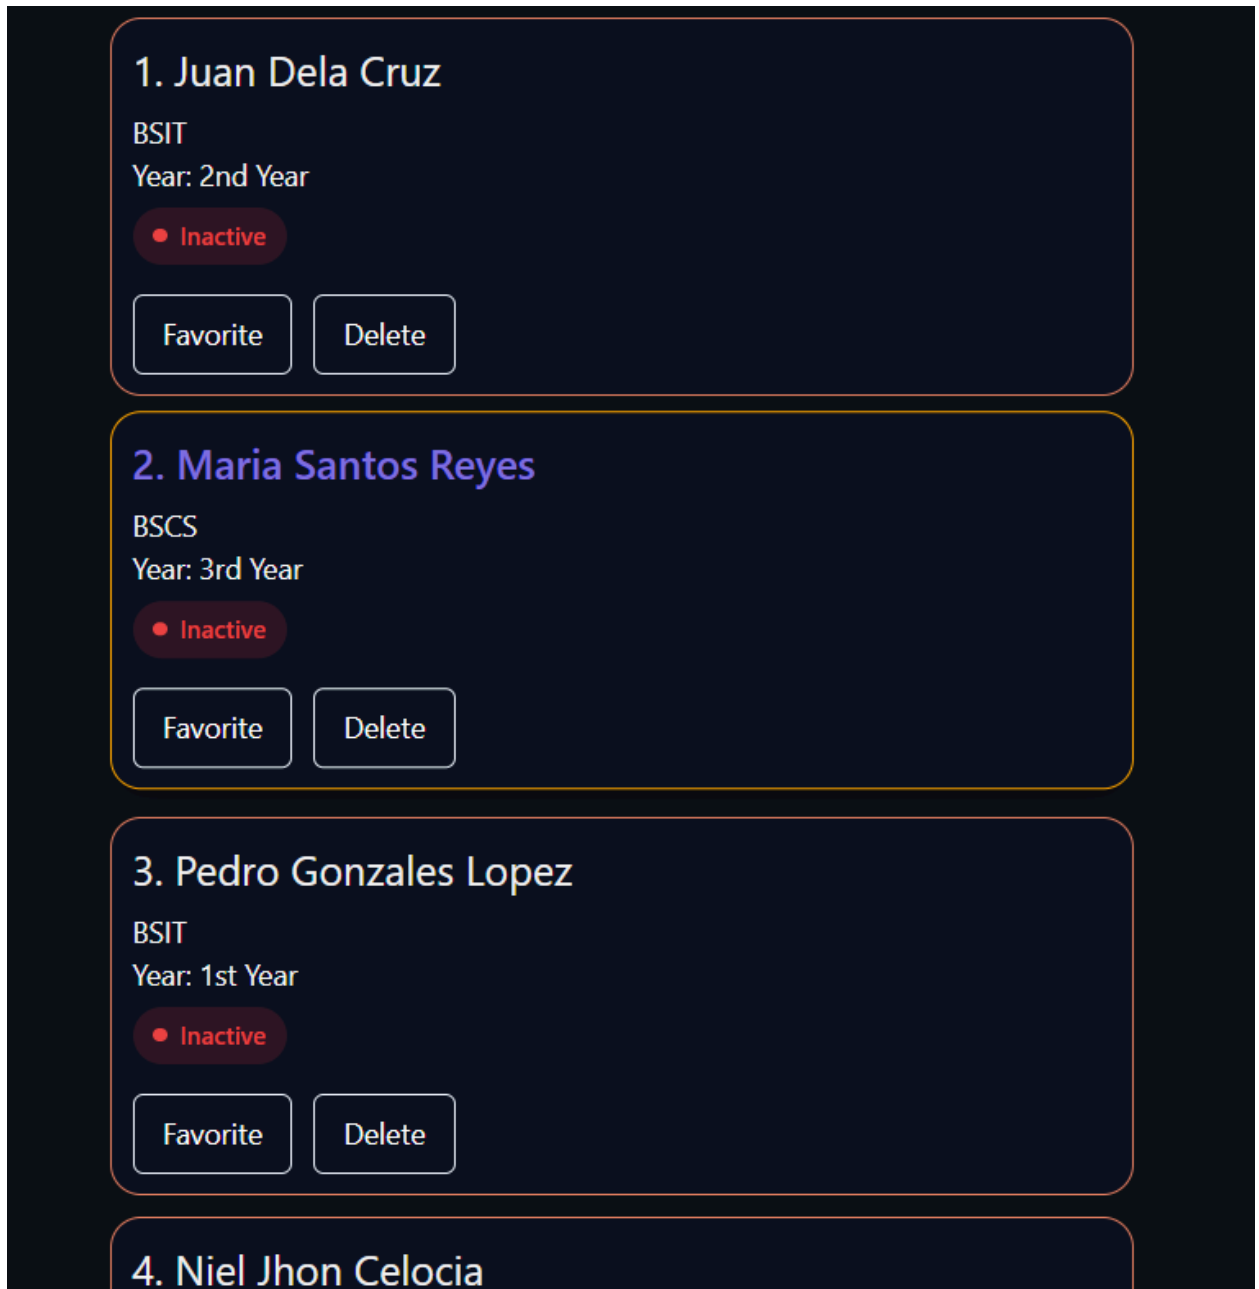

- 
- Empty-state message after removing all students.

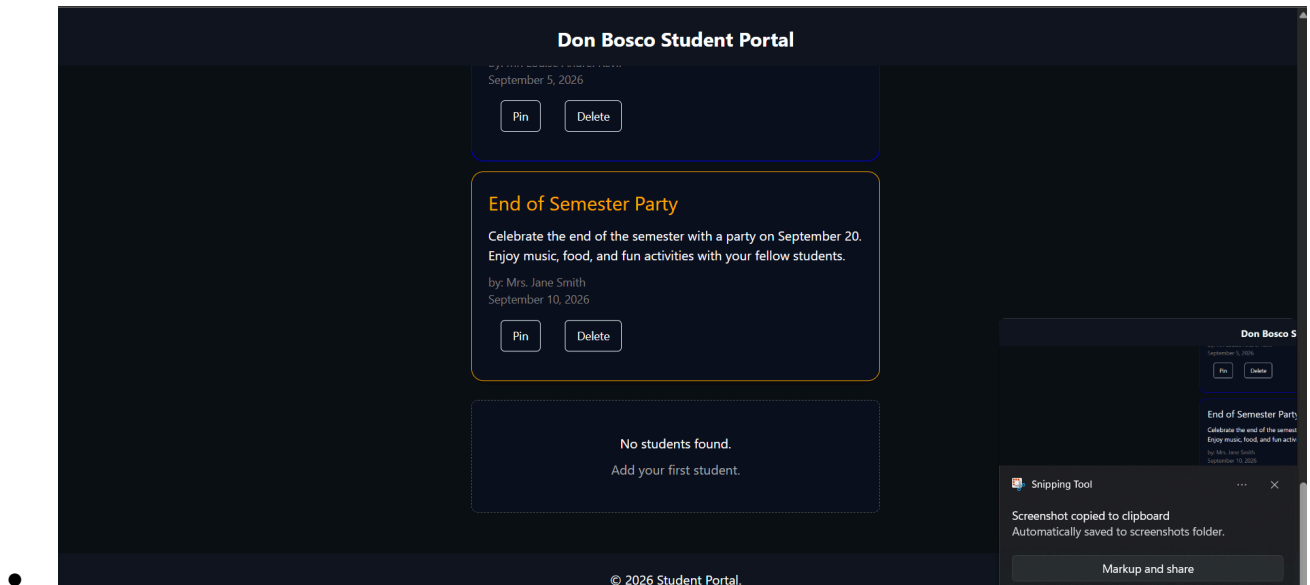

## Flag 7 — Simulate Loading

Objective: Create a fake loading screen.

Before displaying the Student Portal, show a loading message.

Ideas:


- Loading students...
- Spinner icon
- Skeleton cards

After changing the loading variable, the student list should appear.

Hint: Use a boolean variable with `*ngIf`.

Screenshot:

- Loading screen.
-

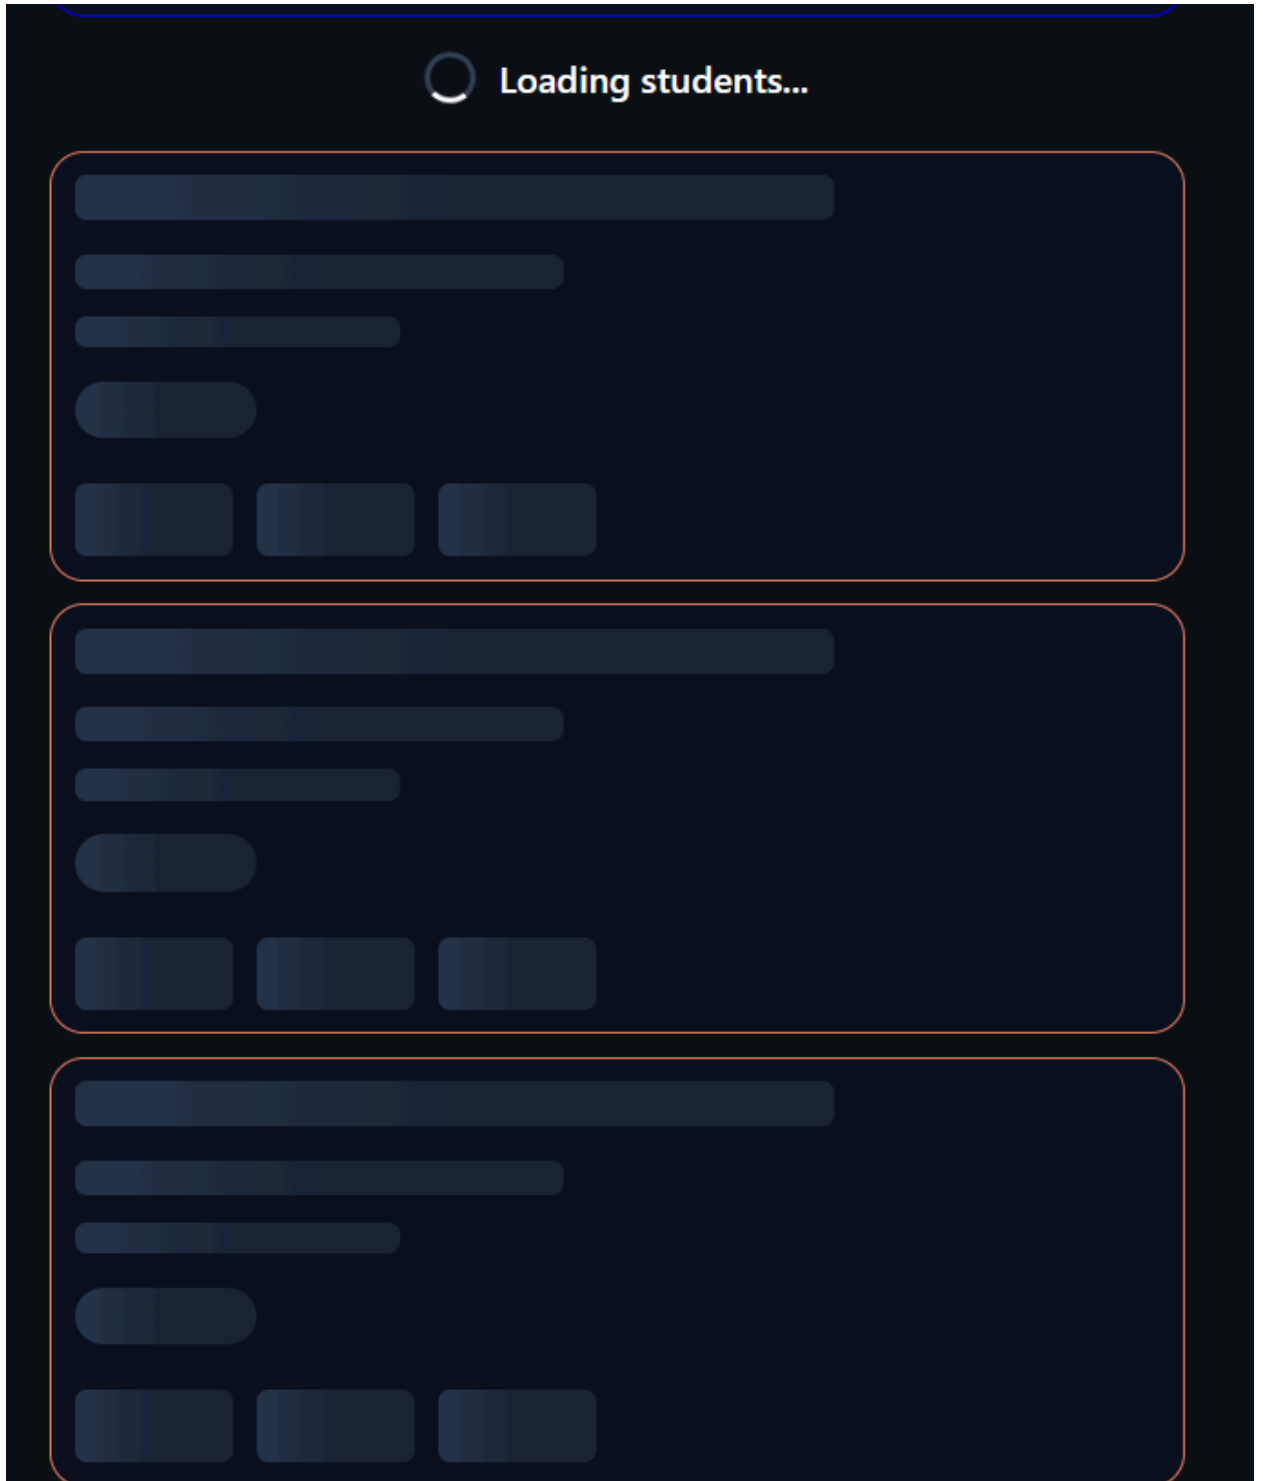

- 
- Student Portal after loading.





### Flag 8 — Mission Complete

Objective: Your Student Portal should now display different UI depending on its current state.

## Checklist

- Students have an **active** property.
- Active students display an Active badge.
- Inactive students display an Inactive badge.
- At least one action changes based on student status.
- An empty-state message appears when no students exist.
- A loading screen appears before the student list.

Screenshot:

- Your completed Student Portal showing active and inactive students, conditional badges, loading state, and empty state working correctly.

## 1. Juan Dela Cruz

BSIT

Year: 2nd Year

● Inactive

Favorite

Delete

## 2. Maria Santos Reyes

BSCS

Year: 3rd Year

● Inactive

Favorite

Delete

## 3. Pedro Gonzales Lopez

BSIT

Year: 1st Year

● Inactive

Favorite

Delete

## 4. Niel Jhon Celocia

## Flag 9 — Commit Your Progress

### Final Flag Screenshot

- Successful push to `feature/conditional-ui`

```
PS C:\Users\nielj\my-first-angular-app> git push -u origin feature/conditional-ui
Enumerating objects: 17, done.
Counting objects: 100% (17/17), done.
Delta compression using up to 12 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (9/9), 2.98 KiB | 763.00 KiB/s, done.
Total 9 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 3 local objects.
remote:
remote: Create a pull request for 'feature/conditional-ui' on GitHub by visiting:
remote:   https://github.com/ejannn/ITFE403A_Celocia/pull/new/feature/conditional-ui
remote:
To https://github.com/ejannn/ITFE403A_Celocia.git
 * [new branch]      feature/conditional-ui -> feature/conditional-ui
branch 'feature/conditional-ui' set up to track 'origin/feature/conditional-ui'.
PS C:\Users\nielj\my-first-angular-app>
```