Lululemon Product Hierarchy Summary


Hierarchy Path

Level	Business Meaning	Examples	Distinct Count
L0	Brand	lululemon, ivivva	2
L1	Channel	ECOMM, RETAIL	2
L2	Division	lulu Womens, lulu Mens, lulu Accessories, lulu Footwear	11
L3	Department	Womens Tops, Womens Bottoms, Mens Bottoms	27
L4	Class	Womens Pants, Womens Tanks, Mens Pants	55
L5	Subclass	Womens Tights, Womens Shorts, Womens Sportsbras	102
L6	Product Family / Style Group	Align Pant II, Energy Bra, Swiftly Tech	16,028
L7	Style / Article Name	Love Crew, Align HR Pant 25, Sculpt Tank	21,741
L8	Size-Level Product Name	Love Crew 10, Energy Bra 8	169,031

How To Read This

- L2-L5 are best for stable category segmentation
- L6-L8 are granular style/article/size detail
- Distinct counts rise sharply after L5

Granularity by Level

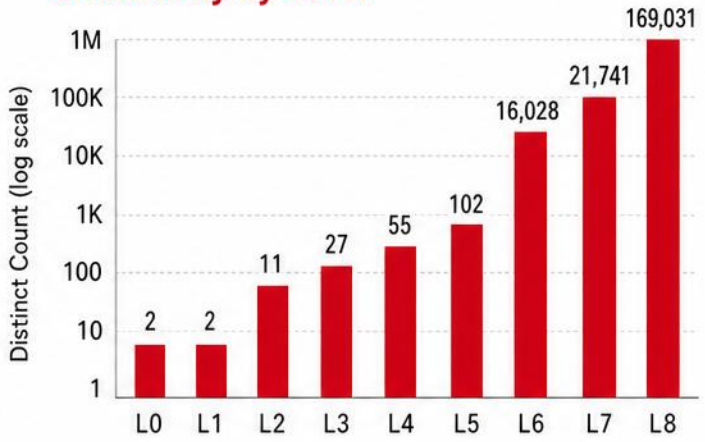

Key Grain Caution

At product_code_original grain,
channel-dependent fields can double count.
Use product_code for channel-specific distributions.

Identifier Key


product_code_original	=	bare SKU
product_code	=	channel-specific SKU
article_original	=	style-color without channel
article	=	style-color with channel

Lululemon Store Hierarchy Summary

As of 2026-05-20 · lululemon-01042025.lulu_ingestion_dev.store_master · 1,853 rows · spine: location_group_hierarchy

Level	Meaning	Column	Distinct	Examples
S0	Brand	s0_name	1	LULULEMON
S1	Channel	s1_name	6	RETAIL, ECOMM, FO, STRAT, CMNTY
S2	Country	s2_name	~24	US, China, Canada, …
S3	Region	s3_name	many	7 rows with \N sentinel → NULL
S4	Area	s4_name	many	Geographic area under region
S5	Store	store_code	1,853	Physical store / DC location

Granularity by Level

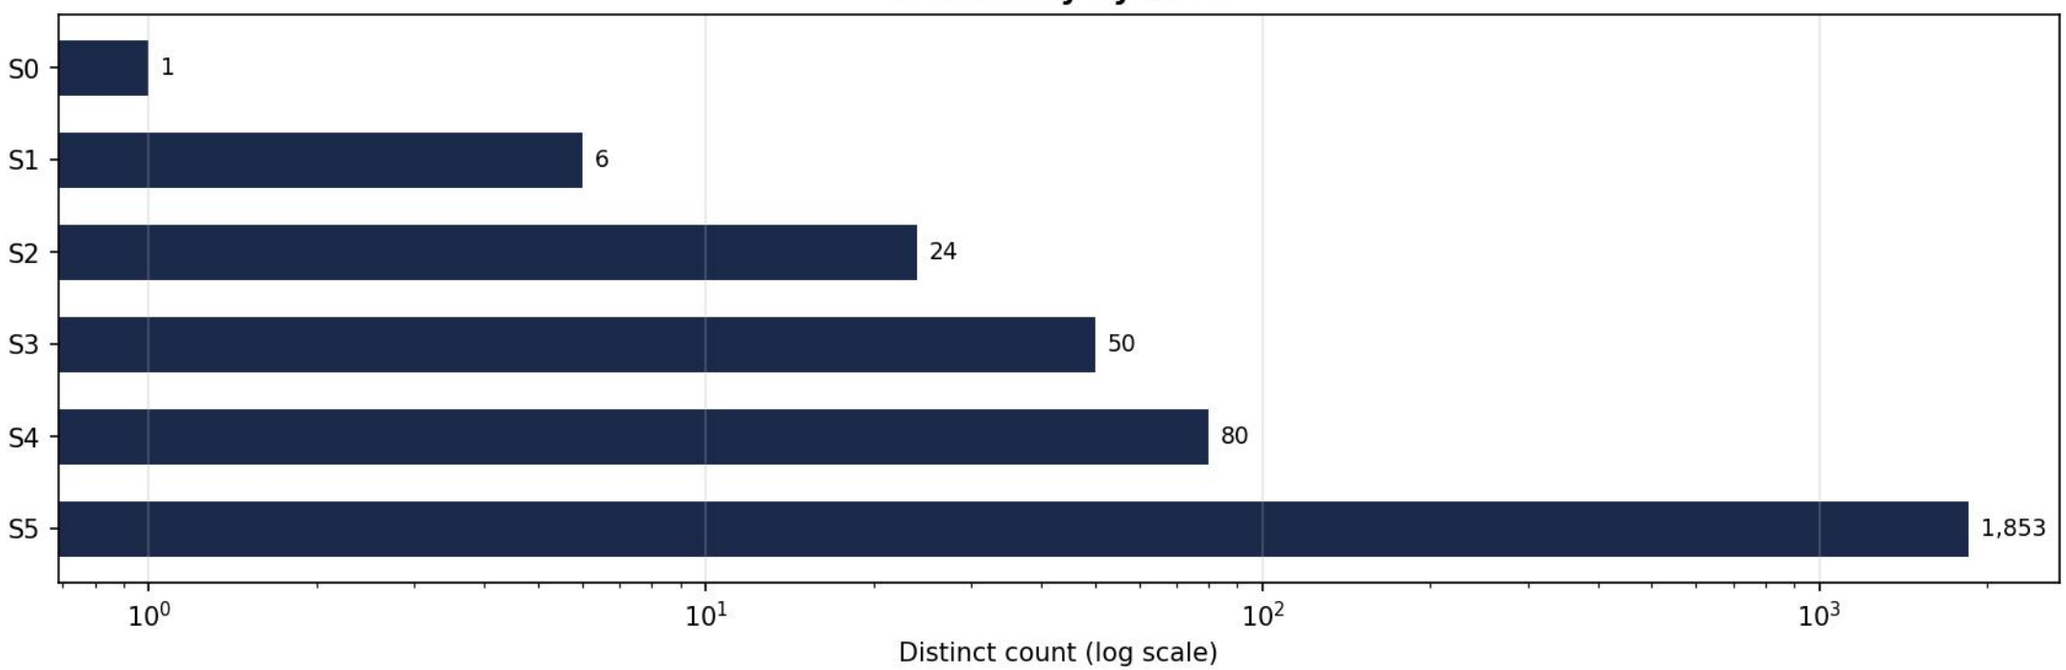

Store type: 93% Store (dc_flag=0, loc_type S) · 7% DC (dc_flag=1, loc_type W). Join inv/txn on store_code; channel in s1_name may differ from product_code suffix.

Lululemon — Channel codes on product_code suffix

inventory_master vs product_master (2026-05-20)

Code	Full name	Typical stores	In product_master?
RETAIL	Brick-and-mortar retail	Malls, street retail	**YES** — ***_RETAIL**
ECOMM	E-commerce (online + ecom DCs)	E-COMMERCE, virtual DC	**YES** — ***_ECOMM**
FO	Factory outlet	OUTLET locations	**NO** — use bare SKU → RETAIL or ECOMM
STRAT	Strategic accounts	Strategic / virtual / partner	**NO** — use bare SKU → RETAIL or ECOMM
COMMUNITY	Community stores (APAC/China naming)	Community locations	**NO** — same as CMNTY
CMNTY	Community stores (NAM/EMEA abbreviation)	Community locations	**NO** — same as COMMUNITY



SKU pattern: {bare_sku}_{CHANNEL} e.g. 155864036_STRAT.
PM only has **155864036_RETAIL** and **155864036_ECOMM**.
transaction_master uses **RETAIL**/**ECOMM** only.

COMMUNITY and CMNTY are the same channel type — regional label difference.

Four Masters — Health Snapshot

As of 2026-05-20 · lululemon-01042025.lulu_ingestion_dev · billing: lululemon-data-scan

Table	Rows	Size	Grain	Verdict	Notes
product_master	1,977,528	0.82 GB	product_code	PASS	0% null l0/l2/product_name
store_master	1,853	<0.01 GB	store_code	PASS	Full LGH + location_details ma
transaction_master	354,138,091	66.8 GB	date × store × product	PASS	Filter qty>0 & revenue>0 for
inventory_master	5,539,053	0.68 GB	date × store × product	PASS	Single date POC: 2025-08-28

Cross-master checks


Check	Result	Verdict
X1 Txn → PM	0 orphans	PASS
X2 Txn → SM	0 orphans	PASS
X3 Inv → PM (strict suffix)	364K rows INFO	Channel suffix mismatch — bare SKU exists
X4 Inv → SM	0 orphans	PASS
X5 PM never sold	63% SKUs	INFO — assortment breadth
X6 Channel alignment	RETAIL/ECOMM	PASS on sold SKUs

Datasets

Raw: lululemon_souricng_outbound
Sourcing: lulu_sourcing_dev
Masters: lulu_ingestion_dev
Postgres: lulu_dev.global.*

Raw → Master Lineage


Lululemon build paths · 2026-05-20 · see findings/raw_to_master_lineage.md

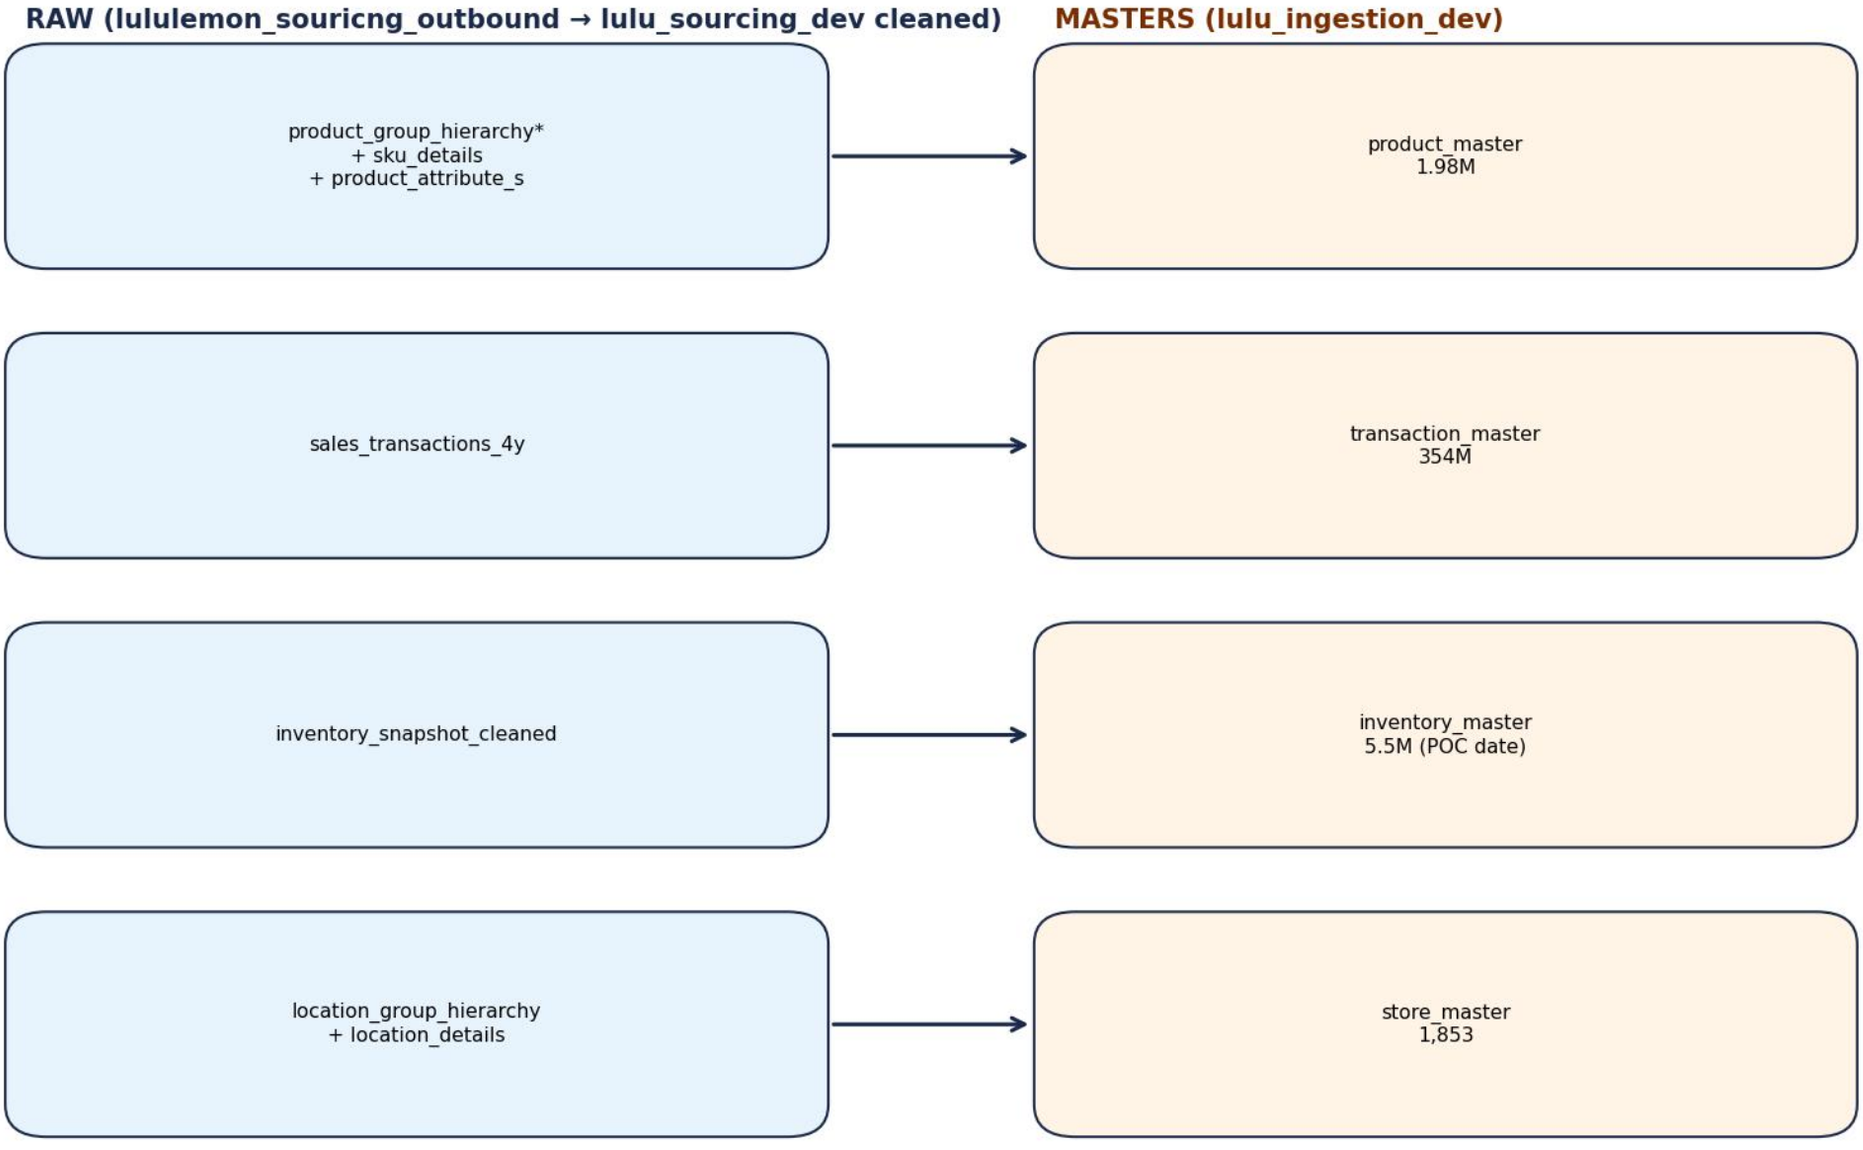

- product_master: pgh spine + LEFT sku_details + product_attribute_s
- transaction_master: sales INNER pgh; store via location_id_sales
- inventory_master: inv snapshot INNER pgh (sku_id_channel = sku_id_code)
- store_master: LGH spine + LEFT location_details (ws_channel)
- Ghost: sku_details_cleaned (no _20251119) — txn build refs suffixed table
- Also: events_master ← promotional_events; fiscal_date_mapping ← calendar_hierarchy

Sourcing → Intermediate → Master

IA Platform pipeline · Lululemon datasets

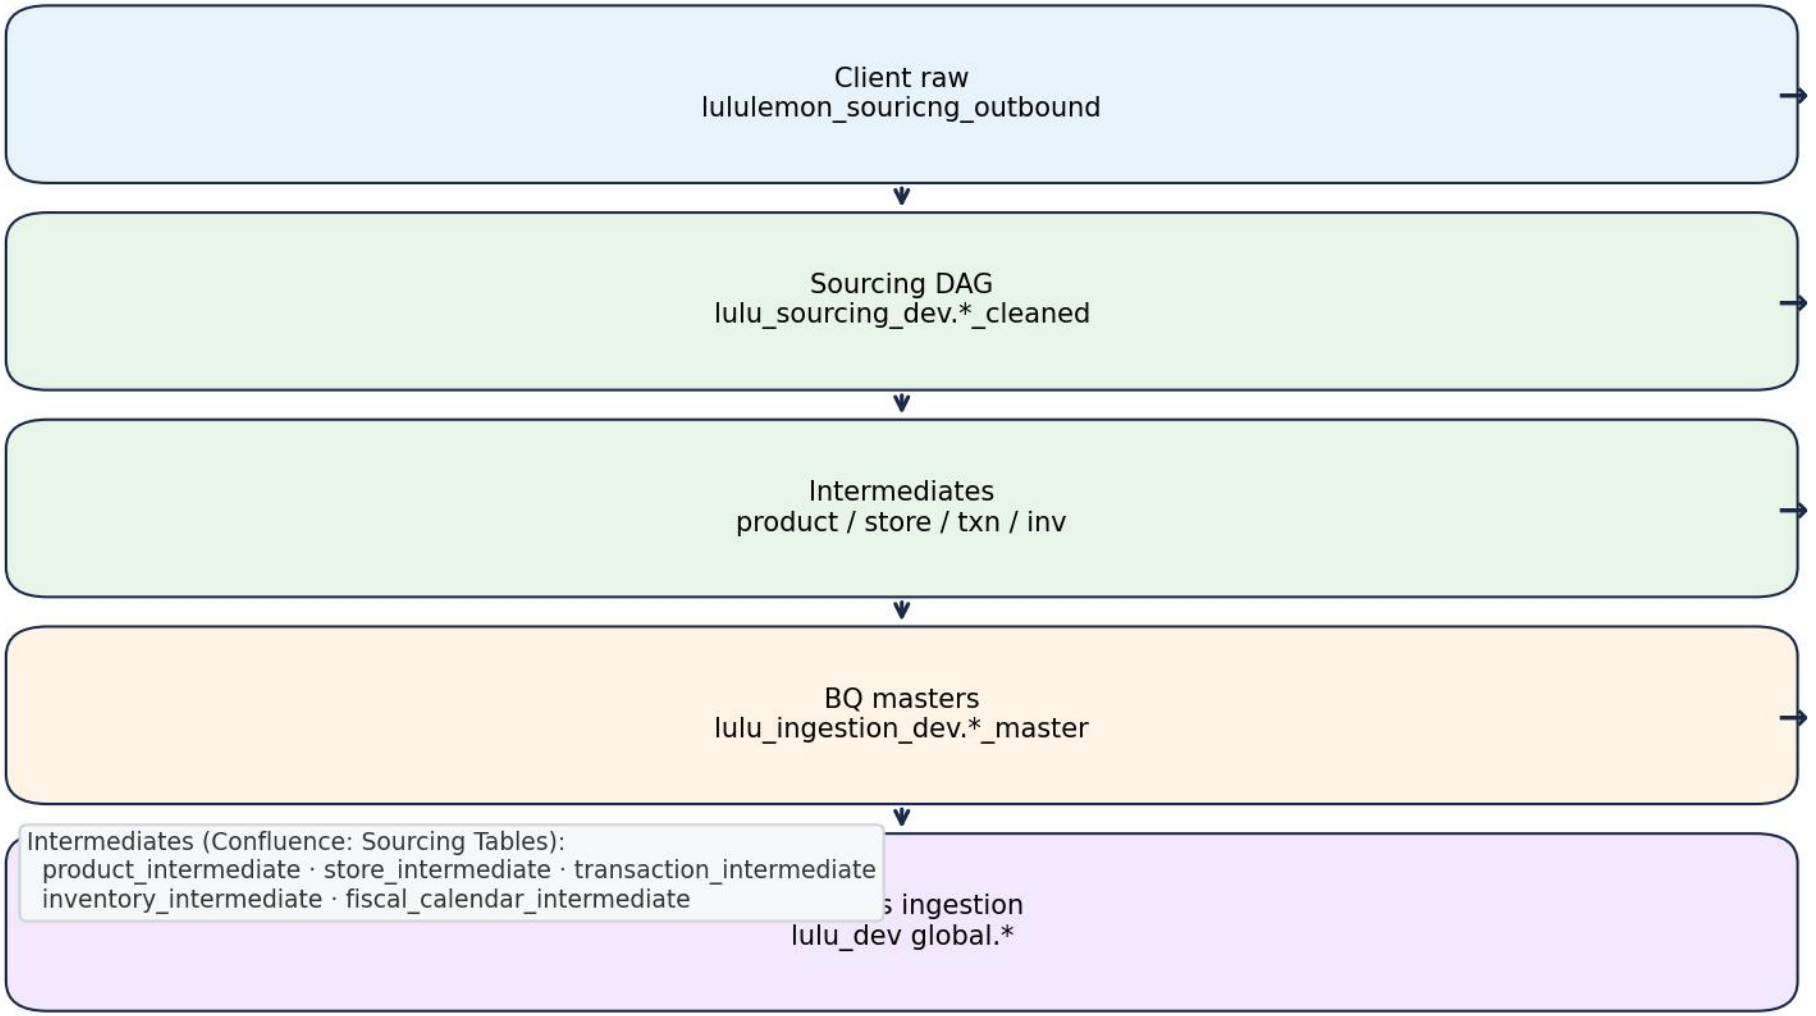

Periodic filter: lulu_sourcing_dev.mapping.filter_param · MERGE keys: (date, store_code, product_code) for txn/inv

InventorySmart — Decision Dashboard (Reference)

Backend tables & features — from Decision Dashboard handbook

1 WHAT IT IS

- Holistic inventory health across stores and DC
- Real-time stock, draft allocation plans, alerts, article-level detail

2 KPI CARDS

- **OH Units**
- **Store WOS (OH)**
- **In-Stock %**
- **DC WOS (OH)**
- **DC Available to Allocate**

3 ALERT FAMILIES

Allocation	Auto Allocation, Stockout, Shortfall, PO to Allocate, Overstock
Forecasting	Demand Forecast is 0, Article/Store Inaccurate Forecast
OMS	Expedite Orders, Need Before Next ROQ, Recommended Orders

4 BACKEND TABLES

1.	`inventory_smart.Article_inventory_dashboard`	BQ + PG	daily after ingestion
2.	`inventory_smart.Alert_product_store_level`	BQ + PG	allocation alerts
3.	`inventory_smart.Article_forecast_alerts_demand_zero`	BQ + PG	forecasting alerts
4.	`Store_stock_drilldown`	BQ prerequisite	daily after ingestion

Downstream of product/store/inventory masters. Full handbook: Decision_Dashboard_handbook.pdf