**Cross-host speedup decomposition against H100: exploratory (post-hoc)**

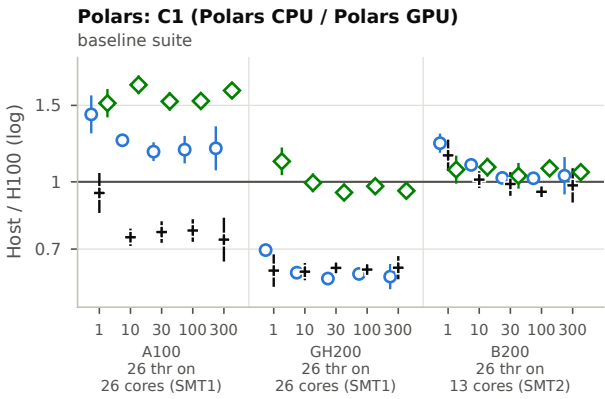


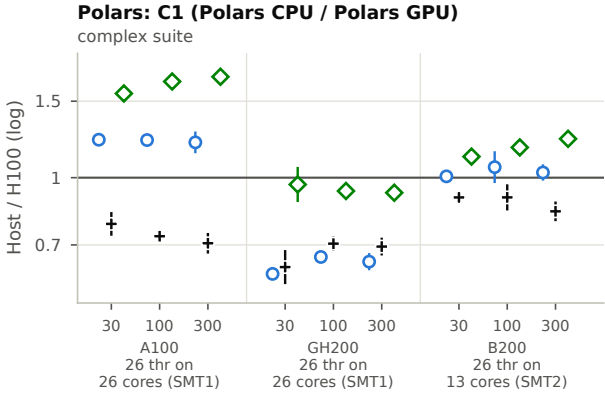


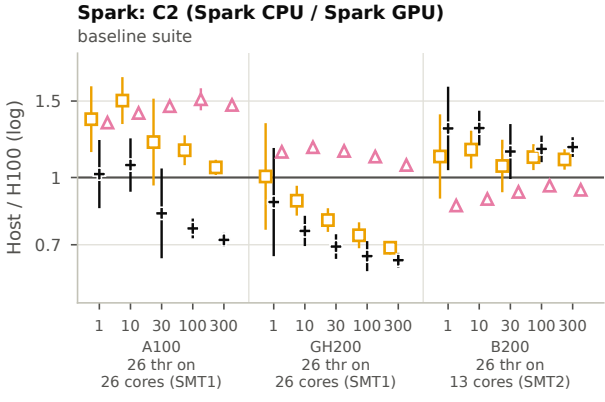


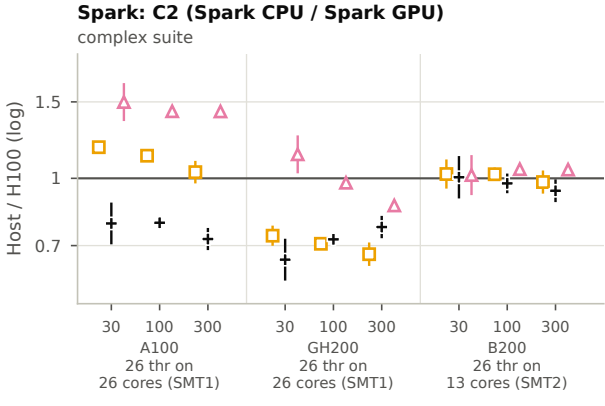

Filled cross: speedup of the host divided by the speedup of H100 (C_host / C_H100). Open markers: the CPU engine's and the GPU engine's time on the host divided by its time on H100, over the same queries (engine colours and markers as elsewhere). log(speedup ratio) = log(CPU-engine ratio) - log(GPU-engine ratio). Below 1 on the CPU-engine ratio means the host's CPU engine was faster than on the reference, which lowers that host's speedup. Welch-type 95% intervals on the log scale (separate campaigns, unpaired rounds). H100: 26 thr on 13 cores (SMT2). Exploratory (post-hoc; not in the locked design §9).