eSkarga – Repertorium Ts/Tw
Model fizyczny bazy danych (ERD)


Schemat **repertorium** w PostgreSQL po migracjach Flyway V1–V12.1 · stan z 07.11.2026 · wygenerowano z katalogu bazy (`infra/scripts/erd-fizyczny.py` → `erd-pdf.py`)

Oznaczenia: **PK** klucz główny · **FK** klucz obcy · **UK** unikalny · linia z „kurzą stopką” przy tabeli podrzędnej (wiele) i kreską przy nadrzędnej (jeden) · `timestamptz` = timestamp with time zone · w nawiasach długości typów.

Strony: 1) przegląd kluczy i relacji wszystkich tabel, 2) wpływ pism i repertorium, 3) akta, czynności i podpisy, 4) doręczenia, terminy, zażalenia, archiwum, 5) dostęp, osoby, słowniki, audyt, 6) indeks tabel.


Przegląd: tabele, klucze i relacje

36 tabel · 26 relacji · tylko klucze (PK, FK, UK)

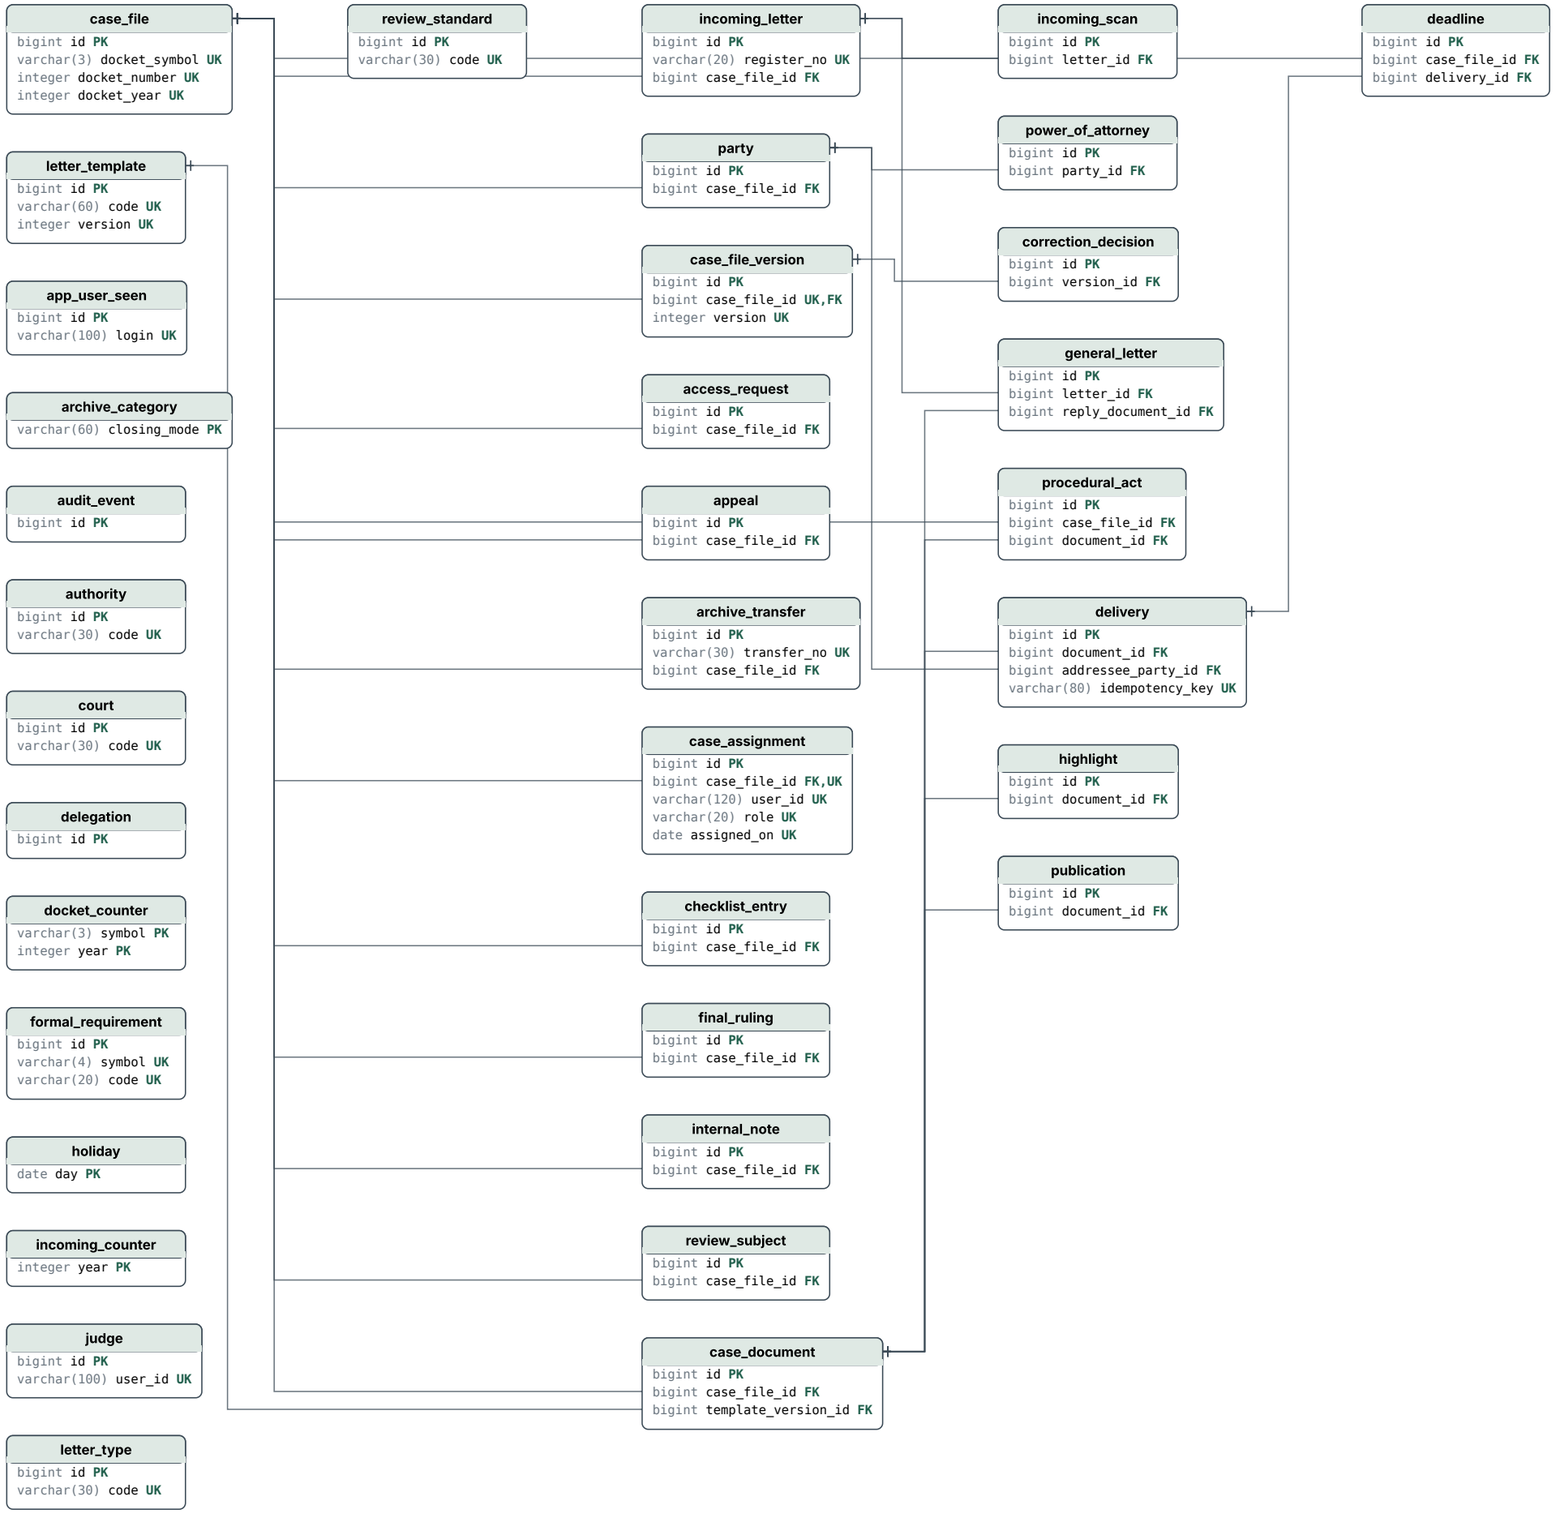


Wpływ pism i repertorium

12 tabel · 9 relacji

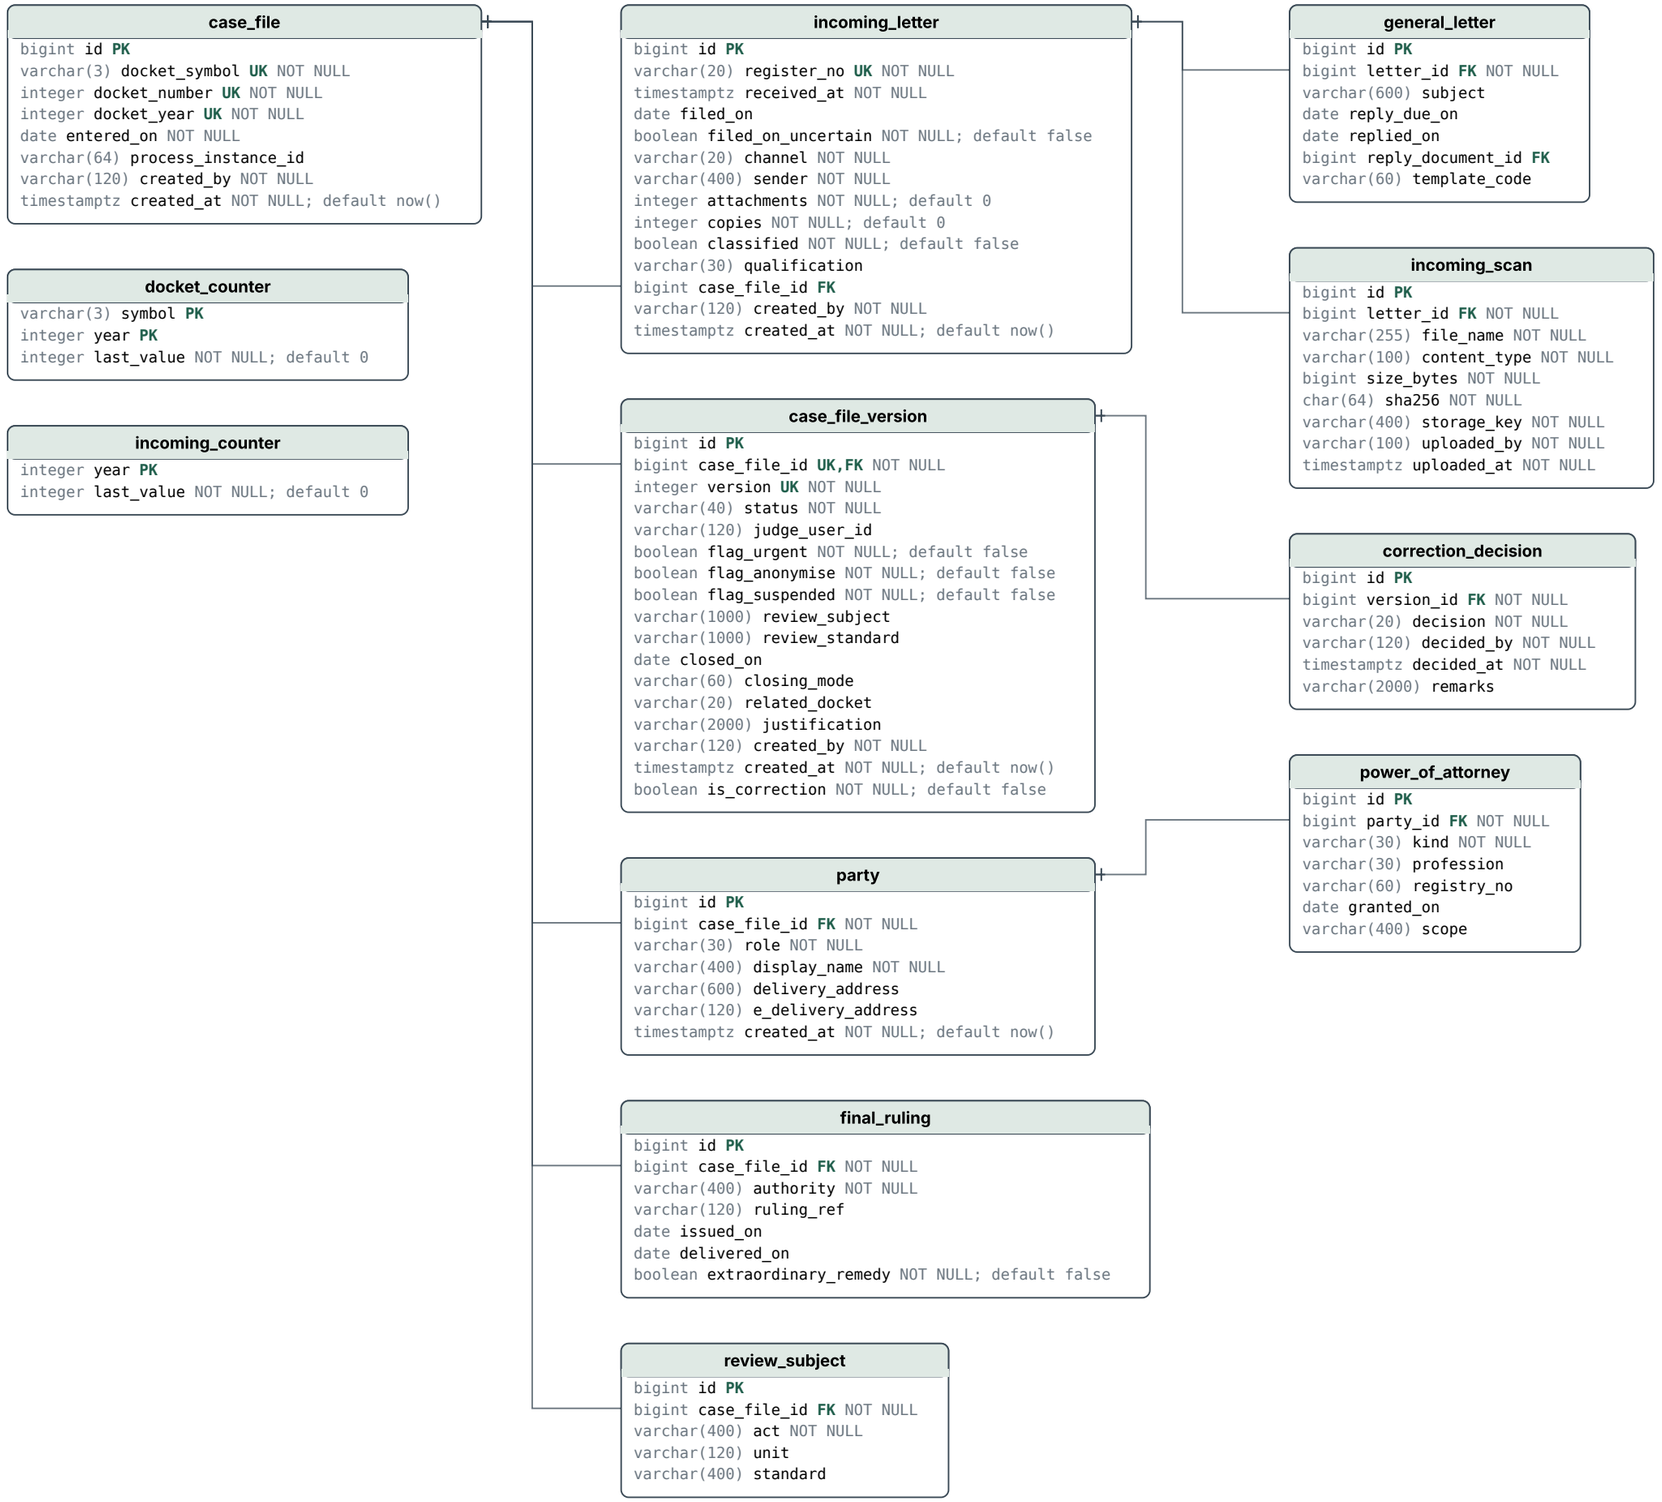


Akta, czynności i podpisy

7 tabel · 3 relacji

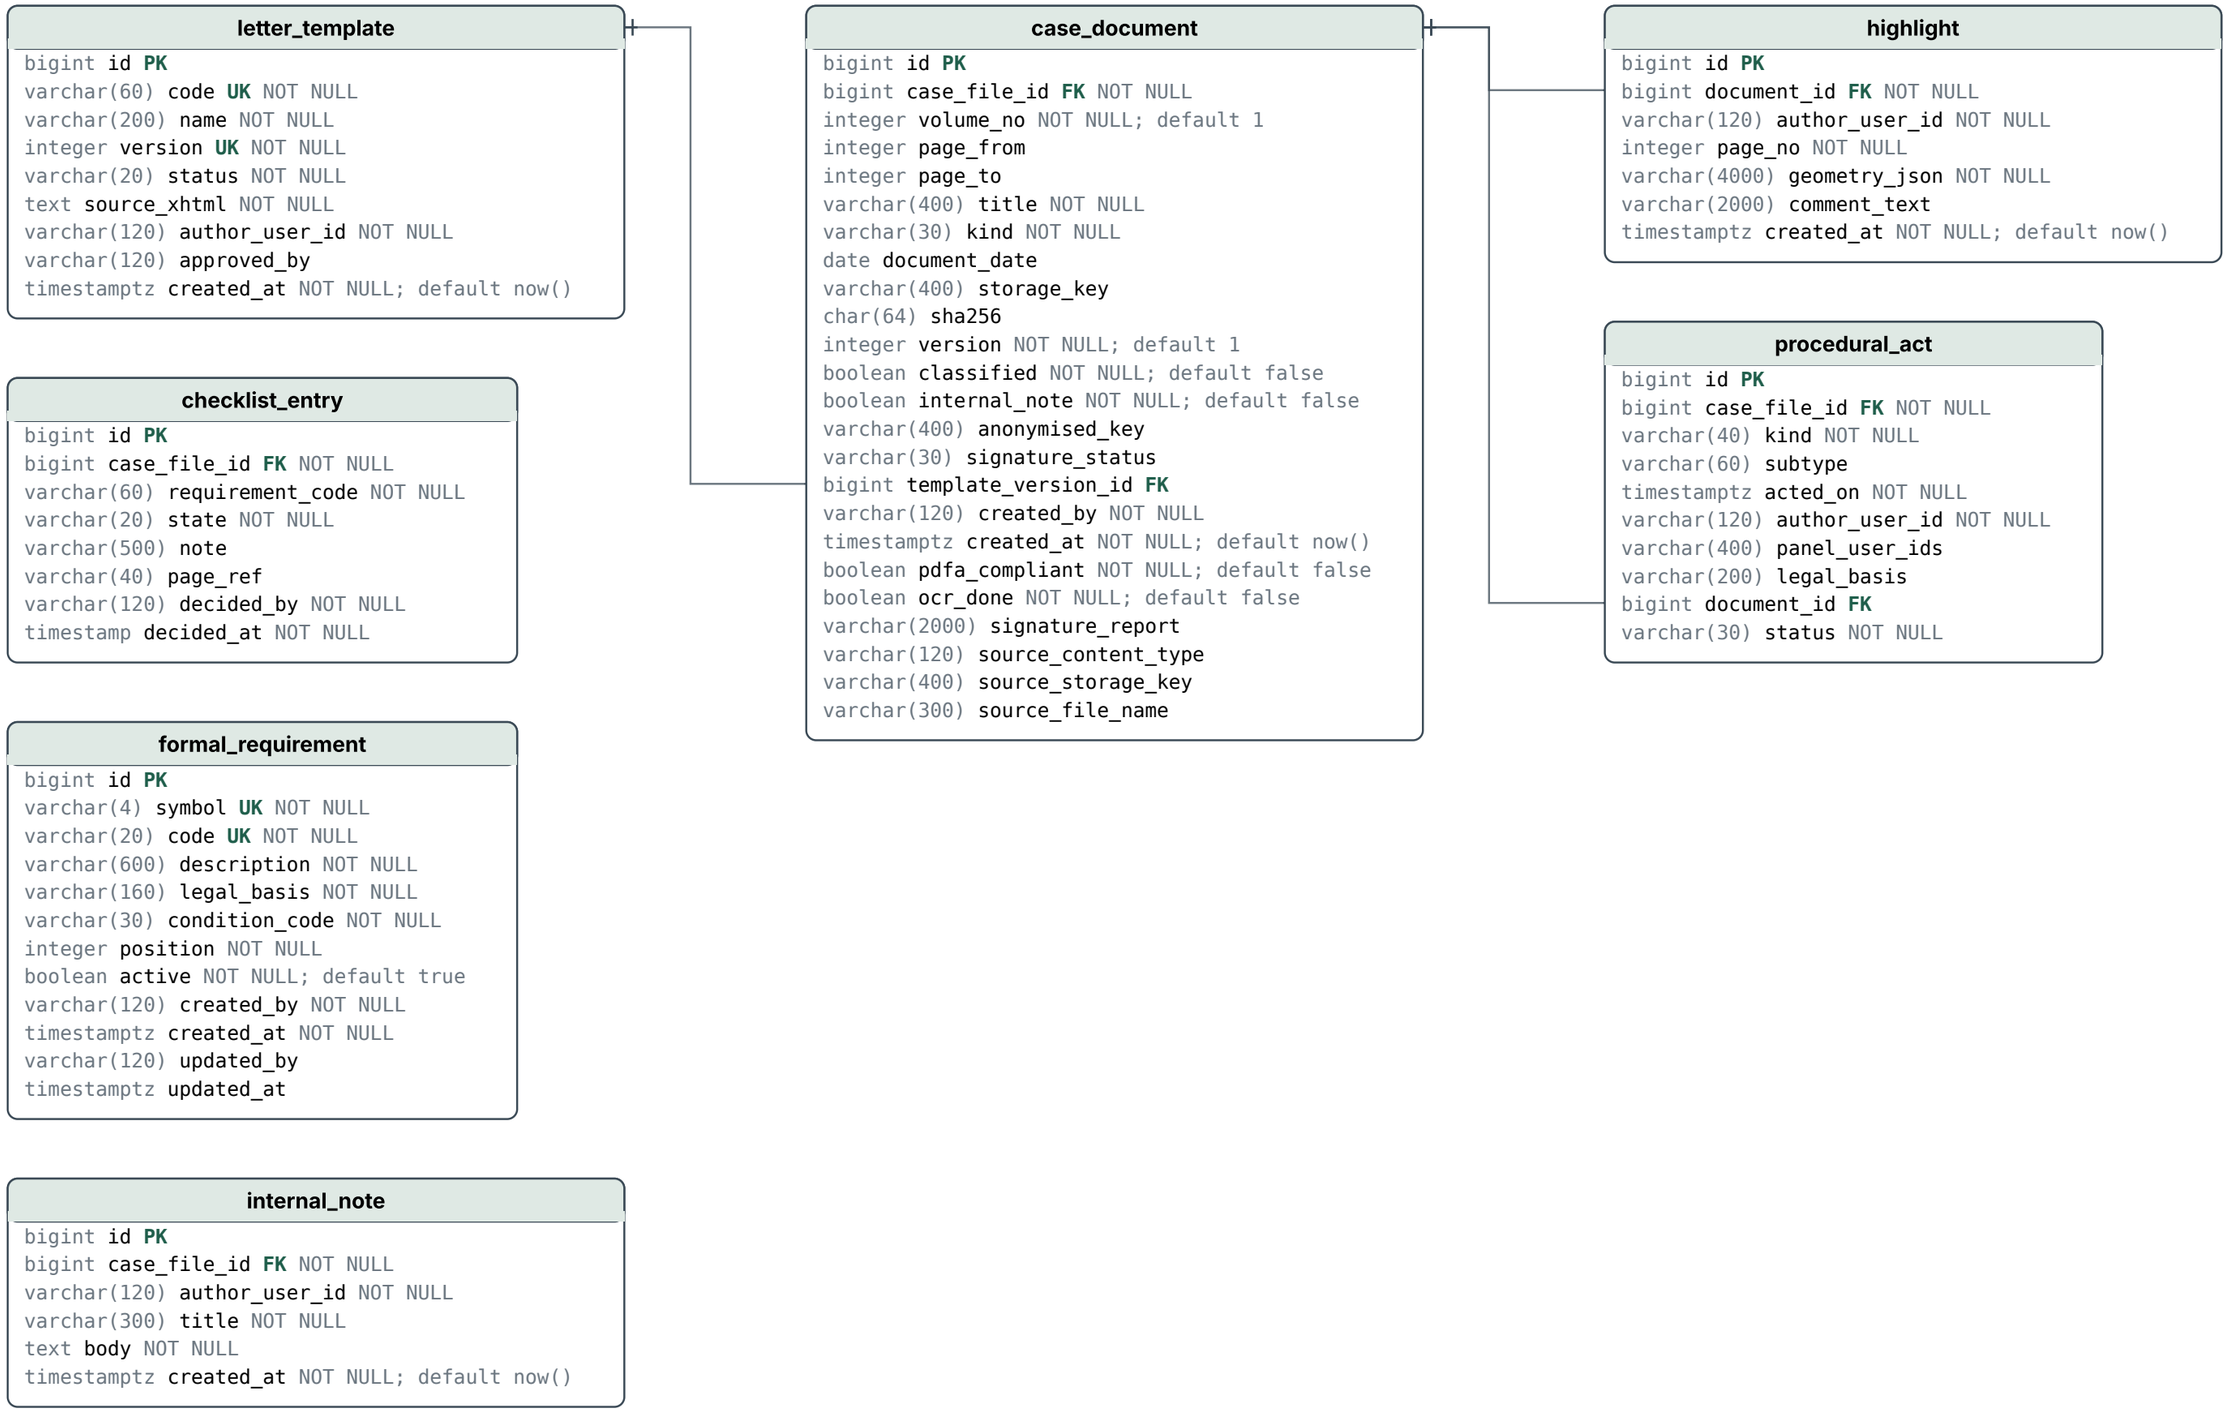

Doręczenia, terminy, zażalenia, archiwum

8 tabel · 1 relacji

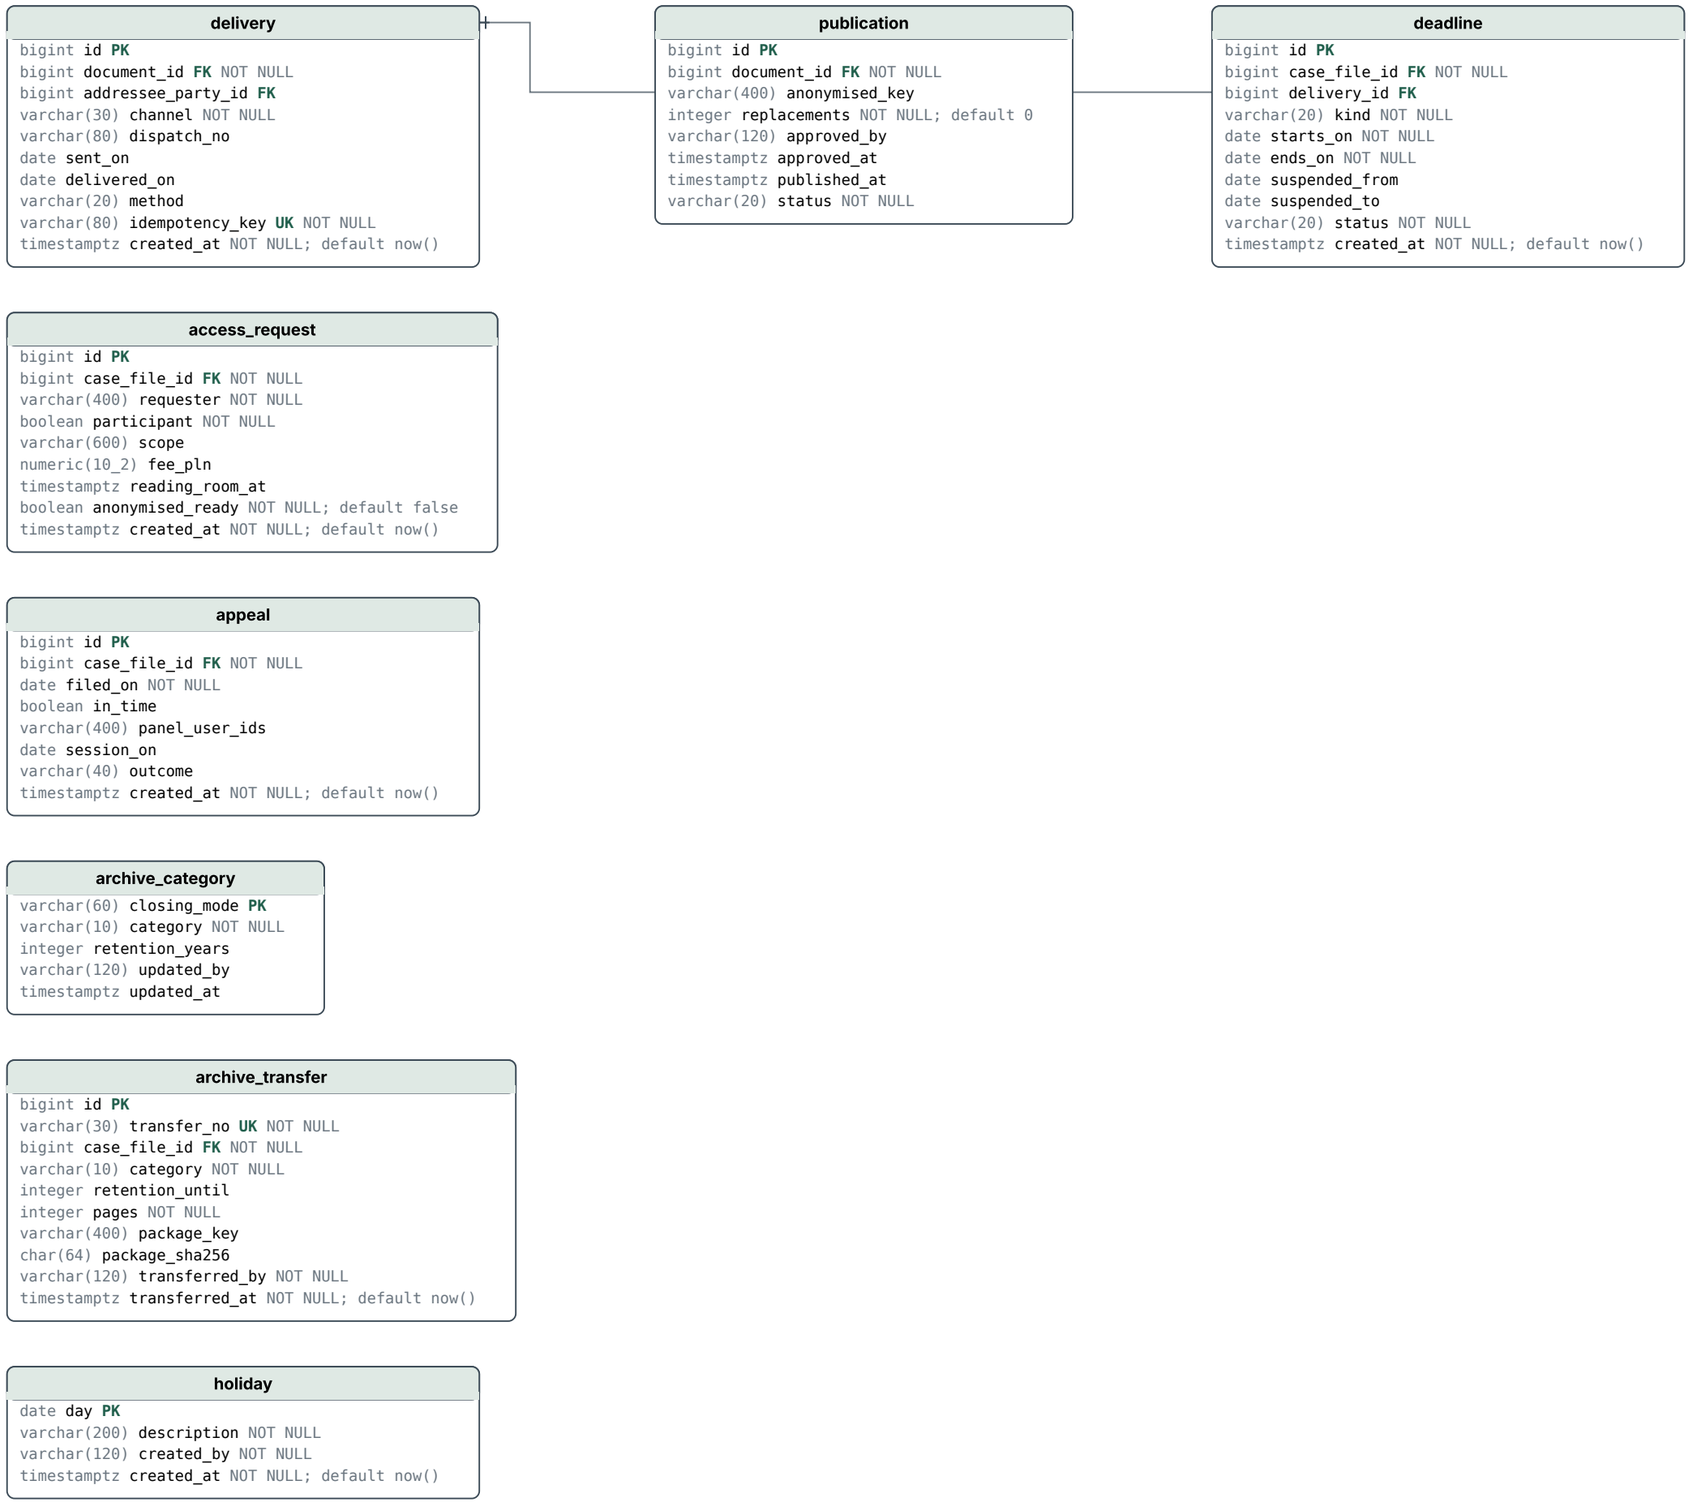

Dostęp, osoby, słowniki, audyt

9 tabel · 0 relacji

app_user_seen

```
bigint id PK
varchar(100) login UK NOT NULL
varchar(200) display_name
varchar(400) roles NOT NULL
timestamptz first_seen_at NOT NULL
timestamptz last_login_at NOT NULL
integer login_count NOT NULL; default 1
```

audit_event

```
bigint id PK
timestamptz occurred_at NOT NULL
varchar(120) user_id NOT NULL
varchar(60) user_role
varchar(80) action NOT NULL
varchar(200) object_ref
varchar(20) case_ref
varchar(45) remote_addr
char(64) prev_hash NOT NULL
char(64) hash NOT NULL
```

authority

```
bigint id PK
varchar(30) code UK NOT NULL
varchar(300) name NOT NULL
boolean active NOT NULL; default true
```

case_assignment

```
bigint id PK
bigint case_file_id FK,UK NOT NULL
varchar(120) user_id UK NOT NULL
varchar(20) role UK NOT NULL
date assigned_on UK NOT NULL
date released_on
```

court

```
bigint id PK
varchar(30) code UK NOT NULL
varchar(300) name NOT NULL
boolean active NOT NULL; default true
```

delegation

```
bigint id PK
varchar(120) user_id NOT NULL
varchar(60) function_code NOT NULL
date valid_from NOT NULL
date valid_to NOT NULL
varchar(200) basis_doc_ref
timestamptz revoked_at
varchar(120) created_by NOT NULL
timestamptz created_at NOT NULL; default now()
varchar(300) basis_doc_key
varchar(64) basis_doc_sha256
```

judge

```
bigint id PK
varchar(100) user_id UK NOT NULL
varchar(200) display_name NOT NULL
varchar(20) function_code NOT NULL
date term_from NOT NULL
date term_to
boolean active NOT NULL; default true
varchar(120) created_by NOT NULL
timestamptz created_at NOT NULL
varchar(120) updated_by
timestamptz updated_at
```

letter_type

```
bigint id PK
varchar(30) code UK NOT NULL
varchar(300) name NOT NULL
boolean active NOT NULL; default true
```

review_standard

```
bigint id PK
varchar(30) code UK NOT NULL
varchar(200) provision NOT NULL
varchar(400) description
boolean active NOT NULL; default true
```

Indeks tabel

Tabela	Kolumny	Klucze obce (wychodzące)	Indeksy
access_request	9	case_file_id → case_file	1
app_user_seen	7	—	2
appeal	8	case_file_id → case_file	1
archive_category	5	—	1
archive_transfer	10	case_file_id → case_file	2
audit_event	10	—	3
authority	4	—	2
case_assignment	6	case_file_id → case_file	3
case_document	24	case_file_id → case_file, template_version_id → letter_template	2
case_file	8	—	2
case_file_version	17	case_file_id → case_file	3
checklist_entry	8	case_file_id → case_file	2
correction_decision	6	version_id → case_file_version	2
court	4	—	2
deadline	10	case_file_id → case_file, delivery_id → delivery	2
delegation	11	—	2
delivery	10	addressee_party_id → party, document_id → case_document	2
docket_counter	3	—	1
final_ruling	7	case_file_id → case_file	1
formal_requirement	12	—	3
general_letter	7	letter_id → incoming_letter, reply_document_id → case_document	1
highlight	7	document_id → case_document	2
holiday	4	—	1
incoming_counter	2	—	1
incoming_letter	14	case_file_id → case_file	2
incoming_scan	9	letter_id → incoming_letter	2
internal_note	6	case_file_id → case_file	2
judge	11	—	3
letter_template	9	—	2
letter_type	4	—	2
party	7	case_file_id → case_file	1
power_of_attorney	7	party_id → party	1
procedural_act	10	case_file_id → case_file, document_id → case_document	1
publication	8	document_id → case_document	1
review_standard	5	—	2
review_subject	5	case_file_id → case_file	1