

Hardware/Software Mapping

The Task Management System consists of the following components:

- **:AuthorisationServer**

This server is an OpenID Provider (OP) that implements the OpenID Connect and OAuth 2.0 protocols. Section 3.4 describes this server in detail.

- **:NGINXServer**

This server serves the visualisation subsystem of the task management system, i.e., such files as HTML, CSS, and JavaScript and provides it to the client-side application. It also provides the load balancer that distributes incoming traffic across multiple servers increasing availability and reliability.

- **:AppServer**

This server allows interaction between user client and server-side application code – the business logic of the task management system – running the backend services and APIs and generating and delivering dynamic content. This server serves the User management, Project and task management, Collaboration, and Notification subsystems.

- **:DatabaseServer**

This server deploys the MySQL relational database which stores and manages the task management system's data and handles database requests.

- **:BackupServer**


This server implements regular data backups and deploys MySQL Enterprise backup storage.

- **:RedisServer**

This server deploys the in-memory data store Redis that can be used as the application cache.

Figure 1

The UML Deployment Diagram of the TMS

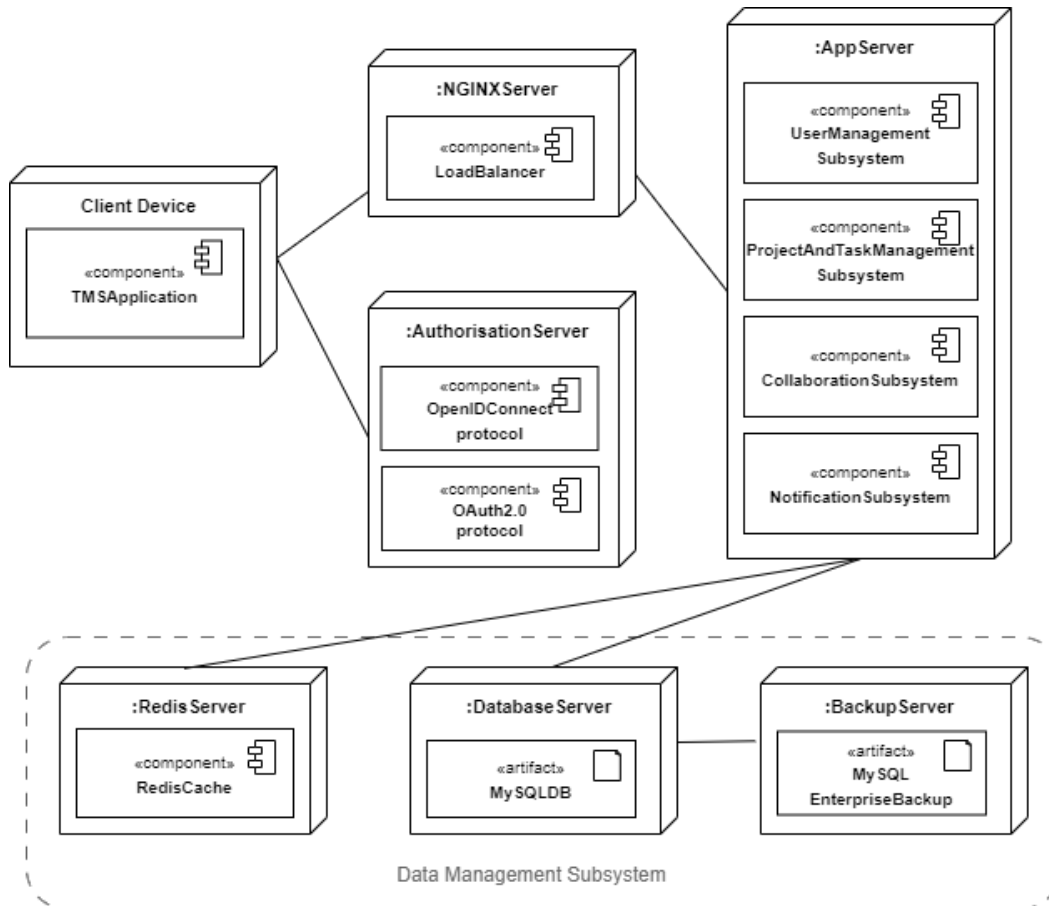

Source: Own results.