


(a) Lattice size $\times$ channel count: the number of oscillators

lattice	channels				
	1	2	4	8	16
8×8	64 128 p	128 256 p	256 512 p	512 1,024 p	1,024 2,048 p
16×16	256 512 p	512 1,024 p	1,024 2,048 p	2,048 4,096 p	4,096 8,192 p
32×32	1,024 2,048 p	2,048 4,096 p	4,096 8,192 p	8,192 16,384 p	16,384 32,768 p
64×64	4,096 8,192 p	8,192 16,384 p	16,384 32,768 p	32,768 65,536 p	65,536 131,072 p
128×128	16,384 32,768 p	32,768 65,536 p	65,536 131,072 p	131,072 262,144 p	262,144 524,288 p

Each cell: oscillators ($C \cdot G^2$) and parameters ($2 \cdot C \cdot G^2$). Equal shades hold equally many oscillators in different layouts. Purple: paper 02's network. Dotted: more than 4,096 states, read channel by channel.

(b) Band mapping: how the mel bands drive a lattice's rows

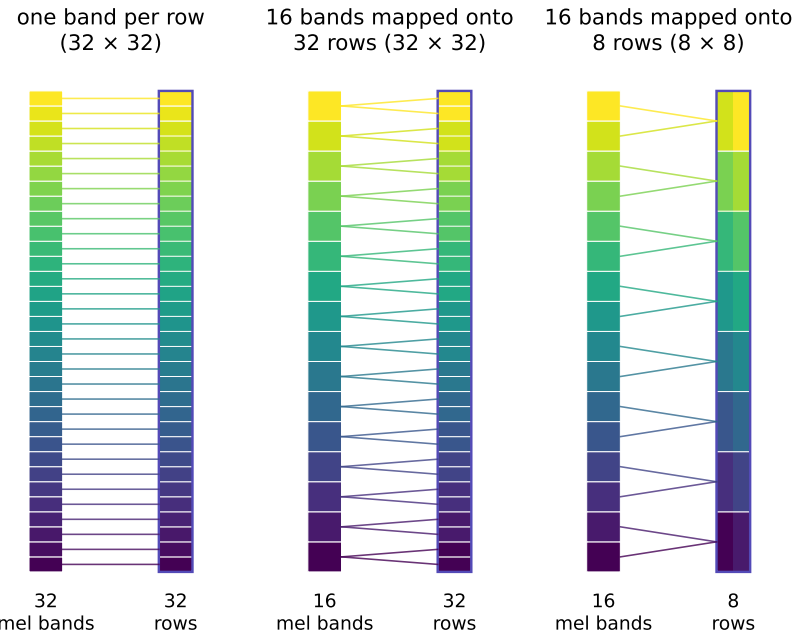

A lattice of G rows is driven by G mel bands, one per row, or by paper 02's 16 bands mapped onto its rows, in frequency order (lowest at the bottom); at 16×16 the two are the same. Every row of every channel is driven alike; nothing in the mapping is fitted.