

PART A — HTML Revision

HTML (HyperText Markup Language) is the skeleton of a webpage. It defines the structure and content using tags. Tags are written inside angle brackets `< >`, most come in pairs (opening + closing).

1. Basic Page Skeleton

Every HTML file must start with this structure:

```
<!DOCTYPE html>           <!-- Tells browser: this is HTML5 -->
<html lang="en">           <!-- Root element of the page -->
  <head>                   <!-- Meta info (not visible on page) -->
    <meta charset="UTF-8">
    <title>Page Title</title>
    <link rel="stylesheet" href="style.css">
  </head>
  <body>                  <!-- Everything visible goes here -->

  </body>
</html>
```

Note: The `<head>` tag is like the settings of the page. The `<body>` tag is what users actually see.

2. Structure & Layout Tags

These tags define the sections and containers of a webpage.

Tag	What it does	Example
<code><div></code>	Generic block-level container. Used to group elements and apply CSS.	<code><div class="box">...</div></code>
<code></code>	Generic inline container. Used to style a small piece of text inside a line.	<code>hi</code>
<code><header></code>	Top section of the page — usually holds logo, nav, heading.	<code><header><h1>My Site</h1></header></code>
<code><nav></code>	Navigation bar — contains links to different sections/pages.	<code><nav>Home</nav></code>
<code><main></code>	Main content area of the page. Should appear only once.	<code><main>...</main></code>

<code><section></code>	A thematic grouping of content (e.g. 'About', 'Projects').	<code><section id="about">...</section></code>
<code><footer></code>	Bottom section — copyright, social links, contact info.	<code><footer>© 2025</footer></code>

3. Text & Heading Tags

These tags deal with displaying text content on the page.

Tag	What it does	Example
<code><h1></code> - <code><h6></code>	Headings. h1 is biggest, h6 is smallest. Use only ONE h1 per page.	<code><h1>Main Title</h1></code>
<code><p></code>	Paragraph of text. Automatically adds spacing above and below.	<code><p>Hello World</p></code>
<code></code>	Bold text — also tells the browser this text is important.	<code>Important!</code>
<code></code>	Italic text — used for emphasis.	<code>Note this</code>
<code>
</code>	Line break — moves text to the next line. Self-closing tag.	Line 1 <code> </code>Line 2
<code><hr></code>	Horizontal line (divider). Self-closing tag.	<code><hr></code>

4. Link & Image Tags

Tag	What it does	Example
<code><a></code>	Anchor tag — creates a clickable hyperlink. href attribute holds the URL. target="_blank" opens in new tab.	<code>Google</code>
<code></code>	Displays an image. src = path to image. alt = text shown if image fails. Self-closing.	<code></code>

5. List Tags

Tag	What it does	Example
<code></code>	Unordered list — bullet points.	<code>Item</code>
<code></code>	Ordered list — numbered items.	<code>First</code>
<code></code>	List item — goes inside <code></code> or <code></code> .	<code>One item</code>

6. Form Tags

Forms collect user input. Very commonly used with DOM and JavaScript.

Tag	What it does	Example
<code><form></code>	Container that wraps all form elements. <code>action</code> sets where data goes, <code>method</code> sets how (GET/POST).	<code><form action="" method="post"></code>
<code><input></code>	Most used form element. <code>type</code> attribute changes its behaviour — text, number, email, password, checkbox, radio. Self-closing.	<code><input type="text" id="name"></code>
<code><label></code>	Describes an input field. Linked via <code>for</code> attribute matching input's <code>id</code> .	<code><label for="name">Name:</label></code>
<code><button></code>	Clickable button. Used with <code>onclick</code> in JS.	<code><button onclick="go()">Submit</button></code>
<code><select></code>	Dropdown menu container.	<code><select id="city">...</select></code>
<code><option></code>	One choice inside a <code><select></code> .	<code><option value="del">Delhi</option></code>
<code><textarea></code>	Multi-line text input box.	<code><textarea id="msg"></textarea></code>

7. Table Tags

Tables display data in rows and columns.

Tag	What it does	Example
<code><table></code>	Outer container that wraps the whole table.	<code><table>...</table></code>
<code><thead></code>	Table header group — wraps the heading row(s).	<code><thead><tr>...</tr></thead></code>

<tbody>	Table body — wraps the data rows.	<code><tbody><tr>...</tr></tbody></code>
<tr>	Table row — one horizontal row.	<code><tr><td>...</td></tr></code>
<th>	Table heading cell — bold and centered by default.	<code><th>Name</th></code>
<td>	Table data cell — regular cell content.	<code><td>Vaibhav</td></code>

Note: In DOM class we will add rows to `<tbody>` dynamically using `innerHTML +=` — so remember these tags!

8. Commonly Used HTML Attributes

Attributes add extra info or behaviour to tags. Written inside the opening tag.

Tag	What it does	Example
id	Unique identifier for ONE element on the page. Used by JS to find it.	<code>id="userName"</code>
class	Reusable name. Multiple elements can share a class. Used for CSS styling.	<code>class="card active"</code>
href	URL for <code><a></code> links.	<code>href="https://..."</code>
src	File path or URL for <code></code> and <code><script></code> .	<code>src="logo.png"</code>
alt	Alternative text for images — shown if image doesn't load.	<code>alt="Profile pic"</code>
type	Sets input type: text, number, email, password, etc.	<code>type="email"</code>
placeholder	Grey hint text inside an input (disappears when user types).	<code>placeholder="Enter name"</code>
value	Sets the default value of an input or option.	<code>value="Hello"</code>
onclick	Runs a JS function when element is clicked.	<code>onclick="submit()"</code>
style	Inline CSS applied directly on the element. Avoid overusing it.	<code>style="color:red"</code>

PART B — CSS Revision

CSS (Cascading Style Sheets) controls how HTML elements look — colour, size, spacing, layout, and more. Without CSS a page is just plain black-and-white text.

1. CSS Syntax

CSS is written as a set of rules. Each rule targets HTML elements (via a selector) and applies styles (property: value pairs).

```
selector {  
  property: value;  
  property: value;  
}
```

```
/* Example */  
h1 {  
  color: blue;  
  font-size: 32px;  
}
```

2. How to Select Elements

Property	Common Values	Description
Tag selector	p { } h1 { }	Selects ALL elements of that tag type.
Class selector	.card { } .btn { }	Selects elements with that class name. Use . (dot) before the name.
ID selector	#header { } #box { }	Selects ONE element with that id. Use # before the name.
* selector	* { }	Selects every element on the page (often used for reset).

```
/* Selecting by tag */  
p { font-size: 16px; }  
  
/* Selecting by class */  
.card { background: white; }  
  
/* Selecting by id */  
#mainTitle { color: navy; }
```

3. Where to Write CSS

Property	Common Values	Description
External file	<code><link rel="stylesheet" href="style.css"></code>	Best practice — write all CSS in a separate .css file and link it in <code><head></code> .
Internal <code><style></code>	<code><style> p{} </style></code>	Write CSS inside <code><style></code> tag in <code><head></code> . Good for quick tests.
Inline style	<code>style="color:red"</code>	Directly on the HTML element. Avoid using too much — hard to maintain.

💡 **Note:** Always prefer an external CSS file for your projects — it keeps HTML clean and makes changes easier.

4. Text & Colour Properties

Property	Common Values	Description
color	red #333 rgb(0,0,255)	Sets the text colour of an element.
background-color	blue #fff rgba(0,0,0,0.5)	Sets the background colour of an element (also written as <code>background: colour</code>).
font-size	16px 1.5rem 24pt	Controls how big the text is. px is most common.
font-weight	normal bold 600	Thickness of text. bold = 700, normal = 400.
font-family	Arial 'Times New Roman' sans-serif	Font used for the text. Always provide a fallback font.
text-align	left center right justify	Horizontal alignment of text inside an element.
text-decoration	none underline line-through	Adds or removes underlines (e.g. remove underline from <code><a></code> links).

```
/* Colour & text example */
body {
  background-color: #f4f4f4; /* light grey background */
  color: #333333;           /* dark text — easy on eyes */
  font-family: Arial, sans-serif;
}

h1 {
  color: #2e75b6; /* blue heading */
  text-align: center;
}
```

5. Spacing — Margin, Padding, Border

Every HTML element is a box. Understanding this box model is key to controlling spacing and layout.

Property	Common Values	Description
padding	10px 10px 20px 10px 5px 10px 5px	Space INSIDE the element, between content and its border. Expands element size.
margin	10px auto 10px 0	Space OUTSIDE the element, between it and neighboring elements. <code>margin: auto</code> centres a block.
border	1px solid #ccc 2px dashed red	Draws a border around the element. Shorthand: <code>size style colour</code> .
border-radius	5px 50% 10px 0	Rounds the corners. 50% makes a circle.
width	200px 100% 50vw	Sets the horizontal size of an element.
height	100px auto 100vh	Sets the vertical size. <code>auto</code> lets content decide height.

```
/* Box model example */
.card {
  width: 200px;
  padding: 16px;          /* space inside the card */
  margin: 10px;           /* space around the card */
  border: 1px solid #ccc; /* thin grey border */
  border-radius: 8px;      /* rounded corners */
  background-color: white;
}
```

💡 **Note:** Quick memory trick — Padding = pillow (cushion inside), Margin = moat (space outside).

6. The display Property

`display` controls how an element behaves in the page layout — whether it sits on its own line, flows inline, or becomes a flex container.

Property	Common Values	Description
display: block	block	Element takes the full width of its parent and starts on a new line. Default for <code><div></code> , <code><p></code> , <code><h1></code> .
display: inline	inline	Element sits in the flow of text — no width/height control. Default for <code></code> , <code><a></code> .

display: inline-block	inline-block	Sits inline like text BUT you can set width and height. Useful for buttons and small boxes.
display: none	none	Completely hides the element — it takes NO space on the page.
display: flex	flex	Makes the element a Flex Container — children are arranged using Flexbox rules.

7. Flexbox — display: flex

Flexbox is the easiest way to arrange items side by side or stack them and control their spacing and alignment. Set display: flex on the PARENT/CONTAINER — the children (items inside it) will automatically get arranged by Flexbox.

```
/* The parent becomes a flex container */
.container {
  display: flex;
}

/* Children become flex items automatically */
```

flex-direction — Which direction do items flow?

Property	Common Values	Description
row	flex-direction: row	Default. Items sit left to right in a horizontal line →.
row-reverse	flex-direction: row-reverse	Items flow right to left ←.
column	flex-direction: column	Items stack top to bottom ↓.
column-reverse	flex-direction: column-reverse	Items stack bottom to top ↑.

justify-content — How are items spaced along the MAIN axis?

When flex-direction is row, main axis = horizontal. When column, main axis = vertical.

Property	Common Values	Description
flex-start	justify-content: flex-start	All items packed to the START (left for row). Default.
flex-end	justify-content: flex-end	All items packed to the END (right for row).
center	justify-content: center	Items grouped in the centre.

space-between	justify-content: space-between	Equal space BETWEEN items, no space at edges. Very common.
space-around	justify-content: space-around	Equal space around each item (half space at edges).
space-evenly	justify-content: space-evenly	Equal space everywhere including edges.

align-items — How are items aligned on the CROSS axis?

Cross axis is always 90° to the main axis. For row direction, cross axis = vertical.

Property	Common Values	Description
stretch	align-items: stretch	Items stretch to fill the container height. Default.
flex-start	align-items: flex-start	Items aligned to the top (for row direction).
flex-end	align-items: flex-end	Items aligned to the bottom (for row direction).
center	align-items: center	Items centred vertically (for row direction). Very useful.

Other useful flex properties

Property	Common Values	Description
flex-wrap	wrap nowrap	wrap: items wrap to next line if container is too narrow. nowrap: forces one line (default).
gap	10px 10px 20px	Spacing between flex items. Shorthand for row-gap and column-gap. Much cleaner than using margin.

8. Complete Flexbox Example

A centered card row — the most common layout pattern you will use:

```
/* HTML */
<div class="card-row">
  <div class="card">Card 1</div>
  <div class="card">Card 2</div>
  <div class="card">Card 3</div>
</div>

/* CSS */
.card-row {
  display: flex;
  /* make it a flex container */
```

```

    flex-direction: row;           /* arrange children left to right */
    justify-content: center;       /* centre the group horizontally */
    align-items: center;          /* centre items vertically */
    flex-wrap: wrap;              /* wrap to next line on small screens */
    gap: 16px;                    /* 16px space between cards */
}

.card {
    width: 150px;
    padding: 20px;
    background-color: #2e75b6;
    color: white;
    border-radius: 8px;
    text-align: center;
}

```

 **Note:** To perfectly centre ONE item both horizontally and vertically inside a container, use: `display:flex + justify-content:center + align-items:center` on the parent. This works for full-page centring too!

9. Quick Reference Cheat Sheet

```

/* === TEXT & COLOUR === */
color: #333;                      /* text colour */
background-color: #f4f4f4;        /* background */
font-size: 16px;
font-weight: bold;
font-family: Arial, sans-serif;
text-align: center;

/* === SPACING === */
padding: 10px;                    /* inside space */
margin: 10px auto;                /* outside space | auto centres block */
border: 1px solid #ccc;
border-radius: 8px;

/* === SIZE === */
width: 100%;
height: auto;

/* === FLEXBOX === */
display: flex;
flex-direction: row;              /* or column */
justify-content: center;          /* space along main axis */
align-items: center;              /* space along cross axis */
flex-wrap: wrap;
gap: 16px;

/* === VISIBILITY === */
display: none;                    /* hide element */
display: block;                   /* show as block */

```

 **Note:** In our DOM examples today, the container div uses `display:flex + flex-wrap:wrap + gap` to automatically arrange the movie cards in a neat grid without writing any JS layout code.

1. What is the DOM?


The DOM (Document Object Model) is a programming interface for HTML and XML documents. When a web page loads, the browser creates a DOM — a tree-like structure made of objects — that represents every element on the page (tags, text, attributes).

JavaScript can use the DOM to read and change the content, structure, and style of a web page while it is running, without reloading it. In simple words: HTML gives the page its structure, CSS gives it style, and the DOM (through JS) lets us change that structure and content dynamically.

DOM stands for **Document Object Model**.

When a web page is loaded, the browser converts the HTML document into a **tree-like structure** called the DOM.

Window Object - The window object represents an open window in a web browser. It is a browser's object, not a javascript object and is automatically created by the browser. It is a global object with lots of properties and methods.

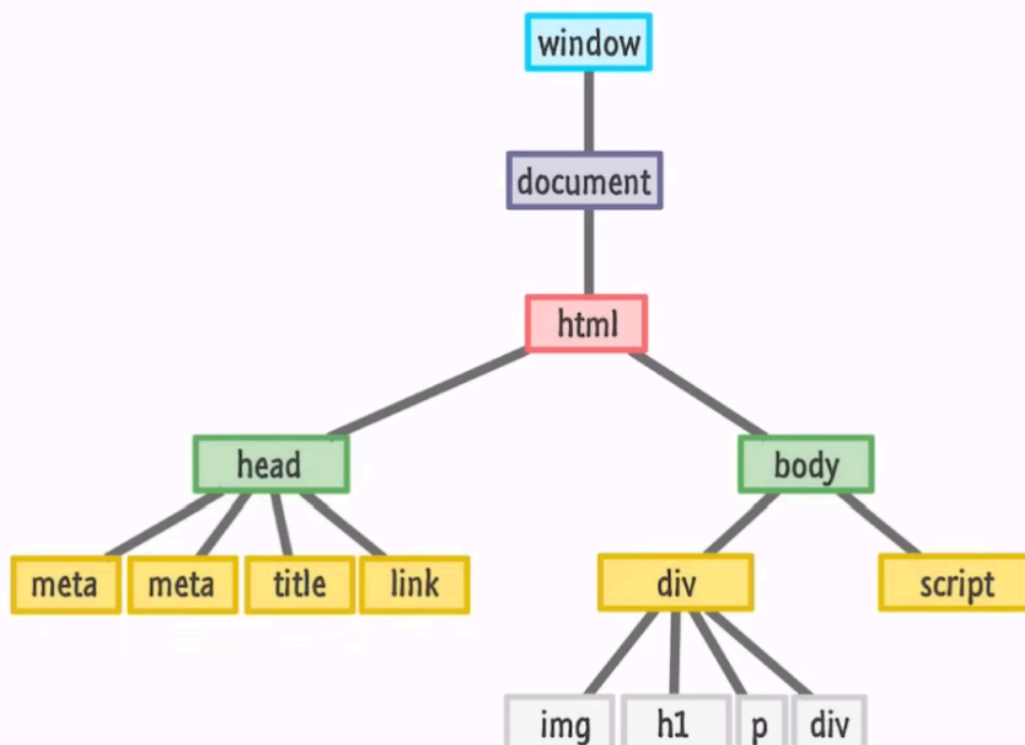

Key Points

- **Document object:** "document" is the entry point — it represents the whole HTML page in JS.
- **Tree structure:** Every HTML tag becomes a "node" — nested tags become parent-child nodes.
- **Dynamic:** DOM lets JS add, remove, or change elements live, e.g. after a button click or form submit.
- **Not part of JS language:** DOM is a Web API provided by the browser, JS just talks to it.

Common DOM Methods/Properties Used Today

- `document.getElementById("id")` → selects one element by its id
- `document.querySelector(".class")` → selects the first matching element
- `document.querySelectorAll(".class")` → selects all matching element
- `element.value` → reads/sets the value typed inside an input box
- `element.innerHTML` → reads/sets the HTML content inside an element
- `element.innerHTML += `...`` → appends new HTML to existing content
- `element.addEventListener("click", function)→` runs code when an event happens

2. Example 1 — Movie Card Generator

Goal: Take 3 inputs from the user — Movie Image URL, Movie Name, and Rating — and display them as a styled card (div) on the page using `innerHTML +=` , without reloading the page.

HTML (index.html)

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Movie Card Generator</title>
  <link rel="stylesheet" href="style.css">
</head>
<body>

  <h1> Movie Card Generator</h1>

  <div class="form-box">
    <input type="text" id="movieUrl" placeholder="Movie Image URL">
    <input type="text" id="movieName" placeholder="Movie Name">
    <input type="number" id="movieRating" placeholder="Rating (out of 10)"
min="0" max="10">
    <button onclick="addMovie()">Add Movie</button>
```

```
</div>

<div id="movieContainer" class="movie-container"></div>

<script src="script.js"></script>
</body>
</html>
```

CSS (style.css)

```
body {
  font-family: Arial, sans-serif;
  text-align: center;
  background: #f4f4f4;
  margin: 0;
  padding: 20px;
}

.form-box {
  margin-bottom: 30px;
}

.form-box input {
  padding: 8px;
  margin: 5px;
  width: 200px;
  border: 1px solid #ccc;
  border-radius: 5px;
}

.form-box button {
  padding: 8px 16px;
  background: #2e75b6;
  color: white;
  border: none;
  border-radius: 5px;
  cursor: pointer;
}

.movie-container {
  display: flex;
  flex-wrap: wrap;
  justify-content: center;
  gap: 15px;
}

.movie-card {
  width: 180px;
  background: white;
  border-radius: 8px;
  box-shadow: 0 2px 6px rgba(0,0,0,0.2);
  overflow: hidden;
}

.movie-card img {
  width: 100%;
  height: 220px;
  object-fit: cover;
}
```

```

}

.movie-card h3 {
  font-size: 16px;
  margin: 8px 0 4px;
}

.movie-card p {
  margin: 0 0 10px;
  color: #555;
}

```

JavaScript (script.js)

```

function addMovie() {
  // 1. Grab values from the 3 inputs using DOM
  let url = document.getElementById("movieUrl").value;
  let name = document.getElementById("movieName").value;
  let rating = document.getElementById("movieRating").value;

  // 2. Basic check so empty cards are not added
  if (url === "" || name === "" || rating === "") {
    alert("Please fill all 3 fields!");
    return;
  }

  // 3. Select the container div where cards will be shown
  let div = document.getElementById("movieContainer");

  // 4. Append a new movie card using innerHTML +=
  div.innerHTML += `
    <div class="movie-card">
      
      <h3>${name}</h3>
      <p> ${rating} / 10</p>
    </div>
  `;

  // 5. Clear the inputs for the next entry
  document.getElementById("movieUrl").value = "";
  document.getElementById("movieName").value = "";
  document.getElementById("movieRating").value = "";
}

```

- `getElementById(...).value` reads what the user typed/pasted in each input.
- We use a template literal (backticks ``) so we can insert variables with `${ }`.
- `innerHTML +=` keeps the old cards and adds the new one at the end (if we used `=`, it would erase previous cards).
- Each new card is just an HTML string injected into the DOM tree — that's DOM manipulation in action.

3. Example 2 — User Info Table

Goal: Take Name, Age, and Email from the user and display each entry as a new row in a HTML table using the DOM.

HTML (index.html)

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>User Info Table</title>
  <link rel="stylesheet" href="style.css">
</head>
<body>

  <h1>👤 User Info Table</h1>

  <div class="form-box">
    <input type="text" id="userName" placeholder="Name">
    <input type="number" id="userAge" placeholder="Age">
    <input type="email" id="userEmail" placeholder="Email">
    <button onclick="addUser()">Add User</button>
  </div>

  <table id="userTable">
    <thead>
      <tr>
        <th>Name</th>
        <th>Age</th>
        <th>Email</th>
      </tr>
    </thead>
    <tbody id="userTableBody">
      <!-- new rows will be added here -->
    </tbody>
  </table>

  <script src="script.js"></script>
</body>
</html>
```

CSS (style.css)

```
body {
  font-family: Arial, sans-serif;
  text-align: center;
  background: #f4f4f4;
  margin: 0;
  padding: 20px;
}

.form-box input {
  padding: 8px;
  margin: 5px;
  width: 160px;
  border: 1px solid #ccc;
  border-radius: 5px;
}
```

```

.form-box button {
  padding: 8px 16px;
  background: #2e75b6;
  color: white;
  border: none;
  border-radius: 5px;
  cursor: pointer;
}

table {
  margin: 20px auto;
  border-collapse: collapse;
  width: 60%;
  background: white;
  box-shadow: 0 2px 6px rgba(0,0,0,0.15);
}

th, td {
  border: 1px solid #ddd;
  padding: 10px;
}

th {
  background: #2e75b6;
  color: white;
}

tr:nth-child(even) {
  background: #f2f2f2;
}

```

JavaScript (script.js)

```

function addUser() {
  // 1. Get values from the 3 inputs
  let name = document.getElementById("userName").value;
  let age = document.getElementById("userAge").value;
  let email = document.getElementById("userEmail").value;

  // 2. Validate
  if (name === "" || age === "" || email === "") {
    alert("Please fill all 3 fields!");
    return;
  }

  // 3. Select the table body
  let tableBody = document.getElementById("userTableBody");

  // 4. Append a new row using innerHTML +=
  tableBody.innerHTML += `
    <tr>
      <td>${name}</td>
      <td>${age}</td>
      <td>${email}</td>
    </tr>
  `;
}

```



```
// 5. Clear inputs
document.getElementById("userName").value = "";
document.getElementById("userAge").value = "";
document.getElementById("userEmail").value = "";
}
```

Explanation

- Same pattern as Example 1: read values → validate → build HTML string → inject with innerHTML += .
- Here we add a <tr> row instead of a <div> card — showing students the DOM doesn't care what tag it is, the logic is identical.
- tbody is targeted (not the whole table) so the header row never gets overwritten.

Quick Recap

- DOM = live tree of the page that JS can read and change.
- Step pattern used in both examples: Select inputs → Read .value → Validate → Build HTML with template literals → Inject with innerHTML += → Clear inputs.
- innerHTML = replaces everything; innerHTML += adds to the end.
- The same technique works for any data: movies, users, products, comments, todo items, etc.

Introduction to JavaScript

JavaScript is a versatile, dynamically typed programming language that brings life to web pages by making them interactive. It is used for building interactive web applications and supports both client-side and server-side development.

- **Interpreted language:** Code is executed line by line.
- **Dynamically typed:** Variable types are determined at runtime.

- **Single-threaded:** Executes one task at a time (but supports asynchronous operations).

Features of JavaScript

Here are some key features of JavaScript that make it a powerful language for web development:

- **Client-Side Scripting:** JavaScript runs on the user's browser, so it has a faster response time without needing to communicate with the server .
- **Versatile:** Can be used for a wide range of tasks, from simple calculations to complex server-side applications.
- **Event-Driven:** Responds to user actions (clicks, keystrokes) in real-time.
- **Asynchronous:** It can handle tasks like fetching data from servers without freezing the user interface.
- **Rich Ecosystem:** There are numerous libraries and frameworks built on JavaScript, such as React , Angular , and Vue.js, which make development faster and more efficient.

1. Variables

A variable is a named container used to store data values in memory. In JavaScript, variables are declared using var, let, or const.

- **var** — function-scoped, can be re-declared and updated, hoisted with a default value of undefined.
- **let** — block-scoped, can be updated but not re-declared in the same scope, hoisted but not initialized.
- **const** — block-scoped, cannot be updated or re-declared; must be initialized at the time of declaration.

```
var age = 21;           // function-scoped
let studentName = "Riya"; // block-scoped, can change
const college = "ABC Engineering College"; // cannot change

studentName = "Riya Sharma"; // OK
// college = "XYZ College"; // Error: Assignment to constant variable
```

2. Data Types

JavaScript has two broad categories of data types: Primitive types and Non-Primitive (Reference) types.

Primitive Data Types

- Number — e.g. 10, 3.14
- String — e.g. "Hello", 'JavaScript'
- Boolean — true or false
- Undefined — a variable declared but not assigned a value
- Null — represents an intentional absence of value
- Symbol — a unique and immutable value
- BigInt — for numbers larger than the safe integer limit

Non-Primitive (Reference) Data Types

- Object — collection of key-value pairs
- Array — ordered list of values
- Function — a reusable block of code

```
let rollNo = 45;           // Number
let name = "Aman";        // String
let isPresent = true;     // Boolean
let marks;                // Undefined
let result = null;        // Null

let student = { name: "Aman", rollNo: 45 }; // Object
let subjects = ["Maths", "DBMS", "OS"]; // Array

console.log(typeof rollNo); // "number"
console.log(typeof name);   // "string"
console.log(typeof student); // "object"
```

3. if...else Statement

The if...else statement is used to perform different actions based on different conditions.

```
let marks = 72;

if (marks >= 90) {
  console.log("Grade: A+");
} else if (marks >= 75) {
  console.log("Grade: A");
} else if (marks >= 60) {
  console.log("Grade: B");
} else {
  console.log("Grade: C");
}
// Output: Grade: B
```

4. for Loop

The for loop is used to execute a block of code repeatedly, a specific number of times.

```
for (let i = 1; i <= 5; i++) {
  console.log("Roll No: " + i);
}
// Output:
// Roll No: 1
// Roll No: 2
// Roll No: 3
// Roll No: 4
// Roll No: 5
```

Syntax breakdown: for (initialization; condition; increment/decrement) { ...code... }

5. Functions

A function is a reusable block of code designed to perform a particular task. It runs only when it is called (invoked).

```
function greetStudent(name) {
  return "Hello, " + name + "! Welcome to class.";
}

console.log(greetStudent("Priya"));
// Output: Hello, Priya! Welcome to class.
```

- Function Declaration — defined using the function keyword, hoisted completely.
- Function Expression — a function assigned to a variable, not hoisted the same way.

```
// Function Expression
const add = function (a, b) {
  return a + b;
};
console.log(add(4, 5)); // 9
```

6. Arrow Functions

Arrow functions, introduced in ES6, provide a shorter syntax for writing functions. They do not have their own 'this' binding.

```
// Normal function expression
const square = function (n) {
  return n * n;
};

// Arrow function equivalent
const squareArrow = (n) => {
  return n * n;
};

// Shorter arrow function (implicit return)
const squareShort = n => n * n;

console.log(squareShort(6)); // 36
```

- If there is only one parameter, parentheses are optional.
- If the function body is a single expression, curly braces and the return keyword can be omitted.

7. How JavaScript Code Runs — Call Stack & Execution Context

JavaScript is a single-threaded, synchronous language. It executes code inside an Execution Context, and every execution context is managed using a Call Stack.

7.1 Call Stack

The Call Stack is a data structure that keeps track of function calls and execution contexts in a JavaScript program. It works on the LIFO (Last In, First Out) principle.

As soon as a JavaScript program starts running, a Global Execution Context (GEC) is created and pushed onto the Call Stack.

7.2 Global Execution Context (GEC)

The Global Execution Context is the base/default context created when the JS engine starts executing a script. It is created in two phases:

- Memory Creation Phase (also called the Creation Phase)
- Code Execution Phase

7.3 Memory Creation Phase

In this phase, the JS engine scans the entire code and allocates memory to variables and functions, without actually running any code:

- Variables (var) are allocated memory and initialized with a special value: undefined.
- let and const variables are also allocated memory, but they remain in an uninitialized state (Temporal Dead Zone) until their actual line of code runs.
- Function declarations are stored in memory with their entire function code (fully hoisted).

7.4 Code Execution Phase

In this phase, the JS engine runs the program line by line, executing statements and assigning actual values to variables that were set to undefined in the memory phase.

Example to understand both phases:

```
var x = 10;
function greet() {
  console.log("Hello!");
}
var y = 20;
greet();
```

Memory Creation Phase (before execution starts):

- x → undefined
- y → undefined
- greet → entire function stored in memory

Code Execution Phase (line by line):

- Line 1: x is assigned the value 10
- Line 2-4: function is already in memory, nothing new happens
- Line 5: y is assigned the value 20
- Line 6: greet() is called → a new Function Execution Context is created and pushed onto the Call Stack, code inside runs, logs "Hello!", then this context is popped off the stack

7.5 Function Execution Context

Every time a function is invoked, a new Function Execution Context (FEC) is created and pushed on top of the Call Stack. It also has its own Memory Creation Phase and Code Execution Phase for the variables and parameters local to that function. Once the function finishes executing, its execution context is popped off the stack, and control returns to where it was called from.

8. Hoisting

Hoisting is JavaScript's default behavior of moving declarations (of variables and functions) to the top of their scope, during the Memory Creation Phase, before the code is executed.

```
console.log(a); // undefined (not an error)
var a = 5;
console.log(a); // 5

sayHi();        // works fine, prints "Hi!"
function sayHi() {
  console.log("Hi!");
}
```

var declarations are hoisted and initialized with undefined, which is why accessing them before their line of code does not throw an error. Function declarations are hoisted completely, including their body, so they can be called before they appear in the code.

9. Temporal Dead Zone (TDZ)

The Temporal Dead Zone is the time period between the start of a scope (where a let or const variable is hoisted into memory) and the line where it is actually declared/initialized. During this period, the variable exists but cannot be accessed.

```
console.log(b); // ReferenceError: Cannot access 'b' before initialization
let b = 10;

console.log(c); // ReferenceError: Cannot access 'c' before initialization
const c = 20;
```

Unlike var, let and const are hoisted but not initialized with undefined. They stay in the Temporal Dead Zone from the start of the block until their declaration is executed, so trying to use them earlier throws a ReferenceError instead of returning undefined.