


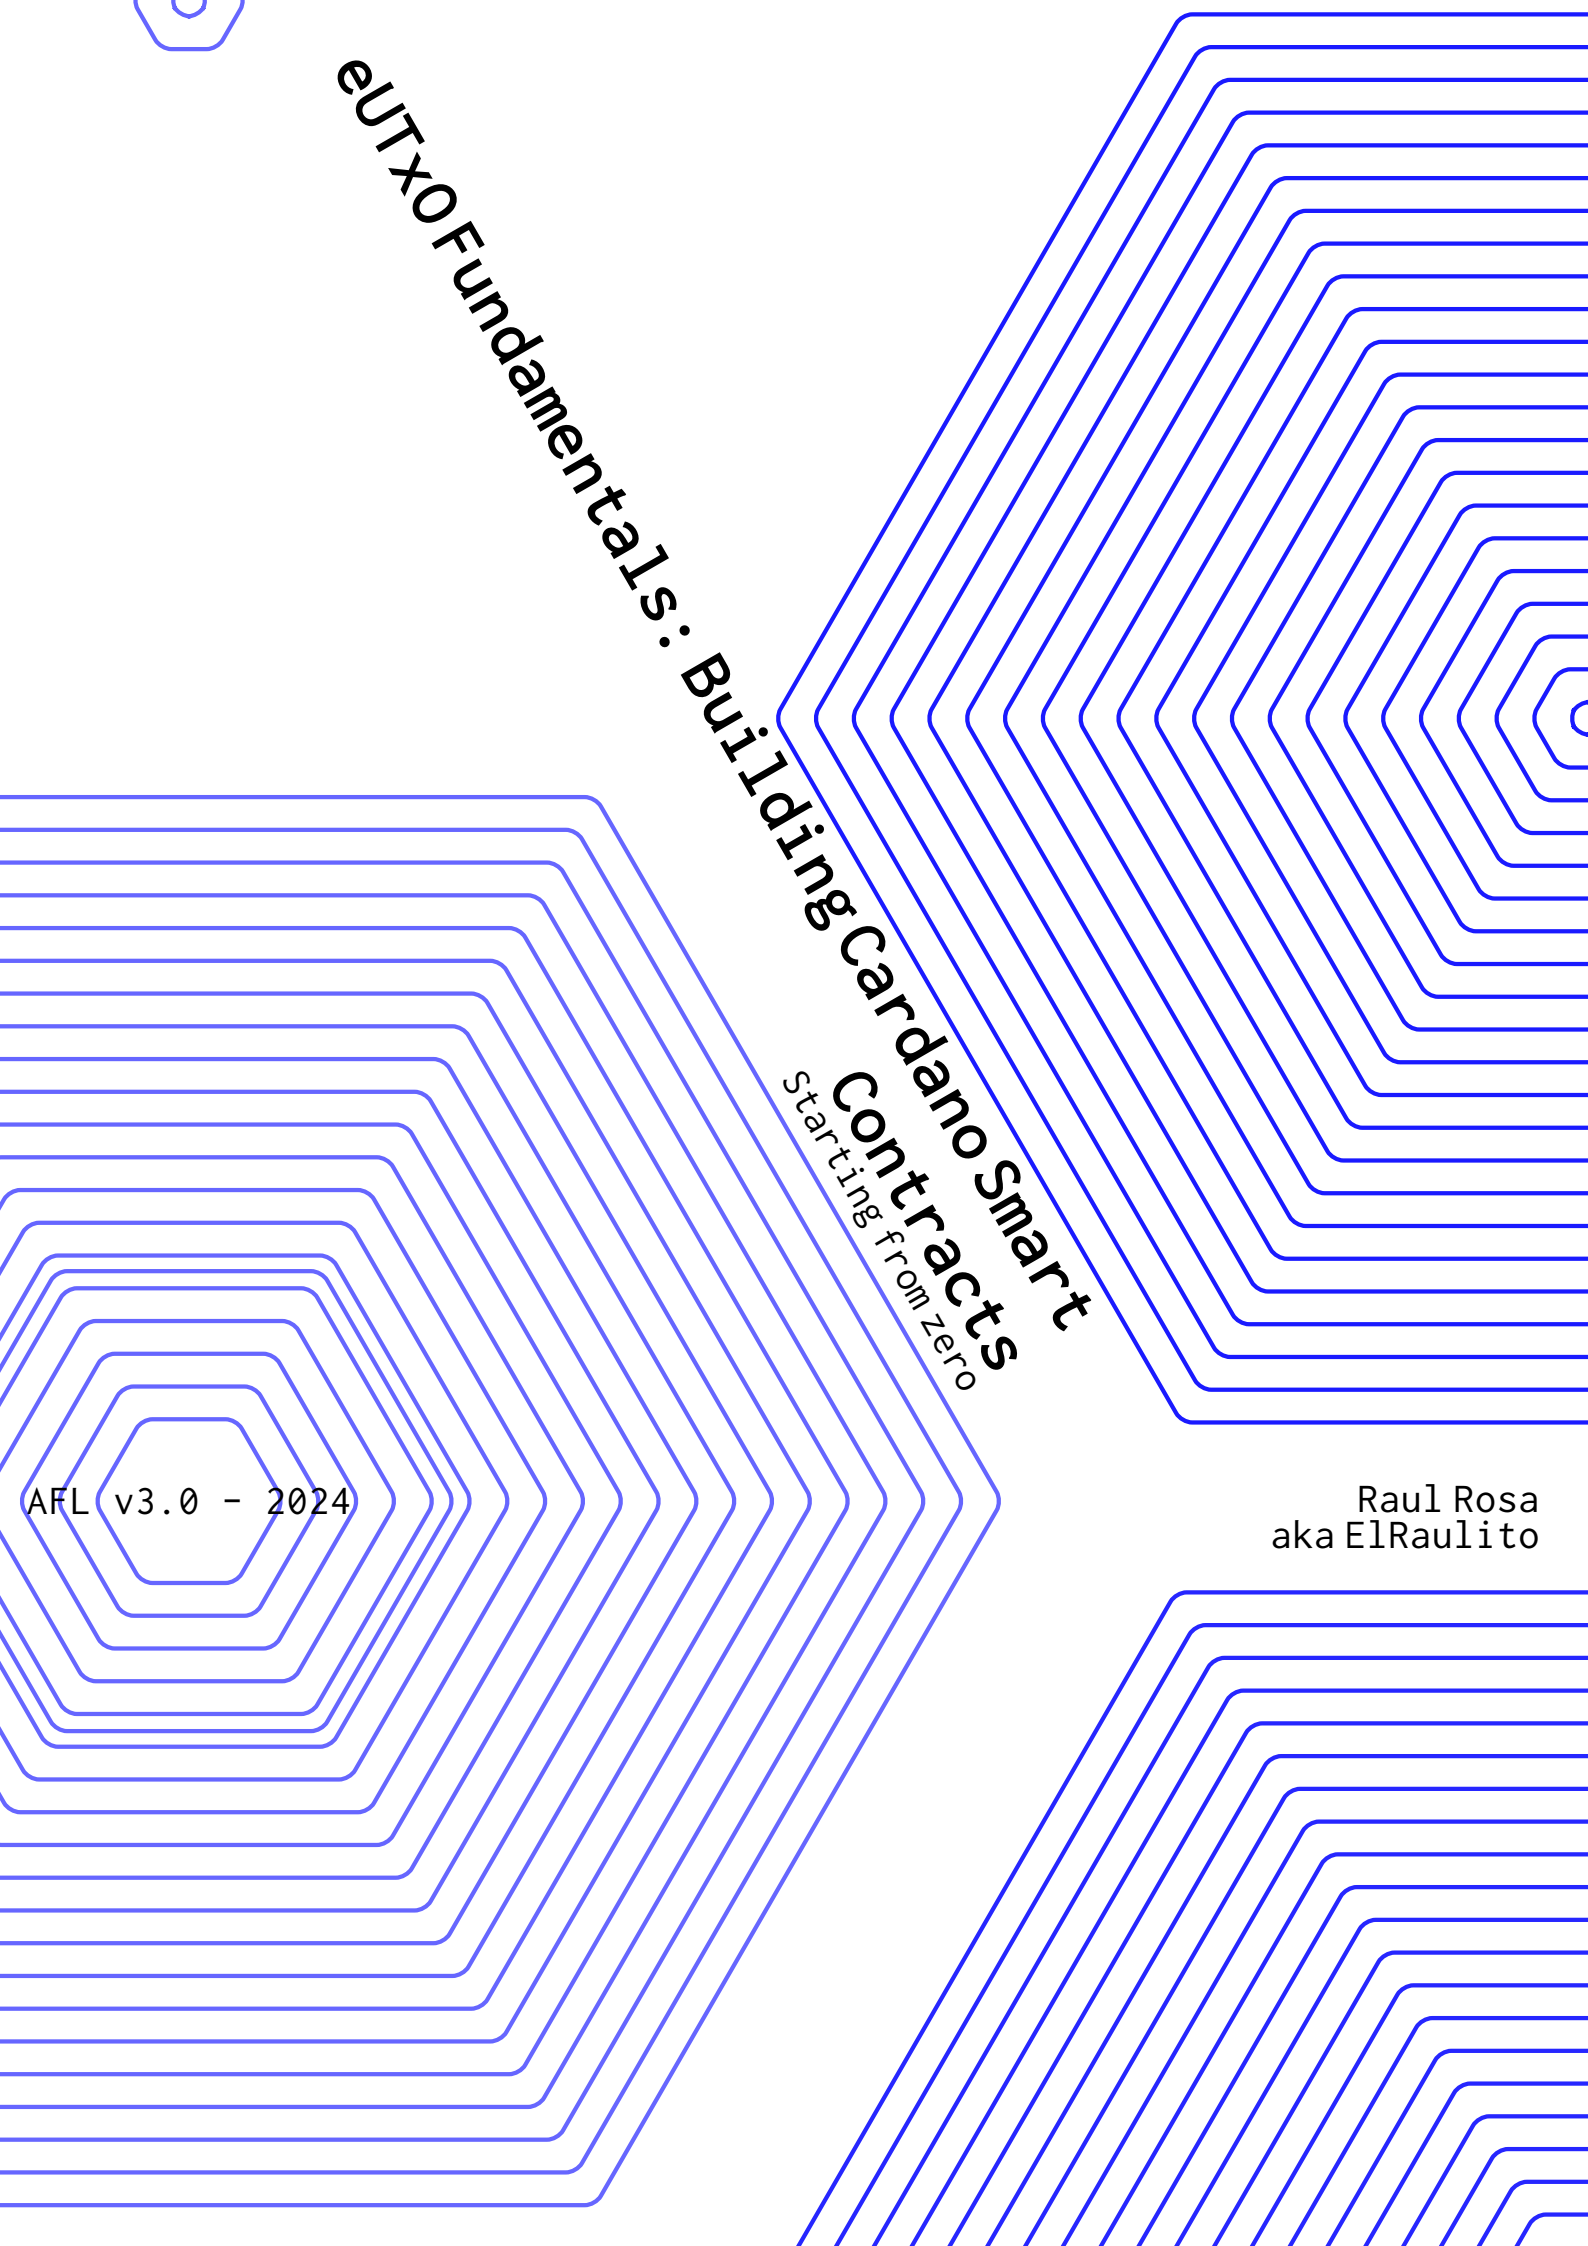

eUTxO Fundamentals: Building Cardano Smart Contracts

Starting from zero

AFL v3.0 - 2024

Raul Rosa
aka ElRaulito

I	INTRODUCTION TO CARDANO SMART CONTRACTS		5
	1	OVERVIEW OF CARDANO BLOCKCHAIN	6
	1.1	Importance and Applications of Smart Contracts	8
	1.2	Advantages of Cardano for Smart Contract Development	10
II	SETTING UP THE DEVELOPMENT ENVIRONMENT		11
DEVELOPMENT TOOLS	2	INSTALLING AND CONFIGURING CARDANO DEVELOPMENT TOOLS	12
	2.1	Installing and Configuring Cardano Development Tools	12
	2.2	Hot wallets on Cardano	12
	2.3	Setting Up and Connecting to Cardano Testnet	12
	2.4	Interacting with Cardano node and Wallet APIs	15
	2.5	Setting Up a Cardano node on Contabo Cloud VPS	16
III	EXPLORING THE EUTXO MODEL		20
COMPONENTS	3	UNDERSTANDING THE EUTXO MODEL AND ITS COMPONENTS	21
	3.1	Understanding the eUTxO Model and Its Components	21
	3.2	eUTXO Model	21
	3.3	Writing Transactions and Validating Inputs and Outputs	22
	3.4	Cardano Native Scripts	26
	3.5	Using Lucid Library for Cardano Native Scripts	30
	3.6	Interacting with Smart Contracts Using Lucid	31
	3.7	Datum, Redeemers, and Script Context	34
IV	CARDANO SMART CONTRACT LANGUAGES		36
	4	CARDANO SMART CONTRACT LANGUAGES	37
	4.1	Introduction to Plutus Language	37
	4.2	Exploring Helios Language	41
	4.3	Aiken Language: Features and Syntax	44
	4.4	OpShin Language: Concepts and Usage	47
	4.5	Plu-ts: Understanding the basics	48

	4.6	Plutarch: Advanced Functional Contract Composition	52
V	SMART CONTRACT RUNTIME		57
58	5	SMART CONTRACT RUNTIME AND EXECUTION	
	5.1	Smart Contract Runtime and Execution	58
	5.2	Transaction Verification and Script Validation	61
	5.3	Debugging and Troubleshooting Smart Contracts	63
	5.4	Tx Optimization Techniques for Efficient Execution	65
VI	WRITE YOUR FIRST SMART CONTRACT		68
	6	GETTING STARTED WITH CARDANO SMART CONTRACT DEVELOPMENT	69
	6.1	Key Concepts and Terminology	69
	6.2	Writing Your First Smart Contract	69
	6.3	Deploying and Interacting with Smart Contracts	73
	6.4	Best Practices for Secure and Robust Smart Contract	77
	6.5	Exercises to test your smart contract skills	78
VII	BUILDING A MARKETPLACE SMART CONTRACT		79
	7	BUILDING A MARKETPLACE	80
	7.1	Defining Requirements for a Marketplace Contract	80
	7.2	Implementing Marketplace Contracts	80
	7.3	Marketplace in Helios	85
	7.4	OpShin Marketplace	88
	7.5	Plu-ts Marketplace	91
	7.6	Aiken Marketplace	94
	7.7	Plutarch Marketplace	97
	7.8	Testing and Deploying Marketplace Contracts	102
	7.9	Enhancing Marketplace Contracts	109

VIII	ON-CHAIN GOVERNANCE	111
8	GOVERNANCE SMART CONTRACTS	112
8.1	Introduction to On-Chain Governance	112
8.2	Governance Transactions and Their Structure	114
8.3	Writing Governance Smart Contracts	117
8.4	Governance Use Cases and Real-World Examples	123
IX	CONCLUSION AND NEXT STEPS	130
9	CONCLUSIONS	131
9.1	Recap of Key Concepts and Takeaways	131
9.2	Resources for Further Learning and Exploration	131
9.3	Contributing to the Cardano Smart Contract Ecosystem	132
X	EXERCISE SOLUTIONS	133
10	SOLUTIONS	134
10.1	Solutions	134
	GLOSSARY	150



INTRODUCTION TO CAR- DANO SMART CONTRACTS



1. OVERVIEW OF CARDANO BLOCKCHAIN

1.0.1. History

Charles Hoskinson, along with Jeremy Wood, co-founded Cardano, both were part of Ethereum before. In 2015, they established Input Output Hong Kong to create and develop more sustainable blockchain solutions. Utilizing a peer-reviewed approach to blockchain development and introducing a novel consensus mechanism called **Ouroboros**, Cardano was prepared for its Mainnet launch in 2017.

1.0.2. Ouroboros

Ouroboros relies on a **proof of stake** consensus. Rather than requiring nodes to engage in computationally intensive work as in PoW chains, nodes are randomly selected based on the amount of ADA they hold at stake. This approach serves two purposes: it is more energy-efficient and incentivizes nodes to act responsibly as their stake is at risk in case of misbehavior.

1.0.3. Cardano Architecture

The blockchain model comprises several components. Users interact with the current ledger state by creating transactions, which are then submitted to the mempool until they are included in a block. Blocks are mined by stake pools, which are rewarded for their efforts and share these rewards with their delegators. Increased decentralization is achieved with more stake pool operators.

1.0.4. Improvements from Other Blockchains

Cardano offers several advantages over other chains:

- **Determinism:** This feature enables transaction chaining.
- **Predictable Fees:** There is no risk of pending transactions due to fee increases.
- **Sustainability:** Unlike PoW, which is power-intensive, Cardano's approach is more sustainable.
- **Native Tokens:** Tokens are stored on the ledger, allowing smart contracts to interact with them. Users have control over tokens in their wallets, which cannot be frozen by external parties.

Scaling is currently the most significant challenge for the ecosystem. The ability to handle high volumes of users without being limited by block or transaction size is crucial for increasing adoption.

1.0.5. *Determinism* and predictable fees to make a better user experience

Why **Determinism** is important in smart contract programming? Cardano inherits determinism from Bitcoin, once all the fields of a transaction are decided you will always

get the same transaction Hash. But more importantly, if you can get the hash of a transaction before actually submitting, you can even create a following transaction, relying on the first one. This is usually called transaction chaining, I can create a chain of transactions that are not submitted, and this can allow me to speed up the user flow. Ok, let's try to simplify even more this concept.

- Alice, Bob and Raul are in a Bar, each has 100 ADA
- Alice sends to Raul 50 ADA but the blockchain right now is super clogged
- However Raul is already able to build a transaction to send 120 ADA to Bob because even if the blockchain is clogged, the hash of the transaction is already decided and won't change at all
- Now even Bob can send 220 ADA to someone else, even before the transactions are confirmed, due to Cardano determinism he can use transactions that are not confirmed yet

Everything seems amazing, perfect. Where is the issue? What happens if for some reason Alice had her transaction with a deadline of 1 hour? In that case, Alice's transaction could never become valid, therefore every other transaction depending on that will never make it. This means that everything goes to the beginning, Alice, Bob and Raul have 100 ADA each. This is a problem if each of them paid for goods in the real world and now they get their money back.

Why do predictable fees matter and what's their role in *determinism*?

On Bitcoin when you set inputs (what you spend), outputs (who gets the money) and fees you can get the transaction hash. This happens also on Cardano, however on Bitcoin, there is a fee market, therefore the fees you set may not be enough to cover the cost of having the transaction in the next blocks. So on Bitcoin fees may need to change, there is an RBF feature that allows you to speed up a transaction increasing the fee cost. But this also leads to a change in the transaction hash, therefore we can't always build a chain of transactions on Bitcoin because one transaction could change, making all the following invalid.

On Cardano there is no fee market, in this way, once you pay enough to cover the processing costs, that transaction will be in the following blocks. Fees are not dynamic and can't change.

Even if it sounds cool, this leads to a problem, if there is no way of speeding up my transaction or making it possible to get priority over others, how can a protocol that needs instant settlement work? This is an open question that lately has been discussed as a tier fee market on Cardano.

1.1.1. IMPORTANCE AND APPLICATIONS OF SMART CONTRACTS

Smart contracts are a concept born alongside Ethereum, enabling the execution of code and interactions without a third party. Once initiated, the terms of the contract are set by the parties involved, and no one can stop or interfere thereafter.

However, history teaches us that some protocols have included backdoors within their smart contracts, leading to fund theft or enabling bad actors to access users' funds.

Let's start with the basics.

1.1.1.1. What is a Smart Contract?

A smart contract is a decentralized software accessible to users on the blockchain, typically through a website interface. Users interacting with the contract can perform operations (financial, trading, storage) without requiring permission from a third party.

The essential components of a smart contract are:

- **Parties:** Who can interact with the contract? Is it open to everyone, specific users, or owners of particular assets?
- **Actions:** What operations can users perform with the contract? These could include depositing funds, creating NFTs, storing data, reading data, withdrawing funds, and more.
- **Rules:** Define the actions each party can take under specific conditions.
- **Data Fields:** What data is involved in interactions with the contract, and how can each step of the interaction be tracked?

1.1.1.2. Applications

In a typical decentralized exchange (DEX) application, the parties are liquidity providers and traders. Liquidity providers can deposit and withdraw liquidity, while traders can only perform swaps. Rules dictate that liquidity providers must hold LP tokens in their wallets, while traders must have sufficient funds to cover transactions. Data fields stored in the contract typically include LP tokens, fees for liquidity providers, and token data.

In a marketplace scenario, the parties are sellers and buyers. Sellers can sell assets, while buyers can buy them. Rules stipulate that sellers must possess the assets they intend to sell, and buyers must have sufficient funds to purchase assets and pay sellers. Data stored includes the seller's address, payment amounts, royalties (if applicable), and platform fees.

On Cardano, specific actions might include *Cancel Listing* and *Buy. Selling/List* is more of a smart contract interaction than an action.

A smart contract action involves a transaction where the smart contract is invoked in the inputs. If the smart contract is present only in the outputs, it's considered a smart contract interaction.

There can be many more smart contract applications, imagination is the limit, and some applications may work better on Cardano due to UTXO architecture or on EVM chains due to the account model. Let's consider the case of a dex, it can be either *orderbook* or

AMM. The orderbook works perfectly in a UTXO blockchain because every order can be a single UTXO. While on EVM chains orderbook dexes struggle because they are limited by the memory of the smart contract. On the opposite side, building an AMM on Cardano requires a lot of emulation, since the pool is a single UTXO, more parties can't spend it at the same time, that's why we found as solutions the batchers. Bachers match the orders with the single UTXO liquidity pool. This concept is not efficient however AMM are more user-friendly usually and that's why currently Cardano is the one leading in liquidity volumes.

1.1.3. Smart Contract audits

Once a smart contract is developed and ready to launch an audit should be done, this is to ensure that the code is safe and no issues may arise once people start interacting with it. Audits play a critical role in the deployment of smart contracts, serving as a crucial safeguard against potential vulnerabilities and ensuring the integrity of the code. Smart contracts, being immutable, leave little room for error once deployed, making thorough scrutiny prior to launch imperative. Audits help identify security flaws, logic errors, and vulnerabilities that may compromise the contract's functionality or jeopardize users' funds. By subjecting the code to rigorous review by experienced professionals, audits instill confidence among users and investors, fostering trust in the decentralized ecosystem. Moreover, audits contribute to the overall maturation of the blockchain space, driving standards for secure coding practices and enhancing the reliability of smart contract applications. Ultimately, investing in audits upfront mitigates the risk of costly exploits or breaches down the line, safeguarding both the project's reputation and the interests of its stakeholders.

But audits have a cost and sometimes early projects may not afford that much.

Opensource can be a way in order to launch a project asking for external reviews coming from the community, usually bug bounty programs are run in order to incentivize users to collaborate in the task of finding risks in the smart contract code.

1.1.4. Smart Contract risks

On Cardano there are some risks regarding smart contracts that we'll study better in the following chapters, but here are a few of them as a preview:

- Double satisfaction attack: User may spend two inputs that require similar conditions
- Dust attack: Users may add spam tokens in a smart contract making it impossible to retrieve funds from it
- Spam Contract: A second smart contract can run together with the attacked one, making it possible to unlock funds from the first
- Datum attack: A datum of the contract may be corrupted making unspendable the funds inside the contract
- backdoor: All the funds of the contract may be retrieved by someone who coded a backdoor

1.1.5. The cost of deploying a contract

Deploying a contract onto the blockchain carries no direct cost, allowing widespread accessibility. However, it's essential to consider additional expenses, especially if utilizing reference scripts like ADA, which may necessitate funds for storage on the blockchain. Moreover, while users typically prefer interacting with contracts via frontends, developing and maintaining such interfaces entail both frontend and backend costs. It's imperative to conduct thorough economic assessments before project launch, ensuring expenses don't surpass revenues. Abruptly discontinuing services without prior notice could result in users losing their funds, highlighting the importance of transparent communication in managing smart contract projects.

1.2. ADVANTAGES OF CARDANO FOR SMART CONTRACT DEVELOPMENT

Two years ago, if you asked me about the advantages of writing smart contracts on Cardano, I would have struggled to answer. However, now I can easily list several:

- **Composability:** The ability to create a transaction involving multiple contracts and perform actions with each of them.
- **User-Friendly:** No longer requiring Haskell, languages like Aiken, Opshin, and more offer a user-friendly experience.
- **Liquid Staking:** Thanks to Cardano staking, smart contracts can delegate ADA or keep funds staked with liquidity providers.
- **UTxO Skills:** While much of the focus has been on Ethereum Virtual Machine (EVM) smart contracts, the UTXO model is ideal for solutions like ZK rollups, as it's easier to implement compared to the account model.

If you're still interested in becoming a Cardano smart contract wizard after this introduction, we can continue in the next chapter, where we'll install the components needed to **build on Cardano**.



SETTING UP THE DEVELOPMENT ENVIRONMENT



2. INSTALLING AND CONFIGURING CARDANO DEVELOPMENT TOOLS

2.1. INSTALLING AND CONFIGURING CARDANO DEVELOPMENT TOOLS

The purpose of this book is to gather all the information for developing Cardano that currently is scattered around. What are we going to use for our project?

- **A hot Wallet:** We are going to use a wallet to test our contracts, this wallet will be used to receive tADA. We'll never store our main ADA holdings in this wallet: Wallets recommended for testnet are Nami on desktop and Vesper for mobile.
- **A indexer account:** Indexers are the ones that will provide us the APIs in order to interact with the chain, we won't need to run a node for testing, let's use services and projects already there like **Maestro**, let's set up an account and get the API key.
- **Lucid library:** Lucid is not maintained anymore as a function and has been replaced by COMING SOON, however for testing and understanding the flow of Cardano transactions it can be really useful.
- **tADA:** How are we going to test without having testnet ADA? let's not mess up real ADA
- **IDE:** Personally I use Visual Studio Code as IDE, but any other editor is ok since we are going to
- **Cardano Node:** This is NOT mandatory at all, as homework, we could try to set up a Cardano node and interact with the chain using cardano-cli (command line), however, this is something we can do in our free time, there are other hobbies out there better than this, swimming, dancing or reading a book.

*A new library is being built and once live it's going to be added in this book.

2.2. HOT WALLETS ON CARDANO

When it comes to the wallet choice on Cardano the question we should ask ourselves is: Desktop or Mobile?

Test the wallet you like most and pick the one that gives you more user-friendly vibes for your use, a developer may require a very detailed wallet, however, a basic user may need just some very simple buttons without details.

2.3. SETTING UP AND CONNECTING TO CARDANO TESTNET

So let's install a wallet and config for testnet


In this example, we'll install the Nami wallet that we can find [here](#)

Once we install the wallet we'll get 24 seed phrase words

Current Cardano wallets available, updated in Q2 24

Wallets	Desktop	Mobile	Website
Nami	X		https://www.namiwallet.io/
Eternl	X	X	https://eternl.io/
Begin		X	https://begin.is/
Vespr		X	https://vespr.xyz/
Lace	X		https://www.lace.io/
NuFi	X		https://nu.fi/
Yoroi	X	X	https://yoroi-wallet.com/
Flint	X	X	https://flint-wallet.com/
Gero	X		https://www.gerowallet.io/
Typhon	X		https://typhonwallet.io/

Never share the seedphrase or store it on a cloud, use paper or different ways to store it, software can keep track of your seedphrase and you could lose the funds.

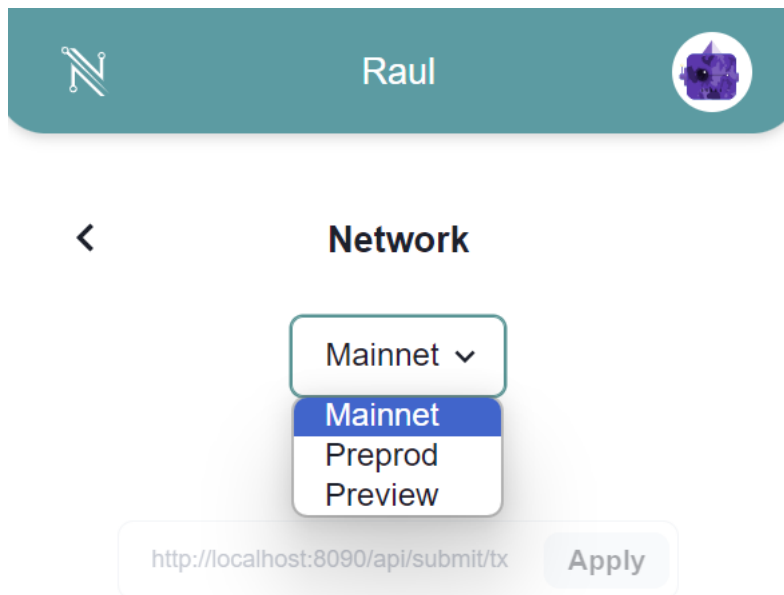

Let's set Nami to **testnet preview** and we'll finally get our wallet in testnet

2.3.1. Preview and Preprod testnets

- **Mainnet:** This is the live network where real transactions occur using actual ADA. It's the primary arena where users engage with Cardano wallets, exchanges, and decentralized applications (dApps).
- **Preprod:** Acting as a staging ground for major upgrades and releases, Preprod is a testing environment where developers validate changes before deploying them to the mainnet. Utilizing test ADA acquired from the faucet, developers simulate real-world scenarios, ensuring everything functions as intended before the changes go live. Preprod typically mirrors mainnet's structure, forking nearly simultaneously to ensure alignment.
- **Preview:** Serving as a testing environment to showcase upcoming features and functionality, Preview allows developers and users to explore and provide feedback on new developments before they reach the wider community. Like Preprod, test ADA from the faucet facilitates testing. Notably, Preview precedes mainnet hard forks by a minimum of four weeks, offering ample time for thorough evaluation and refinement based on community input.


2.3.2. Get tADA

In order to receive tADA we can use the official faucet from Cardano at the following [link](#)

The process doesn't involve any payment and at the end of your testing, ideally, you should return tADA back so other devs can work with it.

2.3.3. CIP30

To connect our wallet with any webpage we'll use CIP30 reference, we can find the list of methods to connect and invoke the functions of the wallets at this [page](#)

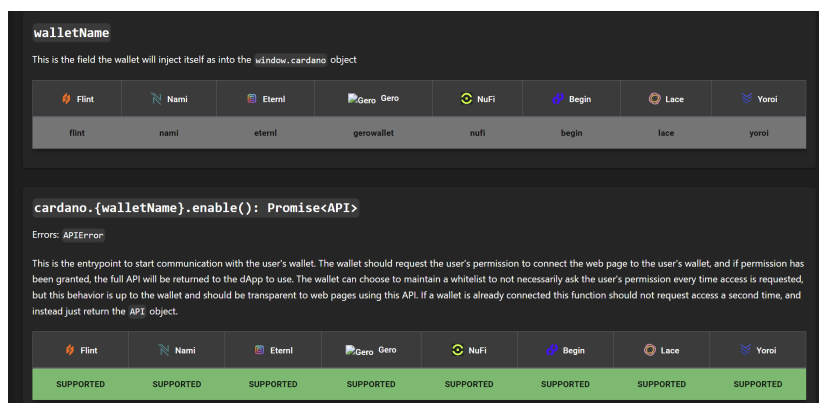

The steps to interact with a wallet following CIP30 are:

- **cardano.walletName.enable()**: we get an API object as Promise, this will create a popup message to allow the wallet to connect to the current website
- **api.getBalance()**: using the API object we got before, we get the total amount of Lovelace in the wallet (1 ADA = 1000,000 Lovelace)
- **api.signTx**: Signing a tx that was built with Lucid or any other library we sign and interact with the blockchain

EXERCISE 1: Create a webpage with 2 buttons, 1 to enable the wallet connection and, a second button to view the amount of ADA in the wallet.


2.4. INTERACTING WITH CARDANO NODE AND WALLET APIS

CIP30 is not enough, what if we want to get the information regarding a specific NFT in our wallet? How to get the list of tokens inside the wallet and get information regarding their circulation supply?

We need an indexer. We could set one on our own or use a service, in this book we'll use **Maestro** as a service provider so the first thing to do is:

2.4.1. Create a Maestro account

Head over **Maestro login** page and create an account, here we'll be able to get the API keys to interact with Cardano.

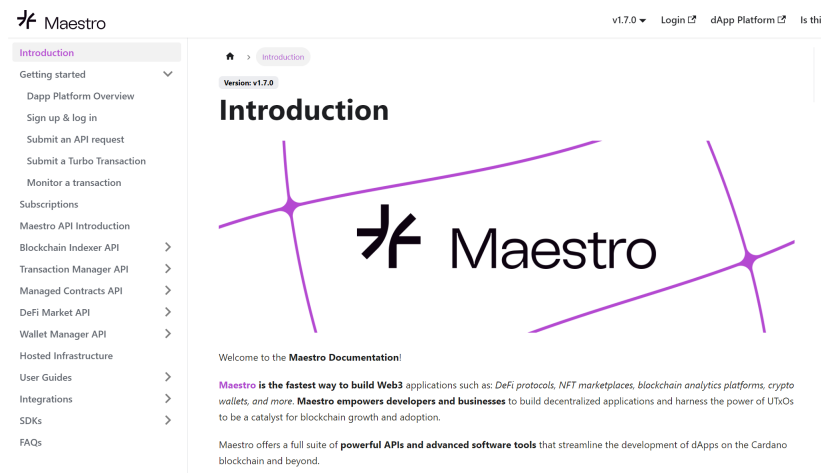

Maestro is going to be our key to getting all the possible APIs in order to interact with Cardano, here are the possible things we can do with these APIs:

- Get the history of an address with this **API**
- Get all the assets of a specific policy
- Get the address holding a specific ada handle
- Get the history of holders for a specific NFT
- and much more

Now that we have a way to interact with a wallet and APIs to query the Cardano blockchain we are ready to put our hands on the real coding part.

2.4.2. Indexer alternatives

If you would like to explore additional API providers you should consider the following:

- Blockfrost: The very first API provider for Cardano **link**
- Kupo: A tool that requires a node in order to host your own11 indexer **Github**
- Db-sync: Additional indexer that requires a Cardano Node, this is the very first one that was created **Github**

Now Let's code smart contracts.

EXERCISE 2: Head over to <http://cnftlab.party/> and connect your testnet wallet, mint a collection of NFTs and then use Maestro to get the information of each NFT of your collection.

2.5. SETTING UP A CARDANO NODE ON CONTABO CLOUD VPS

2.5.1. Step 1: Provisioning a Contabo Cloud VPS

1. Sign up for a Contabo Cloud VPS plan, such as the "Cloud VPS L".
2. Once you have access to your VPS, log in via SSH.

2.5.2. Step 2: Downloading and Extracting Cardano node Software

1. Navigate to the official Cardano GitHub release page: **Cardano Node Releases**.
2. Download the Cardano Node software for macOS by running the following command:

```
wget https://github.com/input-output-hk/cardano-node/releases/download/8.1.2/c
node-8.1.2-macos.tar.gz
```

3. After the download completes, create a directory named "node" and extract the downloaded files into it:

```
mkdir node
tar xvzf cardano-node-8.1.2-macos.tar.gz -C node
```

2.5.3. Step 3: Setting Up Node Configuration

1. Create the necessary directories:

```
cd node
mkdir mainnet
cd ..
mkdir sockets
```

2. Create a systemd service file for the Cardano Node:

```
sudo nano /etc/systemd/system/cardano-node.service
```

Paste the following content in the file:

```
sudo nano /etc/systemd/system/cardano-node.service
Now we should copy and paste the following lines:
[Unit]
Description=Cardano Pool
After=multi-user.target
[Service]
Type=simple
ExecStart=/home/ubuntu/nodev30/cardano-node run --config
/home/ubuntu/nodev30/config/mainnet-config.json --topology
/home/ubuntu/nodev30/config/mainnet-topology.json --database-path
/home/ubuntu/nodev30/mainnet/db/ --socket-path /home/ubuntu/nodev30/sockets/node.
host-addr 0.0.0.0 --port 3001

KillSignal = SIGINT
RestartKillSignal = SIGINT
```

```
StandardOutput=syslog
StandardError=syslog
SyslogIdentifier=cardano
LimitNOFILE=32768
```

```
Restart=on-failure
RestartSec=15s
WorkingDirectory=~
User=USERNAMEVPS
```

```
[Install]
WantedBy=multi-user.target
```

Save the file and exit the editor.

2.5.4. Step 4: Installing Required Dependencies and Syncing the Blockchain

1. Update package list and install necessary tools:

```
sudo apt update && sudo apt install liblz4-tool jq curl
```

2. Fetch the latest blockchain snapshot and sync the blockchain:

```
curl -o - https://downloads.csnapshots.io/snapshots/mainnet/$(curl -s https://
db-snapshot.json| jq -r .[].file_name ) | lz4 -c -d - | tar -x -C /root/node/mainnet
```

This process may take around 30 minutes.

2.5.5. Step 5: Starting the Cardano node

1. Enable and start the Cardano Node service:

```
sudo systemctl enable cardano-node.service
sudo systemctl start cardano-node.service
```

2. Monitor the node's status:

```
journalctl -u cardano-node.service -f -o cat
```

2.5.6. Step 6: Setting Up Cardano Submit API

1. Navigate to the node directory:

```
cd node
```

2. Create a configuration file for the transaction submission API:

```
nano tx-submit-mainnet-config.yaml
```

Paste the content from **Cardano Node GitHub** into this file. Save and exit the editor.

3. Run the Cardano Submit API with the provided configuration:

```
./cardano-submit-api --tx-submit-mainnet-config.yaml --socket-path /root/node/  
port 8090 --mainnet --host-addr 0.0.0.0
```

2.5.7. Step 7: Accessing Transaction Submission Endpoint

With the Cardano Submit API running, you can now send transactions using your node by accessing the following URL:

```
http://VPSIPADDRESS:8090/api/submit/tx
```

Replace VPSIPADDRESS with the IP address of your VPS.

By following these steps, you'll have successfully set up a Cardano node on your Contabo Cloud VPS and be ready to interact with the Cardano blockchain.



EXPLORING THE EUTX0 MODEL



3. UNDERSTANDING THE EUTXO MODEL AND ITS COMPONENTS

3.1. UNDERSTANDING THE EUTXO MODEL AND ITS COMPONENTS

Two popular record-keeping models in blockchain networks are the eUTXO (Extended Unspent Transaction Output) Model used by Cardano and the Account/Balance Model employed by Ethereum. This section provides a basic understanding of these models, their differences, and their respective pros and cons.

3.2. EUTXO MODEL

In Cardano, each transaction spends outputs from prior transactions and generates new outputs for future transactions. All unspent transactions are stored in each fully synchronized node, giving rise to the name “eUTXO”. A user’s wallet tracks unspent transactions associated with the user’s addresses, and the wallet balance is the sum of these unspent transactions.

3.2.1. Example

1. Alice gains 12.5 ADA through staking rewards, resulting in one eUTXO of 12.5 ADA.
2. Alice sends 1 ADA to Bob. Alice’s wallet uses her eUTXO of 12.5 ADA, sending 1 ADA to Bob and receiving 11.5 ADA as a new eUTXO to a new address owned by Alice.
3. If Bob had an eUTXO of 2 ADA before step 2, his wallet now shows a balance of 3 ADA from two eUTXOs.

3.2.2. Account/Balance Model

The Account/Balance Model maintains the balance of each account as a global state. It checks that an account’s balance is sufficient to cover the transaction amount.

3.2.3. Example

1. Alice gains 5 ETH through mining, recorded in the system.
2. Alice sends 1 ETH to Bob, reducing her balance to 4 ETH.
3. Bob’s balance increases by 1 ETH, so if he had 2 ETH initially, he now has 3 ETH.

3.2.4. Analogies

- **eUTXO Model:** Similar to using paper bills, where each bill (eUTXO) can be spent once, and change is returned as new eUTXOs.
- **Account/Balance Model:** Similar to a bank's ATM/debit card system, where the bank ensures sufficient balance before approving transactions.

3.2.5. Benefits

3.2.6. eUTXO Model

- **Scalability:** Enables parallel transactions and scalability innovations.
- **Privacy:** Provides higher privacy, especially with new addresses for each transaction.

3.2.7. Account/Balance Model

- **Simplicity:** Easier for developers of complex smart contracts requiring state information.
- **Efficiency:** More efficient as each transaction only validates account balance.

Drawbacks

Account/Balance Model: Susceptible to double-spending attacks, counteracted by an incrementing nonce.

Both models have trade-offs and are chosen based on specific blockchain needs. Some blockchains, like Hyperledger, adopt eUTXO to benefit from Bitcoin's innovations.

3.3. WRITING TRANSACTIONS AND VALIDATING INPUTS AND OUTPUTS

In this section, we'll analyze the components of a Cardano transaction and how it is built using a Cardano node and then using the Lucid library.

Let's start with the following transaction:

```
a2fcdf32987ebb729ab8f63b377e360ececbbf4805713ff559d2b69bb3c543a01
```



Let's analyze what we can see here:

On the **left**, we have the inputs of the transaction. We can see that we are spending 3 inputs containing tADA and some tokens. The inputs being spent are from the following transactions:

- 5df4a4fb78650b5d8b0e761e0ade2c2ab2289b4feb97f6780b82d78b3d02bf70
- f0e29aed793164ce8192aec7ec647b7e7747206d701b0dfd4a810414f7acb96b
- 5df4a4fb78650b5d8b0e761e0ade2c2ab2289b4feb97f6780b82d78b3d02bf70

This means that for each transaction, we can obtain the transactions that generated the funds being spent directly from the hash of the inputs. Not just this, it means that we are always able to track if the funds generated by a transaction have already been spent because they will appear as input on another transaction.

But that's not all; for each input, we are able to see from which address they come from, in this case `addr_test1qqw...hn5gh` and also the amount of tADA and tokens that were locked inside those inputs. We'll call this **Value**.

On the **right** side, we can see the outputs of the transaction. Therefore, where is the tADA going?

We have 3 outputs:

- The first output is sending 10,000 tADA and 1M tFLDT to `addr_test1qpku...sjuk35q`.
- The second output is a change to `addr_test1qqwywx3ag9sf3jjhk8hd...fhn5gh` sending back all the tADA that was left.
- The third output is a change to `addr_test1qqwywx3ag9sf3jjhk8hd...fhn5gh` sending back all the NFTs and tokens that were leftovers.

Finally, we can see that this transaction was validated during epoch 623, block 2,270,567, and slot 53,865,862. It was confirmed by BEADA stake pool operator, and there was a 0.2 fee paid to the network.

3.3.1. Build a transaction with Cardano node

This part is not mandatory since it requires to run a Cardano node, however it is interesting to see how a transaction is built from scratch

Let's create a folder:

```
1 mkdir exercise01
```

Now we create the wallet with:

```
1 cardano-cli address key-gen --verification-key-file payment.vkey --signing-key-file payment.skey
```

To see the address, use the following command:

```
1 cardano-cli address build --payment-verification-key-file payment.vkey --out-file payment.addr
```

And then:

```
1 cat payment.addr
```

And we now see our address!

Checking funds in wallet

Let's run the command:

```
1 cardano-cli query utxo --address $(cat payment.addr) --mainnet
```

We will see that there are no transactions, so 0 ADA.

Sending funds

Let's send some ADA to the wallet from our main wallet (try with 5 ADA) and run the command again to check the transactions:

```
1 cardano-cli query utxo --address $(cat payment.addr) --mainnet
```

Now we should see some ADA. For instance, 5,000,000 lovelace means 5 ADA.

Check funds of any address

If you want to check the ADA inside any wallet, the command becomes:

```
1 cardano-cli query utxo --address ADDRESSTOCHECKHERE --mainnet
```

The result is all the transactions containing ADA and NFTs in the address.

Creating the raw transaction

Let's copy the transaction hash that contains the 5 ADA and the index:

```
1 cardano-cli transaction build-raw --fee 0 --tx-in HASHOFUNSPENTTRANSACTION#
  INDEX --tx-out ADDRESSRECEIVER+2000000 --tx-out $(cat payment.addr)+0 --
  mainnet --out-file matx.raw
```

Calculate the fee

We must calculate the fee according to the network parameters that we get with the following:

```
1 cardano-cli query protocol-parameters --mainnet --out-file protocol.json
```

Now:

```
1 cardano-cli transaction calculate-min-fee --tx-body-file matx.raw --tx-in-count
  1 --tx-out-count 2 --witness-count 1 --mainnet --protocol-params-file
  protocol.json
```

And we get the fee we should pay at least.

Build the final transaction

Now we can finally build the complete transaction with:

```
1 cardano-cli transaction build-raw --fee FEE_WE_CALCULATED --tx-in
  HASHOFUNSPENTTRANSACTION#INDEX --tx-out ADDRESSRECEIVER+2000000 --tx-out $(
  cat payment.addr)+BALANCE_MINUS_FEES_MINUS_2_ADA --mainnet --out-file matx.
  raw
```

At this point, the transaction is finished. We must sign it with the key to prove we are the owners.

Signing the transaction and submitting it to the blockchain

```
1 cardano-cli transaction sign --signing-key-file payment.skey --mainnet --tx-
  body-file matx.raw --out-file matx.signed
```

Now using the key in the folder, we approved the transactions, we can send it to the blockchain.

Submitting the transaction

To send it to the blockchain, we can launch the following:

```
1 cardano-cli transaction submit --tx-file matx.signed
```

And now, after it has been processed, our balance will decrease.

3.3.2. Building a Transaction with Lucid

The *Lucid* library was the very first library to accelerate development on Cardano. The main advantage of this library is its capability to make the entire process faster and easier. The previous example can be simplified as follows:

```
1 const tx = await lucid.newTx()
2   .payToAddress("ADDRESSRECEIVER", {lovelace: 2000000n})
3   .complete();
4 const signedTx = await tx.sign().complete();
5 const txHash = await signedTx.submit();
```

There is no doubt why *Lucid* has been used by the majority of the **dApps** developed on Cardano.

3.4. CARDANO NATIVE SCRIPTS

Cardano introduced *native scripts* as a foundational feature in the Shelley era, which predated the advent of smart contracts. These scripts provide a way to define complex conditions for spending funds, extending the functionality available in Bitcoin through its script language. While Bitcoin scripts include features like *multisignature* and *timelock*, Cardano's native scripts build upon these concepts with more sophisticated capabilities.

This section explores Cardano's native scripts, focusing on *multisignature scripts* and *time locking*, and comparing them to Bitcoin scripts.

3.4.1. Comparison with Bitcoin Scripts

Bitcoin scripts are a simple stack-based language primarily used for two main features:

- **Multisignature:** Requires multiple signatures to authorize a transaction. For example, a 2-of-3 multisignature scheme requires any two of three possible signatures.
- **Timelock:** Restricts spending of funds until a certain time or block height. Examples include *CheckLockTimeVerify* which locks funds until a specific block height or timestamp.

Cardano extends these features with more advanced scripting capabilities in its native script language.

In the Shelley era and beyond, Cardano introduced a more expressive scripting language that includes *multisignature scripts*. These scripts are used to create addresses that require multiple cryptographic signatures to authorize transactions.

3.4.2. Description

A multisignature script address is one where a transaction must meet specific conditions, such as collecting signatures from multiple keys. The script defines these conditions, and the transaction witness includes both the script and the required signatures.

3.4.3. Multisig Script Language

The multisig script language uses a simple expression tree with four primary constructors:

- **RequireSignature:** `RequireSignature vkeyhash` - Validates that a transaction includes a signature corresponding to the given verification key hash.
- **RequireAllOf:** `RequireAllOf <script> *` - Requires that all included scripts are satisfied.
- **RequireAnyOf:** `RequireAnyOf <script> *` - Requires that at least one of the included scripts is satisfied.
- **RequireMOf:** `RequireMOf <num> <script> *` - Requires that at least M of the included scripts are satisfied.

3.4.4. JSON Script Syntax

Multisignature scripts can be represented in JSON as follows:

```

1 {
2   "type": "sig",
3   "keyHash": "e09d36c79dec9bd1b3d9e152247701cd0bb860b5ebfd1de8abb6735a"
4 }
```

KeyHash is the publicKey of the address allowed to spend from this multisignature, in this case is a simple 1 of 1 multisignature script.

3.4.5. Time Locking Scripts

Cardano introduced time-locking features to the native script language. This extension enables the creation of scripts that restrict transactions based on time conditions.

3.4.6. Description

Time-locking allows conditions like:

- **RequireTimeBefore:** The current slot number must be before a specified slot.
- **RequireTimeAfter:** The current slot number must be after a specified slot.

3.4.7. JSON Script Syntax

Time-locking scripts can be represented in JSON as follows:

```

1 {
2   "type": "all",
3   "scripts":
4   [
5     {
6       "type": "after",
7       "slot": 1000
8     },
9     {
10      "type": "sig",
```

```

11     "keyHash": "966e394a544f242081e41d1965137b1bb412ac230d40ed5407821c37"
12   }
13 ]
14 }

```

This example shows a script where there are two rules, only the owner of this publicKey can use it: 966e394a544f242081e41d1965137b1bb412ac230d40ed5407821c37 and additionally only after the slot 1000.

3.4.8. Multisignature Script Example

Step 1: Create a Multisignature Script Address

```

1 {
2   "type": "all",
3   "scripts":
4   [
5     {
6       "type": "sig",
7       "keyHash": "e09d36c79dec9bd1b3d9e152247701cd0bb860b5ebfd1de8abb6735a"
8     },
9     {
10      "type": "sig",
11      "keyHash": "a687dcc24e00dd3caafbeb5e68f97ca8ef269cb6fe971345eb951756"
12    },
13    {
14      "type": "sig",
15      "keyHash": "0bd1d702b2e6188fe0857a6dc7ffb0675229bab58c86638ffa87ed6d"
16    }
17  ]
18 }

```

This type of multisig is a 3 of 3 multisignature, all the 3 signatures must approve the spending of the funds from the address

Step 2: Create the Address

```

cardano-cli address \
  --payment-script-file allMultiSigScript.json \
  --testnet-magic 42 \
  --out-file script.addr

```

Step 3: Construct and Submit a Transaction

```

cardano-cli transaction build-raw \
  --invalid-hereafter 1000 \
  --fee 0 \
  --tx-in <utxoinput> \
  --tx-out "$(cat script.addr) <amount>" \
  --out-file txbody

```

```

cardano-cli transaction witness \
  --tx-body-file txbody \
  --signing-key-file <utxoSignKey> \

```

```

--testnet-magic 42 \
--out-file utxoWitness

cardano-cli transaction assemble \
  --tx-body-file txbody \
  --witness-file utxoWitness \
  --out-file allWitnessesTx

```

Step 4: Submit the Transaction

```

cardano-cli transaction submit \
  --tx-file allWitnessesTx \
  --testnet-magic 42

```

3.4.9. Time Locking Script Example

Example JSON for a Time Locking Script

```

1 {
2   "type": "all",
3   "scripts":
4   [
5     {
6       "type": "after",
7       "slot": 1000
8     },
9     {
10      "type": "sig",
11      "keyHash": "966e394a544f242081e41d1965137b1bb412ac230d40ed5407821c37 "
12    }
13  ]
14 }

```

Step 1: Create the Address

```

cardano-cli address \
  --payment-script-file timeLockScript.json \
  --testnet-magic 42 \
  --out-file script.addr

```

Step 2: Construct and Submit a Transaction

```

cardano-cli transaction build-raw \
  --invalid-before 1000 \
  --fee 0 \
  --tx-in <txin of script address> \
  --tx-out <yourspecifiedtxout> \
  --out-file spendScriptTxBody

cardano-cli transaction witness \
  --tx-body-file spendScriptTxBody \

```

```

--script-file timeLockScript.json \
--testnet-magic 42 \
--out-file scriptWitness

cardano-cli transaction witness \
  --tx-body-file spendScriptTxBody \
  --signing-key-file <paySignKey> \
  --testnet-magic 42 \
  --out-file keyWitness

cardano-cli transaction assemble \
  --tx-body-file spendScriptTxBody \
  --witness-file scriptWitness \
  --witness-file keyWitness \
  --out-file spendTimeLockTx

```

Step 3: Submit the Transaction

```

cardano-cli transaction submit \
  --tx-file spendTimeLockTx \
  --testnet-magic 42

```

3.5. USING LUCID LIBRARY FOR CARDANO NATIVE SCRIPTS

Working with Cardano native scripts can be made significantly easier and faster by using the Lucid library in JavaScript. This library simplifies many operations that would otherwise require complex command-line interactions. Here, we'll demonstrate how to import a Cardano native script and perform transactions using the Lucid library.

3.5.1. Importing and Using Lucid Library

The Lucid library provides a user-friendly interface for interacting with Cardano, allowing developers to perform tasks quickly and efficiently. Here's an example of how to import a Cardano native script and use it for transactions.

Example: Importing a Native Script and Performing a Transaction

First, we need to import the necessary modules from the Lucid library:

```

1 import { Lucid, Blockfrost, Constr, Utils } from "https://unpkg.com/lucid-
  cardano@0.9.6/web/mod.js";

```

Next, initialize the Lucid library with Blockfrost and specify the network:

```

1 const lucid = await Lucid.new(
2   new Blockfrost("https://cardano-mainnet.blockfrost.io/api/v0", "APIKEYHERE"),
3   "Mainnet",
4 );

```

Now, we can define a multisignature script in JSON format and convert it to a native script using Lucid:

```
1 const multisigScript = lucid.utils.nativeScriptFromJson(
2 {
3   "type": "all",
4   scripts: [
5     { type: "sig", keyHash: "1
      c471b31ea0b04c652bd8f76b239aea5f57139bdc5a2b28ab1e69175" },
6   ],
7 }
8 );
```

With the multisignature script, we can create the corresponding address:

```
1 const multisigAddress = lucid.utils.validatorToAddress(multisigScript);
```

Finally, we can construct, sign, and submit a transaction:

```
1 var tx = await lucid
2   .newTx()
3   .payToAddress(multisigAddress, { lovelace: 1000000 }) // Example: sending 1 ADA
4   .attachMintingPolicy(multisigScript)
5   .addSignerKey("1c471b31ea0b04c652bd8f76b239aea5f57139bdc5a2b28ab1e69175") //
      Signer key
6   .complete();
7
8 const signedTx = await tx.sign().complete();
9 const txHash = await signedTx.submit();
10 console.log(txHash);
```

3.5.2. Advantages of Using Lucid Library

Using the Lucid library for managing Cardano native scripts offers several advantages over traditional command-line methods:

- **Ease of Use:** The Lucid library abstracts away much of the complexity involved in script and transaction management, making it easier for developers to interact with the Cardano blockchain.
- **Speed:** Transactions and script operations can be performed more quickly without the need to manually handle and submit command-line operations.
- **Flexibility:** JavaScript provides a more flexible environment for developing and testing blockchain interactions compared to the command-line interface.
- **Integration:** Lucid can be easily integrated into web applications and other JavaScript-based projects, facilitating broader use cases and seamless user experiences.

3.6. INTERACTING WITH SMART CONTRACTS USING LUCID

In this section we'll see how a transaction including smart contracts on Cardano is done, don't worry if you don't get most of it. Focus on looking at the similarities with using a cardano native script as shown before.

Interacting with smart contracts on the Cardano blockchain using the Lucid library is straightforward and similar to working with native scripts, such as multisignature scripts.

However, smart contracts introduce more complex logic, enabling advanced functionalities. In this section, we'll demonstrate how to use a minting smart contract to create tokens on Cardano using Lucid.

3.6.1. Minting Tokens with a Smart Contract

The process of interacting with a smart contract involves defining the contract's logic and using it in a transaction. The example below illustrates how to mint tokens using a smart contract, showcasing how similar the code structure is to working with native scripts while allowing for more sophisticated operations.

Example: Using a Minting Smart Contract

First, we need to import the necessary modules from the Lucid library and initialize it with Blockfrost:

```
1 import { Lucid, Blockfrost, toHex, fromHex, Data, Constr, fromText } from "
   https://unpkg.com/lucid-cardano@0.10.0/web/mod.js";
2
3 const lucid = await Lucid.new(
4   new Blockfrost("https://cardano-mainnet.blockfrost.io/api/v0", "APIKEYHERE"),
5   "Mainnet",
6 );
```

Next, import the Plutus script data and encode it using CBOR:

```
1 import data from '/plutus.json' assert { type: "json" };
2 console.log(data);
3
4 import * as cbor from "https://deno.land/x/cbor@v1.4.1/index.js";
5
6 const mintingPolicy = {
7   type: "PlutusV2",
8   script: toHex(cbor.encode(fromHex(data.validators[1].compiledCode)))
9 };
10
11 const storageScript = {
12   type: "PlutusV2",
13   script: toHex(cbor.encode(fromHex(data.validators[0].compiledCode)))
14 };
```

Enable the Nami wallet and select it with Lucid:

```
1 const api = await window.cardano.nami.enable();
2 lucid.selectWallet(api);
3
4 const { paymentCredential } = lucid.utils.getAddressDetails(
5   await lucid.wallet.address(),
6 );
```

Define the policy ID and the storage address for the minting process:

```
1 const policyId = lucid.utils.mintingPolicyToId(mintingPolicy);
2 const storageAddress = lucid.utils.validatorToAddress(storageScript);
```

Prepare the UTXO to be used in the transaction and define the redeemer:

```

1 let utxoSeed = await lucid.utxosByOutRef([ { txHash: "451
    d8129bb9fce9829906fe32bb7c2a93f40493f3ceeb3b003ae7eb7c8a99f52", outputIndex
      : 4 } ]);
2
3 const redeemer = Data.to(new Constr(0, []));

```

Define the metadata for the new tokens:

```

1 const metaData = {
2   decimals: 6,
3   description: "The official token of FluidTokens, a leading DeFi ecosystem
    fueled by innovation and community backing.",
4   logo: "https://fluidtokens.com/fldt.png",
5   name: "FLDT",
6   ticker: "FLDT",
7   website: "https://fluidtokens.com/",
8 };
9
10 console.log(metaData);
11
12 Object.keys(metaData)
13   .sort()
14   .forEach(function(v, i) {
15     console.log(v, metaData[v]);
16   });

```

Create the Datum and build the transaction:

```

1 const Datum = Data.to(new Constr(0, [Data.fromJson(metaData), 1n, 1n]));
2
3 const tx = await lucid
4   .newTx()
5   .collectFrom(utxoSeed)
6   .mintAssets({ [{policyId}0014df10${fromText("FLDT")}]: BigInt(100000000 * Math
    .pow(10, 6)), [{policyId}000643b0${fromText("FLDT")}]: 1n }, redeemer)
7   .payToContract(storageAddress, { inline: Datum }, { [{policyId}000643b0${
    fromText("FLDT")}]: 1n })
8   .attachMintingPolicy(mintingPolicy)
9   .complete();

```

Sign and submit the transaction:

```

1 const signedTx = await tx.sign().complete();
2 const txHash = await signedTx.submit();
3 console.log(txHash);

```

3.6.2. Advantages of Using Smart Contracts

Using smart contracts in Cardano allows for more complex and flexible transaction logic compared to native scripts. Here are some of the advantages:

- **Advanced Logic:** Smart contracts enable sophisticated logic that goes beyond simple conditions like multisignature requirements.
- **Automation:** Automate complex workflows and interactions on the blockchain, reducing the need for manual intervention.
- **Flexibility:** Smart contracts can be tailored to a wide variety of use cases, from DeFi applications to NFTs.

- **Efficiency:** With Lucid, interacting with smart contracts is streamlined, making development faster and more efficient.

By leveraging Lucid, developers can easily integrate advanced smart contract functionality into their Cardano applications, enhancing their capabilities and providing richer user experiences.

3.7. DATUM, REDEEMERS, AND SCRIPT CONTEXT

3.7.1. Datum

The datum is data attached to UTxOs. A datum represents the state of a smart contract and is immutable, although the state of the smart contract can change by spending old UTxOs and creating new ones. The 'e' (extended) in eUTxO comes from the datum. Unlike the Bitcoin UTxO model, which lacks datums and thus has limited capabilities, the extended UTxO model (as used by Cardano and Ergo) provides capabilities comparable to an account-based model while maintaining a safer approach to transactions by avoiding global state mutations.

3.7.2. Redeemers

The redeemer is another piece of data provided with the transaction for script execution. The datum and redeemer intervene at two distinct moments: the datum is set when the output is created (similar to attaching a note to a wall), whereas the redeemer is provided only when spending the output (like handing over a form to an employee). Together, they play crucial roles in the functioning of smart contracts.

3.7.3. Script Context

The majority of the logic in smart contracts involves making assertions about certain properties of the `ScriptContext`. The `ScriptContext` contains valuable information, such as:

- When is the transaction occurring?
- What are the inputs of the transaction?
- What are the outputs of the transaction?

All these details are encapsulated in the `ScriptContext` object, which is passed into the contract as the last argument. Understanding and utilizing the `ScriptContext` is essential for validating transactions. The `ScriptContext` can be visualized as an object with the following properties:

```

1 Transaction {
2   inputs: List<Input>,
3   reference_inputs: List<Input>,
4   outputs: List<Output>,
5   fee: Value,
6   mint: MintedValue,
7   certificates: List<Certificate>,
8   withdrawals: Pairs<StakeCredential, Int>,
9   validity_range: ValidityRange,

```

```
10     extra_signatories: List<Hash<Blake2b_224, VerificationKey>>,
11     redeemers: Pairs<ScriptPurpose, Redeemer>,
12     datums: Dict<Hash<Blake2b_256, Data>, Data>,
13     id: TransactionId,
14 }
```

This structure highlights the importance of reading and understanding the exact details of the inputs, outputs, time, and signatories of the transaction. Simply having the datum and redeemers is not sufficient to validate a transaction; the full context provided by the `ScriptContext` is essential for comprehensive validation and ensuring the security and correctness of the smart contract execution.



CARDANO SMART CONTRACT LANGUAGES



4. CARDANO SMART CONTRACT LANGUAGES

4.1. INTRODUCTION TO PLUTUS LANGUAGE

Plutus is the native smart contract language for Cardano. It is a Turing-complete language written in Haskell, and Plutus smart contracts are effectively Haskell programs. By using Plutus, you can be confident in the correct execution of your smart contracts. It draws from modern language research to provide a safe, full-stack programming environment based on Haskell, the leading purely functional programming language.

The Plutus Playground has been recently updated, providing a platform for developing smart contract applications using Haskell. At its core, the Plutus Platform enables developers to write smart contracts in Haskell, a high-level, robust programming language. This setup ensures that users can rely on well-established tooling and libraries without needing to learn a new, proprietary language.

4.1.1. Plutus Tx Compiler

The key technology that facilitates this is Plutus Tx, which acts as a compiler from Haskell to Plutus Core, the language executed on the Cardano blockchain. Provided as a GHC (Glasgow Haskell Compiler) plug-in, Plutus Tx compiles Haskell code into executable files for users' computers and Plutus Core for blockchain execution.

4.1.2. Handling Haskell's Complexity

Haskell, known for its complexity and numerous sophisticated extensions, is simplified through the design of GHC. GHC Core, a straightforward representation of Haskell programs, allows the complex surface language to be desugared after initial type checking. This process lets Plutus Tx operate on GHC Core, benefiting from the extensive Haskell language support.

“Fortunately, the design of GHC, the primary Haskell compiler, makes this possible. GHC has a very simple representation of Haskell programs called GHC Core. After the initial typechecking phase, all of the complex surface language is desugared away into GHC Core, and the rest of the pipeline doesn't need to know about it. This works for us too: we can operate on GHC Core, and get support for the much larger Haskell surface language for free.”

While Haskell's type system is complex, Plutus Tx leverages a subset of it, sufficient for blockchain needs. However, not all Haskell features are supported, particularly those irrelevant or difficult to implement on the blockchain. The compiler provides helpful errors when unsupported features are used.

4.1.3. Compilation Pipeline

The compilation process involves multiple stages, utilizing intermediate languages to break down the tasks. The pipeline includes:

1. GHC: Haskell to GHC Core
2. Plutus Tx compiler: GHC Core to Plutus IR
3. Plutus IR compiler: Plutus IR to Typed Plutus Core
4. Type eraser: Typed Plutus Core to Untyped Plutus Core

Plutus IR, closely aligned with GHC Core, reduces the logic within the plug-in and allows for independent testing of subsequent stages.

4.1.4. Integration with GHC

Plutus Tx integrates into the GHC compilation pipeline through GHC plug-ins, which modify the program during compilation. This integration enables the Plutus Tx compiler to produce Plutus Core, embedded back into the Haskell program as an opaque byte string ready for blockchain transactions.

“Because we are able to modify the program GHC is compiling, we have an obvious place to put the output of the Plutus Tx compiler, back into the main Haskell program! That’s the right place for it, because the rest of the Haskell program is responsible for submitting transactions containing Plutus Core scripts. But from the point of view of the rest of the program, Plutus Core is opaque, so we can get away with just providing it as a blob of bytes ready to go into a transaction.”

4.1.5. Runtime Considerations

Dynamic elements of smart contracts, such as participant details or transaction amounts, require runtime variability. This is addressed using type classes like `Typeable` and `Lift`, which facilitate turning Haskell types and values into Plutus Core representations.

4.1.6. References

For more detailed information, visit the Plutus Playground and follow the development on [GitHub](#).

4.1.7. Setting Up the Environment

To build the Plutus development environment on an Ubuntu 20.04 VM, follow these steps:

4.1.8. Installing Haskell and Components

1. Create and start a VM:

- Create a VM with at least 8 GB of RAM and 100 GB of storage, and select Ubuntu 64-bit.
- Install Ubuntu 20.04 on the VM.

2. Update and upgrade the system:

```
sudo apt update
sudo apt upgrade -y
```

3. Install Haskell:

```
sudo apt-get install haskell-platform
```

4. Install ghcup and required dependencies:

```
sudo apt install curl
sudo apt install build-essential curl libffi-dev libffi6 libgmp-dev
libgmp10 libncurses-dev libncurses5 libtinfo5 libsodium-dev
curl --proto '=https' --tlsv1.2 -sSf https://get-ghcup.haskell.org | sh
```

Restart your terminal.

Check the Haskell version:

```
ghc --version
cabal --version
```

5. Clone the Plutus repositories:

```
sudo apt install git
mkdir cardano
cd cardano
git clone https://github.com/input-output-hk/plutus
git clone https://github.com/input-output-hk/plutus-pioneer-program
```

Run cabal update and cabal build each time you start on a different section of the homework.

4.1.9. Installing nix-shell and Plutus Binaries

1. Install the cache:

```
sudo mkdir /etc/nix
```

Create a file named `nix.conf` in `/etc/nix/` with the following content:

```
substituters          = https://hydra.iohk.io https://iohk.cachix.org
trusted-public-keys   = hydra.iohk.io:f/Ea+s+dFdN+3Y/
G+FDgSq+a5NEWhJGzdjvKNGv0/EQ=iohk.cachix.org-1:
DpRUyj7h7V830dp/i6Nti+NE02/nhblbov/8MW7Rqoo=
cache.nixos.org-1:6NCHdD59X431o0gWypbMrAURkbJ16ZPMQFGspcDShjY=
```

2. Install nix:

```
curl -L https://nixos.org/nix/install | sh
```

After installation, set up the environment variables as instructed. Typically, this involves running:

```
. /home/(user)/.nix-profile/etc/profile.d/nix.sh
```

You may need to add `./nix-profile/bin` to your `/etc/environment` file and restart the computer.

3. Build Plutus with nix-shell:

```
cd ~/cardano/plutus
git checkout 3746610e53654a1167aeb4c6294c6096d16b0502
nix build -f default.nix
plutus.haskell.packages.plutus-core.components.library
```

This process may take a while and may produce a warning about dumping a very large path.

The first run of `nix-shell` will also take some time. The first video in the course will guide you through starting the Plutus Playground server and application.

4.1.10. Writing a Simple Smart Contract in Plutus Tx

Here is a simple example of a smart contract in Plutus Tx. This contract verifies that the number passed in the redeemer is 42.

```
1 {-# LANGUAGE DataKinds           #-}
2 {-# LANGUAGE ImportQualifiedPost  #-}
3 {-# LANGUAGE NoImplicitPrelude    #-}
4 {-# LANGUAGE OverloadedStrings    #-}
5 {-# LANGUAGE TemplateHaskell      #-}
6
7 module FortyTwo where
8
9 import qualified Plutus.V2.Ledger.Api as PlutusV2
10 import      PlutusTx                  (BuiltinData, compile)
11 import      PlutusTx.Builtins         as Builtins (mkI)
12 import      PlutusTx.Prelude          (otherwise, traceError, (==))
13 import      Prelude                   (IO)
14 import      Utilities                 (writeValidatorToFile)
15
16 -- This validator succeeds only if the redeemer is 42
17 --                               Datum      Redeemer      ScriptContext
18 mk42Validator :: BuiltinData -> BuiltinData -> BuiltinData -> ()
19 mk42Validator _ r _
20   | r == Builtins.mkI 42 = ()
21   | otherwise            = traceError "expected 42"
22 {-# INLINABLE mk42Validator #-}
23
24 validator :: PlutusV2.Validator
25 validator = PlutusV2.mkValidatorScript $(PlutusTx.compile [| |
26   mk42Validator |])
27
28 saveVal :: IO ()
29 saveVal = writeValidatorToFile "./assets/fortytwo.plutus" validator
```



```
<script src="https://helios.hyperion-bt.org/<version>/helios.js"
type="module" crossorigin></script>
```

- **Module with CDN URL:** Helios can be imported as a module using the CDN URL. This is compatible with Deno and most modern browsers:

```
import * as helios from "https://helios.hyperion-bt.org/
<version>/helios.js"
```

or only the necessary parts:

```
import { Program } from "https://helios.hyperion-bt.org/
<version>/helios.js"
```

Alternatively, use "helios" as a placeholder for the URL and specify the module URL in an importmap (currently only supported by Chrome):

```
// in your JavaScript file
import * as helios from "helios"
// in your HTML file
<script type="importmap">
  {
    "imports": {
      "helios": "https://helios.hyperion-bt.org/<version>/helios.js"
    }
  }
</script>
```

- **npm:** Install the latest version of the Helios library using npm:

```
$ npm i @hyperionbt/helios
```

Or install a specific version:

```
$ npm i @hyperionbt/helios@<version>
```

In your JavaScript/TypeScript file:

```
import { Program } from "@hyperionbt/helios"
```

Note that installing the Helios library globally is not recommended, as the API is subject to frequent changes.

4.2.4. Running Helios Without Installing Anything

If you prefer not to install Helios locally, you can use the Helios Playground. The Playground allows you to write, compile, and download smart contracts directly in your browser. This is a convenient way to experiment with Helios without needing to set up a local development environment. You can access the Helios Playground at the following URL: <https://playground.helios.hyperion-bt.org>.

4.2.5. Example of a Helios Smart Contract

Here is a simple example of a Helios smart contract:

```
const mainScript = `
spending picoswap

// Note: each input UTxO must contain some lovelace, so the datum price
// will be a bit higher than the nominal price
// Note: public sales are possible when a buyer isn't specified

struct Datum {
  seller: PubKeyHash
  price: Value
  buyer: Option[PubKeyHash]
  nonce: Int // double satisfaction protection

  func seller_signed(self, tx: Tx) -> Bool {
    tx.is_signed_by(self.seller)
  }

  func buyer_signed(self, tx: Tx) -> Bool {
    self.buyer.switch{
      None    => true,
      s: Some => tx.is_signed_by(some)
    }
  }

  func seller_received_money(self, tx: Tx) -> Bool {
    // protect against double satisfaction exploit
    //by datum tagging the output using a nonce
    tx.value_sent_to_datum(self.seller, self.nonce, false) >= self.price
  }
}

func main(datum: Datum, _, ctx: ScriptContext) -> Bool {
  tx: Tx = ctx.tx;

  // sellers can do whatever they want with the locked UTxOs
  datum.seller_signed(tx) || (
    // buyers can do whatever they want with the locked UTxOs,
    //as long as the sellers receive their end of the deal
    datum.buyer_signed(tx) &&
    datum.seller_received_money(tx)
  )
}`
```

In the above contract, we define the `Datum` structure. The `seller` field is necessary to identify who should receive the payment. The `price` represents the amount that must be verified as correctly sent. The `buyer` could be either defined or undefined: if defined, only the specified buyer can complete the purchase; otherwise, anyone can unlock the UTxO by paying the correct amount. The `nonce` is used to prevent double satisfaction attacks, a

concept we will explore further later.

4.2.6. Further Resources

For more information and resources on Helios, you can visit their Discord server at <https://discord.gg/VwyYPh65Um> or check out their comprehensive guide at <https://www.hyperion-bt.org/helios-book/intro.html>. These resources offer additional support and detailed explanations to help you get the most out of Helios.

4.3. AIKEN LANGUAGE: FEATURES AND SYNTAX

4.3.1. Introduction to Aiken

Aiken is a modern programming language and toolchain designed specifically for developing smart contracts on the Cardano blockchain. It draws inspiration from various modern languages, such as Gleam, Rust, and Elm, which are renowned for their friendly error messages and an overall excellent developer experience. Aiken focuses on creating on-chain validator scripts, requiring users to write their off-chain code for generating transactions in other languages such as Rust, Haskell, JavaScript, or Python.

4.3.2. Language Features

Aiken is a purely functional language with static typing and type inference. This means that most of the time, the compiler is smart enough to determine the type of something without requiring user annotation. Aiken allows the creation of custom types resembling records and enums but does not include higher-kinded types or type classes, aiming for simplicity. On-chain scripts are typically small in size and scope compared to other kinds of applications being developed today and do not necessitate as many features as general-purpose languages that must tackle far more complex issues.

4.3.3. Comparison with Plutus

Aiken is considered easier to get started with than Plutus, especially for those who are less familiar with functional languages like Haskell. Similar to Plutus, Aiken scripts are compiled down to the untyped Plutus Core (UPLC).

4.3.4. Setting Up Aiken Environment

4.3.5. Installation Instructions

Manually:

From a package manager:
`npm install -g @aiken-lang/aiken`

Homebrew:

```
brew install aiken-lang/tap/aiken
```

From Sources (All platforms):

```
cargo install aiken --version 1.0.29-alpha
```

From Nix flakes (Linux & MacOS only):

```
nix build github:aiken-lang/aiken#aiken
```

4.3.6. Language Server

The Aiken command-line comes with a built-in language server. Configure your language client with the following settings (refer to your language client's instructions):

```
command: aiken lsp
root pattern: aiken.toml
filetype: aiken (.ak)
```

The language server supports a variety of capabilities. For more details, refer to the supported capabilities on the main repository.

4.3.7. Auto-completion

The command-line comes with a few auto-completion scripts for bash, zsh, and fish users. The scripts can be obtained using the 'aiken completion <shell>' command. Install completions in their standard/default locations as follows:

```
aiken completion bash --install
```

or, manually


```
aiken completion bash > /usr/local/share/bash-completion/completions/aiken
source /usr/local/share/bash-completion/completions/aiken
```

4.3.8. Editor Integrations

The following plugins provide syntax highlighting and indentation rules for Aiken:

- **VSCode:** aiken-lang/vscode-aiken
- **Vim/Neovim:** aiken-lang/editor-integration-nvim
- **Emacs:** aiken-lang/aiken-mode

4.3.9. Aiken Playground

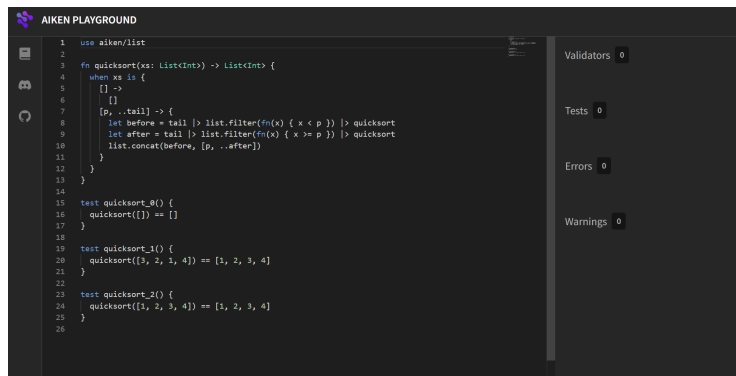

The Aiken Playground (<https://play.aiken-lang.org/>) is an online environment where developers can test and experiment with Aiken functions and smart contracts without needing to download and install the software on their local device. Similar to the Helios playground, this tool provides an easy and accessible way to get started with Aiken, allowing users to write, compile, and run Aiken code directly in the browser. It is especially useful for learning and prototyping, providing a convenient platform for exploring Aiken's features and capabilities.

4.3.10. Example of a Smart Contract with Aiken

In Aiken, we need to manually define the import libraries at the very beginning of the contract. Then, similar to Helios, we define the Redeemer and Datum types. The following smart contract will unlock the UTXO if the signer is the owner and the redeemer is the right user.

```

1 use aiken/hash.{Blake2b_224, Hash}
2 use aiken/list
3 use aiken/transaction.{ScriptContext}
4 use aiken/transaction/credential.{VerificationKey}
5
6 type Datum {
7   owner: Hash<Blake2b_224, VerificationKey>,
8 }
9
10 type Redeemer {
11   msg: ByteArray,
12 }
13
14 validator {
15   fn hello_world(datum: Datum, redeemer: Redeemer, context:
16     ScriptContext) -> Bool {
17     let must_say_hello =
18       redeemer.msg == "Hello, World!"
19
20     let must_be_signed =
21       list.has(context.transaction.extra_signatories, datum.owner)
22
23     must_say_hello && must_be_signed
24   }
25 }
  
```

4.4. OPSHIN LANGUAGE: CONCEPTS AND USAGE

Opshin is an implementation of smart contracts for Cardano which are written in a strict subset of valid Python. The general philosophy of this project is to write a compiler that ensures the following:

- If the program compiles, then:
 - It is a valid Python program.
 - The output running it with Python is the same as running it on-chain.

4.4.1. Why Opshin?

- **100% valid Python:** Leverage the existing tool stack for Python, including syntax highlighting, linting, debugging, unit-testing, property-based testing, and verification.
- **Intuitive:** Just like Python.
- **Flexible:** Imperative, functional, the way you want it.
- **Efficient & Secure:** Static type inference ensures strict typing and optimized code.

Opshin is a pythonic language for writing smart contracts on the Cardano blockchain. The goal of Opshin is to reduce the barrier of entry in smart contract development on Cardano. Opshin is a strict subset of Python, meaning anyone who knows Python can get up to speed with Opshin quickly.

4.4.2. Setting Up the Environment

Check out the **OpShin Book** for an introduction to this tool and detailed guidance on writing smart contracts. This section outlines the basic usage of the tool.

4.4.3. Installation

Install Python 3.8, 3.9, 3.10, or 3.11. Then run:

```
python3 -m pip install opshin
```

4.4.4. Example of a Smart Contract

4.4.5. Example Validator - Gift Contract

In this simple example, we'll write a gift contract that will allow a user to create a gift UTXO that can be spent by:

1. The creator cancelling the gift and spending the UTXO.
2. The recipient claiming the gift and spending the UTXO.

```
1 # gift.py
2
3 # The Opshin prelude contains a lot of useful types and functions
4 from opshin.prelude import *
```

```

5
6 # Custom Datum
7 @dataclass()
8 class GiftDatum(PlutusData):
9     # The public key hash of the gift creator.
10    # Used for cancelling the gift and refunding the creator (1).
11    creator_pubkeyhash: bytes
12
13    # The public key hash of the gift recipient.
14    # Used by the recipient for collecting the gift (2).
15    recipient_pubkeyhash: bytes
16
17 def validator(datum: GiftDatum, redeemer: None, context: ScriptContext)
18     -> None:
19     # Check that we are indeed spending a UTxO
20     assert isinstance(context.purpose, Spending), "Wrong type of script
21         invocation"
22
23     # Confirm the creator signed the transaction in scenario (1).
24     creator_is_cancelling_gift = datum.creator_pubkeyhash in context.
25     tx_info.signatories
26
27     # Confirm the recipient signed the transaction in scenario (2).
28     recipient_is_collecting_gift = datum.recipient_pubkeyhash in
29     context.tx_info.signatories
30
31     assert creator_is_cancelling_gift or recipient_is_collecting_gift,
32     "Required signature missing"

```

This might be a bit to take in, especially the logic for checking the signatures. The most important part is to see the parameters and the return type, as well as the assert statements actually controlling the validation. For more details, refer to the **OpShin Book**.

4.5. PLU-TS: UNDERSTANDING THE BASICS

Plu-ts is a library designed for building Cardano dApps in an efficient and developer-friendly way. It is composed of two main parts:

- **plu-ts/onchain:** An eDSL (embedded Domain Specific Language) that leverages TypeScript as the host language, designed to generate efficient Smart Contracts.
- **plu-ts/offchain:** A set of classes and functions that allow reuse of onchain types.

4.5.1. Design Principles

Plu-ts was designed with the following goals in mind, in order of importance:

- Smart Contract efficiency
- Developer experience
- Reduced script size
- Readability

For more information, see the **Plu-ts Book**.

4.5.2. Setting Up the Environment

From npm:

```
npm install @harmoniclabs/plu-ts
```

NPM: NPM is the package manager used by NodeJS. You can install Node and NPM from the **NodeJS website**.

From source:

```
git clone https://github.com/HarmonicLabs/plu-ts
cd plu-ts
npm run build
```

The dist Folder: The library is then available in the `dist` folder. You can move the directory where you need it.

4.5.3. Quick Start

First, create a new directory where to build your project:

```
mkdir my-pluts-project
cd my-pluts-project
```

Then initialize your Node project with npm:

```
npm init
```

Install TypeScript and the TypeScript compiler `tsc` if it is not already available globally:

```
npm install --save-dev typescript
```

Finally, install Plu-ts:

```
npm install @harmoniclabs/plu-ts
```

4.5.4. Example of a Smart Contract

4.5.5. The Contract

In this example, we'll write a contract that expects a `MyDatum`, a `MyRedeemer`, and finally a `PScriptContext` to validate a transaction.

```

1 import { Address, bool, compile, makeValidator, PaymentCredentials,
    pBool, pfn, Script, ScriptType, V2 } from "@harmoniclabs/plu-ts";
2 import MyDatum from "./MyDatum";
3 import MyRedeemer from "./MyRedeemer";
4
5 export const contract = pfn([
6     MyDatum.type,
7     MyRedeemer.type,
8     V2.PScriptContext.type
9 ], bool)
10 (( datum, redeemer, ctx ) =>
11     // always succeeds
12     pBool( true )
13 );
14
15 export const untypedValidator = makeValidator( contract );
16 export const compiledContract = compile( untypedValidator );
17 export const script = new Script(
18     ScriptType.PlutusV2,
19     compiledContract
20 );
21
22 export const scriptMainnetAddr = new Address(
23     "mainnet",
24     new PaymentCredentials(
25         "script",
26         script.hash
27     )
28 );
29
30 export const scriptTestnetAddr = new Address(
31     "testnet",
32     new PaymentCredentials(
33         "script",
34         script.hash.clone()
35     )
36 );
37
38 export default contract;

```

This contract expects a MyDatum, a MyRedeemer, and a PScriptContext to validate a transaction.

Custom Datum and Redeemer

MyDatum and MyRedeemer are types defined by us in `src/MyDatum/index.ts` and `src/MyRedeemer/index.ts` respectively.

```

1 import { int, pstruct } from "@harmoniclabs/plu-ts";
2
3 // modify the Datum as you prefer
4 const MyDatum = pstruct({
5     Num: {
6         number: int
7     },
8     NoDatum: {}
9 });

```

```

10
11 export default MyDatum;

1 import { pstruct } from "@harmoniclabs/plu-ts";
2
3 // modify the Redeemer as you prefer
4 const MyRedeemer = pstruct({
5     Option1: {},
6     Option2: {}
7 });
8
9 export default MyRedeemer;

```

Entry Point

Finally, the contract is used in `src/index.ts`, which is our entry point.

```

1 import { script } from "./contract";
2
3 console.log("validator compiled successfully! \n");
4 console.log(
5     JSON.stringify(
6         script.toJson(),
7         undefined,
8         2
9     )
10 );

```

This index file imports the script from `src/contract.ts` and prints it out in JSON form. In this example, we see something different; instead of writing everything in the same file, we split it into several files to increase readability.

Also, note that the current contract always returns `true` as output, therefore it will always unlock the UTXO.

For more details, refer to the **Plu-ts Book**.

The Plu-ts contract above is divided into the following key files:

- `src/contract.ts` - Contains the main validator function and the script logic.
- `src/MyDatum/index.ts` - Defines the data structure for the Datum.
- `src/MyRedeemer/index.ts` - Defines the data structure for the Redeemer.
- `src/index.ts` - Serves as the entry point, importing and displaying the compiled script.

This organization enhances readability and separates concerns, making it easier for developers to manage and understand the contract's different components.

In the provided example, the contract always returns `true` as the output. This means that the contract will always validate successfully, effectively always unlocking the UTXO. While this makes the contract straightforward, it also means that the contract does not perform any meaningful validation or logic checks.

4.6. PLUTARCH: ADVANCED FUNCTIONAL CONTRACT COMPOSITION

Plutarch is an embedded domain-specific language (eDSL) for writing Cardano smart contracts directly in Haskell. Rather than compiling a surface language to Untyped Plutus Core (UPLC), Plutarch lets developers construct UPLC terms explicitly using a library of typed combinators. The resulting scripts are typically smaller and cheaper to execute than equivalent PlutusTx contracts because every UPLC node is under the developer's direct control.

4.6.1. Design Philosophy

Plutarch is built around three guiding ideas:

- **Explicit over implicit:** PlutusTx compiles arbitrary Haskell through GHC plugins, which can silently generate expensive UPLC. Plutarch makes every UPLC construct explicit — if a term is shared, the developer writes `phoistAcyclic`; if a value is bound, the developer writes `plet`. There are no hidden costs.
- **Type safety end-to-end:** Plutarch uses GHC's kind system to distinguish Plutarch types (`S -> Type`) from ordinary Haskell types. A `Term s PInteger` is a typed UPLC integer term, not a Haskell `Integer`. This prevents category errors at compile time.
- **Haskell as the host:** Because Plutarch is a Haskell library, it shares the full GHC toolchain — Cabal, HLS, QuickCheck, and any Haskell testing framework — without requiring a separate build system or language server.

4.6.2. Plutarch and the Cardano Haskell Ecosystem

Plutarch sits between PlutusTx and raw UPLC in the Cardano development stack:

- **PlutusTx** compiles Haskell quasi-quoted with `[| ... |]` through a GHC plugin pipeline: Haskell → GHC Core → Plutus IR → Typed Plutus Core → UPLC. The developer writes normal Haskell and the pipeline handles the rest.
- **Plutarch** is a Haskell library whose combinators (`plam`, `phoistAcyclic`, `plet`, `pif`, ...) map one-to-one onto UPLC constructs. The developer writes Plutarch terms and calls `compile` to produce the UPLC script.
- **Raw UPLC** is the bytecode executed on-chain. Both PlutusTx and Plutarch compile down to it; Plutarch just exposes the structure more directly.

Plutarch uses the same `plutus-ledger-api` types as PlutusTx (`PPubKeyHash`, `PCurrencySymbol`, `PTxInfo`, ...), so datum and redeemer definitions are compatible between the two ecosystems.

4.6.3. Setting Up the Plutarch Development Environment

The recommended way to set up a Plutarch project is through Nix, which pins all dependencies to a known-good set:

```
# 1. Install Nix (if not already installed)
curl -L https://nixos.org/nix/install | sh
```

```
# 2. Clone the Plutarch starter template
git clone https://github.com/Plutonomicon/plutarch-template
cd plutarch-template

# 3. Enter the Nix development shell
nix develop

# 4. Build the project
cabal build all

# 5. Run tests
cabal test
```

For developers who prefer Cabal without Nix, Plutarch can be added to an existing `cabal.project` by pointing to the GitHub repository:

```
source-repository-package
  type:      git
  location:  https://github.com/Plutonomicon/plutarch-plutus
  tag:       <commit-hash>
```

The recommended GHC version is **GHC 9.6** or later, which is required for the `QualifiedDo` and `OverloadedRecordDot` extensions used throughout Plutarch contracts.

4.6.4. Language Features

The eDSL Approach

Plutarch terms live in the type `Term s a`, where `s` is a phantom type enforcing that terms from different evaluation scopes are not mixed, and `a` is the Plutarch type of the result. Lambdas are written with `plam` and applied with the `#` operator:

```
1 -- Identity function
2 pid :: Term s (a --> a)
3 pid = plam $ \x -> x
4
5 -- Addition
6 padd :: Term s (PInteger --> PInteger --> PInteger)
7 padd = plam $ \x y -> x + y
8
9 -- Application: result is 3
10 three :: Term s PInteger
11 three = padd # 1 # 2
```

Type-Level Programming

On-chain data types are defined as Haskell types of kind `S -> Type` using `PDataRecord` for product fields and `PlutusType` for sum constructors. The `PlutusTypeData` strategy encodes the type as Plutus Data, matching PlutusTx's on-chain representation:

```

1 -- Product type (datum)
2 data PMyDatum (s :: S) = PMyDatum
3   ( Term s (PDataRecord '["owner" ' := PPubKeyHash, "value" ' := PInteger
4     ]) )
5   deriving stock (Generic)
6   deriving anyclass (PlutusType, PIsData, PDataFields)
7 instance DerivePlutusType PMyDatum where type DPTStrat _ =
8   PlutusTypeData
9
10 -- Sum type (redeemer)
11 data PMyRedeemer (s :: S)
12   = PIncrement (Term s (PDataRecord '[]))
13   | PClose      (Term s (PDataRecord '[]))
14   deriving stock (Generic)
15   deriving anyclass (PlutusType, PIsData)
16 instance DerivePlutusType PMyRedeemer where type DPTStrat _ =
17   PlutusTypeData

```

Term-Level Constructs

The most common Plutarch term-level constructs are:

- `plam`: construct a lambda
- `phoistAcyclic`: hoist a closed term to the top of the script (defined once, shared everywhere)
- `plet`: bind a sub-term to avoid repeated evaluation
- `pif`: conditional branching (`pif condition trueBranch falseBranch`)
- `pmatch`: pattern match on a sum type
- `pletFields`: extract multiple named fields from a product type in one traversal
- `perror`: fail script execution (equivalent to returning `False`)
- `pconstant`: lift a Haskell value into a constant Plutarch term

4.6.5. A Simple Smart Contract in Plutarch

The following contract checks that the redeemer is the integer 42, mirroring the `PlutusTx` example earlier in this chapter:

```

1 {-# LANGUAGE DataKinds           #-}
2 {-# LANGUAGE OverloadedStrings #-}
3 {-# LANGUAGE TypeApplications    #-}
4 {-# LANGUAGE TypeOperators       #-}
5
6 module Contracts.FortyTwo where
7
8 import Plutarch.Prelude
9 import Plutarch.LedgerApi.V2 (PScriptContext)
10 import Plutarch.Internal.Term (compile)
11 import Plutarch.Script (serialiseScript)
12
13 -- Validator: succeeds only when the redeemer equals 42
14 fortyTwoValidator

```

```

15  :: Term s (PAsData PInteger --> PAsData PInteger --> PScriptContext
    --> PUnit)
16 fortyTwoValidator = phoistAcyclic $ plam $ \_datum redeemerData _ctx ->
17   let redeemer = pfromData redeemerData
18   in pif (redeemer == 42)
19       (pconstant ())
20       perror
21
22 -- Compile and serialise the validator
23 compiledScript :: Either Text ShortByteString
24 compiledScript = serialiseScript <$> compile mempty fortyTwoValidator

```

EXPLANATION

- `phoistAcyclic` ensures the validator body is compiled once and referenced, rather than inlined at every use site.
- `pfromData` unwraps the `PAsData PInteger` redeemer into a plain `PInteger` term for comparison.
- `pif` evaluates to `pconstant ()` (success) when the redeemer is 42, and `perror` (failure) otherwise.
- `compile mempty` compiles the term without tracing. Passing `Config { tracingMode = DoTracing }` instead retains `ptrace` output for debugging.

The compiled `ShortByteString` is the CBOR-encoded UPLC script ready to be submitted to the chain or stored in a `plutus.json` blueprint.

4.6.6. Comparison with Other Cardano Smart Contract Languages

- **vs PlutusTx:** Both are Haskell-based and share the same ledger-api types. `PlutusTx` is more beginner-friendly because it looks like normal Haskell. `Plutarch` requires understanding UPLC-level constructs but produces smaller, cheaper scripts and makes execution costs predictable.
- **vs Aiken:** `Aiken` has a cleaner, Rust-inspired syntax and is the easiest entry point for developers new to Cardano. `Plutarch` stays in Haskell and offers the full GHC type system, but demands more prior knowledge.
- **vs Helios:** `Helios` targets JavaScript/TypeScript developers with a C-like syntax. `Plutarch` targets Haskell developers who want low-level UPLC control.
- **vs OpShin:** `OpShin` compiles Python to UPLC, making it the most accessible to developers with a Python background. `Plutarch` provides stronger static guarantees through Haskell's type system.
- **vs Plu-ts:** `Plu-ts` is a TypeScript eDSL conceptually similar to `Plutarch`, but targeting the TypeScript ecosystem. `Plutarch` targets Haskell.

4.6.7. References and Further Resources

- **Plutarch GitHub repository:** github.com/Plutonomicon/plutarch-plutus — source code, documentation, and examples.

- **Plutarch starter template:** github.com/Plutonomicon/plutarch-template — a ready-to-use project scaffold with Nix and Cabal configuration.
- **Plutarch documentation:** The `docs/` folder in the repository covers all typeclasses, combinators, and concepts in detail.
- **Plutonomicon:** github.com/Plutonomicon — the organisation that maintains Plutarch and related on-chain tooling for the Cardano ecosystem.



SMART CONTRACT RUNTIME



5. SMART CONTRACT RUNTIME AND EXECUTION

5.1. SMART CONTRACT RUNTIME AND EXECUTION

This part has been updated to be Chang compatible. The code here is already compatible with DReps, the new Aiken version, and Plutus v3.

5.1.1. Overview of Cardano's Smart Contract Execution Model

Smart contracts on Cardano are simple constructs based on **validator scripts**. These scripts define the logic or rules to be enforced by Cardano nodes when a transaction attempts to move a UTXO locked inside the script's address.

Validator scripts can access the **transaction context** (e.g., who signed it, and which assets are sent to/from where) and the **datum** of the locked UTXO being moved, allowing the creation of complex contracts. For instance:

With smart contracts, we can add conditions to stake delegation, withdraw Cardano rewards from the protocol, or create minting policies with more dynamic conditions than regular ones.

Validator scripts are executed with three main arguments:

- **Datum:** Attached to the output locked by the script, often carrying state.
- **Redeemer:** Attached to the spending input, typically providing an input to the script. For example, a validator can apply the redeemer to the datum and verify it matches the output UTXO datum.
- **Context:** Contains transaction-level information, used to assert properties like “Bob signed it.”

Transaction context properties:

Property	Description
inputs	Outputs to be spent.
reference inputs	Inputs used for reference only, not spent.
outputs	New outputs created by the transaction.
fees	Transaction fees.
minted value	Minted or burned value.
certificates	Digest of certificates in the transaction.
withdrawals	Used to withdraw rewards from the stake pool.
valid range	Time range in which the transaction is valid.
signatories	List of transaction signatures.
redeemers	Data used as input to the script.
id	Transaction identification.

5.1.2. Understanding the Transaction Context Table

Inputs: These represent UTXOs being *spent* in the transaction. In the UTXO model, every transaction produces outputs, which in turn become inputs for future transactions. Understanding this flow is key to interpreting inputs and outputs.

Outputs: These are the new UTXOs created by the transaction, ready to be used as inputs in subsequent transactions.

Fees: The amount of lovelace spent for transaction execution. This value is predictable and depends on the transaction size. Fees can often be optimized.

Minted Value: This indicates any minting or burning of tokens that occurs in the transaction.

Certificates: Information about stake operations. For example:

- Registering a stake key.
- Delegating to a DRep.

Withdrawals: Rewards withdrawn from stake keys. For example, if you use a wallet like Lace, which allows delegation to multiple pools, you may see multiple withdrawals in one transaction.

Valid Range: A time frame during which the transaction is valid. This is useful for ensuring a transaction only executes within specific boundaries.

Signatories: A list of hashes representing who signed the transaction. This is essential for multi-signature transactions.

Redeemers: A list of redeemers used by the contracts executed in the transaction.

ID: The transaction hash, uniquely identifying the transaction.

During runtime, each validator checks its *datum*, *redeemer*, and the *context* (or local transaction state).

Important exercise: Imagine a transaction that:

- Spends **three different UTXOs** from the same contract.
- Withdraws staking rewards from a stake key contract.
- Mints **two different tokens** under separate contract policies.

Questions:

1. How many unique contracts are executed?
2. How many datums are present?
3. How many redeemers?

Answer: After a blank page—*Take your time; don't rush!*

Real answer:

1. 4
2. 3
3. 6

Did you get them? Let's try to understand why. Spending inputs from a contract, even if it's coming from the same contract is treated like a unique execution. Therefore for each input coming from contract A, we will have it's own Datum and it's own redeemer.

Withdraw and minting contract do not have datums, they have redeemers. You can mint or withdraw from the same contract only once, therefore the logic behind these contracts must be more flexible to allow different logic inside the same execution.

It will be easier to understand at the end of this chapter, you need to take home this:

SPEND contracts are executed once for each input, while minting and withdrawals contracts are executed once for each transaction

5.2. TRANSACTION VERIFICATION AND SCRIPT VALIDATION


To understand transaction validation on Cardano, it is crucial to recognize that even if a script validates a transaction, the transaction might still fail due to the network's robust two-phase validation mechanism. This section explores this process and the role of collateral in ensuring successful smart contract execution.

Two-Phase Validation Mechanism

Cardano employs a two-phase validation scheme to minimize uncompensated work for nodes, ensuring efficiency and security:

- **Phase 1: Structural Validation**
 - Checks if the transaction is correctly constructed.
 - Ensures that the transaction can pay its processing fee.
 - If Phase 1 fails, the transaction is immediately discarded without running any scripts.
- **Phase 2: Script Execution**
 - Executes the scripts included in the transaction.
 - If a script fails, the transaction fails, and collateral is used to compensate nodes.

The Role of Collateral

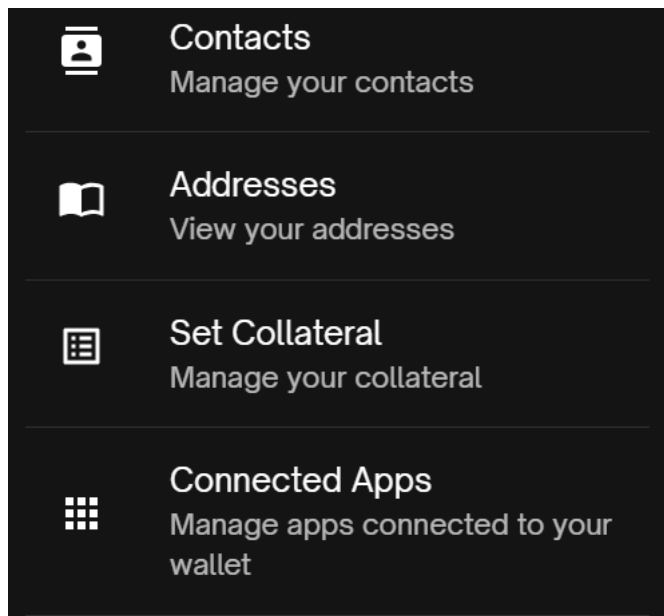

Collateral ensures that nodes are compensated for their work if Phase 2 validation fails. It acts as a monetary guarantee, encouraging careful design and testing of smart contracts. Key details about collateral:

- **Collateral Inputs:** The collateral amount is determined by the total balance of UTXOs marked as collateral inputs.
- **Safety for Honest Users:** Collateral is not collected if a transaction succeeds or is invalid at Phase 1.
- **Deterministic Costs:** Cardano's deterministic design allows users to calculate execution costs and collateral requirements in advance, unlike Ethereum where gas costs can vary based on network activity.
- **Vasil Upgrade Improvement:** Developers can specify a change address for script collateral, ensuring only the required amount is taken if a script fails, with the remainder returned to the specified address.

Importance of Collateral

Without collateral, malicious actors could exploit the network by flooding it with invalid transactions at little cost. By requiring collateral, Cardano ensures:

- Transactions calling non-native (Phase 2) smart contracts include sufficient collateral to cover potential failure costs.
- Denial of Service (DoS) attacks become prohibitively expensive.
- Honest users never lose their collateral as long as transactions are valid and successful.

Technical Details

Phase 2 scripts on Cardano can perform arbitrary computations and require a budget of execution units (ExUnits) to quantify resource usage. This budget is included in the transaction fee calculation. Collateral provides additional safeguards:

- **Multi-Signature Scripts:** Introduced in the Shelley era, Phase 1 scripts follow deterministic ledger rules, enabling straightforward cost assessment.
- **ExUnit Budgeting:** Phase 2 scripts require a resource budget for metrics like memory usage and execution steps, ensuring fair cost allocation.

The Cardano testnet provides a safe environment with free test ADA, enabling developers to rigorously test smart contracts before deploying them on the mainnet. This ensures that transactions and scripts function correctly under real-world conditions.

5.3. DEBUGGING AND TROUBLESHOOTING SMART CONTRACTS

Debugging smart contracts can be challenging, but interacting directly with the blockchain is not always necessary. Thanks to tools like Aiken and Gastronomy, developers can efficiently test and debug their smart contracts in a controlled environment.

Debugging with Aiken

Aiken offers first-class support for unit tests and property-based tests, allowing developers to write and execute tests directly in Aiken without deploying to the blockchain. The toolkit (`'aiken check'`) parses tests, runs them, and displays detailed reports.

UNIT TESTS

Unit tests in Aiken are written using the `'test'` keyword. A test is a named function that takes no arguments and returns a boolean. It is valid (i.e., it passes) if it returns `'True'`.

```
test foo() {  
  1 + 1 == 2  
}
```

Unit tests can call functions and use constants, and they execute on the same virtual machine used for on-chain contracts. This ensures that tests mirror the production environment.

EXAMPLE UNIT TESTS

```
lib/example.ak  
fn add_one(n: Int) -> Int {  
  n + 1  
}  
  
test add_one_1() {  
  add_one(0) == 1  
}
```

```
test add_one_2() {
  add_one(-42) == -41
}
```

Running ‘aiken check’ generates a report grouping tests by module and displaying the memory and CPU execution units needed for each test. This report can also be used as a benchmark to compare execution costs of different approaches.

Tests in Aiken can be as complex as necessary, without the execution limits imposed on on-chain scripts.

TRACE AND DEBUGGING


Aiken supports debugging via CBOR diagnostic traces. Developers can use ‘trace’ to print diagnostic data (e.g., integers or byte arrays) in the event of a contract failure. If the contract succeeds, no output is shown.

```
// An Int becomes a CBOR int
trace cbor.diagnostic(42)

// A ByteArray becomes a CBOR bytestring
trace cbor.diagnostic("foo")
```

This feature provides valuable insights during debugging by simulating breakpoints.

Advanced Debugging with Gastronomy

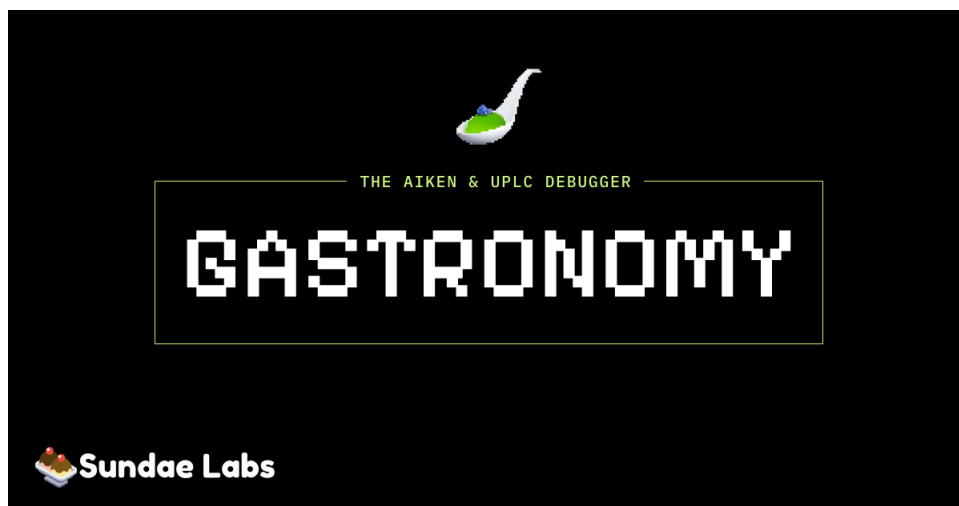

Gastronomy, developed by Sundae Labs, is a powerful UPLC debugger designed to aid in diagnosing failed scripts based on error codes. It allows developers to step through script execution with ease.

FEATURES

- Stores the state of the machine at every execution step.
- Allows stepping forward and backward to analyze script behavior.
- Provides a user-friendly interface for debugging.

QUICK START

CLI Tool:

```
gastronomy-cli run test_data/fibonacci.uplc 03
```

N - Advance to the next step

P - Rewind to the previous step

Q - Quit

GUI Tool: Simply run ‘gastronomy’ to launch the graphical interface.

CONFIGURATION

Gastronomy can be configured using environment variables or a ‘gastronomyrc.toml’ file in the home directory. Example configuration:

Setting	Environment Variable	Description
blockfrost.key	BLOCKFROST_KEY	The API key to use when querying Blockfrost

By leveraging Aiken and Gastronomy, developers can thoroughly test and debug their smart contracts, ensuring reliability and efficiency before deployment.

5.4. TX OPTIMIZATION TECHNIQUES FOR EFFICIENT EXECUTION

In recent years, several effective techniques have been discovered to optimize smart contracts on Cardano. Many of these can be found in the repository at **Aiken Design Patterns**. Here, we will discuss two game-changing techniques: the “Withdraw 0 Trick” and “Parametric Scripts.”

Withdraw 0 Trick

The “Withdraw 0 Trick” is particularly useful for validators that need to handle multiple inputs efficiently. By splitting logic into two distinct parts—a minimal spending logic and an arbitrary withdrawal logic—scripts can be made significantly more efficient.

HOW IT WORKS

Withdraw scripts are executed only once per transaction, whereas spend validators are executed once for every input originating from the same smart contract. For example,

if purchasing multiple NFTs from a marketplace, the transaction's execution logic grows proportionally to the number of NFTs.

Using the "Withdraw 0 Trick," this logic is split:

- The spend validator checks that a "withdraw 0" operation is executed.
- The withdrawal logic is handled independently in the "withdraw 0" contract, decoupling it from the number of NFTs.

This approach reduces complexity, ensures scalability, and maintains elegance in design.

IMPLEMENTATION DETAILS

The module offers two key functions for spending endpoints:

- **spend** – Traverses both the withdrawals and redeemers fields, validating against both the redeemer and the withdrawal quantity.
- **spend_minimal** – Traverses only the withdrawals, ideal when no validation is needed on the staking script's redeemer or withdrawal quantity.

Additionally, the **withdraw** function unwraps the staking credential and provides the underlying hash, facilitating minimal execution logic.

Parametric Scripts

Parametric scripts are another crucial optimization technique, significantly enhancing execution efficiency by predefining key parameters within the script itself.

WHY USE PARAMETRIC SCRIPTS?

Certain contracts require specific parameters, such as a spend contract that must identify an NFT with a matching policy script hash. Without predefined parameters, the contract would consume excessive CPU resources to compute its own script hash. By using parametric scripts, the contract already "knows" the required values, saving computation time and resources.

PRACTICAL EXAMPLE

Consider a minting script that restricts token destinations to instances of a specific spending script parameterized by user wallets. Each wallet results in a different script address, making verification challenging. Using parametric scripts, the minting script can:

- Validate instances as the result of applying specific parameters to a parameterized script.
- Ensure robust asset flow control.

ON-CHAIN VALIDATION REQUIREMENTS

To validate parameterized scripts on-chain, the following restrictions apply:

- Script parameters must have constant lengths (achieved via hashing).
- Redeemers must supply resolved values of parameters for each transaction.
- Dependent scripts must include CBOR bytes of instances before and after parameter application.
- Logic wrapping ensures a single occurrence of each parameter.

IMPLEMENTATION STEPS

Define parameterized scripts and generate instances with dummy data to obtain required prefix and postfix values. Use these values in your target script. For detailed examples, refer to **`validators/apply-params-example.ak`**.

These optimization techniques provide a solid foundation for efficient, scalable smart contract execution on Cardano.



WRITE YOUR FIRST SMART CONTRACT



6. GETTING STARTED WITH CARDANO SMART CONTRACT DEVELOPMENT

6.1. KEY CONCEPTS AND TERMINOLOGY

In this chapter, we will get hands-on experience by writing a smart contract in Aiken and the corresponding off-chain code, typically implemented in the frontend using Mesh. Finally, we will submit a transaction and interact with it.

At the end of the chapter, you will also find exercises to test your understanding and skills.

6.1.1. Key Concepts

Here is a list of key concepts and terminology that will help you:

- **Collateral:** A specific UTxO required to interact with smart contracts. It ensures that nodes are compensated in case the contract validation fails.
- **Script Hash:** A unique hash that identifies the smart contract, allowing transactions to reference it securely.
- **Locked UTxO:** A transaction output that holds funds, NFTs, or tokens locked within a contract. These can only be spent if the contract validation logic passes.
- **CIP69 Contract:** A contract where the datum is optional. It behaves like a user, allowing it to receive funds. However, every UTxO associated with this contract must execute the validation logic to be spendable.
- **Multipurpose Script:** A versatile script that can perform multiple functions, such as locking funds, minting NFTs, and more.

6.2. WRITING YOUR FIRST SMART CONTRACT

Let's write and execute a smart contract on Cardano in 10 minutes. Yes, you read that right.

You can find code supporting this tutorial on Aiken's main repository.

6.2.1. Covered in this tutorial

- Writing a basic Aiken validator;
- Writing & running tests with Aiken;
- Troubleshooting smart contracts.

When encountering an unfamiliar syntax or concept, do not hesitate to refer to the language-tour for details and extra examples.

6.2.2. Pre-requisites

We'll use Aiken to write the script, so make sure the command-line tool is installed already. Otherwise, refer to the installation instructions.

6.2.3. Scaffolding

First, let's create a new Aiken project:

```
aiken new aiken-lang/hello-world
cd hello-world
```

This command scaffolds an Aiken project. In particular, it creates a `lib` and `validators` folder in which you can put Aiken source files.

```
./hello-world
```

```
README.md
aiken.toml
lib
validators
```

6.2.4. Using the standard library

We'll use the standard library for writing our validator. Fortunately, `aiken new` did automatically add the standard library to our `aiken.toml` for us. It should look roughly like that:

```
aiken.toml
name = "aiken-lang/hello-world"
version = "0.0.0"
license = "Apache-2.0"
description = "Aiken contracts for project 'aiken-lang/hello-world'"

[repository]
user = 'aiken-lang'
project = 'hello-world'
platform = 'github'

[[dependencies]]
name = "aiken-lang/stdlib"
version = "v2"
source = "github"
```

Now, running `aiken check`, we should see dependencies being downloaded. That shouldn't take long.

```

aiken check
  Compiling aiken-lang/hello-world 1.0.0 (examples/hello-world/)
  Resolving aiken-lang/hello-world
    Fetched 1 package in 0.01s from cache
  Compiling aiken-lang/stdlib v2 (/Users/aiken/Documents/aiken-lang/hello-
world/build/packages/aiken-lang-stdlib)
  Summary 0 errors, 0 warnings

```

6.2.5. Our First Validator

Let's write our first validator as `validators/hello_world.ak`:

```

validators/hello_world.ak
use aiken/collection/list
use aiken/crypto.{VerificationKeyHash}
use cardano/transaction.{OutputReference, Transaction}

pub type Datum {
  owner: VerificationKeyHash,
}

pub type Redeemer {
  msg: ByteArray,
}

validator hello_world {
  spend(
    datum: Option<Datum>,
    redeemer: Redeemer,
    _own_ref: OutputReference,
    self: Transaction,
  ) {
    expect Some(Datum { owner }) = datum
    let must_say_hello = redeemer.msg == "Hello, World!"
    let must_be_signed = list.has(self.extra_signatories, owner)
    must_say_hello && must_be_signed
  }
}

```

Our first validator is rudimentary, yet there's already a lot to say about it.

It looks for a verification key hash (`owner`) in the datum and a message (`msg`) in the redeemer. Remember that, in the eUTxO model, the datum is set when locking funds in the contract and can be seen as configuration. Here, we'll indicate the owner of the contract and require a signature from them to unlock funds—very much like it already works on a typical non-script address.

Moreover, because there's no "Hello, World!" without a proper "Hello, World!", our little contract also demands this very message, as a UTF-8-encoded byte array, to be passed as redeemer (i.e. when spending from the contract).

It's now time to build our first contract!

```
aiken build
```

This command generates a CIP-0057 Plutus blueprint as `plutus.json` at the root of your project. This blueprint describes your on-chain contract and its binary interface. In particular, it contains the generated on-chain code that will be executed by the ledger and a hash of your validator(s) that can be used to construct addresses.

This format is framework-agnostic and is meant to facilitate interoperability between tools. The blueprint is fully integrated into Aiken, which can automatically generate it based on your type definitions and comments.

6.2.6. Let's see the validator in action!

- Interact with a validator on the Preview network;
- Using Mesh through Blockfrost;
- Getting test funds from the Cardano Faucet;
- Using web explorers such as CardanoScan.

6.2.7. Pre-requisites

We assume that you have followed the "Hello, World!"'s First steps and thus, have Aiken installed and ready-to-use. We will also use Mesh, so make sure you have your dev environment ready for some JavaScript!.

You can install Mesh and set up the project as follows:

```
npm init -y
npm install @meshsdk/core @meshsdk/core-csl tsx
```

6.2.8. Getting Funds

For this tutorial, we will use the validator we built in First steps. Yet, before moving on, we'll need some funds, and a public/private key pair to hold them. We can generate a private key and an address using MeshWallet.

```
generate-credentials.ts
import { MeshWallet } from '@meshsdk/core';
import fs from 'node:fs';

const secretKey = MeshWallet.brew(true) as string;

fs.writeFileSync('me.sk', secretKey);

const wallet = new MeshWallet({
  networkId: 0,
  key: {
    type: 'root',
    bech32: secretKey,
```

```

    }
  });

  (async () => {
    const [address] = await wallet.getUnusedAddresses()
    fs.writeFileSync('me.addr', address);
  })();

```

You can run the instructions above via:

```
npx tsx generate-credentials.ts
```

Now, we can head to the Cardano faucet to get some funds on the preview network to our newly created address (inside `me.addr`).

Make sure to select "Preview Testnet" as the network.

Using CardanoScan, we can watch for the faucet sending some ADA our way. This should be pretty fast (a couple of seconds).

6.3. DEPLOYING AND INTERACTING WITH SMART CONTRACTS

No need to deploy like in ethereum, as soon as we send a transaction in the contract we are ready to go.

Now that we have some funds, we can lock them in our newly created contract. We'll use Blockfrost Provider to construct and submit our transaction through Blockfrost.

This is only one example of a possible setup using tools we love. For more tools, make sure to check out the Cardano Developer Portal!

6.3.1. Setup

First, we set up Mesh with Blockfrost as a provider. This will allow us to let Mesh handle transaction building for us, which includes managing changes. It also gives us a direct way to submit the transaction later on.

```

common.ts
import fs from 'node:fs';
import {
  BlockfrostProvider,
  MeshTxBuilder,
  MeshWallet,
  serializePlutusScript,
} from "@meshsdk/core";
import { applyParamsToScript } from '@meshsdk/core-csl';
// Point to the Aiken validator blueprint
import blueprint from "../../hello-world/plutus.json";

```

```

const blockfrostApiKey = process.env.BLOCKFROST_API_KEY!;

if (!blockfrostApiKey) {
  throw new Error("BLOCKFROST_API_KEY not set");
}
export const provider = new BlockfrostProvider(blockfrostApiKey);

export const wallet = new MeshWallet({
  networkId: 0,
  fetcher: provider,
  submitter: provider,
  key: {
    type: 'root',
    bech32: fs.readFileSync('me.sk', 'utf8'),
  }
});

export function getScript() {
  const scriptCbor = applyParamsToScript(
    blueprint.validators[0].compiledCode,
    []
  );

  const validatorAddr = serializePlutusScript(
    { code: scriptCbor, version: "V3" },
  ).address;

  return { scriptCbor, validatorAddr };
}

export const getTxBuilder = () => {
  return new MeshTxBuilder({
    fetcher: provider,
    submitter: provider,
  });
}

```

Note that this script requires an environment variable named `BLOCKFROST_PROJECT_ID` to be set to your Blockfrost project id. You can define a new environment variable in your terminal by running (in the same session you're also executing the script!):

```
export BLOCKFROST_PROJECT_ID=preview...
```

Replace `preview...` with your actual project id.

6.3.2. Locking Funds into the Contract

Now that we can read our validator, we can make our first transaction to lock funds into the contract. The datum must match the representation expected by the validator (and as specified in the blueprint), so this is a constructor with a single field that is a byte array.

```

lock.ts
import { deserializeAddress, mConStr0 } from '@meshsdk/core';
import { getScript, getTxBuilder, wallet } from './common';

(async () => {
  const lockAmount = 10_000_000;
  const { validatorAddr } = getScript();

  const ownerAddress = (await wallet.getUnusedAddresses())[0];
  const { pubKeyHash: ownerPubKeyHash } = deserializeAddress(ownerAddress);
  const walletUtxos = await wallet.getUtxos();

  const txBuilder = getTxBuilder();

  const unsignedTx = await txBuilder
    .txOut(validatorAddr, [{
      unit: "lovelace",
      quantity: lockAmount.toString()
    }])
    .txOutInlineDatumValue(
      // The datum for the validator has a
      // constructor with one field
      mConStr0([ownerPubKeyHash])
    )
    .changeAddress(ownerAddress)
    .selectUtxosFrom(walletUtxos)
    .complete();

  const signedTx = await wallet.signTx(unsignedTx);
  const txHash = await wallet.submitTx(signedTx);

  console.log(`Locked ${lockAmount} lovelace at ${validatorAddr}`);
  console.log(`Transaction hash: ${txHash}`);
})();

```

Transaction Details	
Transaction Hash 6d236d9326f2ac6dc2663fcefcd5f138542b9e1174821a814dd3d3f9326d2355	Timestamp Nov 16, 2024 5:48:28 AM
Block 2892490	Total Fees 0.178105
Assurance High 124219 confirmations	Total Output 6.898507
Epoch / Slot 179 / 362428	Certificates 0
Absolute Slot 76848829	
Summary <u>UTXOs</u>	
From Addresses (Inputs)	
Address	Amount
addr_test1qqj968hh9zk3lryjwpcdr7783rdmqtmnn69pkd2msux3kxzuqwsck42qu2lqj4kx2qcv06mgtbudpgl6wz06lq760zp2	1.0
addr_test1qqj968hh9zk3lryjwpcdr7783rdmqtmnn69pkd2msux3kxzuqwsck42qu2lqj4kx2qcv06mgtbudpgl6wz06lq760zp2	6.898507

Once again, you may check the transaction on CardanoScan.

6.3.3. Spending from the Contract

With our funds now locked in the contract, we can now spend them. First, we'll need a transaction that spends the funds, passing in the correct redeemer with the value Hello, World!.

```

spend.ts
import { deserializeAddress, mConStr0, stringToHex } from '@meshsdk/core';
import { parseDatumCbor } from '@meshsdk/core-csl';
import { getScript, getTxBuilder, wallet, provider } from './common';

(async () => {
  const { scriptCbor, validatorAddr } = getScript();

  const ownerAddress = (await wallet.getUnusedAddresses())[0];
  const { pubKeyHash: ownerPubKeyHash } = deserializeAddress(ownerAddress);

  const scriptUtxos = await provider.fetchAddressUTxOs(validatorAddr);

  // Finds the UTxO previously created by searching through the
  // list of UTxOs in the contract and finding the one where the datum
  // matches our wallet's pubKeyHash - remember, the owner is us!
  const utxoToSpend = scriptUtxos.find(utxo => {
    if (utxo.output.plutusData) {
      const datum = parseDatumCbor(utxo.output.plutusData);
      if (datum && datum.fields && datum.fields.length > 0) {
        const [owner] = datum.fields;
        return owner.bytes === ownerPubKeyHash;
      }
    }
    return false;
  });

  if (!utxoToSpend) {
    throw new Error('No UTxO found at script address with your ownership datum');
  }

  const [collateral] = await wallet.getCollateral();
  const txBuilder = getTxBuilder();

  const unsignedTx = await txBuilder
    .spendingPlutusScriptV3()
    .txIn(
      utxoToSpend.input.txHash,
      utxoToSpend.input.outputIndex,
      utxoToSpend.output.amount,
      utxoToSpend.output.address
    )
    .txInScript(scriptCbor)
    .txInRedeemerValue(mConStr0([stringToHex("Hello, World!")]))
    .txInInlineDatumPresent()
    .txInCollateral(
      collateral.input.txHash,

```


```

        collateral.input.outputIndex,
        collateral.output.amount,
        collateral.output.address
    )
    .requiredSignerHash(ownerPubKeyHash)
    .changeAddress(ownerAddress)
    .selectUtxosFrom(await wallet.getUtxos())
    .complete();

const signedTx = await wallet.signTx(unsignedTx);
const txHash = await wallet.submitTx(signedTx);

console.log(`Unlocked funds and sent to: ${ownerAddress}`);
console.log(`Transaction hash: ${txHash}`);
})();

```

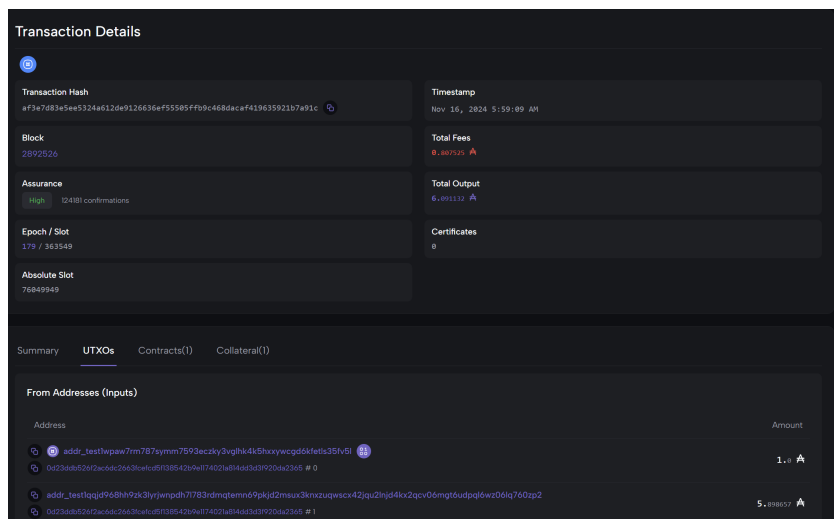

After running this script, use the new transaction hash printed to the console and look for it on CardanoScan again to confirm it has been processed.

6.4. BEST PRACTICES FOR SECURE AND ROBUST SMART CONTRACT

Auditing should be mandatory before any contract goes live. While open-source code is beneficial for transparency and trust, it is not sufficient on its own. Audits help identify potential vulnerabilities and ensure that the contract behaves as expected under various conditions.

A well-conducted audit verifies that the code meets security standards and mitigates risks, including potential exploits or misuse. Moreover, it's important to have a robust testing framework in place to ensure the contract functions correctly in both expected and edge cases.

Following these best practices ensures the safety of assets and enhances the reliability of smart contracts in decentralized applications.

Here is a list of checks that you should perform on your contract before going live:

- **Dust attack:** The contract may be used by an attacker who adds additional tokens,

making the UTXO locked forever.

- **Double spending:** Ensure that the contract logic is enforced so that it is only executed for one input at a time, preventing multiple inputs from being withdrawn from the contract.
- **Stake key:** Verify that funds are sent to the correct contract under the right stake key. This ensures that the true owner receives staking rewards.
- **Mint-burn:** Confirm that the mint or burn functions are validating the correct policy, and not just using a random asset name.

6.5. EXERCISES TO TEST YOUR SMART CONTRACT SKILLS

EXERCISE 3: Make all tutorials available in the following links:

- <https://aiken-lang.org/example--vesting>
- <https://aiken-lang.org/example--gift-card>

EXERCISE 4: Create a minting policy that allows the following:

- Mint the token `always` to everyone, at any time.
- Mint the token `onetime` only to the project owner, and only once forever.
- Mint the token `fenix` only if both `always` and `onetime` have been burned.
- Any other token name is forbidden.

EXERCISE 5: Create a smart wallet account where users can receive payments. The datum is optional, as it can function like a regular wallet. The rules are as follows:

- If the datum is empty, the owner can spend the tokens.
- If the datum is not empty, it indicates the time when the user can withdraw it, as a POSIX timestamp.
- The owner can be a user, a smart contract, or a multisig, allowing multisignatures and smart contracts to use it as well.

EXERCISE 6: Implement a contract where a user can lock 1 NFT and generate an amount of N tokens as a result. The conditions are as follows:

- The only way to unlock the NFT is to burn a number M of tokens in the transaction.
- The unit of the NFT, the number N of tokens generated, and the number M of tokens to burn are parameters of the contract.



BUILDING A MARKETPLACE SMART CONTRACT



7. BUILDING A MARKETPLACE

7.1. DEFINING REQUIREMENTS FOR A MARKETPLACE CONTRACT

In this section, we define the essential requirements for our marketplace contract. The contract should include the following checks:

- **Owner's Actions:** An owner can cancel or create a listing in the contract.
- **Buyer Limitation:** A buyer can purchase only one NFT at a time to avoid double-spending, a potential issue to be explained later.
- **NFT Transfer:** Ensure that the NFT is correctly transferred to the buyer upon purchase.
- **Seller Payment:** The contract must ensure that the seller receives the correct payment.
- **Marketplace Payment:** The marketplace fee must be paid correctly.
- **Royalties:** If royalties are present, they must be paid to the designated address.

The contract will store the following information for each NFT listing:

- `nSeller :: PubKeyHash` the address to pay
- `nPrice :: Integer` the amount
- `nCurrency :: CurrencySymbol` the policy of the token
- `nToken :: TokenName` the asset name of the token
- `nRoyalty :: PubKeyHash` the address of the royalty recipient
- `nRoyaltyPercent :: Integer` the percentage of royalty

7.2. IMPLEMENTING MARKETPLACE CONTRACTS

To implement marketplace contracts, we will begin by analyzing the contract implementation in **PlutusTX**. We can refer to the [JPG Store contract repository](https://github.com/jpg-store/current-jpg-store-contracts/blob/main/src/Market/Onchain.hs).

In the repository, we can see how the marketplace contract is implemented in `Onchain.hs`, which defines the main logic and transaction validation.

7.2.1. PlutusTX Code for Marketplace Contract

We provide the following code implementation for the market contract in Plutus:

```

1 {-# LANGUAGE DataKinds           #-}
2 {-# LANGUAGE NoImplicitPrelude   #-}
3 {-# LANGUAGE OverloadedStrings   #-}
4 {-# LANGUAGE TemplateHaskell     #-}
5 {-# LANGUAGE TypeApplications    #-}
6 {-# LANGUAGE TypeFamilies        #-}
7 {-# LANGUAGE DerivingStrategies  #-}
8 {-# LANGUAGE NumericUnderscores #-}
9
10 module Market.Onchain
11   ( apiBuyScript
12     , buyScriptAsShortBs
  
```

```

13     , typedBuyValidator
14     , Sale
15     , buyValidator
16     , nftDatum
17   ) where
18
19   import qualified Data.ByteString.Lazy      as LB
20   import qualified Data.ByteString.Short    as SBS
21   import          Codec.Serialise           ( serialise )
22
23   import          Cardano.Api.Shelley       (PlutusScript (..),
24     PlutusScriptV1)
25   import qualified PlutusTx
26   import PlutusTx.Prelude
27   import PlutusTx.Ratio
28   import Ledger
29     ( TokenName ,
30       PubKeyHash(..),
31       CurrencySymbol ,
32       DatumHash ,
33       Datum(..),
34       txOutDatum ,
35       txSignedBy ,
36       ScriptContext(scriptContextTxInfo),
37       TxInfo ,
38       TxInInfo(..),
39       txInfoInputs ,
40       txOutDatumHash ,
41       Validator ,
42       TxOut ,
43       txInfoSignatories ,
44       unValidatorScript , valuePaidTo )
45   import qualified Ledger.Typed.Scripts      as Scripts
46   import qualified Plutus.V1.Ledger.Scripts as Plutus
47   import          Ledger.Value               as Value ( valueOf )
48   import qualified Plutus.V1.Ledger.Ada     as Ada (fromValue, Ada (
49     getLovelace))
50
51   import          Market.Types               (NFTSale(..), SaleAction
52     (..))
53
54   {-# INLINABLE nftDatum #-}
55   nftDatum :: TxOut -> (DatumHash -> Maybe Datum) -> Maybe NFTSale
56   nftDatum o f = do
57     dh <- txOutDatum o
58     Datum d <- f dh
59     PlutusTx.fromBuiltinData d
60
61   {-# INLINABLE ensureOnlyOneScriptInput #-}
62   ensureOnlyOneScriptInput :: ScriptContext -> Bool
63   ensureOnlyOneScriptInput ctx =
64     let
65       isScriptInput :: TxInInfo -> Bool
66       isScriptInput i = case (txOutDatumHash . txInInfoResolved) i of
67         Nothing -> False
68         Just _ -> True
69     in if length (filter isScriptInput $ txInfoInputs (
70       scriptContextTxInfo ctx)) <= 1
71       then True
72       else False

```

```

70 {-# INLINABLE mkBuyValidator #-}
71 mkBuyValidator :: PubKeyHash -> NFTSale -> SaleAction -> ScriptContext
    -> Bool
72 mkBuyValidator pkh nfts r ctx =
73     case r of
74         Buy    -> traceIfFalse "NFT not sent to buyer" checkNFTOut &&
75                 traceIfFalse "Seller not paid" checkSellerOut &&
76                 traceIfFalse "Fee not paid" checkMarketplaceFee &&
77                 traceIfFalse "Royalties not paid" checkRoyaltyFee &&
78                 traceIfFalse "More than one script input"
    onlyOneScriptInput
79         Close -> traceIfFalse "No rights to perform this action"
    checkCloser
80 where
81     info :: TxInfo
82     info = scriptContextTxInfo ctx
83
84     tn :: TokenName
85     tn = nToken nfts
86
87     cs :: CurrencySymbol
88     cs = nCurrency nfts
89
90     seller :: PubKeyHash
91     seller = nSeller nfts
92
93     sig :: PubKeyHash
94     sig = case txInfoSignatories info of
95         [pubKeyHash] -> pubKeyHash
96         _ -> error ()
97
98     price :: Integer
99     price = nPrice nfts
100
101     checkNFTOut :: Bool
102     checkNFTOut = valueOf (valuePaidTo info sig) cs tn == 1
103
104     marketplacePercent :: Integer
105     marketplacePercent = 20
106
107     marketplaceFee :: Ratio Integer
108     marketplaceFee = max (1_000_000 % 1) (marketplacePercent % 1000 *
    fromInteger price)
109
110     checkMarketplaceFee :: Bool
111     checkMarketplaceFee
112     = fromInteger (Ada.getLovelace (Ada.fromValue (valuePaidTo info
    pkh)))
113       >= marketplaceFee
114
115     royaltyFee :: Ratio Integer
116     royaltyFee = max (1_000_000 % 1) (nRoyaltyPercent nfts % 1000 *
    fromInteger price)
117
118     checkRoyaltyFee :: Bool
119     checkRoyaltyFee = if nRoyaltyPercent nfts > 0
120     then fromInteger (Ada.getLovelace (Ada.fromValue (valuePaidTo
    info $ nRoyalty nfts))) >= royaltyFee
121     else True
122
123     checkSellerOut :: Bool

```

```

124     checkSellerOut
125         = fromInteger (Ada.getLovelace (Ada.fromValue (valuePaidTo info
126             seller)))
127         >= ((fromInteger price - marketplaceFee) - royaltyFee)
128
129     checkCloser :: Bool
130     checkCloser = txSignedBy info seller
131
132     onlyOneScriptInput :: Bool
133     onlyOneScriptInput = ensureOnlyOneScriptInput ctx
134
135 data Sale
136 instance Scripts.ValidatorTypes Sale where
137     type instance DatumType Sale      = NFTSale
138     type instance RedeemerType Sale = SaleAction
139
140
141 typedBuyValidator :: PubKeyHash -> Scripts.TypedValidator Sale
142 typedBuyValidator pkh = Scripts.mkTypedValidator @Sale
143     ($$(PlutusTx.compile [|| mkBuyValidator ||]) `PlutusTx.applyCode`
144     PlutusTx.liftCode pkh)
145     $$(PlutusTx.compile [|| wrap ||])
146 where
147     wrap = Scripts.wrapValidator @NFTSale @SaleAction
148
149 buyValidator :: PubKeyHash -> Validator
150 buyValidator = Scripts.validatorScript . typedBuyValidator
151
152 buyScript :: PubKeyHash -> Plutus.Script
153 buyScript = Ledger.unValidatorScript . buyValidator
154
155 buyScriptAsShortBs :: PubKeyHash -> SBS.ShortByteString
156 buyScriptAsShortBs = SBS.toShort . LB.toStrict . serialise . buyScript
157
158 apiBuyScript :: PubKeyHash -> PlutusScript PlutusScriptV1
159 apiBuyScript = PlutusScriptSerialised . buyScriptAsShortBs

```

7.2.2. Types.hs Code for Marketplace Contract

Here is the code for `types.hs`, which defines the datum structures used in the marketplace contract:

```

1 {-# LANGUAGE DeriveAnyClass      #-}
2 {-# LANGUAGE DataKinds          #-}
3 {-# LANGUAGE DeriveGeneric       #-}
4 {-# LANGUAGE ScopedTypeVariables #-}
5 {-# LANGUAGE TemplateHaskell     #-}
6 {-# LANGUAGE MultiParamTypeClasses #-}
7 {-# LANGUAGE TypeOperators       #-}
8
9 module Market.Types
10     ( NFTSale (..)
11     , SaleAction (..)
12     , SaleSchema

```

```

13     , StartParams (...)
14     , BuyParams (...)
15 )
16 where
17
18 import           Data.Aeson                (ToJSON, FromJSON)
19 import           GHC.Generics              (Generic)
20 import           Prelude                   (Show (...))
21 import qualified Prelude                   as Pr
22
23 import           Schema                    (ToSchema)
24 import qualified PlutusTx
25 import           PlutusTx.Prelude         as Plutus ( Eq(..), (&&),
Integer )
26 import           Ledger                    ( TokenName, CurrencySymbol,
PubKeyHash )
27 import           Plutus.Contract          ( Endpoint, type (./) )
28
29 -- This is the datum type, carrying the previous validator params
30 data NFTSale = NFTSale
31   { nSeller      :: !PubKeyHash
32   , nPrice       :: !Integer
33   , nCurrency    :: !CurrencySymbol
34   , nToken       :: !TokenName
35   , nRoyalty     :: !PubKeyHash
36   , nRoyaltyPercent :: !Integer
37   } deriving (Pr.Eq, Pr.Ord, Show, Generic, ToJSON, FromJSON,
ToSchema)
38
39 instance Eq NFTSale where
40   {-# INLINABLE (==) #-}
41   a == b = (nSeller      a == nSeller      b) &&
42           (nPrice       a == nPrice       b) &&
43           (nCurrency    a == nCurrency    b) &&
44           (nToken       a == nToken       b) &&
45           (nRoyalty     a == nRoyalty     b) &&
46           (nRoyaltyPercent a == nRoyaltyPercent b)
47
48 PlutusTx.makeIsDataIndexed 'NFTSale [('NFTSale, 0)]
49 PlutusTx.makeLift 'NFTSale
50
51
52 data SaleAction = Buy | Close
53   deriving Show
54
55 PlutusTx.makeIsDataIndexed 'SaleAction [('Buy, 0), ('Close, 1)]
56 PlutusTx.makeLift 'SaleAction
57
58
59 -- We define two different params for the two endpoints start and buy
60 -- with the minimal info needed.
61 -- Therefore the user doesn't have to provide more than what's needed
62 -- to execute the said action.
63 {- For StartParams we omit the seller
64    because we automatically input the address of the wallet running
65    the startSale endpoint
66
67    For BuyParams we omit seller and price
68    because we can read that in datum which can be obtained with just
69    cs and tn of the sold token -}

```

```

67 data BuyParams = BuyParams
68   { bCs :: CurrencySymbol
69   , bTn :: TokenName
70   } deriving (Pr.Eq, Pr.Ord, Show, Generic, ToJSON, FromJSON,
71               ToSchema)
72
73 data StartParams = StartParams
74   { sPrice :: Integer
75   , sCs     :: CurrencySymbol
76   , sTn     :: TokenName
77   , sRoyaltyAddress :: !PubKeyHash
78   , sRoyaltyPercent :: !Integer
79   } deriving (Pr.Eq, Pr.Ord, Show, Generic, ToJSON, FromJSON,
80               ToSchema)
81
82 type SaleSchema = Endpoint "close" BuyParams .\ / Endpoint "buy"
                       BuyParams .\ / Endpoint "start" StartParams

```

The process is straightforward: when a seller wishes to list an NFT for sale, they send the NFT to the marketplace contract address and attach the correct datum. This allows the seller to retain the ability to cancel the listing later if they change their mind.

A buyer can purchase the NFT by fulfilling the following conditions:

- Paying the correct amount to the seller.
- Paying the applicable fees to the marketplace.
- Paying royalties, if any are set.
- Purchasing only one NFT at a time.

You don't need to fully grasp every detail of the contract at this moment. This book is here to guide you through the learning process, not to overwhelm you with technicalities. Let's simplify the contract and break it down into more accessible terms with other programming languages.

7.3. MARKETPLACE IN HELIOS

To implement the marketplace contract in Helios, we can follow a similar structure to the Plutus contract but using the Helios language. In this subsection, we'll define the contract's key components, including the datum, actions, and the main program.

DEFINING THE CONTRACT NAME

First, we define the name of the contract as follows:

```

1 spending marketplace

```

DEFINING THE DATUM

Next, we define the `Datum`, which holds the key data for each NFT sale listing. The datum will contain the seller's address, the price of the NFT, the currency, token name, the royalty recipient, and the royalty percentage:

```
1 struct Datum{
2     nSeller: PubKeyHash
3     nPrice: Int
4     nCurrency: AssetClass
5     nRoyalty: PubKeyHash
6     nRoyaltyPercent: Int
7 }
```

DEFINING THE REDEEMER

We define the possible actions (or `Redeemer`) that users can perform. The two actions in our marketplace contract are `Cancel` and `Buy`, which control the logic for canceling a listing or purchasing the NFT:

```
1 enum Redeemer{
2     Cancel
3     Buy
4 }
```

MAIN PROGRAM LOGIC

Finally, we define the main program for the marketplace contract. The `main` function takes the `Datum`, the `Redeemer`, and the script context as inputs. The main logic will validate the transaction based on the action chosen by the redeemer. Here's the initial version of the contract:

```
1 func main(datum: Datum, redeemer: Redeemer, ctx: ScriptContext) -> Bool
2 {
3     tx: Tx = ctx.tx;
4
5     redeemer.switch{
6         Cancel => {
7             true
8         },
9         Buy => {
10            false
11        }
12    }
```

At this point, we have defined the basic structure of the marketplace contract in Helios. The next step will be to replace `true` and `false` with the actual logic for checking that the correct payments are made, the buyer gets the NFT, and the appropriate parties (seller, marketplace, and royalty recipient) are paid. This basic flow sets the foundation for a fully functional smart contract in Helios.

In this section, we will add the first validation checks to our marketplace contract: one for the `Cancel` action and multiple checks for the `Buy` action.

CANCEL FLOW

The only way a listing can be canceled is if the transaction is signed by the owner of the NFT. We define this rule in the `Cancel` case, where the transaction must be signed by the seller's address, as indicated by the `nSeller` field in the `Datum`:

```
1 Cancel => {
2     tx.is_signed_by(datum.nSeller)
3 }
```

This ensures that only the owner of the NFT (the seller) can cancel the listing.

BUY FLOW

The `Buy` action has several checks to ensure that the transaction is valid:

- The buyer must send the correct amount of money to the seller, as specified in the `nPrice` field.
- A marketplace fee of 2% is collected and sent to the designated marketplace fee address.
- If royalties are set, the appropriate royalty percentage is sent to the royalty recipient address.
- The contract checks that only one input with a datum is present to prevent multiple NFTs from being purchased in a single transaction.

Here's the complete Helios code with the checks for both `Cancel` and `Buy` actions:

```
1 spending marketplace
2
3 struct Datum{
4     nSeller: PubKeyHash
5     nPrice: Int
6     nCurrency: AssetClass
7     nRoyalty: PubKeyHash
8     nRoyaltyPercent: Int
9 }
10
11 enum Redeemer{
12     Cancel
13     Buy
14 }
15
```

```

16 func main(datum: Datum, redeemer: Redeemer, ctx: ScriptContext) -> Bool
17 {
18     tx: Tx = ctx.tx;
19     marketplaceFeeAddress: PubKeyHash = PubKeyHash::new(#87
20     beeb2237d63ff03bc842950a88959d69abbe29e8adea8176b32fd69);
21     datums: Int = tx.inputs.map((x: TxInput) -> Int { x.output.datum.
22     switch{None => 0, else => 1} }).fold((sum: Int, x: Int) -> Int {
23     sum + x }, 0);
24
25     redeemer.switch {
26         Cancel => {
27             tx.is_signed_by(datum.nSeller)
28         },
29         Buy => {
30             tx.value_sent_to(datum.nSeller).contains(Value::new(datum.
31             nCurrency, datum.nPrice)) &&
32             tx.value_sent_to(marketplaceFeeAddress).contains(Value::new
33             (datum.nCurrency, datum.nPrice * 20 / 1000)) &&
34             tx.value_sent_to(datum.nRoyalty).contains(Value::new(datum.
35             nCurrency, datum.nPrice * datum.nRoyaltyPercent / 1000)) &&
36             datums == 1
37         }
38     }
39 }

```

EXPLANATION OF THE CODE

In the code above:

- **Cancel:** The transaction must be signed by the seller (the owner of the NFT), ensuring that only the owner can cancel the listing.
- **Buy:**
 - The buyer must pay the correct price to the seller.
 - The marketplace receives a 2% fee, calculated as `datum.nPrice * 20 / 1000`.
 - If royalties are set, the specified royalty percentage is paid to the royalty address.
 - The `datums == 1` check ensures that only one NFT can be purchased at a time by counting how many inputs contain a datum.

These checks ensure that the transaction is valid for both canceling and buying actions. The marketplace fee and royalties are handled, and the buyer is restricted to purchasing only one NFT per transaction.

You can find the code at [\[link\]\(https://www.hyperion-bt.org/helios-playground/?share=a0e1ed7521aba9\)](https://www.hyperion-bt.org/helios-playground/?share=a0e1ed7521aba9) and export it to use it.

7.4. OPSHIN MARKETPLACE

In this subsection, we will explore how to implement a marketplace contract using the OpShin framework. OpShin is a Python-based framework for developing smart contracts, and it provides a more user-friendly development experience compared to PlutusTx. You can find an example of this contract on their

DATUM DEFINITION

In OpShin, the datum for the marketplace contract is defined as follows. The `Listing` datum includes the price of the listing, the vendor (the owner of the listed item), and the owner who can withdraw the listing:

```

1 @dataclass
2 class Listing(PlutusData):
3     CONSTR_ID = 0
4     # Price of the listing in lovelace
5     price: int
6     # the owner of the listed object
7     vendor: Address
8     # whoever is allowed to withdraw the listing
9     owner: PubKeyHash

```

ACTIONS DEFINITION

OpShin defines the possible actions that users can perform in the marketplace using Python dataclasses. The actions include `Buy`, which allows the buyer to purchase the listed item, and `Unlist`, which enables the owner to remove the listing:

```

1 @dataclass
2 class Buy(PlutusData):
3     # Redeemer to buy the listed values
4     CONSTR_ID = 0
5
6 @dataclass
7 class Unlist(PlutusData):
8     # Redeemer to unlist the values
9     CONSTR_ID = 1
10
11 ListingAction = Union[Buy, Unlist]

```

SMART CONTRACT IMPLEMENTATION

Now we can define the smart contract logic in OpShin, which includes several auxiliary functions to check payments, prevent double spending, and verify that the correct parties are signing the transaction.

Here are the auxiliary functions used in the contract:

- **check_paid:** This function ensures that the correct amount of lovelace has been paid to the vendor.
- **check_single_utxo_spent:** This function prevents double spending by ensuring that only one UTXO is spent from the contract address.

- **check_owner_signed:** This function checks that the owner of the listing has signed the transaction when unlisting.

The contract is implemented as follows:

```

1 def check_paid(txouts: List[TxOut], addr: Address, price: int) -> None:
2     """Check that the correct amount has been paid to the vendor (or
3     more)"""
4     res = False
5     for txo in txouts:
6         if txo.value.get(b"", {b"": 0}).get(b"", 0) >= price and txo.
7         address == addr:
8             res = True
9             assert res, "Did not send required amount of lovelace to vendor"
10
11 def check_single_utxo_spent(txins: List[TxInInfo], addr: Address) ->
12 None:
13     """To prevent double spending, count how many UTxOs are unlocked
14     from the contract address"""
15     count = 0
16     for txi in txins:
17         if txi.resolved.address == addr:
18             count += 1
19     assert count == 1, f"Only 1 contract utxo allowed but found {count}"
20
21 def check_owner_signed(signatories: List[PubKeyHash], owner: PubKeyHash
22 ) -> None:
23     assert (
24         owner in signatories
25     ), f"Owner did not sign transaction, requires {owner.hex()} but got
26     [{s.hex() for s in signatories}]"
27
28 def validator(datum: Listing, redeemer: ListingAction, context:
29 ScriptContext) -> None:
30     purpose = context.purpose
31     tx_info = context.tx_info
32     assert isinstance(purpose, Spending), f"Wrong script purpose: {
33     purpose}"
34     own_utxo = resolve_spent_utxo(tx_info.inputs, purpose)
35     own_addr = own_utxo.address
36
37     check_single_utxo_spent(tx_info.inputs, own_addr)
38     # It is recommended to explicitly check all options with isinstance
39     for user input
40     if isinstance(redeemer, Buy):
41         check_paid(tx_info.outputs, datum.vendor, datum.price)
42     elif isinstance(redeemer, Unlist):
43         check_owner_signed(tx_info.signatories, datum.owner)
44     else:
45         assert False, "Wrong redeemer"

```

EXPLANATION OF THE CODE

In the smart contract:

- `check_paid`: Verifies that the correct amount of lovelace has been paid to the vendor.
- `check_single_utxo_spent`: Ensures that only one UTxO is spent, preventing double spending.
- `check_owner_signed`: Ensures that the owner has signed the transaction for the unlisting action.

The contract logic starts by checking that the transaction purpose is `Spending`, resolving the spent UTxO, and ensuring that only one contract UTxO is unlocked. Depending on the redeemer type, it either checks that the payment has been made correctly (for the `Buy` action) or that the owner has signed the transaction (for the `Unlist` action).

CONCLUSION

This example demonstrates how OpShin provides a more user-friendly approach to building smart contracts using Python. By leveraging Python's simplicity and the `PlutusData` class, we can easily define the datum, actions, and contract logic. This approach is ideal for developers who prefer working with Python and want to avoid the complexities of `PlutusTx`.

7.5. PLU-TS MARKETPLACE

In this subsection, we will explore how to implement a marketplace contract using `Plu-ts`, a TypeScript-based framework for writing Cardano smart contracts. With `Plu-ts`, we can write Cardano smart contracts in a more familiar programming language like TypeScript, which can make the development process easier for web developers.

You can find the `Plu-ts` framework and more examples in the official [Plu-ts GitHub repository](https://github.com/harmoniclabs/plu-ts).

DATUM DEFINITION

In `Plu-ts`, we define the datum structure for the marketplace contract as follows. The `MarketDatum` includes the seller's public key hash and the price (in lovelace) of the listed item:

```
1 import { PPubKeyHash, int, pstruct } from "@harmoniclabs/plu-ts";
2
3 const MarketDatum = pstruct({
4   MarketDatum: {
5     seller: PPubKeyHash.type,
6     lovelace: int // price in lovelace
7   }
8 });
9
10 export default MarketDatum;
```

This structure defines the key data that will be used in the contract: the seller's public key hash and the price of the item in lovelace.

CONTRACT DEFINITION

Now, we define the marketplace contract using the `pfn` function in `Plu-ts`. This function allows us to write the contract logic. In the contract, we will check the transaction purpose and the seller's signature, ensuring that the correct parties are involved.

Here's the main contract definition:

```

1  /* imports */
2
3  import { PPubKeyHash, int, pstruct } from "@harmoniclabs/plu-ts";
4
5  const MarketDatum = pstruct({
6    MarketDatum: {
7      seller: PPubKeyHash.type,
8      lovelace: int // price in lovelace
9    }
10 });
11
12 const plovelaces = phoist(
13   pfn([ PValue.type ], int)
14   ( value => value.head.snd.head.snd )
15 );
16
17 export default MarketDatum;
18
19 /* imports */
20
21 export const contract = pfn([ PScriptContext.type ], unit)(
22   ( {redeemer, tx, purpose} ) => {
23
24     const maybeDatum = plet(
25       pmatch(purpose)
26       .onSpending(({ datum }) => datum)
27       ._( _ => perror(PMaybe(data).type))
28     );
29
30     const datum = plet( punsafeConvertType( maybeDatum.unwrap,
31       MarketDatum.type ) );
32
33     const seller = plet( datum.seller );
34
35     // use `peq` instead of `eq` to pass the function as argument
36     // or save it as variable
37     const isSeller = plet( datum.seller.peq );
38
39     const signedBySeller = tx.signatories.some( isSeller );
40
41     const sellerGetsPaid = plet(
42       tx.outputs.some( out =>
43         isSeller.$( out.address.credential.hash )
44         .and( plovelaces.$( out.value ).eq( datum.lovelace ) )
45       )
46     );
47
48     return passert.$(
49       (ptraceIfFalse.$(pdelay(pStr("Error in signedBySeller"))).$(
50         signedBySeller))
51       .or( ptraceIfFalse.$(pdelay(pStr("Seller not paid"))).$(
52         sellerGetsPaid ) )
53     )
54   )
55 )

```

```

48         );
49     }
50 );
51
52 /* other code */

```

EXPLANATION OF THE CODE

In this contract:

- **maybeDatum**: This variable attempts to extract the datum from the transaction based on the script's purpose (in this case, spending).
- **datum**: The datum is then converted to the correct **MarketDatum** type.
- **signedBySeller**: This checks whether the transaction has been signed by the seller (using the public key hash in the datum).
- **passert**: This is used to assert conditions within the contract, ensuring that the seller has signed the transaction and that the seller has been paid the correct amount.
- **ptraceIfFalse**: If any assertion fails, a trace message is printed to indicate what went wrong (e.g., "Error in signedBySeller" or "Seller not paid").

The contract logic checks that:

- The transaction has been signed by the seller.
- The seller has been paid the correct amount of lovelace as indicated in the **MarketDatum**.

ADDITIONAL FEATURES

This contract provides a simple structure for handling the sale of items, ensuring that only the seller can sign the transaction and that they are paid correctly. You can easily extend this contract to include additional features, such as marketplace fees, royalty payments, or checks for multiple buyers.

CONCLUSION

The **Plu-ts** framework provides a way to write Cardano smart contracts using TypeScript, making it easier for web developers familiar with Haskell/TypeScript to build blockchain applications. With simple constructs like **pfn**, **pstruct**, and **passert**, **Plu-ts** provides a clean and readable way to define and enforce contract logic on the Cardano blockchain.

This contract has been written in plutus v3, how do we know? The Datum is optional and we see that the contracts try to read it before running.

7.6. AIKEN MARKETPLACE

In this subsection, we will explore how to implement a marketplace contract using Aiken, a smart contract language built on top of the Cardano blockchain. This contract is the latest version from JPG Store and is available in their [GitHub repository](https://github.com/jpg-store/contracts-v3/blob/main/validators/ask.ak).

Aiken offers a clean and expressive syntax for building Cardano smart contracts. Below, we will break down the key parts of this marketplace contract, focusing on the Datum, Redeemer, and the Validator.

DATUM DEFINITION

In Aiken, the datum for the marketplace listing contains two primary fields: 1. **payouts**: A list of addresses that need to be paid, such as the seller and royalties. 2. **owner**: The owner's verification key hash, which determines who can update or cancel the listing.

Here is the Datum type definition:

```
1 type Datum {
2   payouts: List<Payout>, -- List of payouts (royalty, seller, etc.)
3   owner: VerificationKeyHash, -- Owner of the listing
4 }
```

Additionally, the Payout type represents a payment that needs to be made, with an address and the amount_lovelace that needs to be paid:

```
1 pub type Payout {
2   address: Address,
3   amount_lovelace: Int,
4 }
```

This setup means that the price of the listed NFT is always in ADA (lovelace), and the contract enforces payments to the specified addresses.

REDEEMER DEFINITION

The contract allows two types of actions through the Redeemer: 1. **Buy**: The buyer can purchase the listed item. The `payout_outputs_offset` specifies the starting point of the outputs containing the payouts. 2. **WithdrawOrUpdate**: The owner can update or cancel the listing. This action requires the owner's signature.

Here is the Redeemer definition:

```
1 type Redeemer {
2   Buy { payout_outputs_offset: Int } -- Buy action with payout offset
3   WithdrawOrUpdate -- Cancel or update the listing
```

```
4 }
```

CONTRACT FLOW

The flow of the contract is as follows:

- **Buy:** When a user buys the NFT, the contract checks the payouts to the correct addresses and calculates the marketplace fee if necessary. If any of the authorized users have signed the transaction, a discount may be applied.
- **WithdrawOrUpdate:** If the owner wants to cancel or update the listing, the contract checks whether the transaction is signed by the owner of the NFT.

Here's the core logic of the contract:

```
1 validator {
2   fn spend(datum: Datum, redeemer: Redeemer, ctx: ScriptContext) ->
3     Bool {
4     let ScriptContext { transaction, purpose } = ctx
5     let Transaction { outputs, extra_signatories, .. } = transaction
6
7     when redeemer is {
8       Buy { payout_outputs_offset } -> {
9         expect Spend(out_ref) = purpose
10
11         let datum_tag = out_ref
12         |> serialise_data
13         |> blake2b_256
14         |> InlineDatum
15
16         let Datum { payouts, .. } = datum
17         let payout_outputs = find_payout_outputs(outputs,
18           payout_outputs_offset)
19
20         let can_have_discount = constants.authorizers()
21         |> list.any(fn(authorizer) { list.has(extra_signatories,
22           authorizer) })
23
24         if can_have_discount {
25           check_payouts(payout_outputs, payouts, datum_tag) > 0
26         } else {
27           expect [marketplace_output, ..rest_outputs] = payout_outputs
28
29           let payouts_sum = check_payouts(rest_outputs, payouts,
30             NoDatum)
31           let marketplace_fee = payouts_sum * 50 / 49 / 50
32
33           check_marketplace_payout(marketplace_output, marketplace_fee,
34             datum_tag)
35         }
36
37         WithdrawOrUpdate ->
38         list.has(extra_signatories, datum.owner)
39       }
40     }
```

37 }

EXPLANATION OF THE CODE

In the contract:

- **Buy Action:**
 - The contract expects a `Spend` purpose, indicating that the transaction is a purchase.
 - The contract checks the payouts by using `find_payout_outputs` to locate the relevant outputs and then verifying that the correct amounts are paid.
 - If authorized users have signed the transaction, a discount can be applied to the marketplace fee.
 - If no discount is applied, the marketplace fee is calculated and verified.
- **WithdrawOrUpdate Action:**
 - The contract verifies that the transaction is signed by the owner of the listing, allowing them to update or cancel the listing.

DISCOUNT HANDLING

One interesting feature of this contract is the ability to apply a discount to the marketplace fee. This is done by checking if any of the authorizers (presumably JPG Store's trusted signers) have signed the transaction. If so, the contract assumes that JPG Store has correctly calculated the fee off-chain and applies the discount:

```
1 let can_have_discount = constants.authorizers()  
2   |> list.any(fn(authorizer) { list.has(extra_signatories, authorizer)  
   })
```

CONCLUSION

This Aiken marketplace contract is a powerful and flexible solution for managing NFT listings on the Cardano blockchain. By using Aiken's expressive syntax, the contract efficiently handles buy and update actions while ensuring proper payout distribution. The ability to allow discounts based on JPG Store's off-chain calculations is also a unique feature that makes this contract more adaptable to real-world usage.

With Aiken, Cardano developers can write clean, readable smart contracts that interact seamlessly with Cardano's blockchain, while also offering advanced features like dynamic fee handling and marketplace control.

7.7. PLUTARCH MARKETPLACE

In this subsection, we will explore how to implement the marketplace contract using **Plutarch**, an embedded domain-specific language (eDSL) for writing Cardano smart contracts in Haskell. Unlike **PlutusTx**, which uses Template Haskell to compile Haskell directly to Untyped Plutus Core (UPLC), Plutarch gives developers explicit control over the generated UPLC through a typed combinator library. This results in more predictable script sizes and execution costs.

You can find the Plutarch library and documentation at github.com/Plutonomicon/plutarch-plutus.

LANGUAGE EXTENSIONS AND IMPORTS

Plutarch relies heavily on GHC extensions. A typical Plutarch module begins with:

```

1 {-# LANGUAGE DataKinds           #-}
2 {-# LANGUAGE DeriveAnyClass      #-}
3 {-# LANGUAGE DeriveGeneric       #-}
4 {-# LANGUAGE DerivingStrategies  #-}
5 {-# LANGUAGE OverloadedRecordDot #-}
6 {-# LANGUAGE OverloadedStrings   #-}
7 {-# LANGUAGE QualifiedDo         #-}
8 {-# LANGUAGE TypeApplications    #-}
9 {-# LANGUAGE TypeFamilies        #-}
10 {-# LANGUAGE TypeOperators       #-}
11
12 module Market.Plutarch where
13
14 import GHC.Generics (Generic)
15 import Plutarch.Prelude
16 import Plutarch.LedgerApi.V2
17 import Plutarch.LedgerApi.Value (pvalueOfValueOf, pvalueOf)
18 import qualified Plutarch.Monad as P

```

DEFINING THE DATUM TYPE

In Plutarch, on-chain data types are defined as Haskell types of kind $S \rightarrow \text{Type}$, where S is a phantom type representing the script evaluation context. Record fields are declared using `PDataRecord`, and the `PlutusTypeData` strategy ensures the type is encoded as Plutus Data — exactly matching the on-chain representation.

The `PNFTSale` datum mirrors the `NFTSale` from the `PlutusTx` implementation, carrying the seller, price, token policy, token name, royalty address, and royalty percentage:

```

1 data PNFTSale (s :: S) = PNFTSale
2   ( Term s
3     ( PDataRecord
4       ' [ "nSeller"           ' := PPubKeyHash
5         , "nPrice"            ' := PInteger

```

```

6      , "nCurrency"      := PCurrencySymbol
7      , "nToken"        := PTokenName
8      , "nRoyalty"       := PPubKeyHash
9      , "nRoyaltyPercent" := PInteger
10     ]
11   )
12 )
13 deriving stock (Generic)
14 deriving anyclass (PlutusType, PIsData, PDataFields)
15
16 instance DerivePlutusType PNFTSale where
17   type DPTStrat _ = PlutusTypeData

```

The key difference from a plain Haskell record is that each field is tracked with its on-chain Data encoding in the type system. The `PDataFields` instance enables convenient field extraction with `pletFields`.

DEFINING THE REDEEMER TYPE

The redeemer represents the two possible actions a user can take: purchasing the NFT (`PBuy`) or closing the listing (`PClose`):

```

1 data PSaleAction (s :: S)
2   = PBuy    (Term s (PDataRecord '[]))
3   | PClose  (Term s (PDataRecord '[]))
4   deriving stock (Generic)
5   deriving anyclass (PlutusType, PIsData)
6
7 instance DerivePlutusType PSaleAction where
8   type DPTStrat _ = PlutusTypeData

```

Sum types in Plutarch use the same `PlutusTypeData` strategy, which generates constructor indices matching `PlutusTx.makeIsDataIndexed`. Here `PBuy` has index 0 and `PClose` has index 1, consistent with the `PlutusTx.SaleAction` type.

IMPLEMENTING THE VALIDATOR

The marketplace validator is a Plutarch term of type `PNFTSale --> PSaleAction --> PScriptContext --> PUnit`. The `-->` operator denotes a Plutarch-level function arrow, and `plam` constructs the lambda. Every top-level function is wrapped in `phoistAcyclic` to avoid duplicating its definition at every call site in the compiled UPLC:

```

1 marketplaceValidator
2   :: Term s PPubKeyHash -- marketplace fee address
3   -> Term s (PNFTSale --> PSaleAction --> PScriptContext --> PUnit)
4 marketplaceValidator feeAddr = phoistAcyclic $ plam $ \datumRaw
5   redeemerRaw ctx' ->
6     P.do
7       ctx'    <- pmatch ctx'

```

```

7 txInfo <- pmatch (pscriptContext'txInfo ctx)
8 datum <- pletFields @"["nSeller","nPrice","nCurrency",
9                       "nToken","nRoyalty","nRoyaltyPercent"]
10                      datumRaw
11 pmatch redeemerRaw $ \case
12   PClose _ ->
13     -- Only the seller can close the listing
14     pif (pelem # pdata (pfromData datum.nSeller)
15         # pfromData (ptxInfo'signatories txInfo))
16         (pconstant ())
17         perror
18   PBuy _ ->
19     P.do
20       let outputs      = pfromData (ptxInfo'outputs txInfo)
21       seller           = pfromData datum.nSeller
22       price            = pfromData datum.nPrice
23       cs               = pfromData datum.nCurrency
24       tn               = pfromData datum.nToken
25       royaltyPkh       = pfromData datum.nRoyalty
26       royaltyPercent   = pfromData datum.nRoyaltyPercent
27
28       -- Fee constants (20/1000 = 2%, minimum 1 ADA)
29       let marketplacePercent = pconstant @PInteger 20
30       minFee                 = pconstant @PInteger 1_000_000
31
32       let mktFee             = pmax # minFee
33                               # (marketplacePercent * price `pdiv`
1000)
34       let royaltyFee         = pmax # minFee
35                               # (royaltyPercent * price `pdiv` 1000)
36
37       -- Check NFT reaches the buyer
38       let checkNFTOut =
39         pany # plam (\o ->
40           let out = pfromData o
41           val = pfromData (ptxOut'value out)
42           in pvalueOf # val # cs # tn #== 1)
43           # outputs
44
45       -- Check seller receives at least price - fees
46       let sellerMin = price - mktFee - royaltyFee
47       let checkSellerOut =
48         pany # plam (\o ->
49           let out      = pfromData o
50           lovelace = plovelaceValueOf
51                     # pfromData (ptxOut'value out)
52           in ptxOut'address out #== pcon (PAddress
53             (pdcons # pdata (pcon $ PPubKeyCredential
54               (pdcons # pdata seller # pdnil))
55               # pdnil)
56             (pconstant Nothing))
57             #&& sellerMin #<= lovelace)
58           # outputs
59
60       -- Check marketplace fee output
61       let checkMarketplaceFee =
62         pany # plam (\o ->
63           let out      = pfromData o
64           lovelace = plovelaceValueOf
65                     # pfromData (ptxOut'value out)
66           in ptxOut'address out #== pcon (PAddress

```

```

67         (pdcons # pdata (pcon $ PPubKeyCredential
68             (pdcons # pdata feeAddr # pdnil))
69             # pdnil)
70         (pconstant Nothing))
71     #&& mktFee #<= lovelace)
72     # outputs
73
74     -- Check royalty fee (skipped when royaltyPercent == 0)
75     let checkRoyaltyFee =
76         pif (royaltyPercent #== 0)
77             (pcon PTrue)
78             (pany # plam (\o ->
79                 let out      = pfromData o
80                     lovelace = ploveValueOf
81                         # pfromData (ptxOut'value out)
82                 in  ptxOut'address out #== pcon (PAddress
83                     (pdcons # pdata (pcon $ PPubKeyCredential
84                         (pdcons # pdata royaltyPkh #
85                             # pdnil)
86                             (pconstant Nothing))
87                     #&& royaltyFee #<= lovelace)
88                 # outputs)
89
90         pif (checkNFTOut #&& checkSellerOut
91             #&& checkMarketplaceFee #&& checkRoyaltyFee)
92             (pconstant ())
93         perror

```

EXPLANATION OF THE CODE

- **plam and phoistAcyclic**: `plam` constructs a Plutarch-level lambda. `phoistAcyclic` lifts the compiled term to the top of the UPLC program so it is defined once and shared across all call sites, reducing script size.
- **pletFields**: Extracts multiple named fields from a `PDataFields` instance in a single traversal. Field access uses dot notation via `OverloadedRecordDot`.
- **pmatch**: Pattern-matches on a Plutarch sum type, analogous to Haskell's `case` expression. The `PClose` branch checks that the seller's `PPubKeyHash` is present in the transaction's signatories using `pelem`.
- **pany**: Traverses a `PBuiltinList` and returns `PTrue` if any element satisfies the predicate, analogous to Haskell's `any`.
- **ploveValueOf / pvalueOf**: Utility functions from `Plutarch.LedgerApi.Value` that query the lovelace amount or a specific token quantity within a `PLedgerValue`.
- **pmax and pdiv**: Plutarch-level arithmetic operators. `pdiv` performs integer division; `pmax` returns the larger of two integers.
- **pif**: Plutarch's conditional operator. Unlike Haskell's `if`, both branches are Plutarch terms evaluated lazily only when needed.
- **perror**: Terminates script execution with a validation error, equivalent to returning `False` in a `PlutusTx` validator.

FEE CALCULATION

The marketplace fee mirrors the PlutusTx implementation: a percentage of the listing price with a minimum of 1 ADA (1,000,000 lovelace). Royalties are only checked when `nRoyaltyPercent` is non-zero, and the seller receives the price minus both fees:

```
1 let marketplacePercent = pconstant @PInteger 20 -- 2% (20/1000)
2   minFee                = pconstant @PInteger 1_000_000
3
4 let mktFee              = pmax # minFee # (marketplacePercent * price `pdiv`
5   1000)
6 let royaltyFee          = pmax # minFee # (royaltyPercent * price `pdiv` 1000)
7 let sellerMin           = price - mktFee - royaltyFee
```

COMPILING THE VALIDATOR

Once the validator term is defined, it is compiled to a Plutus Script and serialised to bytes using Plutarch's `compile` and `serialiseScript` functions:

```
1 import Plutarch.Internal.Term (compile)
2 import Plutarch.Script        (serialiseScript)
3 import Data.ByteString.Short  (ShortByteString)
4
5 compiledMarketplace :: PPubKeyHash -> Either Text ShortByteString
6 compiledMarketplace feeAddr =
7   serialiseScript <$>
8     compile mempty (marketplaceValidator (pconstant feeAddr))
```

The resulting `ShortByteString` is the CBOR-encoded UPLC script that can be stored in a `plutus.json` blueprint or submitted directly to the chain.

COMPARISON WITH OTHER IMPLEMENTATIONS

Plutarch occupies a distinct position among the languages covered in this chapter:

- **vs PlutusTx:** Both are Haskell-based, but PlutusTx uses Template Haskell quasi-quotes (`[| ...|]`) and GHC plugins to compile to UPLC. Plutarch is explicit: the developer writes UPLC-like combinators directly, giving full control over the generated code's size and cost.
- **vs Aiken:** Aiken is a purpose-built language with a clean, Rust-inspired syntax. Plutarch is more verbose but offers the full power of the Haskell type system, including type classes, higher-kinded types, and compile-time guarantees that Aiken cannot provide.
- **vs Helios and OpShin:** These languages compile their own syntax (TypeScript-like and Python respectively) to UPLC. Plutarch stays within Haskell, so developers share the same tooling (GHC, Cabal, HLS) with PlutusTx projects.

- **vs Plu-ts:** Plu-ts is a TypeScript eDSL, similar in spirit to Plutarch but targeting a JavaScript/TypeScript audience. Plutarch targets Haskell and functional-programming developers.

The tradeoff is learning curve versus control. Plutarch's explicit UPLC-level types make it harder to get started but easier to reason about on-chain cost and correctness once the developer is familiar with the combinators.

CONCLUSION

Plutarch's eDSL approach allows Haskell developers to write highly optimised Cardano validators without sacrificing type safety. By defining `PNFTSale` and `PSaleAction` with the `PlutusTypeData` strategy, the on-chain encoding is transparent and consistent with `PlutusTx` data types. The validator logic — fee calculation, signatory checks, and output traversal — maps directly to the `PlutusTx` implementation but is expressed through Plutarch combinators that compile to smaller, more predictable UPLC scripts.

7.8. TESTING AND DEPLOYING MARKETPLACE CONTRACTS

Now that we've defined and explained the marketplace contract using the Aiken language, it's time to interact with it. This process involves obtaining the contract address and interacting with the contract, which can be done with various tools and libraries.

Compiling and Serialising a Plutarch Marketplace Contract

Plutarch validators must be explicitly compiled to UPLC before they can be deployed. The two key functions are `compile` (from `Plutarch.Internal.Term`) and `serialiseScript` (from `Plutarch.Script`):

```

1 import Plutarch.Internal.Term  (compile, Config(...))
2 import Plutarch.Script         (serialiseScript)
3 import Data.ByteString.Short   (fromShort)
4 import qualified Data.ByteString.Base16 as Base16
5 import qualified Data.Text.IO as TIO
6
7 writeValidator :: IO ()
8 writeValidator =
9   case compile mempty (marketplaceValidator marketplaceFeeHash) of
10     Left err  -> TIO.putStrLn $ "Compilation error: " <> err
11     Right scr -> do
12       let bytes = fromShort (serialiseScript scr)
13       writeFile "marketplace.plutus" (show (Base16.encode bytes))
14       putStrLn "Validator written to marketplace.plutus"
15   where
16     marketplaceFeeHash =
17       pconstant "87
18       beb2237d63ff03bc842950a88959d69abbe29e8adea8176b32fd69"

```

Passing `mempty` as the `Config` disables tracing so trace statements are stripped from the compiled script. During development you can use `Config { tracingMode = DoTracing }` to retain `ptrace` messages for debugging.

Generating the Plutus Blueprint

Cardano's CIP-57 Plutus Blueprint format (`plutus.json`) is the standard way to distribute compiled validators. For Plutarch validators the blueprint must currently be generated manually, since Plutarch does not yet include a built-in blueprint generator. A minimal `plutus.json` for the marketplace validator looks like:

```

1 {
2   "preamble": {
3     "title": "Plutarch Marketplace",
4     "description": "NFT marketplace validator compiled with Plutarch",
5     "version": "1.0.0",
6     "plutusVersion": "v2"
7   },
8   "validators": [
9     {
10      "title": "marketplace.spend",
11      "compiledCode": "<hex-encoded CBOR of the UPLC script>",
12      "hash": "<script hash>"
13    }
14  ]
15 }
```

The script hash can be computed with `cardano-cli transaction policyid --script-file marketplace.plutus` or by using the `cardano-api` library's `hashScript` function.

Obtaining the Contract Address

Once the compiled script is available the contract address is derived from its hash using the Cardano CLI:

```

1 # Build the script address (preview testnet, magic 2)
2 cardano-cli address build \
3   --payment-script-file marketplace.plutus \
4   --testnet-magic 2 \
5   --out-file marketplace.addr
6
7 cat marketplace.addr
```

Alternatively, MeshJS can derive the address from the `compiledCode` field in `plutus.json` directly in TypeScript, as shown in the MeshJS section below.

Testing the Plutarch Validator Off-Chain

Before deploying to testnet, Plutarch validators can be unit-tested off-chain using `evalScript` from `Plutarch.Evaluate`:

```

1 import Plutarch.Evaluate (evalScript, applyArguments)
2 import PlutusLedgerApi.V2 (toData)
3
4 testBuy :: IO ()
5 testBuy = do
6   let Right scr = compile mempty
7                       (marketplaceValidator marketplaceFeeHash)
8       args = [ toData mockDatum      -- NFTSale datum
9               , toData Buy           -- Buy redeemer
10              , toData mockContext   -- ScriptContext
11              ]
12       (result, budget, traces) = evalScript (applyArguments scr args)
13   case result of
14     Right _ -> putStrLn $ "PASS - budget: " <> show budget
15     Left e   -> putStrLn $ "FAIL: " <> show e
16               <> "\nTraces: " <> show traces

```

The `mockDatum` and `mockContext` values are constructed using the `plutus-ledger-api` test helpers. Running these tests with `cabal test` verifies that the validator accepts and rejects the correct transactions before any on-chain submission.

Deploying to Testnet

After off-chain testing, the workflow for deploying a Plutarch marketplace contract to the Cardano preview or preprod testnet is identical to any other Plutus V2 contract:

1. Obtain test ADA from the Cardano faucet.
2. Build the contract address from the compiled script file as shown above.
3. Use MeshJS, Lucid, or the Cardano CLI to submit listing and purchase transactions to the contract address, attaching the inline datum and redeemer as shown in the MeshJS section below.
4. Monitor transaction status with a testnet explorer such as `preview.cardanoscan.io`.

Because the Plutarch validator compiles to standard Plutus V2 UPLC, all existing off-chain tooling (MeshJS, Lucid, `cardano-cli`) works without any modification.

7.8.1. Getting the Marketplace Address

To begin interacting with the marketplace contract, we first need to obtain the address of the deployed contract. This is crucial for sending transactions that interact with the contract, such as listing or delisting NFTs. The address can be obtained by using the Plutus bytecode, which is stored in the `plutus.json` file.

In the case of the marketplace contract provided earlier, the contract's compiled code is stored in the `plutus.json` file, which contains all the necessary information to interact with the contract. You can find an example of this file from the JPG Store repository on

GitHub [here](https://github.com/jpg-store/contracts-v3/blob/main/plutus.json). This file contains the contract's bytecode and other details required to interact with it.

The `plutus.json` file looks like this:

```
{
  "validators": [
    {
      "name": "ask_validator",
      "compiledCode": "<compiled contract bytecode>",
      "isMultiAsset": false
    }
  ]
}
```

From this file, we can extract the compiled bytecode to deploy the contract on the Cardano blockchain.

7.8.2. Using MeshJS to Build the Frontend

To interact with the Cardano blockchain and deploy the marketplace contract, we will use MeshJS. MeshJS is a powerful library designed for interacting with Cardano-based smart contracts. It allows us to build a frontend interface to interact with the marketplace contract, enabling features like listing NFTs, delisting them, and managing transactions.

MeshJS provides an easy-to-use framework to connect to Cardano's blockchain, deploy smart contracts, and manage transactions. By integrating MeshJS into our frontend, we can perform tasks such as:

- Connecting to the Cardano blockchain.
- Sending transactions to deploy or interact with the marketplace contract.
- Managing wallet connections and user interactions.
- Signing and submitting transactions to the blockchain.

In the following sections, we'll demonstrate how to use MeshJS to list and delist NFTs in the marketplace, as well as perform a purchase.

Listing an NFT

The first part of the code is used by the seller to list an NFT for sale and set the price. The seller locks the NFT and specifies the amount of ADA (lovelace) that the item is priced at. This is achieved by sending the assets (NFT and the specified ADA price) to the contract address.

Here's how the listing works:

```
1 import { Asset, deserializeAddress, mConStr0 } from "@meshsdk/core";
2 import { getScript, getTxBuilder, wallet } from "./common";
3
4 async function main() {
5   // These are the assets we want to lock into the contract
6   const assets: Asset[] = [
```

```

7      {
8          unit: "lovelace",
9          quantity: "2000000", // minADA attached
10     },
11     {
12         unit: "NFT_UNIT",
13         quantity: "1", // nft to list
14     },
15 ];
16
17 // Get utxo and wallet address
18 const utxos = await wallet.getUtxos();
19 const walletAddress = (await wallet.getUsedAddresses())[0];
20
21 const { scriptAddr } = getScript();
22
23 // Hash of the public key of the wallet, to be used in the datum
24 const signerHash = deserializeAddress(walletAddress).pubKeyHash;
25
26 // Build transaction with MeshTxBuilder
27 const txBuilder = getTxBuilder();
28 await txBuilder
29     .txOut(scriptAddr, assets) // Send assets to the script address
30     .txOutInlineDatumValue(mConStr0([], signerHash)) //let's start by
    setting only the owner and no payout list
31     .changeAddress(walletAddress) // Send change back to the wallet
    address
32     .selectUtxosFrom(utxos)
33     .complete();
34 const unsignedTx = txBuilder.txHex;
35
36 const signedTx = await wallet.signTx(unsignedTx);
37 const txHash = await wallet.submitTx(signedTx);
38 console.log(`NFT locked into the contract at Tx ID: ${txHash}`);
39 }
40
41 main();

```

In this example, the seller is locking an NFT and setting the price. The datum contains the seller's public key hash, and the transaction ensures the correct amount of ADA is transferred to the contract.

Delisting or Purchasing an NFT

The second part is used for delisting or purchasing an NFT. When a buyer wants to purchase the NFT or the seller wants to remove it from the marketplace, they must interact with the contract to either complete the purchase or delist the item.

Here's how the delisting and purchase flow works:

```

1 import {
2     deserializeAddress,
3     mConStr0,
4     stringToHex
5 } from "@meshsdk/core";

```

```

6 import { getScript, getTxBuilder, getUtxoByTxHash, wallet } from "../
  common";
7
8 export function getScript() {
9   const scriptCbor = applyParamsToScript(
10     blueprint.validators[0].compiledCode,
11     []
12   );
13
14   const scriptAddr = serializePlutusScript(
15     { code: scriptCbor, version: "V3" },
16   ).address;
17
18   return { scriptCbor, scriptAddr };
19 }
20
21 async function main() {
22   // Get utxo, collateral and address from wallet
23   const utxos = await wallet.getUtxos();
24   const walletAddress = (await wallet.getUsedAddresses())[0];
25   const collateral = (await wallet.getCollateral())[0];
26
27   const { scriptCbor } = getScript();
28
29   // Hash of the public key of the wallet, to be used in the datum
30   const signerHash = deserializeAddress(walletAddress).pubKeyHash;
31   const scriptUtxo = await getUtxoByTxHash(txHashFromDesposit);
32
33   // Build transaction with MeshTxBuilder
34   const txBuilder = getTxBuilder();
35   await txBuilder
36     .spendingPlutusScript("V2") // We used Plutus V3
37     .txIn( // Spend the utxo from the script address
38       scriptUtxo.input.txHash,
39       scriptUtxo.input.outputIndex,
40       scriptUtxo.output.amount,
41       scriptUtxo.output.address
42     )
43     .txInScript(scriptCbor)
44     .txInRedeemerValue(mConStr1([]))
45     .txInInlineDatumPresent()
46     .requiredSignerHash(signerHash)
47     .changeAddress(walletAddress)
48     .txInCollateral(
49       collateral.input.txHash,
50       collateral.input.outputIndex,
51       collateral.output.amount,
52       collateral.output.address
53     )
54     .selectUtxosFrom(utxos)
55     .complete();
56   const unsignedTx = txBuilder.txHex;
57
58   const signedTx = await wallet.signTx(unsignedTx);
59   const txHash = await wallet.submitTx(signedTx);
60   console.log(`1 tADA unlocked from the contract at Tx ID: ${txHash}`);
61 }
62
63 main();

```

Purchase code

```

1  import {
2      deserializeAddress,
3      mConStr0,
4      stringToHex
5  } from "@meshsdk/core";
6  import { getScript, getTxBuilder, getUtxoByTxHash, wallet } from "../
    common";
7
8  async function main() {
9      // Get utxo, collateral and address from wallet
10     const utxos = await wallet.getUtxos();
11     const walletAddress = (await wallet.getUsedAddresses())[0];
12     const collateral = (await wallet.getCollateral())[0];
13
14     const { scriptCbor } = getScript();
15
16     // Hash of the public key of the wallet, to be used in the datum
17     const signerHash = deserializeAddress(walletAddress).pubKeyHash;
18     const scriptUtxo = await getUtxoByTxHash(txHashFromDesposit);
19
20     // Build transaction with MeshTxBuilder
21     const txBuilder = getTxBuilder();
22     await txBuilder
23         .spendingPlutusScript("V2") // We used Plutus V3
24         .txIn( // Spend the utxo from the script address
25             scriptUtxo.input.txHash,
26             scriptUtxo.input.outputIndex,
27             scriptUtxo.output.amount,
28             scriptUtxo.output.address
29         )
30         .txInScript(scriptCbor)
31         .txInRedeemerValue(mConStr0([0]))
32         .txInInlineDatumPresent()
33         .requiredSignerHash(signerHash)
34         .changeAddress(walletAddress)
35         .txInCollateral(
36             collateral.input.txHash,
37             collateral.input.outputIndex,
38             collateral.output.amount,
39             collateral.output.address
40         )
41         .selectUtxosFrom(utxos)
42         .txOut(marketplaceaddress, {lovelace:fee})
43         .txOut(sellerAddress, {lovelace:fee})
44         .complete();
45     const unsignedTx = txBuilder.txHex;
46
47     const signedTx = await wallet.signTx(unsignedTx);
48     const txHash = await wallet.submitTx(signedTx);
49     console.log(`1 tADA unlocked from the contract at Tx ID: ${txHash
    }`);
50 }
51
52 main();
53

```

In this example: 1. Purchasing the NFT: If the buyer sends the correct amount of ADA to the marketplace contract, the contract checks that the buyer is paying the right amount, and the NFT is transferred to the buyer. 2. Delisting the NFT: The seller can delist their NFT by interacting with the contract, provided they are the one who signed the transaction.

Conclusion

Using MeshJS, we can easily build a frontend to interact with the marketplace contract deployed on Cardano. The listing functionality locks the NFT and sets a price, while the delisting or purchase functionalities allow users to either remove the NFT from the marketplace or complete the purchase.

These examples demonstrate how to manage NFTs on the Cardano blockchain using MeshJS, making it possible for developers to create simple, intuitive interfaces for interacting with smart contracts.

7.9. ENHANCING MARKETPLACE CONTRACTS

In this section, we explore potential enhancements for the marketplace contracts. These could include adding new features like auction support, bidding systems, or enhancing security by implementing advanced validation techniques. We will also discuss how we can extend the contract to support multi-asset marketplaces and integrate additional services.

7.9.1. Improving Marketplace Contract Features

Many marketplaces have been developed with basic functionalities, but several improvements could enhance their capability and security. Some key features that could be added or improved include:

- **Listing an NFT for Different Currencies:** Allowing NFTs to be listed for various currencies such as ADA or tokens, providing more flexibility in transaction options.
- **Listing an NFT for a Specific Buyer:** Introducing functionality where an NFT can only be purchased by a specific person, adding more control over the marketplace.
- **Listing a Bundle of NFTs:** Although bundles of NFTs can already be listed, this feature could be enhanced further. Understanding why and how this works in the current ecosystem is crucial for improving the process.

One example of a successful enhancement is the Aiken version, which allows multiple NFTs to be purchased in a single transaction. This is beneficial for security, as it mitigates risks related to transaction errors.

However, in the `plu-ts` smart contract, there is a potential vulnerability in the absence of checks for single inputs coming from the contract. This lack of validation could present an attack vector for double-spending issues. To address this, additional validation mechanisms could be implemented to ensure that each input is validated and that transactions are secure.

Now, it's time to reflect on these improvements and consider how we can achieve the desired results in our marketplace contracts.

EXERCISE 7: Write a function to delist an NFT from a marketplace based on the following conditions:

- The redeemer to delist is represented by the following redeemer value:

```
redeemerCancel = Data.to( new Constr(0,[]) )
```

- The datum is hashed, not inline.
- The contract bytecode for the delisting function is available at: <https://github.com/elRaulito/cnft-delist/blob/main/contract.json>.



ON-CHAIN GOVERNANCE



8. GOVERNANCE SMART CONTRACTS

8.1. INTRODUCTION TO ON-CHAIN GOVERNANCE

Cardano is advancing towards a decentralized governance model designed to empower community participation and ensure robust decision-making processes. This model is detailed in CIP-1694, which outlines a framework for governance through a tricameral model and a structured decision-making process via seven different types of governance actions. A governance action is a transaction-triggered on-chain event with a time-limited window for execution.

8.1.1. Cardano Ledger Eras

Cardano has undergone various ledger era upgrades – Byron, Shelley, Allegra, Mary, Alonzo, Babbage, and the current Conway era. Each era has introduced new functionalities to the network. Conway introduced decentralized governance, implementing CIP-1694 functionality.

Era	Key Features	Consensus	Hard Fork Event
Byron	Proof of stake	Ouroboros Classic / PBFT	Genesis / Byron rebond
Shelley	Decentralized block production	TPraos	Shelley HF
Allegra	Token locking	TPraos	Allegra HF
Mary	Native tokens	TPraos	Mary HF
Alonzo	Plutus smart contracts	TPraos	Alonzo HF
Babbage	PlutusV2, Reference inputs, Inline datums	Praos	Vasil
Conway	Decentralized governance	Praos	Chang HF

Cardano Ledger Eras and Key Features

Transitioning from one era to the next is triggered by an update proposal that updates the protocol version. The Conway ledger era introduces a new governance framework to Cardano, marking a significant evolution in how decisions about the protocol are made. Building on the foundations laid in previous eras, Conway empowers Cardano with a decentralized governance model where decision-making is accessible to all stakeholders.

8.1.2. The Governance Bodies

Cardano's governance model is built on three governance bodies that collaborate through a formalized voting system:

Ada Holders

Ada holders are at the core of Cardano's governance, wielding critical voting power and the ability to shape the blockchain's future:

- **Delegation of Voting Power:** Ada holders can delegate their voting rights to DReps to aggregate their influence. This delegation process involves creating and issuing a delegation certificate from the Ada holder's stake key to the chosen DRep.
- **Participation as DReps:** Ada holders can register as DReps, locking a deposit of `dRepDeposit`, allowing them to directly partake in the governance process, propose changes, and represent community interests.
- **Submitting Governance Actions:** Any Ada holder can propose governance actions on the blockchain network. To initiate such an action, a deposit of `govActionDeposit` lovelace must be provided. This deposit will be returned once the action reaches its conclusion, either through enactment or expiration.
- **Influence on Network Operations:** By delegating to specific SPOs, Ada holders indirectly influence the operational stability and security of the network and delegate their voting power for SPOs.

Each associated stake key can issue two types of delegation certificates: one for delegation to a stake pool and the other for delegation to a DRep.

Delegated Representatives (DReps)

DReps serve as officials representing Ada holders in the governance system. Every ada holder has the choice to either register themselves as a DRep to represent themselves or others, or delegate their voting power to a DRep of their choice. Their primary roles include:

- **Proposing and Debating:** DReps propose and debate changes to the Cardano protocol. They gather feedback from the community and represent constituent interests during governance discussions.
- **Voting on Proposals:** DReps vote on proposals based on the priorities and interests of the Ada holders they represent.
- **Voting Power:** DReps' voting power is proportional to the stake delegated to them.

Stake Pool Operators (SPOs)

SPOs are fundamental to the network's operational integrity and also play a crucial role in governance by:

- Maintaining network infrastructure and ensuring stable operation.
- Participating in governance discussions, particularly on technical aspects.
- Voting on governance actions with power based on their active stake.
- Implementing approved changes by upgrading their infrastructure.

Constitutional Committee (CC)

The Constitutional Committee oversees and guides the governance process to adhere to Cardano's foundational governance principles as defined in the Cardano Constitution:

- Interprets the Cardano Constitution and ensures governance actions align with it.
- Provides a system of checks and balances by reviewing the constitutionality of governance actions.
- Ensures transparency and fairness in the governance process.
- Each CC member has one vote.

8.1.3. The Decision-Making Process

The governance process involves several stages:

1. **Off-Chain Discussion:** The majority of discussions and consensus-building about specific governance issues happens off-chain before any governance action has been submitted to the blockchain.
2. **Governance Action Submission:** Any Ada holder can submit a governance action as long as a sufficient ada deposit is provided.
3. **Voting:** Decisions on governance actions are made through a democratic voting process involving DReps, SPOs, and the CC. The required thresholds that have to be met to ratify a governance action are specified in the governance protocol parameters.
4. **Enactment:** Governance actions are checked for ratification only at the epoch boundary. Once ratified, actions will be enacted at the next epoch boundary. The governance action deposit will be returned once a governance action has been enacted or expired.

8.2. GOVERNANCE TRANSACTIONS AND THEIR STRUCTURE

8.2.1. Types of Governance Actions

In the Conway ledger era, any ada holder can submit a Governance action, which is the on-chain method to put a proposal to the consideration of the three governance bodies. There are 7 types of governance actions:

Governance Action	Description
NoConfidence	A motion to create a state of no-confidence in the current constitutional committee
UpdateCommittee	Changes to the members of the constitutional committee and/or to its signature threshold and/or terms
NewConstitution	A modification to the off-chain Constitution and/or the proposal policy script
TriggerHF	Triggers a non-backwards compatible upgrade of the network; requires a prior software upgrade
ChangePParams	A change to one or more updatable protocol parameters, excluding changes to major or minor protocol versions
TreasuryWdrl	Movements from the treasury
Info	An action that has no effect on-chain, other than an on-chain record

Types of Governance Actions in Cardano

8.2.2. Ratification Thresholds

Each type of governance action requires meeting a different mix of voting thresholds to be ratified:

Governance Action Type	CC	DReps	SPOs
Motion of no-confidence	-	0.67	0.51
Update committee/threshold (normal state)	-	0.67	0.51
Update committee/threshold (state of no-confidence)	-	0.60	0.51
New Constitution or Guardrails Script	2/3	0.75	-
Hard-fork initiation	2/3	0.60	0.51
Protocol parameter changes, network group	2/3	0.67	-
Protocol parameter changes, economic group	2/3	0.67	-
Protocol parameter changes, technical group	2/3	0.67	-
Protocol parameter changes, governance group	2/3	0.75	-
Treasury withdrawal	2/3	0.67	-
Info	2/3	1	1

Ratification Thresholds for Governance Actions

Some parameters (from different groups) are relevant to security properties of the system. Any proposal attempting to change such a parameter requires an additional vote of the SPOs, with the threshold 0.51.

8.2.3. Governance Action Lifecycle

A proposed governance action has a lifespan of 6 epochs, as defined by the protocol parameter `govActionLifetime`. During this period, governance bodies can vote on the proposal. If the action reaches the end of its lifespan without being ratified, it automatically expires.

At every epoch boundary within the governance action lifetime, proposals and votes are snapshotted. The `DRepPulserState` snapshot includes SPOs, DReps, CC members, their votes, stake distribution, and the delegation map.

The lifecycle proceeds as follows:

1. The system uses the `DRepPulserState` snapshot to calculate the DReps and SPOs voting stake distribution. This computation is performed gradually during the first $4k/f$ slots.
2. The Hard-fork combinator requires knowledge about a potential hard fork $6k/f$ slots before the epoch change. If the voting stake distribution is not finished by that point, the computation is forced to complete.
3. On the first tick within the last $6k/f$ slots of the epoch, the system solidifies the next epoch protocol parameters. The `RATIFY` and `ENACT` rules are executed to determine the enact state.
4. At the next epoch boundary, the system applies the enact state.
5. A governance action expires if it does not accumulate enough votes during its lifetime.

Its last chance to be ratified is when the DRep Pulser tallies the votes on the epoch following its expiration.

8.2.4. Votes and Proposals

Proposals

To propose a governance action, a Proposal needs to be submitted in a transaction. Besides the proposed governance action, it requires:

- A pointer to the previous action (for hash protection, see below).
- Potentially a pointer to the proposal policy (the guardrail script for `ChangePParams` and `TreasuryWdrl`).
- A deposit, which will be returned to `returnAddr`.
- An anchor, providing further information about the proposal.

Votes

A vote is `Yes`, `No`, or `Abstain`. To be cast, a vote must include additional details such as the voter's role (e.g., `CC`, `DRep`, or `SPO`) and their credential, along with the specific governance action ID being voted on. Optionally, an anchor may be provided to give context or explain the reasoning behind the vote.

Hash Protection

`NoConfidence`, `UpdateCommittee`, `NewConstitution`, `TriggerHF`, and `ChangePParams` actions all require a reference to the last enacted governance action that modified the same state in order to be enacted. This ensures that the final state after enactment matches the intended state at the time the proposal was submitted.

8.2.5. Submitting Governance Actions

Governance actions can be submitted using:

- **cardano-cli**: The command-line interface for interacting with the Cardano blockchain.
- **GovTool**: A dedicated governance tool with a graphical interface.

Before submitting a governance action, you should:

1. **Prepare Metadata**: Create a metadata file following CIP-100 and CIP-108 standards. Host it on a content-addressable storage solution (e.g., IPFS).
2. **Obtain Sufficient ada**: Ensure you have the required governance action deposit of 100,000 ada (as of March 2025).
3. **Test on a Testnet**: Always test your submission on a Cardano testnet before submitting on mainnet. Governance actions cannot be modified after submission.

The metadata file should include:

- **Title**: A concise title for the governance action.

- **Abstract:** A brief summary of the proposal.
- **Motivation:** A concise statement of the problem or opportunity that the governance action addresses.
- **Rationale:** A logical argument explaining why the proposed solution is the best approach.
- **References:** Links to any relevant documents, research, or discussions.

8.3. WRITING GOVERNANCE SMART CONTRACTS

In this section, we will explore how to write governance smart contracts on Cardano. We will look at both an Aiken-based DRep smart contract and how to interact with governance transactions programmatically using MeshJS.

8.3.1. DRep Smart Contract in Aiken

One of the key use cases for governance smart contracts is creating a DRep (Delegated Representative) controlled by a smart contract rather than a simple key-based credential. This allows for programmable governance logic, where voting decisions can be automated or governed by specific on-chain conditions.

The following example demonstrates a real DRep smart contract built in Aiken that controls governance actions based on NFT ownership. This contract has been deployed on Cardano mainnet.

```

1 use aiken/collection/list
2 use cardano/address.{Inline, VerificationKey}
3 use cardano/assets.{quantity_of}
4 use cardano/certificate.{Certificate}
5 use cardano/governance.{ProposalProcedure, Voter}
6 use cardano/transaction.{Input, Transaction}
7
8 validator drep {
9   publish(_redeemer: Data, _certificate: Certificate,
10     tx: Transaction) {
11     is_nft_owner(tx)
12   }
13
14   vote(_redeemer: Data, _voter: Voter, tx: Transaction) {
15     is_nft_owner(tx)
16   }
17
18   propose(_redeemer: Data, _proposal: ProposalProcedure,
19     tx: Transaction) {
20     is_nft_owner(tx)
21   }
22
23   else(_) {
24     fail
25   }
26 }
27
28 pub fn is_nft_owner(tx: Transaction) {
29   expect Some(referenceInput) =
30     list.at(tx.reference_inputs, 0)
31

```

```

32 expect Some(cred) =
33     referenceInput.output.address.stake_credential
34 expect Inline(stake_key_hash) = cred
35 expect VerificationKey(hash) = stake_key_hash
36
37 and {
38     quantity_of(
39         referenceInput.output.value,
40         #"4523c5e21d409b81c95b45b0aea275b8ea1406e6cafea5583b9f8a5f",
41         #"000de14042756438383632",
42     ) == 1,
43     list.has(tx.extra_signatories, hash),
44 }
45 }

```

How the Contract Works

This contract defines a **drep** validator with three governance-specific handlers:

- **publish:** Handles DRep registration and deregistration certificates. It verifies that the transaction includes a reference input containing the required NFT and that the NFT owner has signed the transaction.
- **vote:** Handles vote casting on governance actions. It uses the same NFT ownership check to ensure only the authorized party can vote.
- **propose:** Handles proposal submissions. Again, it validates NFT ownership before allowing the proposal.
- **else:** A catch-all handler that rejects any other type of interaction with the contract.

The NFT Ownership Check


The core logic of the contract resides in the `is_nft_owner` function. This function performs two critical checks:

1. **NFT Presence:** It verifies that the first reference input contains exactly one instance of a specific NFT (identified by its policy ID and asset name). Reference inputs allow the contract to read UTXO data without consuming them.
2. **Signature Verification:** It extracts the stake credential from the reference input's address and verifies that the corresponding key hash is present in the transaction's extra signatories. This ensures that the person who owns the NFT has actually signed the transaction.

This pattern effectively creates a “governance token” – whoever holds the designated NFT controls the DRep's governance actions. In this particular deployment, the NFT used is a SpaceBud (shown in Figure 8.1), one of the earliest NFT collections on Cardano.

Why Sign with the Stake Key?

An important design choice in this contract is that it verifies the **stake credential** of the address holding the NFT, rather than the spending credential. This is deliberate and

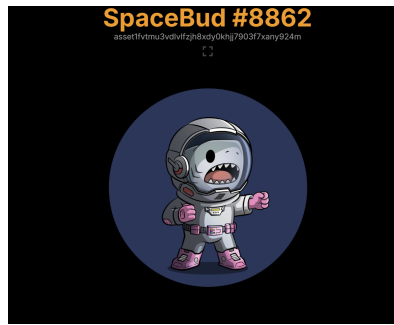


The SpaceBud NFT used as the governance token for this DRep smart contract

enables a powerful delegation pattern:

A Cardano address is composed of two parts – a **payment (spending) key** and a **stake key**. These can belong to different parties. By checking the stake key, the NFT owner can place the NFT at an address where:

- The **spending key** remains under their control, so they never lose custody of the NFT.
- The **stake key** belongs to someone else, effectively delegating governance authority to that person.

This means the NFT owner can delegate DRep voting power to a trusted party without ever transferring the NFT itself. If they want to revoke the delegation, they simply move the NFT to an address with a different stake key. This is a clean separation of asset ownership from governance authority, made possible by Cardano's dual-key address model.

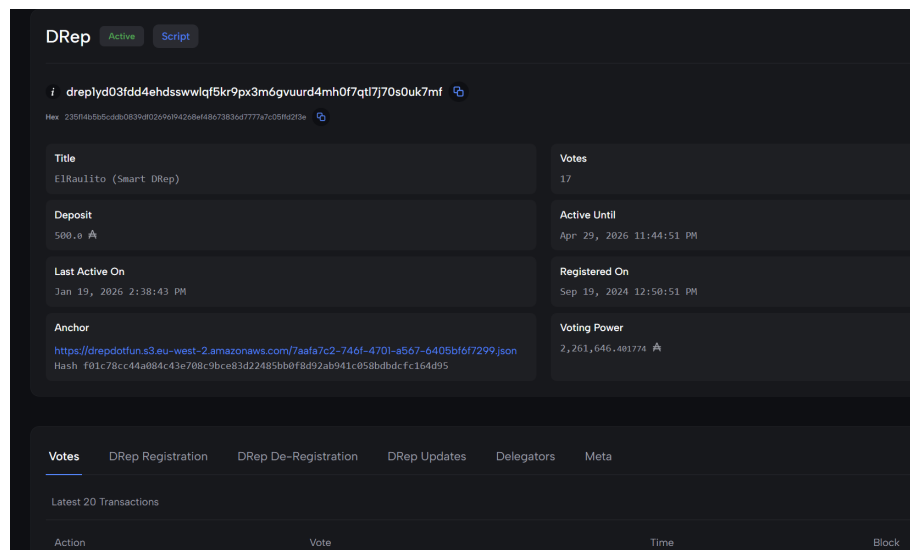

A deployed DRep smart contract on Cardano mainnet

8.3.2. Governance Transactions with MeshJS

MeshJS provides a comprehensive API for building governance transactions in TypeScript/JavaScript. This section demonstrates the key governance operations.

Setting Up the Transaction Builder

All governance transactions follow a similar pattern using the MeshTxBuilder:

```
1 import { MeshTxBuilder, BlockfrostProvider }
2   from "@meshsdk/core";
3
4 const provider =
5   new BlockfrostProvider("<YOUR_API_KEY>");
6 const txBuilder = new MeshTxBuilder({
7   fetcher: provider,
8   verbose: true,
9 });
```

Delegating Voting Power to a DRep

Ada holders can delegate their voting power to a registered DRep using the `voteDelegationCertificate` method:

```
1 const utxos = await wallet.getUtxos();
2 const changeAddress = await wallet.getChangeAddress();
3 const rewardAddresses =
4   await wallet.getRewardAddresses();
5 const rewardAddress = rewardAddresses[0];
6
7 const dRepId =
8   "drep1yv4uesaj92wk81jlsh4p7jzndnzrflchaz5fzug3zxxg4naqkpeas3";
9
10 txBuilder
11   .voteDelegationCertificate({ dRepId }, rewardAddress)
12   .changeAddress(changeAddress)
13   .selectUtxosFrom(utxos);
14
15 const unsignedTx = await txBuilder.complete();
16 const signedTx = await wallet.signTx(unsignedTx);
17 const txHash = await wallet.submitTx(signedTx);
```

The DRepId object supports three delegation modes:

- { dRepId: "drep1..." } – Delegate to a specific DRep
- { alwaysAbstain: true } – Always abstain from voting
- { alwaysNoConfidence: true } – Always vote no confidence

Registering as a DRep

To register as a DRep, you need to provide metadata following the CIP-119 standard:

```
1 import { MeshTxBuilder, BlockfrostProvider,
2   hashDrepAnchor } from "@meshsdk/core";
3
4 const dRep = await wallet.getDRep();
```

```

5 const dRepId = dRep.dRepIDCip105;
6
7 const anchorUrl =
8   "https://example.com/drep-metadata.jsonld";
9 const anchorMetadata = {
10   "@context": {
11     "@language": "en",
12     "CIP100": "https://github.com/cardano-foundation"
13       + "/CIPs/blob/master/CIP-0100/README.md",
14     "CIP119": "https://github.com/cardano-foundation"
15       + "/CIPs/blob/master/CIP-0119/README.md",
16     "hashAlgorithm": "CIP100:hashAlgorithm",
17     "body": { "@id": "CIP119:body" },
18     "givenName": "CIP119:givenName"
19   },
20   "hashAlgorithm": "blake2b-256",
21   "body": { "givenName": "My DRep Name" }
22 };
23 const anchorHash = hashDrepAnchor(anchorMetadata);
24
25 const utxos = await wallet.getUtxos();
26 const changeAddress = await wallet.getChangeAddress();
27
28 txBuilder
29   .drepRegistrationCertificate(dRepId, {
30     anchorUrl,
31     anchorDataHash: anchorHash,
32   })
33   .changeAddress(changeAddress)
34   .selectUtxosFrom(utxos);
35
36 const unsignedTx = await txBuilder.complete();
37 const signedTx = await wallet.signTx(unsignedTx);
38 const txHash = await wallet.submitTx(signedTx);

```

Voting on Governance Actions

DReps can cast votes on governance actions using the vote method:

```

1 const dRep = await wallet.getDRep();
2 const dRepId = dRep.dRepIDCip105;
3 const utxos = await wallet.getUtxos();
4 const changeAddress = await wallet.getChangeAddress();
5
6 const govActionTxHash = "aff2909f8175ee02a8c1bf"
7   + "96ff516685d25bf0c6b95aac91f4dfd53a5c0867cc";
8 const govActionIndex = 0;
9
10 txBuilder
11   .vote(
12     { type: "DRep", drepId: dRepId },
13     { txHash: govActionTxHash,
14       txIndex: govActionIndex },
15     { voteKind: "Yes" }
16   )
17   .selectUtxosFrom(utxos)

```

```

18 .changeAddress(changeAddress);
19
20 const unsignedTx = await txBuilder.complete();
21 const signedTx = await wallet.signTx(unsignedTx);
22 const txHash = await wallet.submitTx(signedTx);

```

The Voter object supports three voter types:

- { type: "DRep", drepId: "drep1..." } – DRep voter
- { type: "StakePool", poolId: "pool1..." } – Stake pool operator
- { type: "ConstitutionalCommittee", hotCred: "..." } – Constitutional committee member

Voting with a Plutus Script

Script-based DReps can vote using Plutus V3 scripts, which enables programmable governance logic:

```

1 import { MeshTxBuilder, BlockfrostProvider,
2   resolveScriptHash, resolveScriptHashDRepId,
3   applyCborEncoding } from "@meshsdk/core";
4
5 const utxos = await wallet.getUtxos();
6 const collateral = await wallet.getCollateral();
7 const changeAddress = await wallet.getChangeAddress();
8
9 const votingScriptCbor =
10   applyCborEncoding("your-voting-script-cbor");
11 const scriptHash =
12   resolveScriptHash(votingScriptCbor, "V3");
13 const scriptDRepId =
14   resolveScriptHashDRepId(scriptHash);
15
16 txBuilder
17   .txIn(
18     utxos[0].input.txHash,
19     utxos[0].input.outputIndex,
20     utxos[0].output.amount,
21     utxos[0].output.address
22   )
23   .txInCollateral(
24     collateral[0].input.txHash,
25     collateral[0].input.outputIndex,
26     collateral[0].output.amount,
27     collateral[0].output.address
28   )
29   .votePlutusScriptV3()
30   .vote(
31     { type: "DRep", drepId: scriptDRepId },
32     { txHash: "abc123...", txIndex: 0 },
33     { voteKind: "Yes" }
34   )
35   .voteScript(votingScriptCbor)
36   .voteRedeemerValue("")
37   .changeAddress(changeAddress);
38

```

```

39 const unsignedTx = await txBuilder.complete();
40 const signedTx = await wallet.signTx(unsignedTx, true);
41 const txHash = await wallet.submitTx(signedTx);

```

DRep Retirement

A DRep can retire and reclaim their deposit:

```

1  const dRep = await wallet.getDRep();
2  const dRepId = dRep.dRepIDCip105;
3  const utxos = await wallet.getUtxos();
4  const changeAddress = await wallet.getChangeAddress();
5
6  txBuilder
7    .drepDeregistrationCertificate(dRepId)
8    .selectUtxosFrom(utxos)
9    .changeAddress(changeAddress);
10
11 const unsignedTx = await txBuilder.complete();
12 const signedTx = await wallet.signTx(unsignedTx);
13 const txHash = await wallet.submitTx(signedTx);

```

8.4. GOVERNANCE USE CASES AND REAL-WORLD EXAMPLES

8.4.1. Building a DRep Delegation Frontend

One practical use case is building a web frontend that allows ada holders to delegate their voting power to a DRep. The following example demonstrates a Next.js application that connects to a Cardano wallet and submits a vote delegation transaction.

```

1  import { useEffect, useState } from 'react';
2  import {
3    BrowserWallet, Wallet, MeshTxBuilder,
4    MaestroProvider, keepRelevant, Transaction, DRep
5  } from "@meshsdk/core";
6
7  export default function DelegatePage() {
8    const [selectedWallet, setSelectedWallet] =
9      useState(null);
10    const [isConnected, setIsConnected] =
11      useState(false);
12
13    const handleConnectWallet = async (walletId) => {
14      const wallet =
15        await BrowserWallet.enable(walletId, [95]);
16      setSelectedWallet(wallet);
17      setIsConnected(true);
18    };
19
20    const handleVoteDelegation = async (drepId) => {

```

```

21     if (!selectedWallet) return;
22
23     const maestroProvider = new MaestroProvider({
24       network: "Mainnet",
25       apiKey: "<YOUR_API_KEY>",
26       turboSubmit: false
27     });
28
29     const txBuilder = new MeshTxBuilder({
30       fetcher: maestroProvider,
31       verbose: true
32     });
33
34     const changeAddress =
35       await selectedWallet.getChangeAddress();
36     const utxos = await selectedWallet.getUtxos();
37     const rewardAddresses =
38       await selectedWallet.getRewardAddresses();
39     const rewardAddress = rewardAddresses[0];
40
41     txBuilder
42       .selectUtxosFrom(utxos)
43       .changeAddress(changeAddress)
44       .voteDelegationCertificate(
45         { dRepId: drepId }, rewardAddress
46       );
47
48     const unsignedTx = await txBuilder.complete();
49     const signedTx =
50       await selectedWallet.signTx(unsignedTx);
51     const txHash =
52       await selectedWallet.submitTx(signedTx);
53
54     console.log(`Delegated to DRep: ${txHash}`);
55   };
56
57   // ... render wallet selection and delegation UI
58 }

```

This example shows the essential steps:

1. Connect to a browser-based Cardano wallet using CIP-30/CIP-95.
2. Set up a transaction builder with a blockchain provider (Maestro in this case).
3. Fetch the user's UTxOs, change address, and reward addresses.
4. Build the vote delegation certificate transaction.
5. Sign and submit the transaction.


8.4.2. Complete DRep Lifecycle

The following example demonstrates a complete DRep lifecycle, from registration to retirement:

```

1 import { MeshTxBuilder, BlockfrostProvider,
2   hashDrepAnchor } from "@meshsdk/core";
3

```

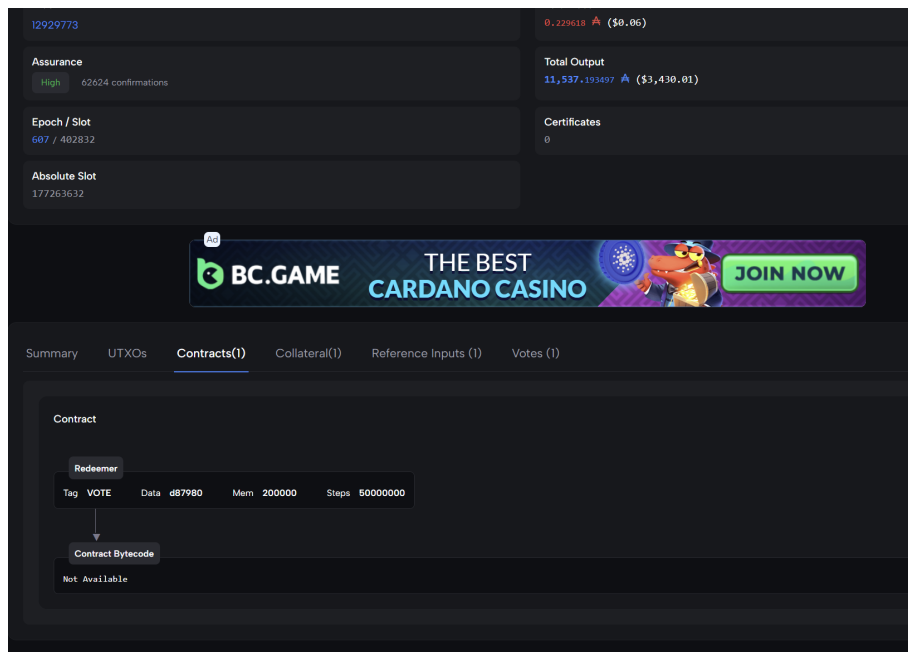

A vote executed by a smart contract DRep

```

4 const provider =
5   new BlockfrostProvider("<YOUR_API_KEY>");
6
7 function getTxBuilder() {
8   return new MeshTxBuilder({
9     fetcher: provider, verbose: true
10  });
11 }
12
13 // 1. Register as a DRep
14 async function registerDRep(wallet, name, url) {
15   const txBuilder = getTxBuilder();
16   const dRep = await wallet.getDRep();
17   const dRepId = dRep.dRepIDCip105;
18   const metadata = {
19     "@context": { /* CIP-119 context */ },
20     "body": { "givenName": name }
21   };
22   const anchorHash = hashDrepAnchor(metadata);
23   const utxos = await wallet.getUtxos();
24   const changeAddress =
25     await wallet.getChangeAddress();
26   txBuilder
27     .drepRegistrationCertificate(dRepId, {
28       anchorUrl: url,
29       anchorDataHash: anchorHash,
30     })
31     .changeAddress(changeAddress)
32     .selectUtxosFrom(utxos);
33   const unsignedTx = await txBuilder.complete();
34   const signedTx = await wallet.signTx(unsignedTx);
35   return await wallet.submitTx(signedTx);
36 }
37
38 // 2. Vote on a governance action
39 async function castVote(wallet, govActionTxHash,
40   govActionIndex, voteKind) {

```


```

41 const txBuilder = getTxBuilder();
42 const dRep = await wallet.getDRep();
43 const dRepId = dRep.dRepIDCip105;
44 const utxos = await wallet.getUtxos();
45 const changeAddress =
46   await wallet.getChangeAddress();
47 txBuilder
48   .vote(
49     { type: "DRep", drepId: dRepId },
50     { txHash: govActionTxHash,
51       txIndex: govActionIndex },
52     { voteKind }
53   )
54   .selectUtxosFrom(utxos)
55   .changeAddress(changeAddress);
56 const unsignedTx = await txBuilder.complete();
57 const signedTx = await wallet.signTx(unsignedTx);
58 return await wallet.submitTx(signedTx);
59 }
60
61 // 3. Delegate to a DRep
62 async function delegateToDRep(wallet, dRepId) {
63   const txBuilder = getTxBuilder();
64   const utxos = await wallet.getUtxos();
65   const changeAddress =
66     await wallet.getChangeAddress();
67   const rewardAddresses =
68     await wallet.getRewardAddresses();
69   const rewardAddress = rewardAddresses[0];
70   txBuilder
71     .voteDelegationCertificate(
72       { dRepId }, rewardAddress)
73     .changeAddress(changeAddress)
74     .selectUtxosFrom(utxos);
75   const unsignedTx = await txBuilder.complete();
76   const signedTx = await wallet.signTx(unsignedTx);
77   return await wallet.submitTx(signedTx);
78 }
79
80 // 4. Retire as DRep
81 async function retireDRep(wallet) {
82   const txBuilder = getTxBuilder();
83   const dRep = await wallet.getDRep();
84   const dRepId = dRep.dRepIDCip105;
85   const utxos = await wallet.getUtxos();
86   const changeAddress =
87     await wallet.getChangeAddress();
88   txBuilder
89     .drepDeregistrationCertificate(dRepId)
90     .selectUtxosFrom(utxos)
91     .changeAddress(changeAddress);
92   const unsignedTx = await txBuilder.complete();
93   const signedTx = await wallet.signTx(unsignedTx);
94   return await wallet.submitTx(signedTx);
95 }

```

8.4.3. Lessons from Other Ecosystems: The Polkadot Treasury Case

Cardano is not the only blockchain with on-chain governance. Polkadot implemented its own model (OpenGov), which includes delegated voting and on-chain treasury management. However, Polkadot's experience serves as a **cautionary tale** rather than a model to follow.

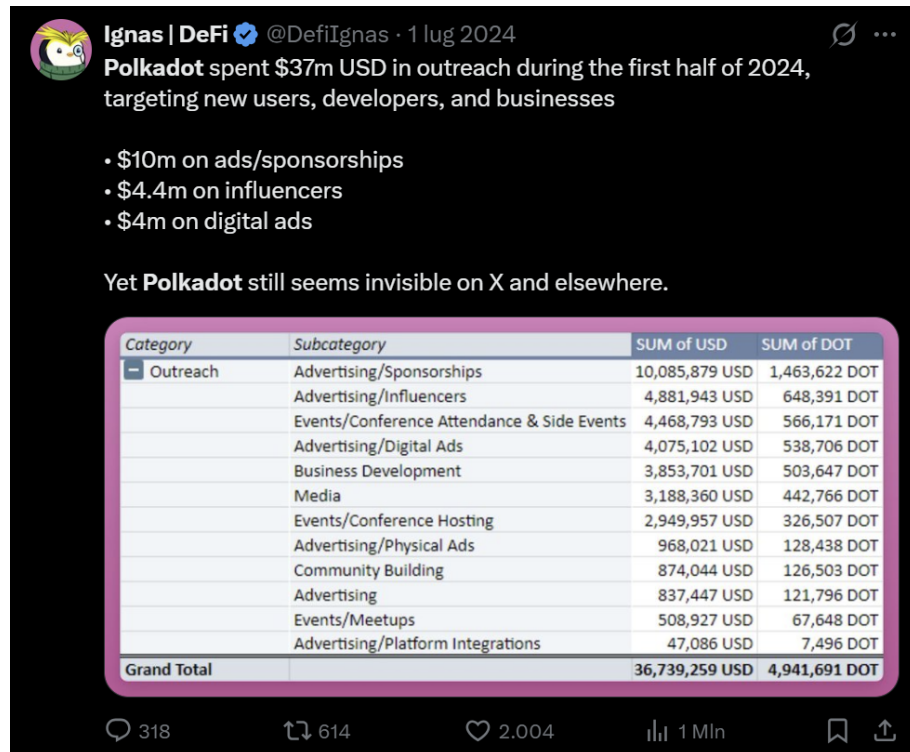

On-chain governance proposals in the Polkadot ecosystem

Polkadot's treasury was effectively drained through governance proposals that delivered little measurable impact on the ecosystem. Large sums were approved for marketing campaigns, events, and initiatives that failed to produce meaningful results in terms of adoption, developer growth, or ecosystem value. The lack of rigorous accountability mechanisms and the low barrier for approval meant that funds flowed out faster than they could generate returns for the network.


This outcome highlights a fundamental challenge of on-chain treasury governance: **the ability to vote on spending is meaningless without the discipline to vote responsibly.** A governance system is only as good as the quality of decisions made by its participants.

8.4.4. Cardano Treasury: A Responsibility, Not Just a Feature

The Cardano treasury is a pool of ada accumulated from transaction fees and monetary expansion. It is governed by the community through governance actions of type `TreasuryWdr1`. Treasury withdrawals require approval from both DReps and the Constitutional Committee.

Before approving treasury withdrawals, DReps must approve a net change limit and budget through Info actions. This ensures that treasury funds are managed responsibly and in accordance with the Cardano Constitution.

Learning from the mistakes of other ecosystems, Cardano's governance participants –

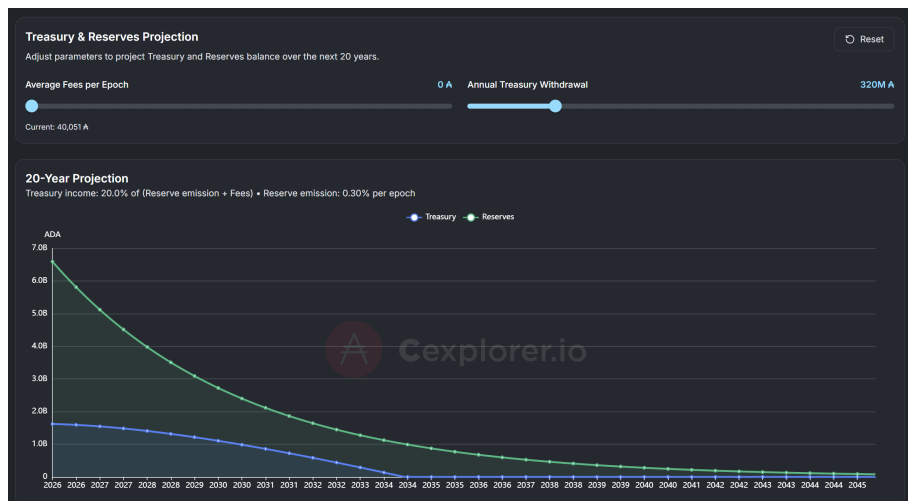

Cardano treasury projection from Cexplorer

DReps, SPOs, and the Constitutional Committee – must exercise careful judgment when voting on treasury withdrawals. Key principles to keep in mind:

- **Demand accountability:** Every treasury proposal should include clear deliverables, timelines, and measurable success criteria.
- **Evaluate impact:** Proposals should demonstrate how they will contribute to the long-term growth and sustainability of the Cardano ecosystem.
- **Protect the treasury:** The treasury is a finite resource. Voting “Yes” on every proposal is not participation – it is negligence.
- **Follow the Constitution:** The Cardano Constitution provides guardrails for treasury management. DReps should familiarize themselves with Article IV, which governs treasury operations.

The strength of Cardano’s governance will ultimately be measured not by the sophistication of its mechanisms, but by the quality of the decisions its community makes.

8.4.5. Common Issues and Troubleshooting

When working with governance transactions, you may encounter the following common issues:

- **“DRep not registered” error:** You must register as a DRep before voting. Use `drepRegistrationCertificate()` first.
- **“Invalid anchor hash” error:** The hash must match the content at the URL exactly. Use `hashDrepAnchor()` to compute the correct hash and ensure the metadata file is publicly accessible.
- **“Insufficient deposit” error:** DRep registration requires a deposit (check current protocol parameters). Ensure the wallet has enough ADA for deposit and fees.
- **“DRep inactive” error:** DReps must vote regularly to stay active. Vote on governance actions or submit an update certificate.
- **“Governance action not found” error:** Verify the transaction hash and index are correct. The governance action may have already been resolved.

8.4.6. Key Takeaways

- Cardano's on-chain governance (CIP-1694) enables decentralized decision-making through three governance bodies: DReps, SPOs, and the Constitutional Committee.
- Smart contracts can be used to create programmable DReps, enabling automated or conditional governance participation.
- MeshJS provides a comprehensive TypeScript API for building governance transactions including delegation, registration, voting, and retirement.
- The governance action lifecycle involves submission, voting within a 6-epoch window, ratification at epoch boundaries, and enactment.
- Always test governance transactions on a testnet before deploying to mainnet.



CONCLUSION AND NEXT STEPS



9. CONCLUSIONS

9.1. RECAP OF KEY CONCEPTS AND TAKEAWAYS

Cardano's UTXO architecture allows for both native scripts and smart contracts, offering a unique approach to blockchain development. Native scripts enable features like multisig and timelock rules, which are essential for secure spending and minting of assets. Smart contracts, on the other hand, provide more flexibility, enabling developers to implement a wide range of decentralized applications (dApps).

It is also important to note that, while Haskell was once considered the primary language for programming on Cardano, this is no longer the case. Today, developers have access to more than four different programming languages that allow them to interact with and develop on Cardano's UTXO model. These languages make it easier for new developers to start working on Cardano, expanding the ecosystem.

9.2. RESOURCES FOR FURTHER LEARNING AND EXPLORATION

Here are some useful resources to continue your journey in Cardano development:

Resource	Link
Aiken Page	https://aiken-lang.org/
Aiken Docs	https://aiken-lang.github.io/stdlib/
Aiken Discord	https://discord.com/invite/Vc3x8N9nz2
Aiken GitHub	https://github.com/aiken-lang/aiken
Helios Page	https://www.helios-lang.io/
Helios Discord	https://discord.com/invite/XTwPrvB25q
Helios GitHub	https://github.com/orgs/HeliosLang/repositories
Pluts Docs	https://pluts.harmoniclabs.tech/
Pluts GitHub	https://github.com/HarmonicLabs/plu-ts
Anastasia Labs GitHub	https://github.com/Anastasia-Labs
Anastasia Labs Discord	https://discord.gg/VDXbPkcmjT
Mesh Page	https://meshjs.dev/
Mesh Discord	https://discord.com/invite/WvnCNqmAxy
Opshin Page	https://opshin.dev/
Opshin Book	https://book.opshin.dev/

Useful Resources for Cardano Smart Contract Development

9.3. CONTRIBUTING TO THE CARDANO SMART CONTRACT ECOSYSTEM

The best way to contribute to the Cardano smart contract ecosystem is by getting involved with the community on GitHub and Discord. These platforms are where the majority of development happens, and interacting with other developers is a great way to learn and contribute. Don't be afraid to ask questions—those who are not learning are often the ones who don't ask questions. By being curious and engaged, you can contribute to the growth of the ecosystem and help build a vibrant, decentralized future.

Dear builder, if you reach this part let me tell you that I admire your passion and dedication. Please make sure to reach out to me on twitter, discord or telegram.

This book is only the starting block of your journey as Cardano Developer



EXERCISE SOLUTIONS



10. SOLUTIONS

10.1. SOLUTIONS

10.1.1. Exercise 1

You can find the solution file for easy copy and paste: **Solution 1 File** (formatted code)

```

1 <!DOCTYPE html>
2 <html lang="en" dir="ltr">
3   <head>
4     <meta charset="utf-8">
5     <title>Cardano Wallet Balance</title>
6   </head>
7   <body>
8     <div id="balance"></div>
9
10    <script type="module">
11      import { Maestro, Lucid } from "https://deno.land/x/lucid/mod.
12      ts";
13
14      const lucid = await Lucid.new(
15        new Maestro({
16          network: "Preview", // For MAINNET: "Mainnet".
17          apiKey: "<Your-API-Key>", // Get yours by visiting
18            https://docs.gomaestro.org/docs/Getting-started/Sign-up-login.
19            turboSubmit: false // Read about paid turbo
20            transaction submission feature at https://docs.gomaestro.org/docs/
21            Dapp%20Platform/Turbo%20Transaction.
22          })),
23        "Preview", // For MAINNET: "Mainnet".
24      );
25
26      // Enable Cardano wallet
27      const api = await window.cardano.eternl.enable();
28      lucid.selectWallet(api);
29
30      // Get wallet balance
31      const balance = await lucid.wallet.getBalance();
32
33      // Display balance on the page
34      document.getElementById('balance').innerText = `Wallet Balance:
35      ${balance}`;
36    </script>
37  </body>
38</html>

```

10.1.2. Exercise 2

You can find the solution file for easy copy and paste: **Solution 2 File** (formatted code)

```

1 import requests
2 import json
3
4 url = "https://preview.gomaestro-api.org/v1/policy/YOURPOLICYID/addresses"
5 api_key = "<Your-API-Key>"
6 headers = {
7     'Accept': 'application/json',
8     'api-key': api_key
9 }
10
11 def get_addresses(url, headers):
12     addresses = []
13     next_cursor = None
14
15     while True:
16         params = {'cursor': next_cursor} if next_cursor else {}
17         response = requests.get(url, headers=headers, params=params)
18
19         if response.status_code == 200:
20             data = response.json()
21             addresses.extend(data.get('data', []))
22             next_cursor = data.get('next_cursor')
23
24             if not next_cursor:
25                 break
26         else:
27             print("Error:", response.status_code)
28             break
29
30     return addresses
31
32 addresses = get_addresses(url, headers)
33
34 # Write the JSON response to a file
35 with open('addresses.json', 'w') as file:
36     json.dump(addresses, file, indent=4)
37
38 print("Addresses written to addresses.json")

```

10.1.3. Exercise 4

You can find the solution file for easy copy and paste: **Solution 4 File (formatted code)**

```

1 use aiken/collection/dict
2 use aiken/collection/list
3 use aiken/crypto.{VerificationKeyHash}
4 use aiken/primitive/bytearray.{to_string}
5 use aiken/primitive/string.{to_bytearray}
6 use cardano/address.{Address, Script}
7 use cardano/assets.{PolicyId, from_asset, from_asset_list, zero}
8 use cardano/transaction.{
9     Input, NoDatum, Output, OutputReference, Transaction, placeholder,
10 }
11 use mocktail/virgin_key_hash.{mock_policy_id, mock_pub_key_hash}
12 use mocktail/virgin_output_reference.{mock_utxo_ref}
13

```

```

14 pub type Action {
15     Mint
16     Burn
17 }
18
19 validator custom_minting(
20     utxo_ref: OutputReference,
21     owner: Option<VerificationKeyHash>,
22 ) {
23     mint(rdmr: Action, policy_id: PolicyId, tx: Transaction) {
24         let Transaction { inputs, mint, .. } = tx
25
26         let assets =
27             mint
28             |> assets.tokens(policy_id)
29             |> dict.to_pairs()
30
31         when rdmr is {
32             Mint -> {
33                 let is_token_name_valid = validate_token_name(assets)
34                 let is_mint_valid = validate_mint(assets, tx, inputs, utxo_ref,
35                     owner)
36
37                 is_token_name_valid? && is_mint_valid?
38             }
39             Burn -> {
40                 let is_burn_valid = validate_burn(assets)
41
42                 is_burn_valid?
43             }
44         }
45
46         else(_) {
47             fail
48         }
49     }
50
51 fn validate_token_name(tokens) {
52     let token_names =
53         [@"always", @"onetime", @"fenix"]
54
55     if list.all(
56         tokens,
57         fn(Pair(name, _amount)) {
58             list.any(token_names, fn(n) { n == to_string(name) })
59         },
60     ) {
61         trace @"All token names correct!..."
62         True
63     } else {
64         trace @"Ooops.... wrong token name found"
65         False
66     }
67 }
68
69 fn validate_mint(
70     tokens: Pairs<ByteArray, Int>,
71     tx: Transaction,
72     inputs: List<Input>,
73     utxo_ref: OutputReference,

```

```

74   owner: Option<VerificationKeyHash>,
75 ) {
76   let fenix_exists =
77     if list.any(
78       tokens,
79       fn(Pair(name, _amount)) { to_bytearray(to_string(name)) == "fenix
80     },
81     ) {
82       True
83     } else {
84       False
85     }
86   if list.all(
87     tokens,
88     fn(Pair(name, amount)) {
89       when to_bytearray(to_string(name)) is {
90         "always" ->
91           if fenix_exists {
92             amount < 0
93           } else {
94             amount >= 1
95           }
96         "onetime" ->
97           if fenix_exists {
98             amount < 0
99           } else {
100             expect Some(_input) =
101               list.find(
102                 inputs,
103                 fn(input) { input.output_reference == utxo_ref },
104               )
105             expect Some(owner_vk) = owner
106             let is_signed = list.has(tx.extra_signatories, owner_vk)
107             is_signed && amount == 1
108           }
109         "fenix" -> and {
110           amount >= 1,
111           list.any(
112             tokens,
113             fn(Pair(name, amount)) {
114               to_bytearray(to_string(name)) == "always" && amount < 0
115             },
116           ),
117           list.any(
118             tokens,
119             fn(Pair(name, amount)) {
120               to_bytearray(to_string(name)) == "onetime" && amount <
121             },
122           ),
123         }
124       } -> False
125     }
126   },
127 ) {
128   trace @"Tokens for minting validated successfully"
129   True
130 } else {
131   trace @"Oops. Validation of tokens for minting failed"
132   False

```

```

133 }
134 }
135
136 fn validate_burn(tokens: Pairs<ByteArray, Int>) {
137   if list.all(tokens, fn(Pair(_name, amount)) { amount < 0 }) {
138     trace @"Tokens for spending/burning validated successfully"
139     True
140   } else {
141     trace @"Ooops. Validation of tokens for spending/burning failed"
142     False
143   }
144 }
145
146 fn get_tx(mint, sign: List<VerificationKeyHash>) {
147   let tx_input =
148     Input {
149       output_reference: mock_utxo_ref(0, 0),
150       output: Output {
151         address: Address {
152           payment_credential: Script(mock_policy_id(0)),
153           stake_credential: None,
154         },
155         value: zero,
156         datum: NoDatum,
157         reference_script: None,
158       },
159     }
160   let tx_inputs =
161     [tx_input]
162
163   Transaction {
164     ..placeholder,
165     mint: mint,
166     inputs: tx_inputs,
167     extra_signatories: sign,
168   }
169 }
170
171 // mock new test
172 test burn_always_and_onetime() {
173   let utxo = mock_utxo_ref(0, 0)
174
175   let test_asset_name1 = "always"
176   let test_asset_name2 = "onetime"
177   let mint =
178     from_asset_list(
179       [
180         Pair(
181           mock_policy_id(0),
182           [Pair(test_asset_name1, -3), Pair(test_asset_name2, -1)],
183         ),
184       ],
185     )
186
187   let tx = get_tx(mint, [])
188
189   custom_minting.mint(utxo, None, Burn, mock_policy_id(0), tx)
190 }
191
192 test burn_always() {
193   let utxo = mock_utxo_ref(0, 0)

```

```

194
195 let mint = from_asset_list([Pair(mock_policy_id(0), [Pair("always",
196   -3)]))])
197
198 let tx = get_tx(mint, [])
199
200 custom_minting.mint(utxo, None, Burn, mock_policy_id(0), tx)
201 }
202
203 test burn_onetime() {
204   let utxo = mock_utxo_ref(0, 0)
205
206   let mint = from_asset_list([Pair(mock_policy_id(0), [Pair("onetime",
207     -1)]))])
208
209   let tx = get_tx(mint, [])
210
211   custom_minting.mint(utxo, None, Burn, mock_policy_id(0), tx)
212 }
213
214 test burn_fenix() {
215   let utxo = mock_utxo_ref(0, 0)
216
217   let mint = from_asset_list([Pair(mock_policy_id(0), [Pair("fenix",
218     -1)]))])
219
220   let tx = get_tx(mint, [])
221
222   custom_minting.mint(utxo, None, Burn, mock_policy_id(0), tx)
223 }
224
225 test mint_fenix() {
226   let utxo = mock_utxo_ref(0, 0)
227
228   let test_asset_name1 = "always"
229   let test_asset_name2 = "onetime"
230   let test_asset_name3 = "fenix"
231   let mint =
232     from_asset_list(
233       [
234         Pair(
235           mock_policy_id(0),
236           [
237             Pair(test_asset_name1, -3),
238             Pair(test_asset_name3, 1),
239             Pair(test_asset_name2, -1),
240           ],
241         ),
242       ],
243     ),
244   let tx = get_tx(mint, [])
245
246   // minting fenix token burns always and onetime
247   custom_minting.mint(utxo, None, Mint, mock_policy_id(0), tx)
248 }
249
250 test mint_always() {
251   let utxo = mock_utxo_ref(0, 0)
252
253   let mint = from_asset_list([Pair(mock_policy_id(0), [Pair("always",

```

```

251     3)))]))
252
253     let tx = get_tx(mint, [])
254
255     custom_minting.mint(utxo, None, Mint, mock_policy_id(0), tx)
256 }
257
258 test mint_onetime() {
259     let utxo = mock_utxo_ref(0, 0)
260
261     let mint = from_asset_list([Pair(mock_policy_id(0), [Pair("onetime",
262     1)))]))
263
264     let tx = get_tx(mint, [mock_pub_key_hash(0)])
265
266     custom_minting.mint(
267         utxo,
268         Some(mock_pub_key_hash(0)),
269         Mint,
270         mock_policy_id(0),
271         tx,
272     )
273 }
274
275 test fail_mint_onetime() fail {
276     // Testing onetime minting with different input utxos
277     // Error parameter is a wrong output reference in tx2
278
279     let utxo = mock_utxo_ref(0, 0)
280
281     let mint = from_asset_list([Pair(mock_policy_id(0), [Pair("onetime",
282     1)))]))
283
284     let tx = get_tx(mint, [mock_pub_key_hash(0)])
285
286     let tx_input =
287         Input {
288             output_reference: mock_utxo_ref(1, 0),
289             output: Output {
290                 address: Address {
291                     payment_credential: Script(mock_policy_id(0)),
292                     stake_credential: None,
293                 },
294                 value: zero,
295                 datum: NoDatum,
296                 reference_script: None,
297             },
298         }
299
300     let tx_inputs =
301         [tx_input]
302
303     let tx2 =
304         Transaction {
305             ..placeholder,
306             mint: mint,
307             inputs: tx_inputs,
308             extra_signatories: [mock_pub_key_hash(0)],
309         }
310
311     custom_minting.mint(
312         utxo,

```

```

310     Some(mock_pub_key_hash(0)),
311     Mint,
312     mock_policy_id(0),
313     tx,
314 ) && custom_minting.mint(
315     utxo,
316     Some(mock_pub_key_hash(0)),
317     Mint,
318     mock_policy_id(0),
319     tx2,
320 )
321 }
322
323 test mint_single_always() {
324     let utxo = mock_utxo_ref(0, 0)
325
326     let mint = from_asset(mock_policy_id(0), "always", 3)
327
328     let tx = get_tx(mint, [])
329
330     custom_minting.mint(utxo, None, Mint, mock_policy_id(0), tx)
331 }

```

10.1.4. Exercise 5

You can find the solution file for easy copy and paste: **Solution 5 File (formatted code)**

```

1 use aiken/collection/list
2 use aiken/crypto.{ScriptHash, VerificationKeyHash}
3 use aiken/interval.{Finite}
4 use cardano/address.{Script}
5 use cardano/transaction.{Input, Transaction, ValidityRange, placeholder
6   }
7 use mocktail/virgin_key_hash.{mock_pub_key_hash}
8
9 pub type User {
10     SingleSigner(VerificationKeyHash)
11     MultiSigner(ScriptHash)
12 }
13
14 pub type SWDatum {
15     lock_duration: Int,
16 }
17
18 validator smart_wallet(user: User) {
19     spend(datum: Option<SWDatum>, _r: Data, _o: Data, self: Transaction)
20     {
21         let Transaction { inputs, .. } = self
22
23         and {
24             is_signed(self, user, inputs),
25             when datum is {
26                 Some(SWDatum { lock_duration }) ->
27                 is_time_reached(self.validity_range, lock_duration)
28             } - -> True
29         },
30     }
31 }

```

```

29 }
30
31 else(_) {
32     fail
33 }
34 }
35
36 fn is_signed(tx: Transaction, user: User, inputs: List<Input>) {
37     when user is {
38         SingleSigner(signer_vk) -> list.has(tx.extra_signatories, signer_vk)
39
40         MultiSigner(script_hash) -> {
41             let script_cred = Script(script_hash)
42             list.any(
43                 inputs,
44                 fn(input) {
45                     let address = input.output.address
46                     address.payment_credential == script_cred
47                 },
48             )
49         }
50     }
51 }
52
53 fn is_time_reached(range: ValidityRange, lock_time: Int) {
54     when range.lower_bound.bound_type is {
55         Finite(time_now) -> lock_time <= time_now
56         _ -> False
57     }
58 }
59
60 // Tests
61
62 fn get_tx(sign: List<VerificationKeyHash>) {
63     Transaction { ..placeholder, extra_signatories: sign }
64 }
65
66 test test_single_signer() {
67     let tx = get_tx([mock_pub_key_hash(0)])
68
69     smart_wallet.spend(SingleSigner(mock_pub_key_hash(0)), None, "", "", tx)
70 }

```

10.1.5. Exercise 6

You can find the solution file for easy copy and paste: **Solution 6 File (formatted code)**

```

1 use aiken/collection/dict
2 use aiken/collection/list
3 use aiken/primitive/bytearray.{to_string}
4 use aiken/primitive/string.{from_bytearray}
5 use cardano/address.{Address, Script}
6 use cardano/assets.{
7     AssetName, PolicyId, from_asset, from_asset_list, quantity_of,
8 }

```

```

9 use cardano/transaction.{
10   Input, NoDatum, Output, OutputReference, Transaction, placeholder,
11 }
12 use mocktail/virgin_key_hash.{mock_policy_id}
13 use mocktail/virgin_output_reference.{mock_utxo_ref}
14
15 pub type Action {
16   Mint
17   Burn
18 }
19
20 validator fract_nft(
21   nft_policy_id: PolicyId,
22   nft_asset_name: AssetName,
23   mint_tokens_quantity: Int,
24   burn_tokens_quantity: Int,
25   uxto_onetime: OutputReference,
26 ) {
27   mint(redeemer: Action, policy_id: PolicyId, self: Transaction) {
28     let Transaction { inputs, outputs, mint, .. } = self
29
30     let assets = mint |> assets.tokens(policy_id) |> dict.to_pairs()
31
32     expect [Pair(fract_asset_name, _)] = assets
33     let valid_fract_asset_name =
34       string.concat(left: @"fract-", right: from_bytearray(
35         nft_asset_name))
36
37     expect valid_fract_asset_name == to_string(fract_asset_name)
38
39     when redeemer is {
40       Mint -> {
41         expect Some(_input) =
42           list.find(
43             inputs,
44             fn(input) { input.output_reference == uxto_onetime },
45           )
46         validate_mint(
47           assets,
48           inputs,
49           outputs,
50           policy_id,
51           nft_policy_id,
52           nft_asset_name,
53           mint_tokens_quantity,
54         )
55       }
56       Burn ->
57         validate_burn(
58           assets,
59           policy_id,
60           inputs,
61           nft_policy_id,
62           nft_asset_name,
63           burn_tokens_quantity,
64         )
65     }
66   }
67
68   spend(_d: Option<Data>, _r: Data, utxo: OutputReference, self:
69     Transaction) {

```

```

68     let Transaction { inputs, mint, .. } = self
69
70     expect Some(own_input) =
71         list.find(inputs, fn(input) { input.output_reference == utxo })
72
73     expect Script(policy_id) = own_input.output.address.
74     payment_credential
75
76     expect [Pair(_, quantity)] =
77         mint |> assets.tokens(policy_id) |> dict.to_pairs
78
79     (quantity <= -burn_tokens_quantity)?
80 }
81
82 else(_) {
83     fail
84 }
85
86 fn validate_mint(
87     assets: Pairs<ByteArray, Int>,
88     inputs: List<Input>,
89     outputs: List<Output>,
90     policy_id: PolicyId,
91     nft_policy_id: PolicyId,
92     nft_asset_name: AssetName,
93     mint_tokens_quantity: Int,
94 ) {
95     let is_nft_in_inputs =
96         inputs
97         |> list.any(
98             fn(input) {
99                 quantity_of(input.output.value, nft_policy_id,
100                     nft_asset_name) == 1
101             },
102         )
103
104     let is_nft_in_outputs =
105         outputs
106         |> list.any(
107             fn(output) {
108                 and {
109                     output.address.payment_credential == Script(policy_id),
110                     quantity_of(output.value, nft_policy_id, nft_asset_name)
111                     == 1,
112                 }
113             },
114         )
115
116     let is_mint_quantity_valid = and {
117         list.length(assets) == 1,
118         assets
119         |> list.all(fn(Pair(_, quantity)) { quantity ==
120             mint_tokens_quantity }),
121     }
122
123     and {
124         is_nft_in_inputs?,
125         is_nft_in_outputs?,
126         is_mint_quantity_valid?,
127     }

```

```

125 }
126
127 fn validate_burn(
128     assets: Pairs<ByteArray, Int>,
129     policy_id: PolicyId,
130     inputs: List<Input>,
131     nft_policy_id: PolicyId,
132     nft_asset_name: AssetName,
133     burn_tokens_quantity: Int,
134 ) {
135     let is_burn_tokens_valid =
136         assets
137         |> list.any(fn(Pair(_, quantity)) { quantity <= -
138             burn_tokens_quantity })
139
140     let is_input_valid =
141         inputs
142         |> list.any(
143             fn(input) {
144                 and {
145                     quantity_of(input.output.value, nft_policy_id,
146                         nft_asset_name) == 1,
147                     input.output.address.payment_credential == Script(
148                         policy_id),
149                 },
150             )
151         )
152
153     is_burn_tokens_valid? && is_input_valid?
154 }
155
156 // Tests
157
158 test test_mint() {
159     let the_nft_policy_id = mock_policy_id(0)
160     let the_nft_asset_name = "my_nft"
161     let the_nft = from_asset(the_nft_policy_id, the_nft_asset_name, 1)
162
163     let tx_input =
164         Input {
165             output_reference: mock_utxo_ref(0, 0),
166             output: Output {
167                 address: Address {
168                     // input from some place
169                     payment_credential: Script(mock_policy_id(5)),
170                     stake_credential: None,
171                 },
172                 value: the_nft,
173                 datum: NoDatum,
174                 reference_script: None,
175             },
176         }
177
178     let tx_output =
179         Output {
180             address: Address {
181                 // Output going into the validator
182                 payment_credential: Script(mock_policy_id(1)),
183                 stake_credential: None,
184             },
185             value: the_nft,

```

```

183     datum: NoDatum,
184     reference_script: None,
185   }
186
187   let mint =
188     from_asset_list([Pair(mock_policy_id(1), [Pair("fract-my_nft", 100)
189       ])]])
190
191   let tx =
192     Transaction {
193       ..placeholder,
194       mint: mint,
195       inputs: [tx_input],
196       outputs: [tx_output],
197     }
198
199   fract_nft.mint(
200     the_nft_policy_id,
201     the_nft_asset_name,
202     100,
203     50,
204     mock_utxo_ref(0, 0),
205     Mint,
206     mock_policy_id(1),
207     tx,
208   )
209 }
210
211 test test_burn() {
212   let the_nft_policy_id = mock_policy_id(0)
213   let the_nft_asset_name = "my_nft"
214   let the_nft = from_asset(the_nft_policy_id, the_nft_asset_name, 1)
215   let validator_hash = mock_policy_id(1)
216
217   let tx_input =
218     Input {
219       // output reference changed
220       output_reference: mock_utxo_ref(0, 1),
221       output: Output {
222         address: Address {
223           // input from validator
224           payment_credential: Script(validator_hash),
225           stake_credential: None,
226         },
227         value: the_nft,
228         datum: NoDatum,
229         reference_script: None,
230       },
231     }
232
233   let mint =
234     from_asset_list([Pair(mock_policy_id(1), [Pair("fract-my_nft", -50)
235       ])]])
236
237   let tx = Transaction { ..placeholder, mint: mint, inputs: [tx_input]
238     }
239
240   fract_nft.mint(
241     the_nft_policy_id,
242     the_nft_asset_name,
243     100,

```

```

241     50,
242     mock_utxo_ref(0, 0),
243     Burn,
244     validator_hash,
245     tx,
246 )
247 }
248
249 test test_spend() {
250     let the_nft_policy_id = mock_policy_id(0)
251     let the_nft_asset_name = "my_nft"
252     let the_nft = from_asset(the_nft_policy_id, the_nft_asset_name, 1)
253     let validator_hash = mock_policy_id(1)
254
255     let own_oref = mock_utxo_ref(0, 1)
256
257     let tx_input =
258         Input {
259             // output reference changed
260             output_reference: own_oref,
261             output: Output {
262                 address: Address {
263                     // input from validator
264                     payment_credential: Script(validator_hash),
265                     stake_credential: None,
266                 },
267                 value: the_nft,
268                 datum: NoDatum,
269                 reference_script: None,
270             },
271         }
272
273     let mint = from_asset_list([Pair(mock_policy_id(1), [Pair("fract1",
274         -50))])])
275
276     let tx = Transaction { ..placeholder, mint: mint, inputs: [tx_input]
277     }
278
279     fract_nft.spend(
280         the_nft_policy_id,
281         the_nft_asset_name,
282         100,
283         50,
284         mock_utxo_ref(0, 0),
285         None,
286         "",
287         own_oref,
288         tx,
289     )
290 }
291
292 test test_mint_with_spend() {
293     let the_nft_policy_id = mock_policy_id(0)
294     let the_nft_asset_name = "my_nft"
295     let the_nft = from_asset(the_nft_policy_id, the_nft_asset_name, 1)
296     let validator_hash = mock_policy_id(1)
297
298     let own_oref = mock_utxo_ref(0, 1)
299
300     let tx_input =
301         Input {

```

```

300 // output reference changed
301 output_reference: own_oref,
302 output: Output {
303   address: Address {
304     // input from validator
305     payment_credential: Script(validator_hash),
306     stake_credential: None,
307   },
308   value: the_nft,
309   datum: NoDatum,
310   reference_script: None,
311 },
312 }
313
314 let mint =
315   from_asset_list([Pair(mock_policy_id(1), [Pair("fract-my_nft", -50)
316   ])]))
317
318 let tx = Transaction { ..placeholder, mint: mint, inputs: [tx_input]
319 }
320
321 and {
322   fract_nft.mint(
323     the_nft_policy_id,
324     the_nft_asset_name,
325     100,
326     50,
327     mock_utxo_ref(0, 0),
328     Burn,
329     validator_hash,
330     tx,
331   ),
332   fract_nft.spend(
333     the_nft_policy_id,
334     the_nft_asset_name,
335     100,
336     50,
337     mock_utxo_ref(0, 0),
338     None,
339     "",
340     own_oref,
341     tx,
342   ),
343 }

```

10.1.6. Exercise 7

You can find the solution file for easy copy and paste: **Solution 7 File (formatted code)**

```

1 import { Lucid , Blockfrost,toUnit,Data,Constr, fromHex,
2   toHex,sha256 } from "https://unpkg.com/lucid-cardano@0.10.0/web/
3   mod.js"
4 const lucid = await Lucid.new(
5   new Blockfrost("https://cardano-mainnet.blockfrost.io/api/v0", "API
6   KEY"),
7   "Mainnet",

```

```

6   );
7
8   import cnftScript from './contract.json' assert {type: 'json'};
9
10  //Here replace with the wallet name according to cip30
11  var wallet="eternl"
12
13  let api = await window.cardano[wallet].enable();
14  lucid.selectWallet(api);
15  window.owner=await lucid.wallet.address()
16  let{ paymentCredential, stakeCredential } = lucid.utils.
    getAddressDetails(
17    await lucid.wallet.address(),
18  );
19
20  //this is the most tricky part, go to https://cbor.me/ and paste this
    datum, replace the fields with your listing data and get the new
    datum to replace this one
21  let datumCancel="D86682008441FB4133D866820082181814D866820180"
22
23  //example
24  //102([0, [h'SELLER_SPENDING_KEY_HASH', h'ROYALTY_SPENDING_KEY_HASH',
    102([0, [//LISTING_PRICE, //ROYALTY_PERCENTAGE_IN_MILLESIMALS]]),
    102([1, []]])])
25  //102([0, [h'FB2CD544A148D0BBC70C9863E3448224EE95C3DB699F864F8D6305E2
    ', h'3342CA8C073A11B7664BD105123353E79C01116CC465915133FDCF75',
    102([0, [249999000000, 20]]), 102([1, []]])])
26
27
28
29  var redeemerCancel=Data.to(
30    new Constr(0,[])
31  )
32
33
34  //THIS IS THE TXHASH OF THE LISTING TO BE CANCELLED REPLACE IT
35  const utxoHash="
dbd761d11fa7dde62c4899b0168c6618789ad68d34560e9fd7a40e5d498d3044"
36  const index=0
37
38  var utxo=await lucid.utxosByOutRef([ { txHash: utxoHash, outputIndex
: index } ])
39  utxo[0].datum=datumCancel
40
41  const tx = await lucid
42    .newTx()
43    .collectFrom(utxo, redeemerCancel)
44    .attachSpendingValidator(cnftScript)
45    .addSignerKey(paymentCredential.hash)
46    .complete();
47
48  const signedTx = await tx.sign().complete();
49  const txHash = await signedTx.submit();

```

GLOSSARY

- AMM** Automatic market maker dexes involve a liquidity pool, the pool has two pair tokens, usually ADA and the Cardano native token, users can sell or buy tokens from this pool and the price is adjusted according to the market need . 9
- block** A block in Cardano is a record of transactions and other information produced by a slot leader during a slot. Blocks are added to the blockchain sequentially. Each block contains a header with metadata, such as the previous block hash, and a body that includes the transaction data and other relevant information. Blocks are produced by slot leaders, which are chosen through the Ouroboros consensus protocol, Cardano's proof-of-stake mechanism. Blocks are essential for maintaining the integrity and continuity of the blockchain, as they confirm and validate transactions. . 23
- CIP** Cardano Improvement Proposals that if approved can change the current ledger or chain parameters, usually are also standards to develop in a similar way between projects . 15
- Composability** Also referred to as transaction in transaction, it's the ability to interact with multiple parties in the same transaction, this is not possible in the account model, however, this also raises the concurrency issue when two parties or transactions want to spend the same utxo. 10
- Determinism** Transaction and blockchain behavior are predictable, given a sort of input and outputs, once the fee is decided the transaction hash will always be the same. 6
- epoch** An epoch in Cardano is a fixed period during which a set of blocks is produced. The duration of an epoch is predefined and consistent. As of the current Cardano implementation, an epoch lasts for 5 days. At the end of each epoch, rewards are calculated and distributed, and a new epoch begins. Epochs help structure the blockchain into manageable time periods, enabling efficient consensus and reward mechanisms. . 23
- inputs** Inputs in a UTXO model transaction specify which unspent outputs are being consumed, so which funds coming from previous transactions are being spent. . 23
- Liquid Staking** Cardano staking is referred to as Liquid, no locking mechanism is needed to get the staking rewards. This becomes useful because users can move their ADA around inside smart contracts while keeping the delegation rewards . 10
- orderbook** In this configuration each order placed by users is a single entry with a price and amount of token willing to sell (ADA or native tokens), swaps happen matching the orders . 8
- slot** A slot is a smaller time unit within an epoch. An epoch is divided into a large number of slots. Each slot represents a potential opportunity to produce a block. In the current implementation of Cardano, there are 432,000 slots in an epoch, with each slot lasting 1 second. However, not every slot will necessarily have a block produced, as block production depends on the consensus protocol and slot leader election. . 23