


Crear el Entorno

1. Ingresamos al Anaconda Prompt

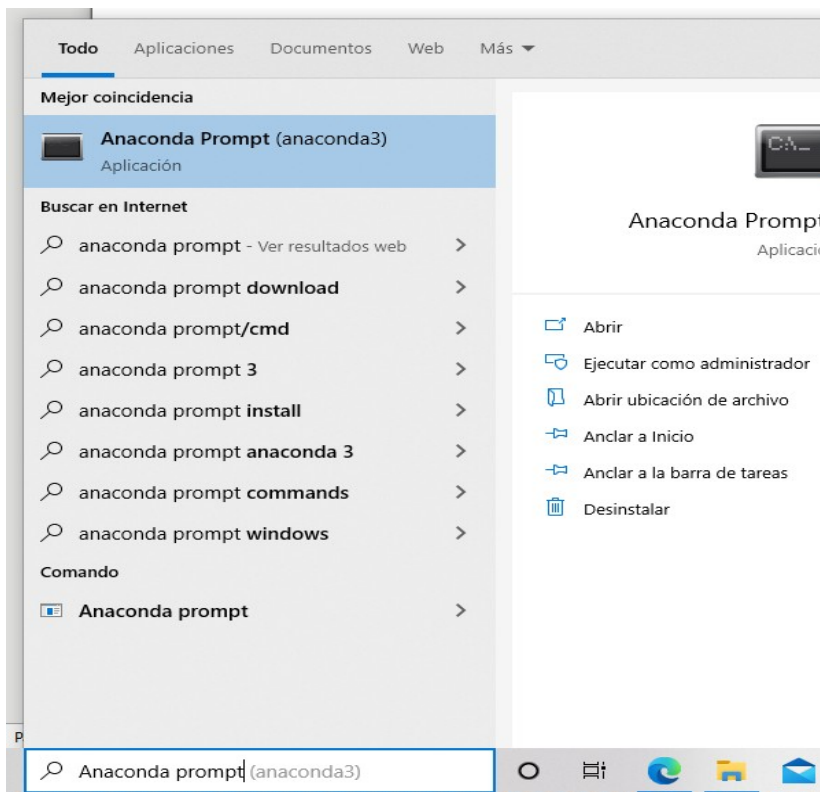

1. Creamos el entorno “env_azure”

`conda create -n env_azure -c conda-forge python=3.7`

Anaconda Prompt (anaconda3) - `conda create -n env_azure -c conda-forge python=3.7`

```
(base) C:\Users\Hector M>conda create -n env_azure -c conda-forge python=3.7
Collecting package metadata (current_repodata.json): done
```

Nota: Por que es necesario instalar una versión anterior. Y no con la actual 3.8 el paquete automl de azure no soporta la versión 3.8 en nuestra experiencia.

2. Confirmamos con la “y”

Anaconda Prompt (anaconda3) - `conda create -n env_azure -c conda-forge python=3.7`

ca-certificates-2021.5.30	h5b45459_0	171 KB	conda-forge
openssl-1.1.1k	h8ffe710_1	5.8 MB	conda-forge
pip-21.2.4	pyhd8ed1ab_0	1.1 MB	conda-forge
python-3.7.10	h7840368_100_cppython	17.9 MB	conda-forge
python_abi-3.7	2_cp37m	4 KB	conda-forge
setuptools-57.4.0	py37h03978a9_0	931 KB	conda-forge
sqlite-3.36.0	h8ffe710_0	1.2 MB	conda-forge
ucrt-10.0.20348.0	h57928b3_0	1.2 MB	conda-forge
vc-14.2	hb210afc_5	13 KB	conda-forge
vs2015_runtime-14.29.30037	h902a5da_5	1.3 MB	conda-forge
wheel-0.37.0	pyhd8ed1ab_1	31 KB	conda-forge


Total:		29.5 MB	

The following NEW packages will be INSTALLED:


ca-certificates	conda-forge/win-64::ca-certificates-2021.5.30-h5b45459_0
openssl	conda-forge/win-64::openssl-1.1.1k-h8ffe710_1
pip	conda-forge/noarch::pip-21.2.4-pyhd8ed1ab_0
python	conda-forge/win-64::python-3.7.10-h7840368_100_cppython
python_abi	conda-forge/win-64::python_abi-3.7-2_cp37m
setuptools	conda-forge/win-64::setuptools-57.4.0-py37h03978a9_0
sqlite	conda-forge/win-64::sqlite-3.36.0-h8ffe710_0
ucrt	conda-forge/win-64::ucrt-10.0.20348.0-h57928b3_0
vc	conda-forge/win-64::vc-14.2-hb210afc_5
vs2015_runtime	conda-forge/win-64::vs2015_runtime-14.29.30037-h902a5da_5
wheel	conda-forge/noarch::wheel-0.37.0-pyhd8ed1ab_1

Proceed ([y]/n)? y

3.Nos debe aparecer en la lista de entornos.Le damos clic a “env_azure” para que inicie

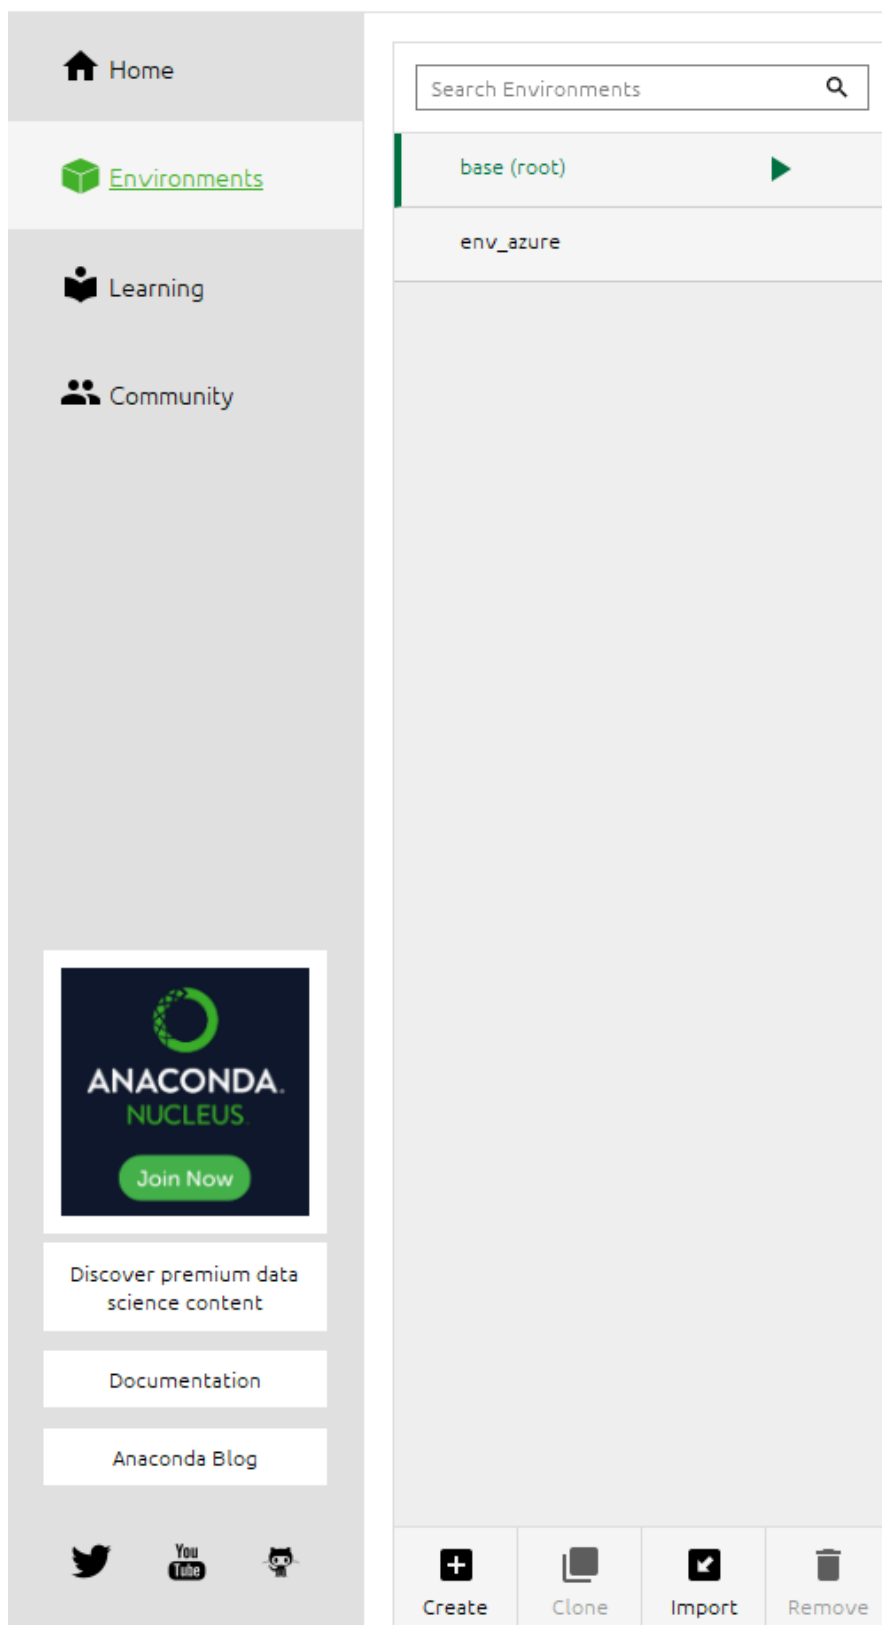


4.Instalamos el Jupyter notebook

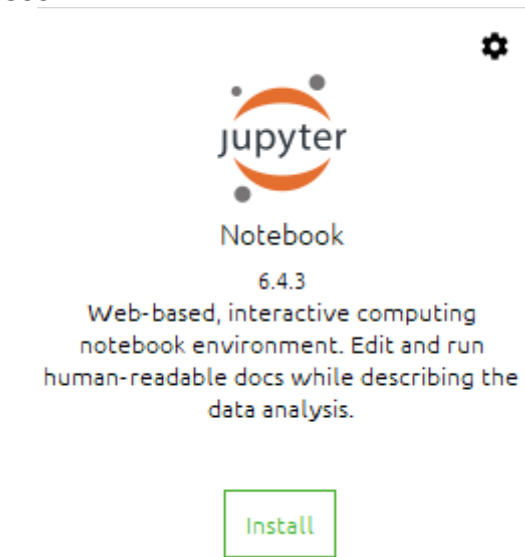

Iniciar Jupyter notebook

A)Primera forma:Anaconda Navigator

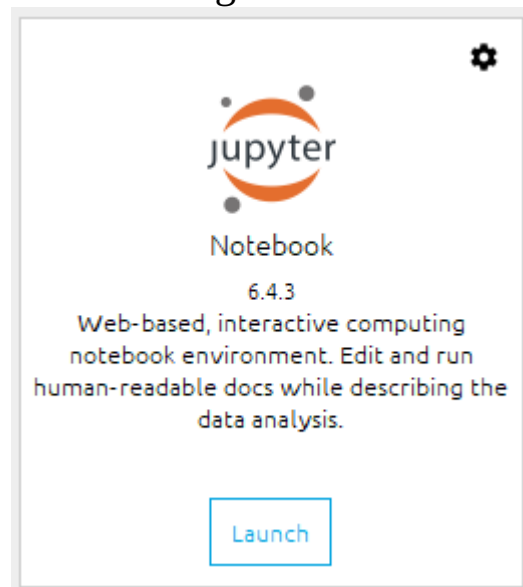

B)Segunda forma:Anaconda Prompt

1. Activamos el entorno “env_azure”

```
(base) C:\Users\Hector M>activate env_azure
```

2.Iniciamos el Jupyter Notebook

```
(env_azure) C:\Users\Hector M>jupyter notebook
[I 01:02:42.437 NotebookApp] Serving notebooks from local directory: D:/notebooks/
[I 01:02:42.437 NotebookApp] Jupyter Notebook 6.4.3 is running at:
[I 01:02:42.437 NotebookApp] http://localhost:8888/?token=c603480c96cf77d3a3bbc01a0f734084a6d81c4a9585b6fe
[I 01:02:42.437 NotebookApp] or http://127.0.0.1:8888/?token=c603480c96cf77d3a3bbc01a0f734084a6d81c4a9585b6fe
[I 01:02:42.437 NotebookApp] Use Control-C to stop this server and shut down all kernels (twice to skip confirmation).
[C 01:02:42.484 NotebookApp]

To access the notebook, open this file in a browser:
    file:///C:/Users/Hector%20M/AppData/Roaming/jupyter/runtime/nbserver-916-open.html
Or copy and paste one of these URLs:
    http://localhost:8888/?token=c603480c96cf77d3a3bbc01a0f734084a6d81c4a9585b6fe
    or http://127.0.0.1:8888/?token=c603480c96cf77d3a3bbc01a0f734084a6d81c4a9585b6fe
```