

A heavy-tailed law of contextual memory in human language

Elan Barenholtz¹

¹*Center for the Future Mind, Florida Atlantic University*

Abstract

Many human behaviors exhibit power-law temporal structure with no characteristic scale. Whether language shares this signature has not been directly measured. We use large language models as probabilistic probes to measure how much prior context constrains the probability of upcoming tokens, isolated from token-frequency effects through a shuffled-token baseline. The persistence function $P(d)$ quantifies this order-specific influence at distance d from the current point of generation. Across ten corpora spanning six language families, multiple genres, and written and spoken modalities, $P(d)$ decays approximately as $1/d$, with mean slope -1.04 ($SD = 0.15$) across nearly two orders of magnitude, vanishes in random-token controls, replicates across independent probe models, and is broadly distributed across prior sentences rather than concentrated in anchors. Order- and content-driven contributions are distinguishable, with content-driven integration carrying the long-range tail. The continuous scale-free form is difficult to reconcile with architectural accounts that posit a sharp division between maintained and retrieved material, and is consistent instead with memory in language as a graded distance-dependent influence carried by the evolving probability structure of the sequence itself.

1 Introduction

Human behavior across many domains exhibits lawful temporal structure across many timescales. In neural activity [Beggs and Plenz, 2003], motor and cognitive performance [Gilden, 2001], and inter-event waiting times in human dynamics [Barabási, 2005], distance-dependent dependencies decay as power laws rather than as bounded or exponential functions, placing these processes among the broad class of human behaviors with scale-free temporal organization [Kello et al., 2010]. Language is among the longer-range coherent sequential behaviors humans produce, sustaining structure across thousands of words, but the quantitative form of its temporal structure — how the influence of prior material scales with distance from the current point of generation — has not been directly measured. Existing characterizations of contextual integration in language, including discourse models, situation models, and resonance-based accounts, operate at the representational rather than the quantitative level, and conventional measures of statistical dependence in text conflate sequential structure with vocabulary-level regularities.

Here we develop a distance-resolved measurement of contextual influence in natural language and apply it across ten corpora spanning six language families, multiple genres, and written and spoken modalities. We use large language models as probabilistic probes, treating their conditional probability estimates as a calibrated readout of how preceding context constrains upcoming tokens. Because naive perplexity reduction conflates sequential dependence with the probe’s distributional calibration, we subtract a shuffled-token baseline that absorbs the contribution of token identity

alone. The resulting persistence function $P(d)$ quantifies the order-specific influence of prior context at distance d from the current point of generation.

$P(d)$ decays approximately as $1/d$ with mean slope -1.04 ($SD = 0.15$) and no characteristic cutoff across nearly two orders of magnitude in distance. This decay is consistent across language families, genres, and modalities, vanishes in random-token controls, scales with the integrity of sequential structure, and is broadly distributed across prior sentences rather than concentrated in a small number of anchors. The persistence function describes a continuous, scale-free temporal structure in human language production, measurable directly from the probability dynamics of generation and replicable across independently trained probe models (Llama-3.1-8B, Mistral-7B).

The shape of $P(d)$ places language alongside other human behaviors and neural processes that exhibit scale-free temporal structure, and constrains the class of mechanisms capable of producing such structure. In particular, the absence of any characteristic scale across the measured range — combined with the graded contributions of prior content distributed across the sequence — is difficult to reconcile with architectural accounts of memory that posit a sharp division between maintained and retrieved material with distinguishable temporal dynamics. The pattern is consistent instead with mechanisms in which prior content continues to shape ongoing generation through the evolving probability structure of the sequence itself.

2 Results

2.1 A persistence function for natural language

We define the persistence function $P(d)$ as the predictive influence of prior context at distance d from the current point of generation, estimated as the reduction in target perplexity produced by revealing prior context at that distance, with shuffled-token baselines controlling for the contribution of token identity alone (Methods). $P(d)$ provides a distance-resolved measurement of how preceding language constrains the probability structure of upcoming tokens.

Across all corpora, $P(d)$ is positive at distances well beyond any plausible bound on working-memory capacity. At distances exceeding 1000 tokens, prior context continues to reduce target perplexity by a measurable margin relative to shuffled controls. Long-range contextual influence is therefore not confined to a recency window but extends as a graded function across the full sequences we examined.

2.2 Heavy-tailed decay across languages, genres, and modalities

The functional form of $P(d)$ is well approximated by a heavy-tailed decay. Figure 1 plots $P(d)$ against distance on log-log axes for each of the ten corpora. Across languages, genres, and modalities, $P(d)$ decays smoothly across nearly two orders of magnitude with a mean slope of -1.04 ($SD = 0.15$) — close to a $1/d$ power law — and a median goodness-of-fit of $r^2 = 0.96$. Fits are computed on $d \geq 10$ tokens, the range over which both ordered- and shuffled-context bases are stable; very-short-range intervals are reported in Methods. Power-law fits substantially outperform exponential alternatives, with ΔAIC values ranging from $+12$ to $+26$ across the majority of corpora. Two corpora, Japanese literary prose and Buckeye spoken English, are better fit by stretched-exponential functions, but their decay remains heavy-tailed and extends well beyond the range over which any bounded buffer could plausibly contribute.

The cross-corpus consistency of the decay regime is notable. The sample spans Germanic, Romance, Turkic, Japonic, Uralic, and Slavic language families, as well as fiction and literary prose,

news and expository prose, prepared speech transcripts, and spontaneous speech. A narrow heavy-tailed regime across this range indicates that the persistence function reflects a general property of natural language rather than a property of any single language, register, or modality.

The qualitative pattern that defines $P(d)$ — a positive contribution of ordered context at long range together with a near-zero contribution of shuffled context — extends beyond the six families covered by the long-range run. In a complementary cross-language analysis evaluating shorter context lengths on both probe models, the long-range sign pattern is preserved across three additional language families: Afro-Asiatic, Koreanic, and Sino-Tibetan (Supplementary Information). The headline slope of $P(d)$ is therefore obtained on a six-family set within a broader nine-family cross-language replication of the qualitative pattern that defines the persistence function.

2.3 The persistence function reflects sequential structure, not properties of the probe

A central concern in any LLM-based measurement is whether the observed pattern reflects properties of natural language or properties of the probe model. We address this directly with synthetic-sequence controls. We constructed sequences with token-frequency statistics matched to natural text but with sequential structure removed. Raw perplexity over these synthetic sequences exhibits apparent power-law structure with a slope comparable in magnitude to that observed on natural text (Llama-3.1: ≈ -1.27 on uniform random vocabulary; Mistral-7B: ≈ -1.34), replicating the general tendency for language-model perplexity to fall as context length increases even when genuine long-range dependence is absent.

The order-specific persistence function $P(d)$, however, is near zero across all distances on the synthetic sequences. The shuffled-token baseline that defines $P(d)$ absorbs the perplexity reduction attributable to token statistics alone, isolating the contribution of sequential organization. The long-range, heavy-tailed $P(d)$ observed for natural language therefore depends on properties of the linguistic sequence itself, not on the probe. We replicated the persistence signature with two independently trained probe models, Llama-3.1-8B and Mistral-7B, obtaining the same qualitative pattern and comparable decay ranges on shared corpora, along with near-zero $P(d)$ on synthetic controls. The persistence function is therefore not an idiosyncratic property of the model used to estimate it.

2.4 Order and content make distinguishable contributions to persistence

To characterize the structure of $P(d)$ further, we compared ordered context to two structure-disrupting manipulations. Sentence shuffling preserves within-sentence syntax and lexical content while disrupting discourse-level ordering. Token shuffling eliminates ordered structure within the contextual span.

Sentence shuffling reduces $P(d)$ at short distances, especially below approximately 30 tokens, but leaves much of the long-range tail intact (Figure 2). Token shuffling collapses $P(d)$ toward zero across all distances. The persistence function therefore decomposes into two distinguishable contributions: a chaining-specific component concentrated at short range (slope ≈ -1.26 , approaching zero by $d > 100$ tokens) and a content-driven component that extends across the long-range tail (slope ≈ -0.78). Discourse-level chaining shapes the short-range structure of $P(d)$; content-driven integration carries its long-range tail.

2.5 Persistence is broadly distributed across prior sentences

We next asked whether persistence is concentrated in a small number of privileged prior sentences or broadly distributed across the prior context. We addressed this with a sentence-level ablation: for each target, we removed one prior sentence at a time and measured the resulting change in prediction.

The majority of prior sentences contribute positively to prediction at all distances examined. The proportion of contributing sentences declines gradually with distance, from approximately 90% at short range to 55–60% beyond 500 tokens, with no sharp transition or threshold (Figure 3). The magnitude of contribution is concentrated at recent positions (top-5 sentences account for 30–51% of total positive influence; Gini coefficient 0.78–0.90), but this concentration is fully explained by recency: variation in mean influence by absolute position within the prior context is accounted for by distance to the target, with no residual effect of structural position (e.g., document opening). Persistence is therefore a distributed field of influence across the prior sequence, with magnitude graded smoothly by recency rather than localized to a small number of anchoring positions.

3 Discussion

The persistence function shows a continuous, distance-dependent influence that extends well beyond the span of explicit maintenance, decays without a characteristic scale, and is distributed across the prior sequence rather than localized to a small number of contributing positions. This pattern is difficult to reconcile with architectural accounts that posit a sharp division between recently-maintained material and remotely-retrieved material with distinguishable temporal dynamics: a sharp division would predict a corresponding inflection in $P(d)$, and we observe none across nearly two orders of magnitude in distance. The distributed influence pattern is similarly difficult to reconcile with retrieval-based accounts in which long-range coherence is supported by access to a small number of privileged anchoring positions. The data are consistent instead with mechanisms in which prior content continues to shape ongoing generation through the evolving probability structure of the sequence — a graded, distance-dependent field of influence rather than a partition between maintained and retrieved content.

The mean exponent we report (-1.04 , $SD = 0.15$) sits in a neighborhood that has been independently identified in two adjacent traditions in memory research. Anderson and Schooler [1991], examining the recurrence statistics of information demand in natural environments, reported a power law with exponent of approximately -0.77 . Kahana et al. [2002], examining associative decay in free recall via lag-conditional response probability, reported a forward-decay exponent of approximately -0.82 for younger adults. Each of these measurements was made by entirely different methods on entirely different data, and neither involves a language model. The convergence is striking but does not by itself establish a common underlying mechanism: it motivates direct cross-paradigm investigation of whether comparable scale-free decay forms across production, environmental statistics, and recall reflect a domain-general dynamic of biological cognition or distinct mechanisms producing similar exponents.

This empirical picture aligns with a longer trajectory in cognitive psychology away from architecturally bounded views of memory and toward continuous and graded characterizations. Cowan’s focus-of-attention model [Cowan, 2001] recasts working memory as a graded availability of items rather than a fixed-capacity slot store; Ericsson and Kintsch’s long-term working memory framework [Ericsson and Kintsch, 1995] argues that skilled performers make routine use of long-term-memory structures during ongoing task performance, blurring the maintenance-retrieval boundary; and continuous-resource accounts in visual working memory [Ma et al., 2014] replace discrete-

item architectures with graded distributions of representational precision. The persistence function provides a direct quantitative measurement of an analogous continuity in language production, observed at the scale of token-level sequential dependence and across naturalistic discourse rather than experimental task sequences. The present result is best read as an empirical capstone to this longer trajectory, not a refutation of it.

We do not claim that these results establish the mechanism by which prior content shapes language production in the brain. The persistence function is a measurement of the form of contextual influence, not of the cognitive processes that implement it. We note, however, that artificial autoregressive systems trained on human text exhibit the same scale-free shape under the same measurements, supporting the interpretation that $P(d)$ reflects properties of well-formed sequential generation rather than properties specific to human cognition. Whether the persistence function generalizes to non-linguistic sequential behaviors with extended temporal coherence — music improvisation, motor sequences, gesture, drawing — and whether the convergence with memory-retrieval exponent ranges reflects a shared dynamic or merely shared statistical constraints, are questions the present results motivate but do not answer.

4 Methods

4.1 Corpora

The long-range persistence function was computed on ten corpora: English fiction (Project Gutenberg), English news prose, English spontaneous speech (Buckeye Corpus of Conversational Speech), TED transcripts in English, German, French, Turkish, and Russian, and literary prose in Japanese and Finnish. Together these cover six language families (Germanic, Romance, Turkic, Slavic, Japonic, Uralic) and four production modes (written fiction, news prose, prepared speech, spontaneous speech). The complementary cross-language qualitative replication of the sign-flip pattern (Afro-Asiatic, Koreanic, Sino-Tibetan) was performed on Wikipedia and TED-transcript cells from a broader corpus inventory at shorter context lengths. Full corpus details, sources, sample sizes, and preprocessing steps are provided in Supplementary Information.

4.2 Probe models

Two autoregressive language models served as probes: Llama-3.1-8B (base; **Meta-Llama-3.1-8B**) and Mistral-7B-v0.1. Neither was fine-tuned for this study. The probes were used only to compute conditional probability estimates over fixed token sequences; the language models themselves were not the object of study. Headline results were obtained on Llama-3.1-8B; the qualitative pattern was replicated on Mistral-7B for shared corpora as a probe-independence check.

4.3 Persistence function

For each document, a single target region of 30 tokens was selected at the midpoint (50%) of document length. Context preceding the target was revealed in incrementally larger spans at log-spaced context lengths $c \in \{0, 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024\}$. At each context length, target perplexity was computed under intact context (the actual preceding c tokens, original order) and shuffled context (the same c tokens, random order). Per-distance marginals were obtained as the per-token change in perplexity across successive context lengths, $m_d = (\text{ppl}_{c_{i-1}} - \text{ppl}_{c_i}) / (c_i - c_{i-1})$, with distance indexed by the geometric mean $d = \sqrt{c_{i-1}c_i}$ of the interval. The persistence function was defined as $P(d) = m_d^{\text{intact}} - m_d^{\text{shuffled}}$, isolating the contribution of sequential structure from

probe-internal token-identity calibration. Marginals were aggregated across documents within each corpus and binned by distance. Only documents with at least $1024 + 30 + 50$ tokens were included, ensuring a full-length context window and target for every measurement.

4.4 Functional-form fitting

The per-token order-specific gap was fit on log-log axes to four functional forms: power law ($y = \alpha d^\beta$), exponential ($y = \alpha e^{-\beta d}$), stretched exponential ($y = \alpha e^{-\beta d^\gamma}$), and quadratic-in-log. Models were compared by Akaike (AIC) and Bayesian (BIC) information criteria, and functional-form preference was determined per corpus. Power-law fits were computed on positive bins with $d \geq 10$ tokens, the first interval at which both ordered and shuffled bases exceed eight tokens.

4.5 Synthetic-sequence controls

To distinguish probe-internal calibration dynamics from genuine sequential dependence, two synthetic-sequence controls were constructed: uniform-vocabulary sequences (tokens drawn uniformly at random from the model vocabulary) and frequency-matched sequences (tokens drawn with empirical token-frequency probabilities matched to the natural corpora). The same persistence-function protocol was applied to both.

4.6 Sentence-level decomposition

The contribution of discourse-level ordering versus within-sentence content was assessed by computing $P(d)$ under three context conditions: ordered (intact), sentence-shuffled (sentences permuted while within-sentence token order preserved), and token-shuffled. The chaining-specific component was estimated as the difference between ordered and sentence-shuffled persistence; the content-driven component as the difference between sentence-shuffled and token-shuffled. Buckeye was excluded from this decomposition because spontaneous speech does not have unambiguous sentence boundaries.

4.7 Sentence-level ablation

For documents in two corpora (English fiction and English TED transcripts, 20 documents per corpus, 1024-token prior context), each prior sentence was individually removed and the resulting change in target perplexity was computed (leave-one-sentence-out). Per-sentence influence was characterized by sign (positive = removing the sentence increased target perplexity) and magnitude. The proportion of contributing sentences was computed in distance bins, and concentration metrics (Gini coefficient over per-sentence magnitudes; share of total positive influence in the top-5 sentences) were computed per document and aggregated. To test whether magnitude variation across prior-sentence positions reflects a privileged structural role over and above distance from the target, the full leave-one-sentence-out influence matrix was computed on a 15-document subset of each ablation corpus; variation in influence magnitude was accounted for by distance, with no residual effect of structural position once distance was controlled.

Data and code availability

Analysis code and corpus manifests are available in the project repository. Per-corpus persistence curves and the figure-generation pipeline are provided as supplementary material.

Cross-corpus persistence functions (10 cells, 6 language families; mean $\alpha = -1.04$, SD = 0.15; $d \geq 10$; † stretched-exp)

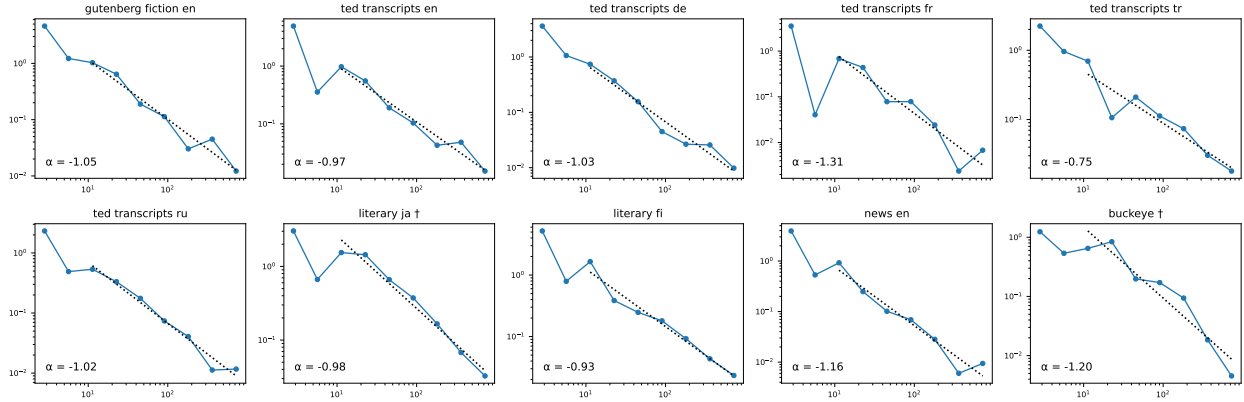


Figure 1: Cross-corpus persistence functions. Per-token order-specific contextual influence $P(d)$ as a function of distance d , log–log axes. Each panel is one of ten corpora spanning six language families (Germanic, Romance, Turkic, Slavic, Japonic, Uralic) and four production modes. All cells exhibit heavy-tailed decay across nearly two orders of magnitude in distance, with mean power-law slope -1.04 (SD = 0.15) — close to a $1/d$ law. Fits computed on $d \geq 10$ tokens. Cells marked † (Japanese literary prose; Buckeye spontaneous English speech) are best fit by stretched-exponential functions but remain heavy-tailed.

References

- John R. Anderson and Lael J. Schooler. Reflections of the environment in memory. *Psychological Science*, 2(6):396–408, 1991. doi: 10.1111/j.1467-9280.1991.tb00174.x.
- Albert-László Barabási. The origin of bursts and heavy tails in human dynamics. *Nature*, 435(7039):207–211, 2005. doi: 10.1038/nature03459.
- John M. Beggs and Dietmar Plenz. Neuronal avalanches in neocortical circuits. *Journal of Neuroscience*, 23(35):11167–11177, 2003. doi: 10.1523/JNEUROSCI.23-35-11167.2003.
- Nelson Cowan. The magical number 4 in short-term memory: A reconsideration of mental storage capacity. *Behavioral and Brain Sciences*, 24(1):87–114, 2001. doi: 10.1017/S0140525X01003922.
- K. Anders Ericsson and Walter Kintsch. Long-term working memory. *Psychological Review*, 102(2):211–245, 1995. doi: 10.1037/0033-295X.102.2.211.
- David L. Gilden. Cognitive emissions of $1/f$ noise. *Psychological Review*, 108(1):33–56, 2001. doi: 10.1037/0033-295X.108.1.33.
- Michael J. Kahana, Marc W. Howard, Franklin Zaromb, and Arthur Wingfield. Age dissociates recency and lag-recency effects in free recall. *Journal of Experimental Psychology: Learning, Memory, and Cognition*, 28(3):530–540, 2002. doi: 10.1037/0278-7393.28.3.530.
- Christopher T. Kello, Gordon D. A. Brown, Ramon Ferrer-i Cancho, John G. Holden, Klaus Linkenkaer-Hansen, Theo Rhodes, and Guy C. Van Orden. Scaling laws in cognitive sciences. *Trends in Cognitive Sciences*, 14(5):223–232, 2010. doi: 10.1016/j.tics.2010.02.005.
- Wei Ji Ma, Masud Husain, and Paul M. Bays. Changing concepts of working memory. *Nature Neuroscience*, 17(3):347–356, 2014. doi: 10.1038/nn.3655.

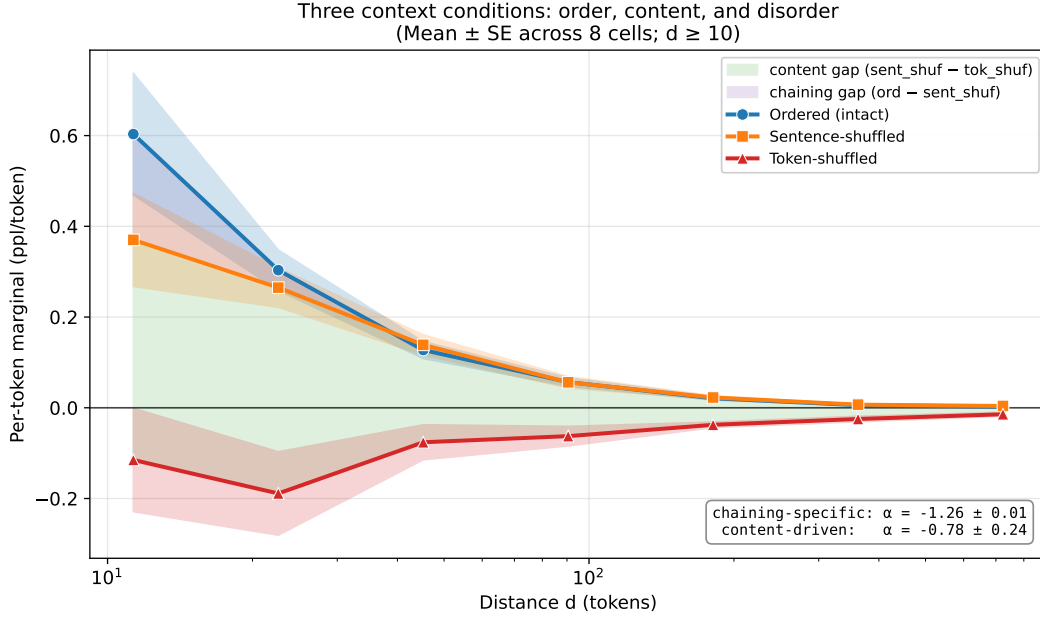


Figure 2: Order and content make distinguishable contributions to persistence. $P(d)$ under context conditions that isolate discourse-level ordering from within-sentence content. The intact and sentence-shuffled curves coincide at long range and diverge only below ~ 30 tokens; both lie far above the token-shuffled baseline at all distances. The persistence function decomposes into a chaining-specific component (slope ≈ -1.26 , approaching zero by $d > 100$ tokens) and a content-driven component (slope ≈ -0.78) that carries the long-range tail.

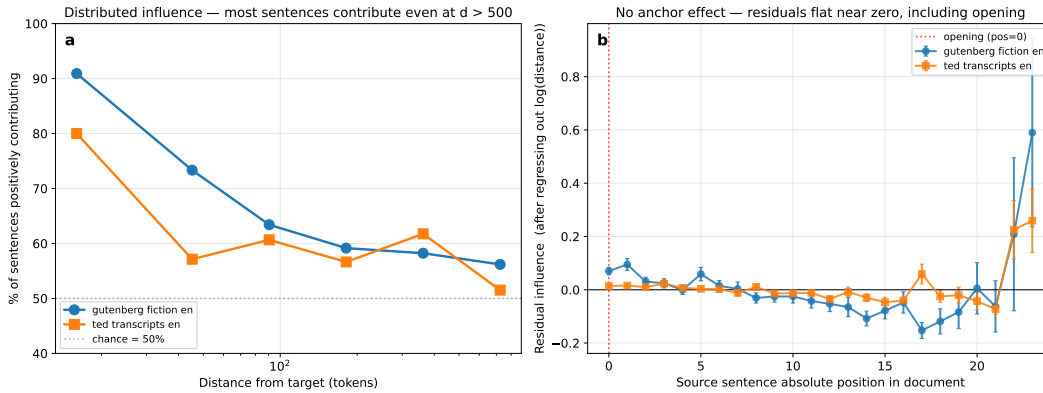


Figure 3: Persistence is broadly distributed across prior sentences. Proportion of prior sentences whose removal degrades target prediction as a function of distance to the target. The proportion declines smoothly from $\sim 90\%$ within the first 32 tokens to $\sim 55\text{--}60\%$ beyond 500 tokens, with no sharp transition. The top-5 sentences account for 30–51% of total positive influence (Gini 0.78–0.90), but this concentration reflects recency, not a privileged structural role for any specific position.