

A scaling law of contextual persistence in human language

Elan Barenholtz¹

¹*Department of Psychology and Center for Complex Systems, Florida Atlantic University*

Abstract

Human language obeys scaling laws for vocabulary growth, word frequency, and syntactic structure, yet none describes how the influence of prior context decays with distance. Using large language models as probabilistic probes, we isolated order-specific influence with a shuffled-token baseline; the contextual persistence function $P(d)$ measures it at distance d . Across ten corpora (449 documents) spanning six language families and written and spoken modalities, $P(d)$ decayed approximately as $1/d$ ($P(d) \propto d^{-\alpha}$, mean $\alpha = 1.04$; median $r^2 = 0.96$). The decay vanished in scrambled and synthetic controls and replicated across independent probes; the same scale-free, near-unity signature did not appear in genomic or protein sequences under domain-native models. Because α is near 1, contextual influence is distributed approximately uniformly across logarithmic timescales. These results establish a previously undescribed scaling law of contextual persistence in human language — a constraint that any theory of language must explain.

1 Introduction

Human language has a rich statistical structure, much of which has been captured by quantitative laws [Altmann and Gerlach, 2016]. Word frequencies follow Zipf’s law [Zipf, 1949], and vocabulary growth follows Heaps’ law [Heaps, 1978]; both are scale-free and recur with striking consistency across languages and corpora. What makes such a regularity a law is the reproducibility of its exponent, not the power-law form alone: Zipf’s sits near unity across a wide range of languages and corpora.

Both describe the units in aggregate, independent of the order in which they appear, and so occupy the most basic level of a hierarchy of statistical structure, in which each successive level is more specific and is defined by removing the contribution of the one below. A second level concerns not how often units occur but how they depend on one another across distance. That language carries such long-range dependence is established: the mutual information between symbols falls off as an approximate power law of their separation, decaying far more slowly than expected under conventional finite-order Markov models [Ebeling and Pöschel, 1994, Lin and Tegmark, 2017, Montemurro and Pury, 2002]. But this measure of raw statistical correlation conflates genuinely sequential structure with order-independent effects such as shared vocabulary and topic: long-range mutual information can reflect repeated lexical and topical content even when the local ordering of that content is disrupted. It therefore does not isolate the contribution of order itself.

A third level lies beyond both, and no law has yet captured it: the order-specific dependence that remains once the contribution of unit identity is removed. This is not a formal residue. Word order encodes grammatical relations and compositional meaning that the identities of the words alone

do not, so isolating order-specific dependence captures structure carried by arrangement, including grammatical and compositional relations that token identity alone cannot preserve, as distinct from the lexical and topical content carried by which words are present. Representational accounts of contextual dependence, such as discourse and situation models [van Dijk and Kintsch, 1983] and resonance-based accounts of memory access during reading [Myers and O’Brien, 1998], describe it qualitatively rather than as a quantitative decay law. Whether this order-specific dependence obeys a scaling law, and if so of what form, is unknown.

Reaching this third level requires estimating the probability of what comes next given long and specific prior context, a quantity that classical corpus statistics approximate only crudely. Large autoregressive transformer models [Vaswani et al., 2017, Radford et al., 2019] change this. Trained only to predict the next token, they assign token-level conditional probabilities to continuations over context lengths that far exceed those tractable with conventional corpus estimators, and are sensitive to precisely the order-dependent structure that raw co-occurrence statistics cannot isolate. Used as measuring instruments, or probes, rather than as objects of study, they provide a new vantage point on this level of linguistic structure.

Here we measure this decay directly. For a fixed upcoming span, we ask how much revealing the true, ordered prior context reduces a probe’s surprise, and subtract the reduction obtained when the same words are supplied in scrambled order. The difference removes predictive benefit available from the same vocabulary and topical content in scrambled order, retaining the additional benefit of intact sequential arrangement: the order-specific contextual influence. Measured as a function of distance d back through the sequence, this defines the *contextual persistence function* (CPF), $P(d)$; its functional form we call the *contextual persistence law*. We apply it across ten corpora spanning six language families, multiple genres, and written and spoken modalities. Throughout, we treat the CPF as a law governing natural-language sequences, a property of the linguistic product; whether and how it maps onto the real-time mechanisms of human production and comprehension is a separate, empirically open question we return to in the Discussion.

$P(d)$ decays approximately as $1/d$ ($P(d) \propto d^{-\alpha}$) with mean decay exponent $\alpha = 1.04$ (SD = 0.15) and no characteristic cutoff across nearly two orders of magnitude in distance. This decay is consistent across language families, genres, and modalities, vanishes in random-token controls, scales with the integrity of sequential structure, and is broadly distributed across prior sentences rather than concentrated in a small number of anchors. The CPF describes a continuous, scale-free temporal structure in human language, measurable directly from the linguistic sequence and replicable across independently trained probe models (Llama-3.1-8B, Mistral-7B).

The shape of $P(d)$ places language alongside other human behaviours and neural processes that exhibit scale-free temporal structure [Gilden, 2001, Barabási, 2005, Linkenkaer-Hansen et al., 2001, Beggs and Plenz, 2003, Kello et al., 2010], and constrains the class of mechanisms capable of producing such structure. In particular, the absence of any characteristic scale across the measured range, combined with the graded contributions of prior content distributed across the sequence, is difficult to reconcile with architectural accounts of memory that posit a sharp division between maintained and retrieved material with distinguishable temporal dynamics. The pattern is consistent instead with mechanisms in which prior content continues to shape ongoing generation through the evolving probability structure of the sequence itself.

We present this as an empirical discovery rather than a mechanistic proposal. We identify a previously undescribed quantitative law governing contextual persistence in human language: the evidence establishes a robust regularity, and the principal question it raises is why it exists.

2 Results

2.1 The contextual persistence function

We define the contextual persistence function (CPF), $P(d)$, as the *order-specific* predictive influence of prior context at distance d from the current point of generation: the reduction in target perplexity produced by revealing prior context at that distance, minus the reduction produced by the same tokens in scrambled order (Methods). Subtracting the shuffled-token baseline controls the predictive benefit available from the same token composition in scrambled order (the lower rungs of the hierarchy above), so $P(d)$ isolates the component of contextual dependence that survives only when sequential order is preserved, resolved as a function of distance.

Across all corpora, $P(d)$ is positive at distances well beyond any plausible bound on working-memory capacity. At distances approaching 1000 tokens (the far end of our measurement range), prior context continues to reduce target perplexity by a measurable margin relative to shuffled controls. Long-range contextual influence is therefore not confined to a recency window but extends as a graded function across the full sequences we examined.

2.2 Heavy-tailed decay across languages, genres, and modalities

The functional form of $P(d)$ is well approximated by a heavy-tailed decay. Figure 1 plots $P(d)$ against distance on log-log axes for each of the ten corpora. Across languages, genres, and modalities, $P(d)$ decays smoothly across nearly two orders of magnitude with a mean decay exponent $\alpha = 1.04$ (SD = 0.15; $P(d) \propto d^{-\alpha}$) — close to a $1/d$ power law — and a median goodness-of-fit of $r^2 = 0.96$. A reduced-sample replication averaging 20 shuffled permutations per target produced the same cross-corpus mean exponent ($\alpha = 1.04$) and improved fit stability (Supplementary Information), indicating that the headline result does not depend on the selected permutation. Fits are computed on $d \geq 10$ tokens, the range over which both ordered- and shuffled-context bases are stable; very-short-range intervals are reported in Methods. In a comparison of five candidate functional forms by small-sample-corrected information criteria (Supplementary Information), the power law is preferred in eight of the ten corpora and outperforms a pure exponential in all ten; a fixed-scale exponential is never preferred. The two remaining corpora, Japanese literary prose and Buckeye spoken English, show mild downward curvature and are marginally better described by a log-normal and a stretched-exponential form respectively; in both the decay remains heavy-tailed and extends well beyond the range expected from a fixed temporal buffer acting alone.

The cross-corpus consistency of the decay regime is notable. The sample spans Germanic, Romance, Turkic, Japonic, Uralic, and Slavic language families, as well as fiction and literary prose, news and expository prose, prepared speech transcripts, and spontaneous speech. A narrow heavy-tailed regime across this range indicates that the CPF reflects a general property of natural language rather than a property of any single language, register, or modality.

The qualitative pattern that defines $P(d)$ — a positive contribution of ordered context at long range together with a near-zero contribution of shuffled context — extends beyond the six families covered by the long-range run. In a complementary cross-language analysis evaluating shorter context lengths on both probe models, the long-range sign pattern is preserved across three additional language families: Afro-Asiatic, Koreanic, and Sino-Tibetan (Supplementary Information). The headline exponent of $P(d)$ is therefore obtained on a six-family set within a broader nine-family cross-language replication of the qualitative pattern that defines the persistence function.

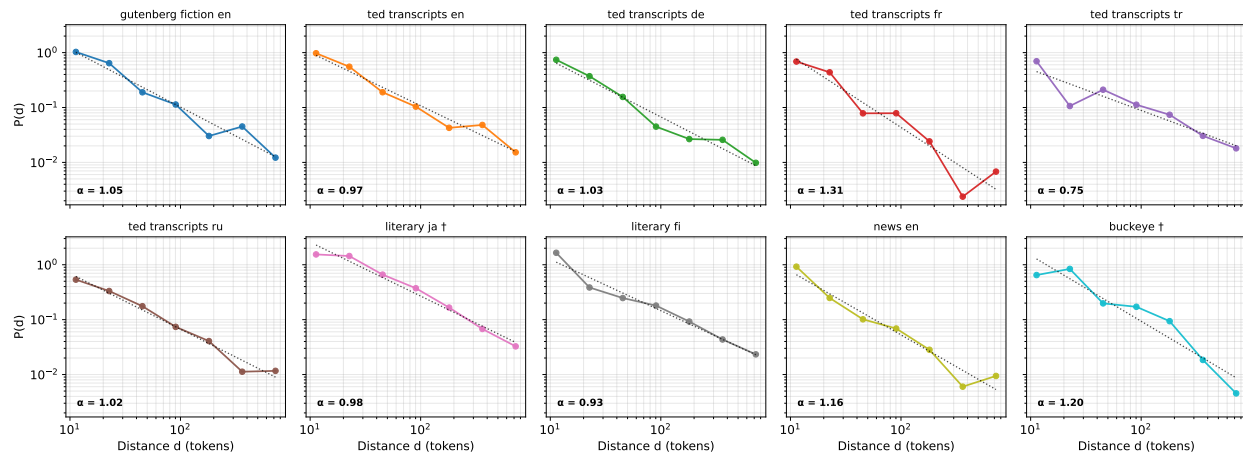


Figure 1: Cross-corpus contextual persistence functions. Per-token order-specific contextual influence $P(d)$ as a function of distance d , log-log axes. Each panel is one of ten corpora spanning six language families (Germanic, Romance, Turkic, Slavic, Japonic, Uralic) and four production modes. All cells exhibit heavy-tailed decay across nearly two orders of magnitude in distance, with mean decay exponent $\alpha = 1.04$ (SD = 0.15; $P(d) \propto d^{-\alpha}$, so the log-log slope is $-\alpha$) — close to a $1/d$ law. Points are shown for $d \geq 10$ tokens; the dotted line is the power-law fit. Intervals below $d = 10$ are excluded because at such short context the shuffled-token baseline is unstable: with only one or two tokens there is no meaningful permutation, so the order-specific difference is ill-defined there and does not reflect the persistence decay (Methods). The two cells marked † (Japanese literary prose; Buckeye spontaneous English speech) show mild downward curvature and are marginally better fit by a log-normal and a stretched-exponential form respectively, but remain heavy-tailed with the power law a close second.

2.3 An exponent near 1: uniform influence across logarithmic timescales

Two properties of the decay should be separated. The first is that it is scale-free: a power law has no distance at which its behaviour changes character, and our fits show none across the measured range. The second, and more distinctive, is the value of the exponent. Across the ten corpora the fitted decay exponent is close to 1 and clustered around it (mean $\alpha = 1.04$, SD = 0.15, with $P(d) \propto d^{-\alpha}$). The observed between-corpus spread modestly exceeds document-sampling error (typical bootstrap SE ≈ 0.10 ; Supplementary Information), although permutation sensitivity analyses indicate that part of this spread reflects noise in the shuffled baseline. The exponent is therefore best described as clustered near 1, with limited evidence for residual corpus-level heterogeneity. The reproducibility of the near-unity value across otherwise very different samples is itself part of the result, and it carries a specific quantitative meaning.

For a CPF of the form $P(d) \propto d^{-\alpha}$, the aggregate contextual influence contained within a logarithmic interval of distance — the band spanning one multiplicative step, or one decade, of the past — is proportional to $dP(d) \propto d^{1-\alpha}$. When $\alpha \approx 1$ this quantity is approximately constant. Put concretely, if one divides the past into logarithmic bands (1–10, 10–100, and 100–1,000 tokens back), each band contributes approximately the same aggregate contextual influence, even though the influence of any single word continues to decline with distance. The reason the decades flatten is a near-exact cancellation of two opposing effects. Each successive logarithmic band reaches proportionally further back and so contains proportionally more words, and at $\alpha \approx 1$ that growth in number almost exactly offsets the $1/d$ decline in the average influence per token, so the many weakly contributing words far back combine to match the few strongly contributing words nearby. Contextual influence is therefore distributed approximately uniformly across logarithmic timescales:

no logarithmic timescale dominates the aggregate, and every decade of the past contributes comparably to ongoing prediction (Figure 2).

This should not be read as memory being equally strong at all distances; individual words do become progressively less influential as they recede. What is approximately equal is the *aggregate* influence summed within each logarithmic decade: pointwise influence falls as $1/d$, while cumulative influence per multiplicative interval of distance remains flat.

The value $\alpha \approx 1$ is also a boundary. For $\alpha > 1$, aggregate influence is concentrated near the present and the remote past contributes negligibly in sum; for $\alpha < 1$, the sum is increasingly dominated by distant context. $\alpha \approx 1$ is the crossover between these regimes: the exponent at which no timescale dominates the total. That human language sits at this boundary, rather than at an arbitrary point along the continuum, is what most distinguishes the result from a generic heavy tail.

The near-unity regime is robust to the choice of response scale: expressing influence in additive log-probability (nats) units rather than perplexity leaves every corpus a near- $1/d$ power law, though the mean exponent shifts modestly from $\alpha = 1.04$ to $\alpha = 1.18$ (Supplementary Information), indicating approximate rather than exact equality of influence across logarithmic decades.

The reproducibility of the near-unity exponent across corpora is what supports treating this as a candidate scaling law rather than an isolated curve fit. As with Zipf’s law, the recurrence of the value — an exponent near 1 across languages, modalities, and independently trained probe models — is the phenomenon, not merely the power-law form.

2.4 The CPF reflects sequential structure, not properties of the probe

A central concern in any LLM-based measurement is whether the observed pattern reflects properties of natural language or properties of the probe model. We address this directly with synthetic-sequence controls. We constructed sequences with token-frequency statistics matched to natural text but with sequential structure removed. Raw perplexity over these synthetic sequences exhibits apparent power-law structure with a slope comparable in magnitude to that observed on natural text (Llama-3.1: ≈ -1.27 on uniform random vocabulary; Mistral-7B: ≈ -1.34), replicating the general tendency for language-model perplexity to fall as context length increases even when genuine long-range dependence is absent.

The order-specific CPF, $P(d)$, however, is near zero across all distances on the synthetic sequences. The shuffled-token baseline that defines $P(d)$ absorbs the perplexity reduction attributable to token statistics alone, isolating the contribution of sequential organization. The long-range, heavy-tailed $P(d)$ observed for natural language therefore depends on properties of the linguistic sequence itself, not on the probe. We replicated the persistence signature with two independently trained probe models, Llama-3.1-8B and Mistral-7B, obtaining the same qualitative pattern and comparable decay ranges on shared corpora, along with near-zero $P(d)$ on synthetic controls. The CPF is therefore not an idiosyncratic property of the model used to estimate it.

A stronger version of this argument replaces synthetic sequences with real non-language sequences that carry their own long-range structure, each probed with its own domain-native autoregressive model. If the law were a by-product of autoregressive probing rather than a property of language, the identical CPF protocol should reproduce it elsewhere. It does not (Figure 3). On genomic sequence (human chromosome 21, HyenaDNA), $P(d)$ is near zero, non-monotonic, and far weaker than language, with no scale-free decay. On protein sequence (Swiss-Prot, ProGen2), there is genuine long-range influence (expected from coevolutionary structure) but not language’s form: the power-law fit is poor, and the point-estimate exponent varies across model scale while the fit itself deteriorates ($r^2 = 0.36$ – 0.62 versus 0.96 for language; Supplementary Information), so

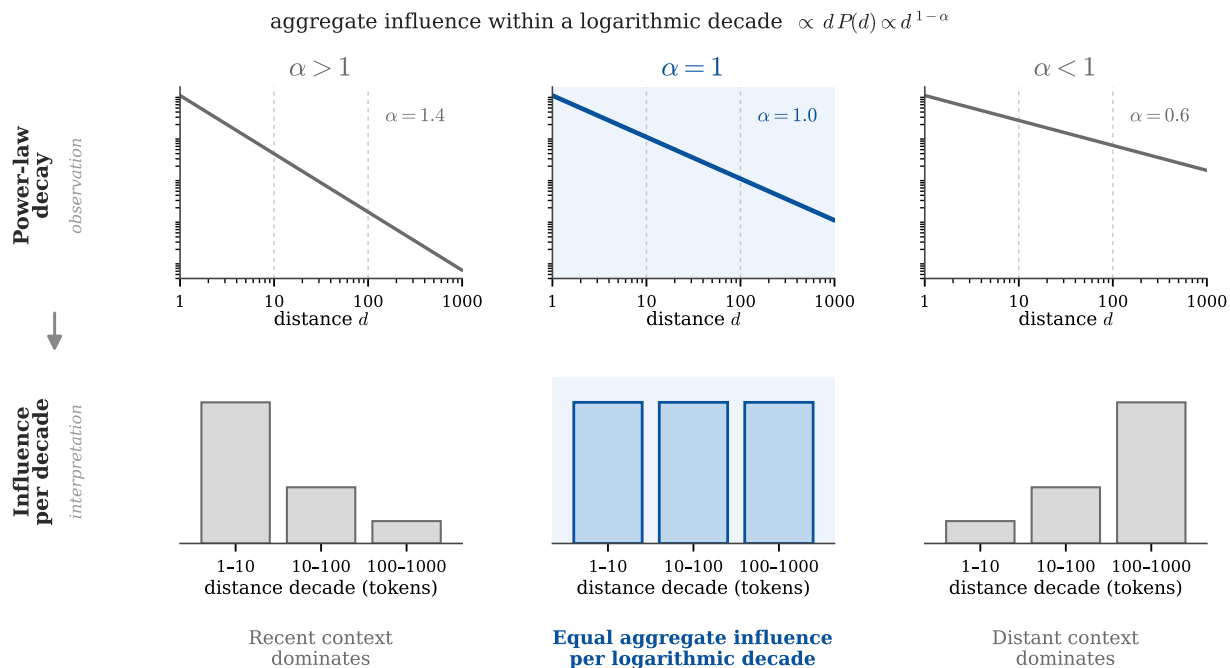


Figure 2: Persistence functions $P(d) \propto d^{-\alpha}$ at three exponents and the resulting per-decade influence (schematic). **Top row (observation):** the persistence law $P(d) \propto d^{-\alpha}$ on log-log axes, where the decay appears as a straight line of slope $-\alpha$. The three laws look nearly indistinguishable. **Bottom row (interpretation):** their sharply different consequences. The aggregate influence within a logarithmic decade of distance is proportional to $d P(d) \propto d^{1-\alpha}$, so for $\alpha > 1$ (left) aggregate influence is concentrated in recent context; for $\alpha < 1$ (right) it is dominated by distant context; and at $\alpha \approx 1$ (centre) each logarithmic decade of the past — 1-10, 10-100, 100-1,000 tokens back — contributes approximately equally, distributing influence uniformly across logarithmic timescales. The measured mean exponent ($\alpha = 1.04$) places human language at this boundary. The lower bands are a conceptual illustration, not data.

the curve is long-range but not scale-free. Long-range dependence is not unique to language. The distinguishing result is the combination of scale-free decay, a near-unity exponent, and cross-probe consistency: among the domains and probes tested, only human language shows all three, with the measurement protocol and the presence of long-range structure held in common. The regularity is a property of the linguistic sequence, not of the instrument.

2.5 Sequence, reversal, and content make distinguishable contributions to persistence

To separate the effects of disrupting, reversing, and dissolving discourse structure, we evaluated four context conditions on the same target windows (Figure 4): intact context; sentence-shuffled context, which preserves sentence content and within-sentence order while disrupting the discourse sequence; sentence-reversed context, which preserves the set of sentence adjacencies while reversing their order and target-relative positions; and token-shuffled context, which removes ordered structure altogether. Three contrasts follow. The sentence-reversal contrast (intact minus sentence-reversed) measures the loss associated with reversing the temporal organization of the prior discourse, while preserving sentence-internal order and the set of sentences; the sequence-permutation contrast (intact minus sentence-shuffled) isolates sentence-sequence organization; and the content-driven contrast (sentence-shuffled minus token-shuffled) estimates the contribution retained by sentence

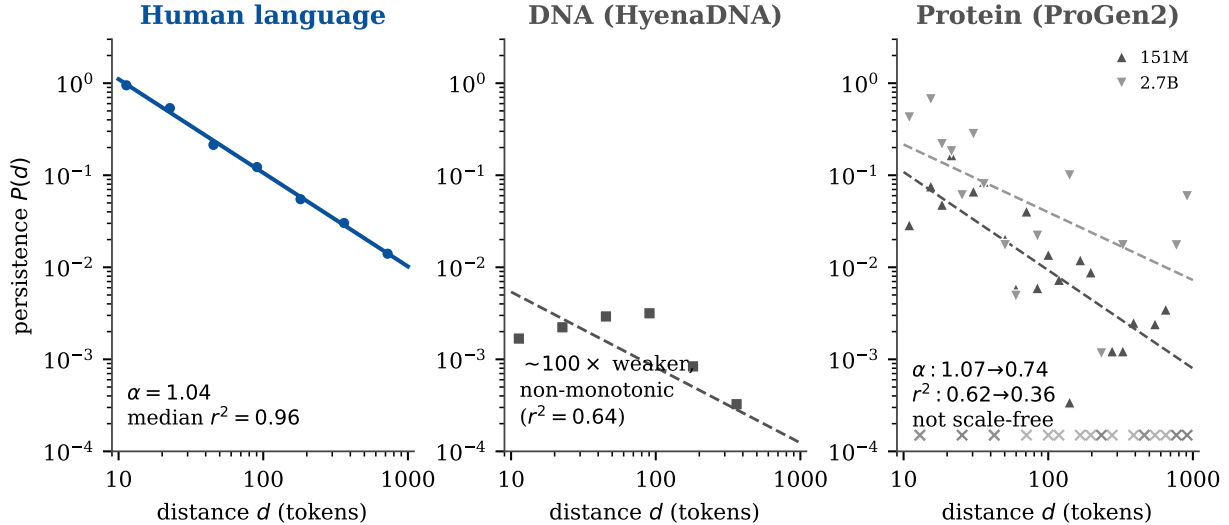


Figure 3: Order-specific persistence $P(d)$ for human language, DNA, and protein under the identical protocol. Order-specific persistence $P(d)$ under the identical CPF protocol, on log-log axes, for human language (aggregate of the ten corpora), DNA (HyenaDNA), and protein (ProGen2 at two scales, 151M and 2.7B). **Left:** language decays as a clean power law (mean $\alpha = 1.04$, median $r^2 = 0.96$; points lie on the fit). **Centre:** DNA is roughly two orders of magnitude weaker and non-monotonic, with no clean scale-free decay. **Right:** protein carries genuine long-range influence but is not scale-free — the fit is poor and the point estimate varies across model scale while power-law fit quality declines ($\alpha = 1.07 \rightarrow 0.74$, $r^2 = 0.62 \rightarrow 0.36$ from 151M to 2.7B); $\times$ marks distances where $P(d) \leq 0$. The discriminating signature is scale-freeness and exponent stability, not the mere presence of long-range structure. Among the domains and probes tested here, only human language exhibits the combination of clean scale-free decay, a near-unity exponent, and cross-probe stability, despite an identical measurement protocol and domain-native autoregressive probes across domains.

content once discourse ordering is removed.

Over their positive range, each contrast is approximately linear on log-log axes, with distinct fitted slopes. The sentence-reversal and sequence-permutation contrasts are steep and concentrated at short range (slopes -1.44 ± 0.48 and -1.26 ± 0.01 respectively, approaching zero by $d > 100$ tokens), whereas the content-driven contrast is shallow and carries the long-range tail (slope -0.78 ± 0.24). Sensitivity to sentence reversal and discourse-sequence permutation is therefore concentrated at short range, whereas sentence-level content carries the long-range tail.

2.6 Persistence is broadly distributed across prior sentences

We next asked whether persistence is concentrated in a small number of privileged prior sentences or broadly distributed across the prior context. We addressed this with a sentence-level ablation: for each target, we removed one prior sentence at a time and measured the resulting change in prediction.

The majority of prior sentences contribute positively to prediction at all distances examined. The proportion of contributing sentences declines gradually with distance, from approximately 90% at short range to 55–60% beyond 500 tokens, with no sharp transition or threshold (Figure 5). The magnitude of contribution is concentrated at recent positions (top-5 sentences account for 30–51% of total positive influence; Gini coefficient 0.78–0.90), but this concentration is attributable to recency: variation in mean influence by absolute position within the prior context is accounted for by distance

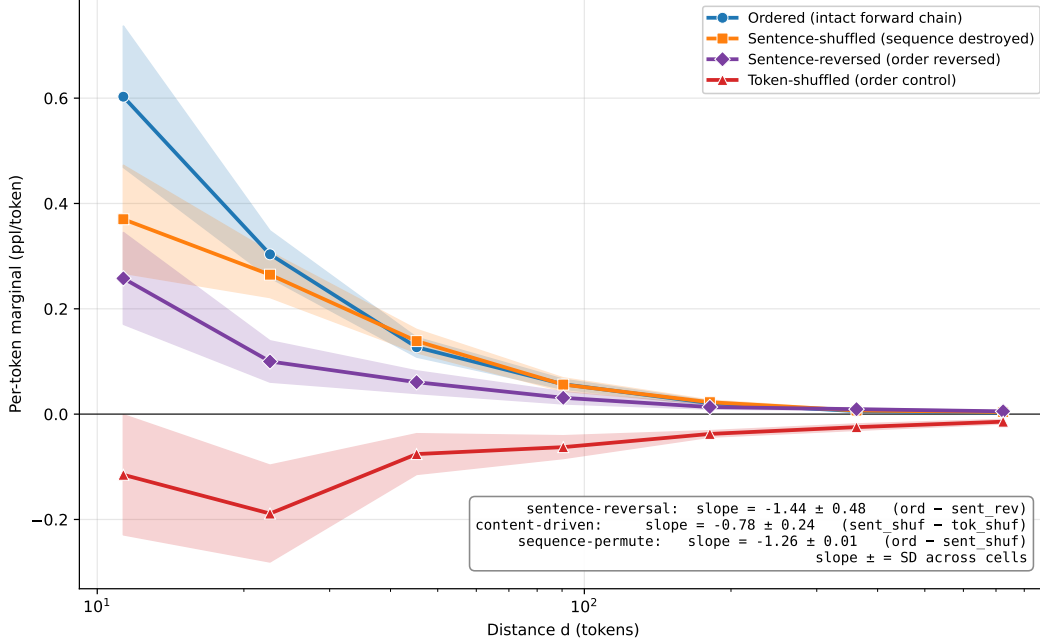


Figure 4: Per-token order-specific marginals under four context conditions. Per-token order-specific marginals for four context conditions on log-log axes, aggregated across eight cells: ordered (intact forward chain), sentence-shuffled (discourse sequence destroyed, sentence content preserved), sentence-reversed (sentence order reversed, so the set of adjacencies is preserved while their order and target-relative positions are reversed), and token-shuffled (ordered structure removed). Curve ribbons are mean $\pm$ SE across the eight cells. Three contrasts decompose $P(d)$: sentence-reversal (intact minus sentence-reversed; slope -1.44 ± 0.48), sequence-permutation (intact minus sentence-shuffled; slope -1.26 ± 0.01), and content-driven (sentence-shuffled minus token-shuffled; slope -0.78 ± 0.24); slope uncertainties are the SD of the per-cell slopes. The sentence-reversal and sequence-permutation contrasts are concentrated below ~ 100 tokens, whereas the content-driven contrast is shallow and carries the long-range tail. The reported quantities are log-log slopes, not values of α ; since $P(d) \propto d^{-\alpha}$ with $\alpha > 0$, a slope of -1.44 corresponds to a decay exponent $\alpha = 1.44$.

to the target, with no detectable residual effect of structural position (e.g., document opening). Persistence is therefore a distributed field of influence across the prior sequence, with magnitude graded smoothly by recency rather than localized to a small number of anchoring positions.

3 Discussion

We have identified a quantitative regularity, which we term the contextual persistence law: contextual influence in human language decays as an approximately scale-free power law, with a near-constant exponent across ten corpora, six language families, and both written and spoken modalities. Because that exponent is close to 1, contextual influence is distributed approximately uniformly across logarithmic timescales rather than concentrated at any one, a more specific statement than the mere absence of a horizon. The consistency of the exponent across such diverse samples makes this a candidate broadly cross-linguistic regularity of human language, in the same empirical sense that Zipf’s and Heaps’ laws are cross-linguistic regularities. In the hierarchy of statistical descriptions considered here — unit frequency (Zipf’s law), pairwise dependence across distance (long-range mutual information), and order-specific dependence — the contextual persis-

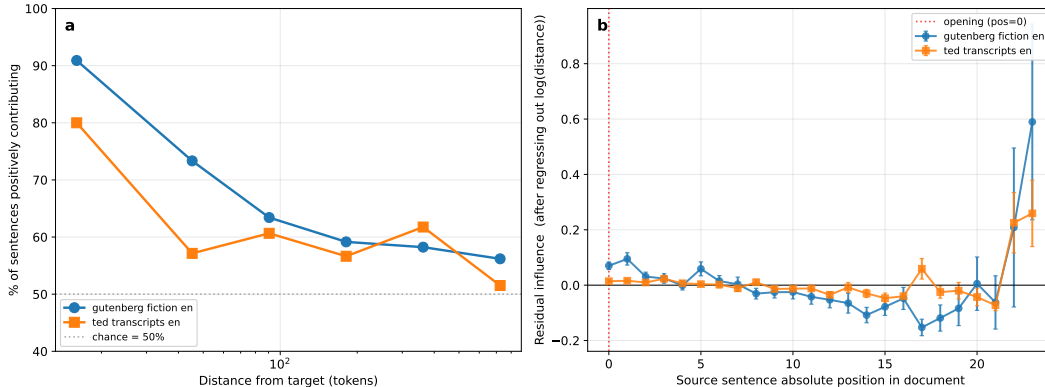


Figure 5: Proportion of prior sentences contributing to prediction as a function of distance.

Proportion of prior sentences whose removal degrades target prediction as a function of distance to the target. The proportion declines smoothly from $\sim 90\%$ within the first 32 tokens to $\sim 55\text{--}60\%$ beyond 500 tokens, with no sharp transition. The top-5 sentences account for 30–51% of total positive influence (Gini 0.78–0.90), but this concentration reflects recency, not a privileged structural role for any specific position.

tence law is the third, order-specific rung, extending the Zipfian program of reproducible scale-free regularities to the component of contextual dependence that remains once unit identity and co-occurrence are removed. We read it as a law to be explained rather than as an adjudication between mechanisms, and its main force is as a constraint. The evidence establishes a robust regularity; the principal question is why it exists. Any successful account of how human language is generated must explain why its statistical product lacks a detectable characteristic scale over this range. An architecture with a fixed maintenance horizon would generally be expected to produce an inflection in $P(d)$ near that horizon, of whatever size; we observe none across nearly two orders of magnitude. An account in which long-range coherence rests on a small number of privileged anchor positions would generally predict a concentrated rather than a distributed influence field; we observe broad, recency-graded distribution. We do not take these observations to settle how memory is organized during production; they characterize the product, not the process. But the law they describe is what every candidate process now has to reproduce.

The mean exponent we report ($\alpha = 1.04$, $SD = 0.15$) sits in a neighborhood that has been independently identified in two adjacent traditions in memory research. Anderson and Schooler [1991], examining the statistics of information demand in natural environments, reported power-law relationships between the odds a memory is needed and its history of past use, with exponents near 0.8 (for example, 0.73 with recency and 0.77 with frequency of prior occurrence, each with $r^2 > 0.98$). Kahana et al. [2002], examining associative decay in free recall via the lag-conditional response probability, fit power functions to each arm of the curve and reported a forward exponent of 0.82 ± 0.09 for younger adults. Each of these measurements was made by entirely different methods on entirely different data, and neither involves a language model: one is a statistical analysis of environmental information demand, the other a behavioural memory task. That two model-free measurements of human memory land in the same order-unity exponent range as our language-based measurement indicates that the scale-free form is neither an artefact of our instrument nor idiosyncratic to language, but a property that recurs across paradigms that are unambiguously about memory. The exponents are not identical: recall and environmental statistics show somewhat shallower decay than the linguistic estimate. We do not claim that a single mechanism generates all three. But their common scale-free form, with no characteristic bound detected in any of the three over the measured range, is the pattern a graded memory would naturally produce, and one

that a fixed-horizon architecture would not naturally predict.

This convergence extends to the mathematical form of forgetting itself. Forgetting across several human and animal memory tasks has been found to be better described by a power function than by exponential and other alternatives [Wixted and Ebbesen, 1991]: the same scale-free signature, with no characteristic timescale, that we find in the contextual persistence of language. That the order-specific structure of language should decay at a near-unity power-law rate, matching the power-law decay of the memory systems that must encode and retrieve it, is at least suggestive. It raises the possibility (which we advance as a hypothesis, not a finding) that linguistic structure is organized to align with, or exploit, the natural decay characteristics of human memory, so that the accessibility of prior content falls in step with its predictive value.

This suggests an ecological reading of the law. The CPF describes the statistical structure of the linguistic input stream itself, and a memory system that adapted rationally to that structure [Anderson and Schooler, 1991] would be expected to mirror its decay rather than impose an arbitrary one. The parallel is to natural-scene statistics, where the sensitivity of the visual system is matched to the $1/f$ spatial-frequency structure of the natural environment [Field, 1987, Simoncelli and Olshausen, 2001]: on this view the $1/d$ temporal structure of linguistic context is an environmental regularity to which the language processor may be tuned, and the shared near-unity exponent of language and of memory decay is what such tuning would produce.

This empirical picture aligns with a longer trajectory in cognitive psychology away from architecturally bounded views of memory and toward continuous and graded characterizations. Cowan’s embedded-processes account [Cowan, 2001] distinguishes a capacity-limited focus of attention from a broader set of activated long-term-memory representations; Ericsson and Kintsch’s long-term working memory framework [Ericsson and Kintsch, 1995] argues that skilled performers make routine use of long-term-memory structures during ongoing task performance, blurring the maintenance-retrieval boundary; and continuous-resource accounts in visual working memory [Ma et al., 2014] replace discrete-item architectures with graded distributions of representational precision. The CPF provides a direct quantitative measurement of an analogous continuity in natural language, observed at the scale of token-level sequential dependence and across naturalistic discourse rather than experimental task sequences. To the extent the law bears on this debate, it is consistent with that longer trajectory rather than a refutation of it.

The CPF characterizes the statistical structure of language, not directly the memory process that produced it: it is computed over text, and predictive structure in text need not imply that speakers and writers actively used long-range memory to generate it. What the data establish is a property of the human-produced signal, not of any particular generative mechanism. That property is, however, far more constrained than a generic statistical regularity. Because $P(d)$ is defined by subtracting a shuffled-token baseline, it isolates the component of contextual influence that depends on the order of prior words; the near-zero $P(d)$ on token-scrambled and frequency-matched synthetic sequences shows it cannot arise from vocabulary statistics or from the probe’s own calibration, and its replication across independently trained probes shows it is not an artefact of any single model. The long-range dependence therefore reflects genuine order-dependent structure in what humans produce, not lexical co-occurrence or measurement bias. A related objection, that written text is a static visual trace an author can edit and cross-reference offline unlike online cognition, is tempered by the modalities in which the law holds. The same signature appears in spontaneous conversational speech in Buckeye, where offline revision is impossible, and in the spoken delivery of prepared TED discourse. The Buckeye result is therefore especially important: it shows that the effect does not depend on written revision and is present in language generated under real-time constraints.

What the data do not establish is that production is implemented by a sequential process draw-

ing directly on arbitrarily distant prior material; that mechanistic claim the present measurements cannot adjudicate, and we do not make it. A natural question is whether autoregressive systems, which generate each element by conditioning on the available prior context, reproduce the same scale-free form under identical measurement. Establishing this would be a sufficiency result, showing that a purely sequential generation mechanism can produce the observed structure and placing the burden on fixed-horizon or non-sequential accounts to explain the absence of a characteristic scale by some other route; we leave that direct comparison to future work. Converting the present result from a property of the product into a claim about the producer, or the comprehender, will require online behavioural and neural evidence, and the law makes this directly testable because it predicts a specific quantity. The central prediction is that the cost of disrupting prior context should itself scale as $P(d)$: shuffling or replacing context in log-spaced windows (for example, tokens 10–20 back versus 100–110 back) should slow human reading and lengthen gaze durations on a downstream target [Hale, 2001, Levy, 2008, Smith and Levy, 2013] by amounts that fall off with distance at the near-unity rate, rather than dropping sharply at a working-memory horizon. Parallel predictions follow for the decay of proactive interference during comprehension and for the context-driven reduction of the N400 [Kutas and Federmeier, 2011] as a function of context distance, each expected to follow the same $\alpha \approx 1$ decay. We regard adjudicating these as the key open hypothesis the law motivates.

Human language appears to obey a simple quantitative law, the contextual persistence law, in which the influence of prior context is distributed approximately uniformly across logarithmic distances in human-produced language. Whether this regularity reflects properties of memory, discourse organization, planning, prediction, or communication is precisely the mechanistic question the law leaves open; whether it generalizes to non-linguistic sequential behaviours with extended temporal coherence (music improvisation, motor sequences, drawing) remains to be tested. But like other scaling laws in language, its value lies less in any mechanism it immediately reveals than in the constraint it imposes on every mechanism proposed thereafter: its existence is now an empirical target that any theory of language must account for.

4 Methods

4.1 Corpora

The long-range CPF was computed on ten corpora: English fiction (public-domain texts from Project Gutenberg, <https://www.gutenberg.org>), English news prose (the English/BBC subset of XL-Sum [Hasan et al., 2021]), English spontaneous speech (Buckeye Corpus of Conversational Speech [Pitt et al., 2007]), TED transcripts in English, German, French, Turkish, and Russian (OPUS TED2020 [Reimers and Gurevych, 2020, Tiedemann, 2012]), and literary prose in Japanese (Aozora Bunko) and Finnish (Project Gutenberg). Together these cover six language families (Germanic, Romance, Turkic, Slavic, Japonic, Uralic) and four production modes (written fiction, news prose, prepared speech, spontaneous speech). Per-corpus document counts (documents contributing at least one full-length target window) were: English fiction 60, English news 60, Buckeye 26, TED English 60, German 60, French 31, Turkish 12, Russian 60, Japanese literary 42, Finnish literary 38 — 449 documents in total. The complementary cross-language qualitative replication of the sign-flip pattern (Afro-Asiatic, Koreanic, Sino-Tibetan) was performed on Wikipedia and TED-transcript cells from a broader corpus inventory at shorter context lengths. Full per-corpus provenance — sources, identifiers, licenses, snapshot dates, and selection criteria — is given in Supplementary Information (Table S3), and preprocessing steps are described there.

4.2 Probe models

Two autoregressive language models served as probes: Llama-3.1-8B (base; **Meta-Llama-3.1-8B**) [Grattafiori et al., 2024] and Mistral-7B-v0.1 (**mistralai/Mistral-7B-v0.1**) [Jiang et al., 2023]. Neither was fine-tuned for this study. The probes were used only to compute conditional probability estimates over fixed token sequences; the language models themselves were not the object of study. Headline results were obtained on Llama-3.1-8B; the qualitative pattern was replicated on Mistral-7B for shared corpora as a probe-independence check.

4.3 Contextual persistence function

For each document, a single target region of 30 tokens was selected at the midpoint (50%) of document length. Context preceding the target was revealed in incrementally larger spans at log-spaced context lengths $c \in \{0, 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024\}$. At each context length, target perplexity was computed under intact context (the actual preceding c tokens, original order) and shuffled context (the same c tokens, random order). The shuffled baseline used a single random permutation of the prior-context tokens at each target and context length, drawn with a fixed seed so that the baseline is deterministic and reproducible and the same permutation is applied across probe models; the 30-token target itself was never permuted, and no sentence-boundary or special tokens were introduced into the shuffled span. Sensitivity of the fitted exponent to this single-permutation choice is quantified in Supplementary Information (*Robustness of the exponent: sensitivity to the shuffled permutation*), where the analysis is repeated with $K = 20$ independent permutations per target and context length. Per-distance marginals were obtained as the per-token change in perplexity across successive context lengths, $m_d = (\text{ppl}_{c_{i-1}} - \text{ppl}_{c_i}) / (c_i - c_{i-1})$, with distance indexed by the geometric mean $d = \sqrt{c_{i-1}c_i}$ of the interval. The CPF was defined as $P(d) = m_d^{\text{intact}} - m_d^{\text{shuffled}}$. The shuffle preserves the identity and composition of the prior context while destroying its order, so this subtraction separates the predictive benefit of intact order from the benefit available from the same token composition in scrambled order, and from probe-internal token-frequency calibration. Marginals were aggregated across documents within each corpus and binned by distance. Only documents with at least $1024 + 30 + 50$ tokens were included, ensuring a full-length context window and target for every measurement.

4.4 Functional-form fitting

The per-token order-specific gap was fit to five candidate functional forms (power law, exponential, stretched exponential, truncated power law, and quadratic-in-log, i.e. log-normal-in-distance) and ranked per corpus by the small-sample-corrected Akaike criterion (AICc); the full comparison is reported in Supplementary Information. Fits were performed in log space on the fit range $d \geq 10$ tokens, the first interval at which both ordered and shuffled bases are at least eight tokens; shorter intervals were excluded a priori because with only one or two context tokens there is no meaningful permutation, leaving the shuffled baseline, and hence $P(d)$, unstable at $d < 10$. Within this fixed fit range the aggregated (corpus-mean) $P(d)$ is positive at every distance for all ten language corpora, so no bins were dropped from any language fit; the positive-value requirement is therefore not a source of tail-selection bias for the headline result and becomes operative only for the non-language controls, where sign changes occur and we report the number of positive bins used (Figure 3).

4.5 Synthetic-sequence controls

To distinguish probe-internal calibration dynamics from genuine sequential dependence, two synthetic-sequence controls were constructed: uniform-vocabulary sequences (tokens drawn uniformly at random from the model vocabulary) and frequency-matched sequences (tokens drawn with empirical token-frequency probabilities matched to the natural corpora). The same CPF protocol was applied to both.

4.6 Non-language domain controls

To test whether the persistence law is specific to human language or a generic property of autoregressive probing over any structured sequence, the identical CPF protocol was applied to two non-language biological-sequence domains, each with a domain-native autoregressive probe. For DNA, the probe was HyenaDNA [Nguyen et al., 2023], a single-nucleotide autoregressive genomic language model, run at two scales (`hyenadna-medium-160k-seqlen` and `hyenadna-large-1m-seqlen`); sequences were non-overlapping ACGT windows from human reference chromosome 21 (GRCh38, Ensembl [Cunningham et al., 2022]). For protein, the probe was ProGen2 [Nijkamp et al., 2023], an autoregressive decoder protein language model, run at two scales (`progen2-small`, 151M; `progen2-large`, 2.7B); sequences were UniProtKB/Swiss-Prot proteins [The UniProt Consortium, 2023] restricted to the twenty standard amino acids. In both domains the protocol matched the language runs: a 30-residue target at the sequence midpoint, log-spaced context lengths capped at the model’s context window, an intact-versus-shuffled contrast, and power-law fitting on positive bins at $d \geq 10$. Because these ports are custom, probe faithfulness was verified before analysis: held-out per-residue perplexity was reproduced (ProGen2: 15.1 and 15.7 for the small and large models respectively, with per-protein spread and well below the ≈ 20 uniform-amino-acid baseline), and a short-range order-specific floor was confirmed. For protein, the exponent was estimated on a dense log-spaced grid (approximately 28 bins between $d = 10$ and 993) over 300 documents at each scale, with 95% confidence intervals from a 1,000-fold document bootstrap using the same estimator applied to the language corpora. Full domain-control results and diagnostics are reported in Supplementary Information.

4.7 Sentence-level decomposition

The effects of sentence-order reversal, discourse-sequence permutation, and within-sentence content were assessed by computing $P(d)$ under four context conditions on the same target windows: ordered (intact); sentence-shuffled (the prior context segmented at sentence boundaries and the sentences randomly permuted, with within-sentence token order preserved); sentence-reversed (the order of the sentences reversed, so that the sentence nearest the target is moved farthest from it, with within-sentence token order preserved), which preserves the set of sentence adjacencies while reversing their order and target-relative positions; and token-shuffled (all context tokens randomly permuted). From these we formed three contrasts, each fit by least squares on log-log axes over the positive bins at $d \geq 10$: the sentence-reversal contrast (ordered minus sentence-reversed), which measures the loss from reversing the temporal organization of the prior discourse; the sequence-permutation contrast (ordered minus sentence-shuffled), which isolates sentence-sequence organization; and the content-driven contrast (sentence-shuffled minus token-shuffled), which estimates the contribution retained by sentence content. Slopes are reported as per-cell means $\pm$ SD across cells. The decomposition was computed across eight cells: the long-range corpora excluding Buckeye (spontaneous speech lacks unambiguous sentence boundaries) and Russian (added to the headline analysis after the decomposition run). Figure 4 aggregates these eight cells.

4.8 Sentence-level ablation

For documents in two corpora (English fiction and English TED transcripts, 20 documents per corpus, 1024-token prior context), each prior sentence was individually removed and the resulting change in target perplexity was computed (leave-one-sentence-out). Per-sentence influence was characterized by sign (positive = removing the sentence increased target perplexity) and magnitude. The proportion of contributing sentences was computed in distance bins, and concentration metrics (Gini coefficient over per-sentence magnitudes; share of total positive influence in the top-5 sentences) were computed per document and aggregated. To test whether magnitude variation across prior-sentence positions reflects a privileged structural role over and above distance from the target, the full leave-one-sentence-out influence matrix was computed on a 15-document subset of each ablation corpus; variation in influence magnitude was accounted for by distance, with no detectable residual effect of structural position once distance was controlled.

Supplementary Information: functional-form robustness

Because scale-free claims are sensitive to the choice of fitting procedure and to competing functional forms, we treated functional-form selection as a robustness analysis rather than assuming a power law. For each corpus the per-token order-specific gap was fit, in log space, to five candidate forms: a power law ($\log y = a + b \log d$), an exponential ($\log y = a + bd$), a stretched exponential ($\log y = a - \beta d^\gamma$), a truncated power law ($\log y = a + b \log d - d/\lambda$), and a quadratic-in-log (log-normal-in-distance) form ($\log y = a + b \log d + c(\log d)^2$). Models were ranked per corpus by the small-sample corrected Akaike criterion (AICc), which penalizes the additional free parameters of the more flexible forms; each fit used the seven binned points with $d \geq 10$ and positive influence.

The power law is preferred in eight of the ten corpora (Table S1) and outperforms the pure exponential (the canonical fixed-scale alternative) in all ten, by ΔAICc ranging from +0.3 to +16.8 (median $\approx +14$); the exponential is never preferred. The truncated power law never improves on the plain power law: in six corpora its fitted decay term is non-negative (no cutoff at all), and in three of the remaining four the implied cutoff λ lies beyond the measured range. Only Buckeye spontaneous speech shows a truncated-power-law cutoff within range ($\lambda \approx 276$ tokens). Separately, and as a distinct model comparison, Buckeye is also the one corpus for which the stretched exponential is marginally preferred over the power law by AICc, while Japanese literary prose marginally prefers the quadratic-in-log form. Both the cutoff and the stretched-exponential preference point to mild downward curvature at the longest distances in this cell, but they are separate tests and should not be read as one explaining the other. In both non-power-law cases the power law remains a close second (margin < 2 AICc), the fitted stretched exponent stays well below one, and the decay remains heavy-tailed. The fitted power-law exponents are tightly clustered near 1 (range $\alpha = 0.75$ to 1.31; eight of ten within 0.93 to 1.20). The maximum-likelihood, Kolmogorov–Smirnov procedure of Clauset et al. [2009] addresses whether a *sample* is drawn from a heavy-tailed distribution rather than the present setting of regressing a response, $P(d)$, on distance; we therefore compared candidate decay functions using AICc. No alternative form removes the central observation: across the measured range the decay carries no characteristic scale.

Robustness of the exponent: units and heterogeneity

Two further checks bound the interpretation of the exponent. First, because $P(d)$ is defined as a difference of perplexities, and perplexity is exponential in the underlying log-loss, we recomputed the entire analysis with $P(d)$ defined in log-probability (nats) units (i.e., replacing each perplexity

Corpus	N	Preferred form	ΔAICc (exp – power)	α [95% CI]
Gutenberg (fiction, en)	60	power law	+12.9	1.05 [0.90, 1.33]
TED (en)	60	power law	+15.5	0.97 [0.87, 1.11]
TED (de)	60	power law	+15.5	1.03 [0.93, 1.16]
TED (fr)	31	power law	+9.4	1.31 [1.02, 1.57]
TED (tr)	12	power law	+5.0	0.75 [0.37, 1.02]
TED (ru)	60	power law	+16.8	1.02 [0.94, 1.13]
Literary prose (ja)	42	quadratic-in-log	+13.2	0.98 [0.84, 1.15]
Literary prose (fi)	38	power law	+14.9	0.93 [0.77, 1.07]
News (en)	60	power law	+13.6	1.16 [0.98, 1.37]
Buckeye (speech, en)	26	stretched exp.	+0.3	1.20 [0.82, 1.53]

Table S1: Functional-form comparison and per-corpus exponents across the ten long-range corpora (Table S1). N is the number of contributing documents. ΔAICc (exp – power) is positive whenever the power law is preferred over a pure exponential; it is positive in every corpus, and the power law is the AICc-preferred form in eight of ten (the two exceptions show mild downward curvature, with the power law a close second). Exponent 95% confidence intervals are from a document-level bootstrap ($B = 2000$); the wider intervals correspond to the smaller corpora (Turkish, Buckeye, French).

by its logarithm, an additive information quantity) and refit the power law. The scale-free *form* is robust to this choice: every corpus remains a near- $1/d$ power law and the ordering of corpora is preserved. The precise exponent, however, is not unit-invariant: the mean shifts from $\alpha = 1.04$ (perplexity) to $\alpha = 1.18$ (log-probability), a consistent offset of ≈ 0.14 present in every cell. We report perplexity-based values in the main text for continuity with the raw measurement and note that the order-unity exponent, and the associated approximate uniformity of influence across logarithmic timescales, hold in both unit conventions, with the exact value dependent on the choice.

Second, a document-level bootstrap ($B = 2000$ resamples of documents within each corpus) yields the per-corpus confidence intervals in Table S1. The between-corpus standard deviation of the ten point estimates (0.156) modestly exceeds the typical within-corpus bootstrap standard error (≈ 0.10). The permutation-sensitivity analysis below shows that part of this residual spread reflects noise in the single-permutation shuffled baseline rather than genuine linguistic variation: averaging over permutations narrows the apparent cross-corpus range. The exponent is therefore best described as clustered near 1, with limited evidence for residual corpus-level heterogeneity and the low- N corpora (Turkish, Buckeye, French) contributing most of both the apparent spread and the widest intervals.

Robustness of the exponent: sensitivity to the shuffled permutation

Because $P(d)$ subtracts a shuffled-context baseline, and the main analysis used a single random permutation of the prior context at each target and context length, we tested whether the fitted exponent depends on that choice with a permutation-seed sensitivity analysis. On a subset of up to 25 documents per corpus (all 26 for Buckeye), we redrew $K = 20$ independent permutations at each target and context length and recorded the target perplexity under every one, so that both the permutation-averaged baseline and the full across-permutation distribution of the exponent are available; permutation index 0 reused the original seed. Three results follow. First, the cross-corpus mean exponent is unchanged: averaging the shuffled baseline over the 20 permutations gives a mean $\alpha = 1.04$, and the mean of the 20 individual single-permutation estimates is $\alpha = 1.05$, both matching the single-permutation value of 1.04 in the main text. Second, averaging the baseline improves the power-law fits: corpora whose single-permutation fits were degraded by shuffle noise

rise to $r^2 \approx 0.97$ once the averaged baseline removes per-permutation fluctuation in the shuffled perplexity (TED German r^2 0.66 $\rightarrow$ 0.97; Finnish literary 0.55 $\rightarrow$ 0.97; TED French 0.82 $\rightarrow$ 0.97; TED Turkish 0.86 $\rightarrow$ 0.98). Third, the per-corpus exponent carries non-negligible permutation noise, concentrated in the smaller corpora: the across-permutation standard deviation of α reaches ≈ 0.20 (Finnish literary prose, English news) while the larger corpora vary by < 0.1 , and a single permutation can differ from the 20-permutation average by up to ≈ 0.28 (TED French). Averaging accordingly narrows the apparent cross-corpus spread, indicating that part of the between-corpus heterogeneity in Table S1 reflects permutation noise rather than genuine linguistic variation. No corpus-level conclusion depends on the chosen permutation, and the near-unity, scale-free signature is unchanged. Per-corpus exponents under the single-permutation and $K = 20$ averaged baselines are given in Table S2.

Corpus	α (single perm.)	α (avg., $K = 20$)	r^2 (avg.)	SD_α (perms)
Gutenberg (fiction, en)	1.15	1.10	0.93	0.09
TED (en)	1.04	0.97	0.96	0.09
TED (de)	1.09	1.07	0.97	0.11
TED (fr)	1.43	1.16	0.97	0.12
TED (tr)	0.75	0.90	0.98	0.07
Literary prose (ja)	0.92	0.99	0.98	0.09
Literary prose (fi)	0.71	0.87	0.97	0.20
News (en)	1.22	1.19	0.95	0.18
Buckeye (speech, en)	1.20	1.11	0.95	0.16

Table S2: Permutation-seed sensitivity of the per-corpus decay exponent (Table S2), Llama-3.1-8B probe, on a subset of up to 25 documents per corpus (all 26 for Buckeye). “Single perm.” reuses the original seed; “avg., $K = 20$ ” averages the shuffled baseline over twenty independent permutations per target and context length; SD_α is the standard deviation of the exponent across the twenty permutations. Averaging leaves the cross-corpus mean at $\alpha = 1.04$ while raising the poorer single-permutation fits to $r^2 \approx 0.97$. The Russian TED cell, computed with a separate pipeline in the main analysis, was not included in this check.

Corpus sources and provenance

Table S3 lists the source, license, and snapshot or version for each of the ten long-range corpora; preprocessing and selection are summarized here. English fiction comprises public-domain novels from Project Gutenberg (catalogue `pg_catalog.csv`; plain-text ebooks), selected as English fiction by Library of Congress class (PR, PS, PZ) or fiction subject headings, ordered by ascending Gutenberg ID to favour canonical works, with a per-author cap and rejection of verse, drama, and OCR artefacts, then segmented into $\approx 3,000$ -word chunks. English news is the English (BBC) portion of XL-Sum [Hasan et al., 2021]. English spontaneous speech is the Buckeye Corpus [Pitt et al., 2007, 2005], retaining interviewee turns. TED transcripts (English, German, French, Turkish, Russian) are from the OPUS TED2020 monolingual release [Reimers and Gurevych, 2020, Tiedemann, 2012] (version v1), retaining talks of at least 900 words after a per-language junk-ratio filter, one segment per talk. Japanese literary prose comprises public-domain texts from Aozora Bunko (Nippon Decimal Classification 913/914/915; 21 authors, 42 texts) and Finnish literary prose public-domain texts from Project Gutenberg (19 authors, 38 texts); both were captured in a snapshot dated 2026-05-01. The cross-language qualitative replication (Afro-Asiatic, Koreanic, Sino-Tibetan) drew additionally on Wikipedia (dumps current at the time of analysis; CC BY-SA 3.0), sampled at a 500-token minimum after removing markup, references, and infoboxes. Tokenization used each probe’s native tokenizer throughout.

Corpus	Source (reference)	License	Snapshot / version
English fiction	Project Gutenberg	Public domain (US)	2026 snapshot
English news	XL-Sum, BBC subset [Hasan et al., 2021]	See source	csebuetnlp/xlsum
English speech	Buckeye [Pitt et al., 2007, 2005]	Free for research	2007 release
TED (en, de, fr, tr, ru)	OPUS TED2020 [Reimers and Gurevych, 2020, Tiedemann, 2012]	See source	v1
Literary prose (ja)	Aozora Bunko	Public domain	2026-05-01
Literary prose (fi)	Project Gutenberg	Public domain (US)	2026-05-01
Wikipedia (replication)	Wikimedia dumps	CC BY-SA 3.0	Dump at analysis time

Table S3: Sources and provenance for the language corpora (Table S3). “See source” indicates the distributing repository states the terms of use; no separate license file was recorded at ingestion. Snapshot dates are given where recorded; the Project Gutenberg fiction set was captured in the same 2026 collection window but without a per-file date stamp.

Data and code availability

Analysis code, corpus manifests, per-corpus persistence curves, and the figure-generation pipeline will be made publicly available in a repository with an assigned DOI upon publication; they are available from the author on reasonable request in the interim.

Funding

The author received no specific funding for this work.

Competing interests

The author declares no competing interests.

References

- Eduardo G. Altmann and Martin Gerlach. Statistical laws in linguistics. *Creativity and Universality in Language*, pages 7–26, 2016. doi: 10.1007/978-3-319-24403-7_2.
- John R. Anderson and Lael J. Schooler. Reflections of the environment in memory. *Psychological Science*, 2(6):396–408, 1991. doi: 10.1111/j.1467-9280.1991.tb00174.x.
- Albert-László Barabási. The origin of bursts and heavy tails in human dynamics. *Nature*, 435(7039):207–211, 2005. doi: 10.1038/nature03459.
- John M. Beggs and Dietmar Plenz. Neuronal avalanches in neocortical circuits. *Journal of Neuroscience*, 23(35):11167–11177, 2003. doi: 10.1523/JNEUROSCI.23-35-11167.2003.
- Aaron Clauset, Cosma Rohilla Shalizi, and M. E. J. Newman. Power-law distributions in empirical data. *SIAM Review*, 51(4):661–703, 2009. doi: 10.1137/070710111.

- Nelson Cowan. The magical number 4 in short-term memory: A reconsideration of mental storage capacity. *Behavioral and Brain Sciences*, 24(1):87–114, 2001. doi: 10.1017/S0140525X01003922.
- Fiona Cunningham, James E. Allen, Jamie Allen, et al. Ensembl 2022. *Nucleic Acids Research*, 50(D1):D988–D995, 2022. doi: 10.1093/nar/gkab1049.
- Werner Ebeling and Thorsten Pöschel. Entropy and long-range correlations in literary English. *Europhysics Letters*, 26(4):241–246, 1994. doi: 10.1209/0295-5075/26/4/001.
- K. Anders Ericsson and Walter Kintsch. Long-term working memory. *Psychological Review*, 102(2):211–245, 1995. doi: 10.1037/0033-295X.102.2.211.
- David J. Field. Relations between the statistics of natural images and the response properties of cortical cells. *Journal of the Optical Society of America A*, 4(12):2379–2394, 1987. doi: 10.1364/JOSAA.4.002379.
- David L. Gilden. Cognitive emissions of 1/f noise. *Psychological Review*, 108(1):33–56, 2001. doi: 10.1037/0033-295X.108.1.33.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, et al. The Llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- John Hale. A probabilistic Earley parser as a psycholinguistic model. In *Proceedings of the Second Meeting of the North American Chapter of the Association for Computational Linguistics (NAACL)*, pages 1–8, 2001.
- Tahmid Hasan, Abhik Bhattacharjee, Md. Saiful Islam, Kazi Mubasshir, Yuan-Fang Li, Yong-Bin Kang, M. Sohel Rahman, and Rifat Shahriyar. XL-Sum: Large-scale multilingual abstractive summarization for 44 languages. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 4693–4703, 2021. doi: 10.18653/v1/2021.findings-acl.413.
- Harold Stanley Heaps. Information retrieval: Computational and theoretical aspects. *Academic Press*, 1978.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7B. *arXiv preprint arXiv:2310.06825*, 2023.
- Michael J. Kahana, Marc W. Howard, Franklin Zaromb, and Arthur Wingfield. Age dissociates recency and lag-recency effects in free recall. *Journal of Experimental Psychology: Learning, Memory, and Cognition*, 28(3):530–540, 2002. doi: 10.1037/0278-7393.28.3.530.
- Christopher T. Kello, Gordon D. A. Brown, Ramon Ferrer-i Cancho, John G. Holden, Klaus Linkenkaer-Hansen, Theo Rhodes, and Guy C. Van Orden. Scaling laws in cognitive sciences. *Trends in Cognitive Sciences*, 14(5):223–232, 2010. doi: 10.1016/j.tics.2010.02.005.
- Marta Kutas and Kara D. Federmeier. Thirty years and counting: Finding meaning in the N400 component of the event-related brain potential (ERP). *Annual Review of Psychology*, 62:621–647, 2011. doi: 10.1146/annurev.psych.093008.131123.
- Roger Levy. Expectation-based syntactic comprehension. *Cognition*, 106(3):1126–1177, 2008. doi: 10.1016/j.cognition.2007.05.006.

- Henry W. Lin and Max Tegmark. Critical behavior in physics and probabilistic formal languages. *Entropy*, 19(7):299, 2017. doi: 10.3390/e19070299.
- Klaus Linkenkaer-Hansen, Vadim V. Nikouline, J. Matias Palva, and Risto J. Ilmoniemi. Long-range temporal correlations and scaling behavior in human brain oscillations. *Journal of Neuroscience*, 21(4):1370–1377, 2001. doi: 10.1523/JNEUROSCI.21-04-01370.2001.
- Wei Ji Ma, Masud Husain, and Paul M. Bays. Changing concepts of working memory. *Nature Neuroscience*, 17(3):347–356, 2014. doi: 10.1038/nn.3655.
- Marcelo A. Montemurro and Pedro A. Pury. Long-range fractal correlations in literary corpora. *Fractals*, 10(4):451–461, 2002. doi: 10.1142/S0218348X02001257.
- Jerome L. Myers and Edward J. O’Brien. Accessing the discourse representation during reading. *Discourse Processes*, 26(2–3):131–157, 1998. doi: 10.1080/01638539809545042.
- Eric Nguyen, Michael Poli, Marjan Faizi, Armin Thomas, Callum Birch-Sykes, Michael Wornow, Aman Patel, Clayton Rabideau, Stefano Massaroli, Yoshua Bengio, Stefano Ermon, Stephen A. Baccus, and Christopher Ré. HyenaDNA: Long-range genomic sequence modeling at single nucleotide resolution. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- Erik Nijkamp, Jeffrey A. Ruffolo, Eli N. Weinstein, Nikhil Naik, and Ali Madani. ProGen2: Exploring the boundaries of protein language models. *Cell Systems*, 14(11):968–978, 2023. doi: 10.1016/j.cels.2023.10.002.
- Mark A. Pitt, Keith Johnson, Elizabeth Hume, Scott Kiesling, and William Raymond. The Buckeye corpus of conversational speech: Labeling conventions and a test of transcriber reliability. In *Speech Communication*, volume 45, pages 89–95, 2005. doi: 10.1016/j.specom.2004.09.001.
- Mark A. Pitt, Laura Dilley, Keith Johnson, Scott Kiesling, William Raymond, Elizabeth Hume, and Eric Fosler-Lussier. Buckeye corpus of conversational speech (2nd release). *Department of Psychology, Ohio State University (Distributor)*, 2007. www.buckeyecorpus.osu.edu.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI Technical Report*, 2019.
- Nils Reimers and Iryna Gurevych. Making monolingual sentence embeddings multilingual using knowledge distillation. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4512–4525, 2020. doi: 10.18653/v1/2020.emnlp-main.365.
- Eero P. Simoncelli and Bruno A. Olshausen. Natural image statistics and neural representation. *Annual Review of Neuroscience*, 24:1193–1216, 2001. doi: 10.1146/annurev.neuro.24.1.1193.
- Nathaniel J. Smith and Roger Levy. The effect of word predictability on reading time is logarithmic. *Cognition*, 128(3):302–319, 2013. doi: 10.1016/j.cognition.2013.02.013.
- The UniProt Consortium. UniProt: the universal protein knowledgebase in 2023. *Nucleic Acids Research*, 51(D1):D523–D531, 2023. doi: 10.1093/nar/gkac1052.
- Jörg Tiedemann. Parallel data, tools and interfaces in OPUS. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC)*, pages 2214–2218, 2012.
- Teun A. van Dijk and Walter Kintsch. *Strategies of Discourse Comprehension*. Academic Press, 1983.

- 645 Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez,
646 Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information*
647 *Processing Systems (NeurIPS)*, volume 30, 2017.
- 648 John T. Wixted and Ebbe B. Ebbesen. On the form of forgetting. *Psychological Science*, 2(6):
649 409–415, 1991. doi: 10.1111/j.1467-9280.1991.tb00175.x.
- 650 George Kingsley Zipf. *Human Behavior and the Principle of Least Effort*. Addison-Wesley, Cam-
651 bridge, MA, 1949.