

Architecture design:5 points

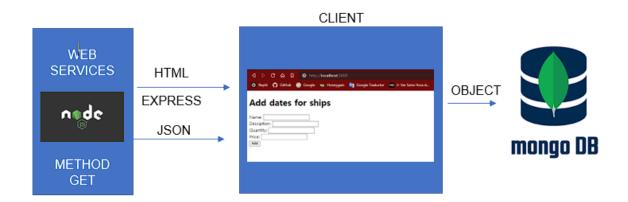

Form design:5 points. (Sketch in paper or using a design tool)

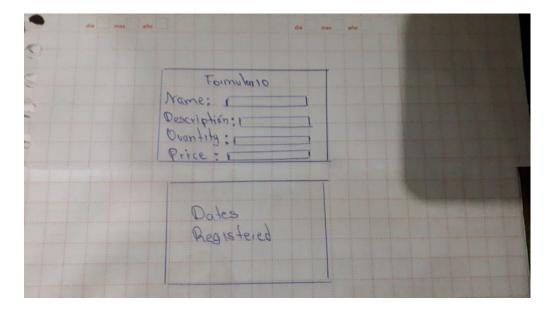

Web client (HTML):5 points.

```
Q Peplit G Google W Honeygain Google Traductor HD ▷ Ver Serie Hora d...
```

Add dates

```
• index

Name:

Desciption:

Quantity:

Price:

Add
```

```
rc > views > partials > ships > \infty \text{ shipsforms.hbs > \infty \text{ form > \infty \text{ button}}}

\[
\text{ \left(form action="/ships/add" method="POST">}

\text{ \left(div)}

\text{ \left(label for="name" > Name: \left(label) \\
\text{ \left(form)}

\text{ \left(div)}

\text{ \left(label for="description" > Desciption: \left(label) \\
\text{ \left(label for="description" id="description" />}

\text{ \left(div)}

\text{ \left(label for="quantity" > Quantity: \left(label) \\
\text{ \left(label)}

\text{ \left(label for="quantity" > Quantity: \left(label) \\
\text{ \left(label)}


\text{ \left(label for="price" > Price: \left(label) \\
\text{ \left(label)}

\text{ \left(label for="price" > Price: \left(label) \\
\text{ \left(label)}

\text{ \left(label
```

JSP(node) page working:.5 points.

insertando datos



Add dates for ships

Name:	ships	
Desciption: ships		
Quantit	ty: 300	
Price: 4	400	
Add		


```
PS D:\WodeJS Proyects\ZambranoShips\Unit1> npm run dev
npm WARN config global `--global`, `--local` are deprecated. Use `--location=global` instead.

> unit1@1.0.0 dev
> nodemon src/index.js --exec babel-node

[nodemon] 2.0.18
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s: *.*
[nodemon] watching extensions: js,mjs,json
[nodemon] starting `babel-node src/index.js`
Server port on 3000
DB connected to Ship
```

Database data:5 points.

visualización de datos en mongodb atlas

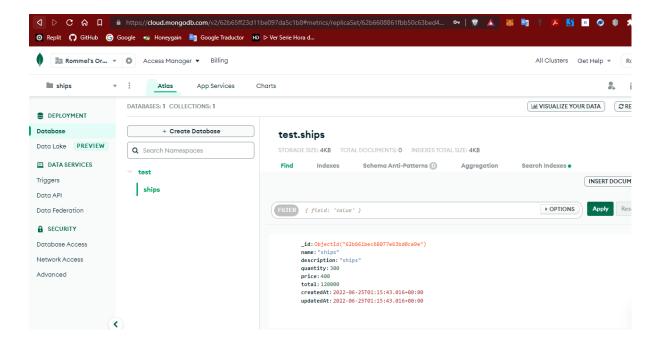

URI MONGO:

mongodb+srv://ships:ships@cluster0.rw3cl.mongodb.net/?retryWrites=
true&w=majority

Clean Code:5 points.