

7. CEDEÑO CUENCA ANDRES ISAIAS


```

$ mongo mongodb-srv/cv < +
Please enter a MongoDB connection string (Default: mongodb://localhost/): mongodb+srv://cedeno:cedeno@cluster0.arabu7a.s
onogdb.net/
Please enter a MongoDB connection string (Default: mongodb://localhost/): mongodb+srv://cedeno:cedeno@cluster0.arabu7a.s
onogdb.net/
Current Mongosh Log ID: 6084cc04c31c2fb315cc8987
Connecting to: mongodb+srv://<credentials>@cluster0.arabu7a.mongodb.net/?appName=mongosh+2.2.10
Using Mongosh: 7.0.11
                2.2.10


For mongosh info see: https://docs.mongodb.com/mongosh-shell/

Atlas atlas-mkszf1-shard-0 [primary] test> use opp
switched to db opp
Atlas atlas-mkszf1-shard-0 [primary] opp> db.student.insertOne({ "nombre": "Pepe", "edad": 25, "ocupacion": "Vendedor" }
)
acknowledged: true
insertedId: ObjectId('6084cca6c31c2fb315cc8988')
Atlas atlas-mkszf1-shard-0 [primary] opp>

```

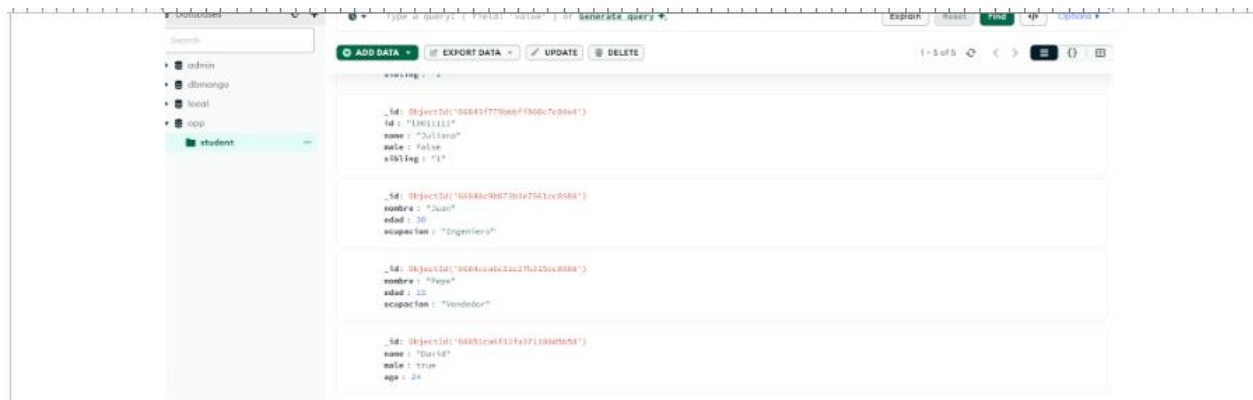js:

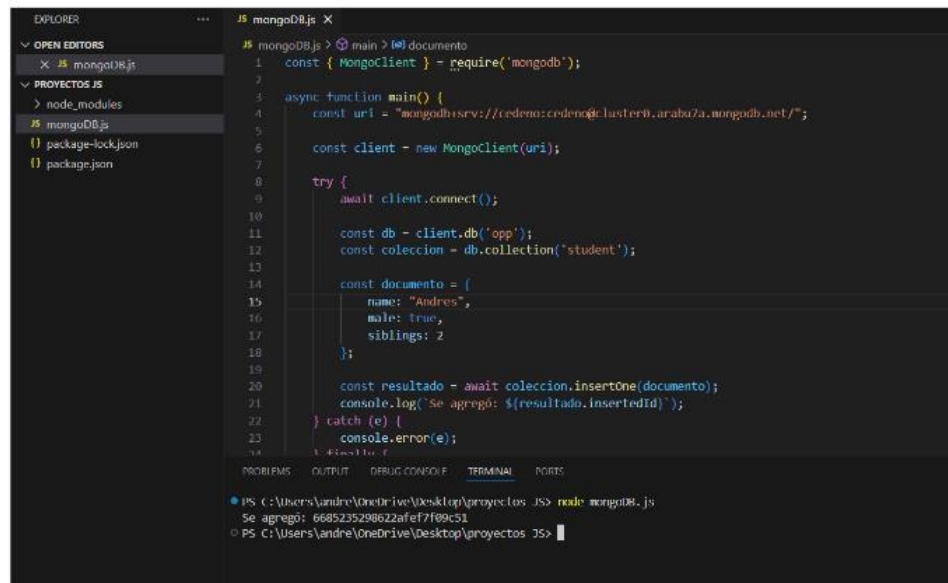

My Queries

Performance

Databases

Search

index

sharding

index

zoo

student

Documents

Aggregations

Schema

Indexes

Validation

Type a query (field: 'value') or Generate query

ADD DATA

EXPORT DATA

UPDATE

DELETE

1-6 of 6

name: 'John'
strings: '1'

_id: ObjectId('6684bc0973d9c736cc29887')
name: 'John'
age: 30
occupation: 'Engineer'

_id: ObjectId('6684bc0973d9c736cc29887')
name: 'John'
age: 30
occupation: 'Engineer'

_id: ObjectId('6684bc0973d9c736cc29887')
name: 'John'
age: 30
occupation: 'Engineer'

_id: ObjectId('6684bc0973d9c736cc29887')
name: 'John'
age: 30
occupation: 'Engineer'