

DCCO



Second Semester


**EXAM REVIEW**

OOP - 23217

Professor: Edison Lascano

2025-05-27

1. Andrade Julio Aaron

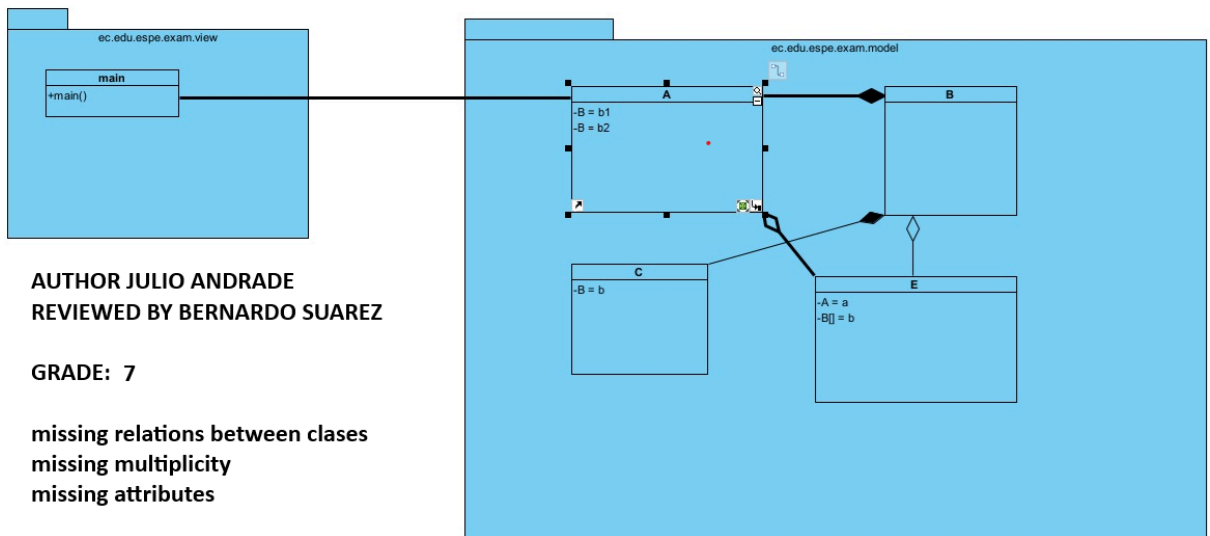

```
JS SoccerPlayer.js x JS pencil.js Calibri 20 N A S U P = = = Ke
C: > Users > G300 > AppData > Local > Temp > c1a62a94-fc6a-431a-bec2-ca7f657c14ff_exam.zip.4ff > exam > JS pencil.js > Pencil
1  const fs = require('fs');
2  const readline = require('readline');
3
4  class Pencil {
5      constructor(id, brand, color, length) {
6          this.id = id;
7          this.brand = brand;
8          this._color = color;
9          this._length = length;
10     }
11
12     get brand() {
13         return this._brand;
14     }
15
16     get color() {
17         return this._color;
18     }
19
20     get length() {
21         return this._length;
22     }
23
24     set brand(newBrand) {
25         this._brand = newBrand;
26     }
27
28     set color(newColor) {
29         this._color = newColor;
30     }
31
32     set length(newLength) {
33         this._length = newLength;
34     }
35 }
```

**TOTAL 23**

2. Astudillo Gerald Ortega



```
EXPLORER
  soundmixer.py
  mixer_settings.py
  soundmixer
  mixer_settings
  soundmixer
  mixer_settings

class SoundMixer:
    def __init__(self):
        self._equalizer = Equalizer()

    def to_dict(self):
        return {
            "volume": self._volume,
            "balance": self._balance,
            "equalizer": self._equalizer.to_dict()
        }

    def from_dict(self, data):
        self._volume = int(data["volume"])
        self._balance = int(data["balance"])
        self._equalizer.from_dict(data)

class CSVHandler:
    def save_to_csv(file_path, sound_mixer):
        with open(file_path, mode="w", newline="") as file:
            writer = csv.DictWriter(file, fieldnames=["volume", "balance", "bass", "mid", "treble"])
            writer.writeheader()
            writer.writerow(sound_mixer.to_dict())

    def load_from_csv(file_path):
        with open(file_path, mode="r") as file:
            reader = csv.DictReader(file)
            for row in reader:
                equalizer = Equalizer()
                equalizer.from_dict(row)
                mixer = SoundMixer()
                mixer.from_dict(row)
                return mixer


equalizer = Equalizer(bass=5, mid=1, treble=2)


[{"bass": 5, "mid": 1, "treble": 2}]
PS C:\Users\G30M\Downloads> soundmixer & C:\Users\G30M\AppData\Local\Microsoft\WindowsApps\python3.11.exe c:\Users\G30M\Downloads\soundmixer\soundmixer.py
Traceback (most recent call last):
  File "c:\Users\G30M\Downloads\soundmixer\soundmixer.py", line 100, in module:
    print('mixer: ' + loaded_mixer.get_volume())
TypeError: can only concatenate str (not "int") to str
PS C:\Users\G30M\Downloads> soundmixer & C:\Users\G30M\AppData\Local\Microsoft\WindowsApps\python3.11.exe c:\Users\G30M\Downloads\soundmixer\soundmixer.py
-58
[{"bass": 5, "mid": 1, "treble": 2}]
PS C:\Users\G30M\Downloads> soundmixer
```

DIAGRAMS: 7/10  
FOLDERS: 8/10  
CLEANCODE: 8/10  
RUN: 7/10  
READ: 6/10



36/50

3. Bonilla David Alejandro

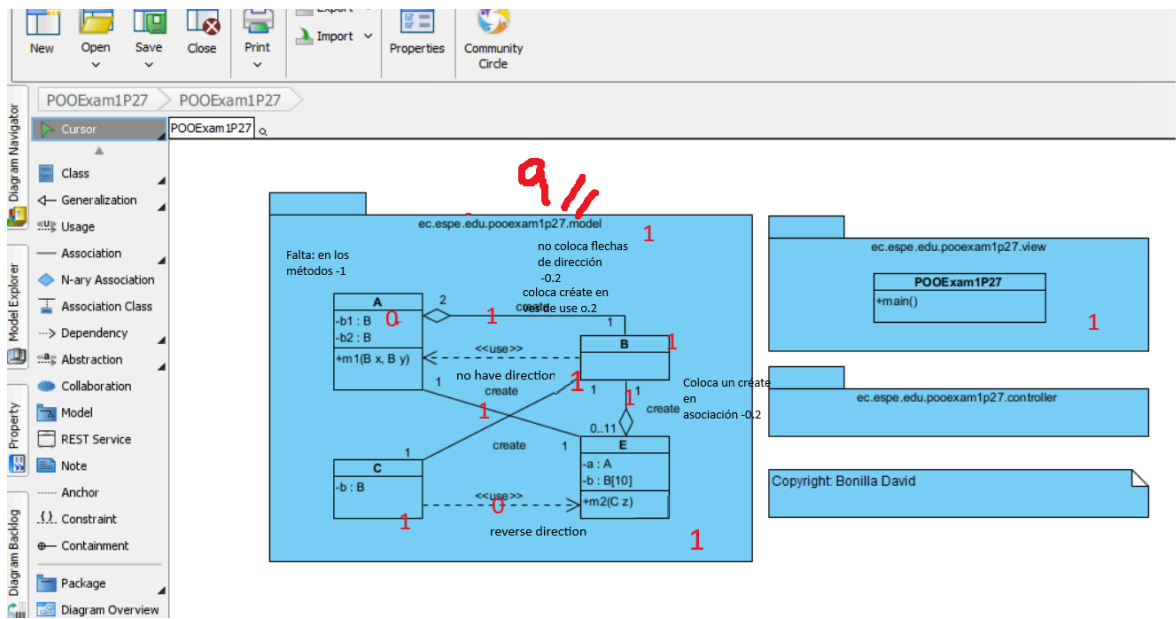

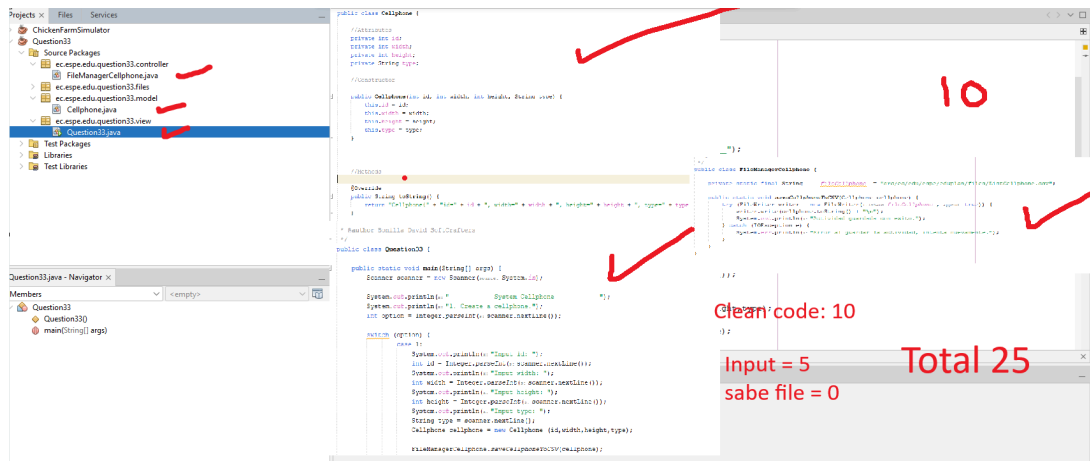

#### 4. Caizapanta Tammy Amarilis

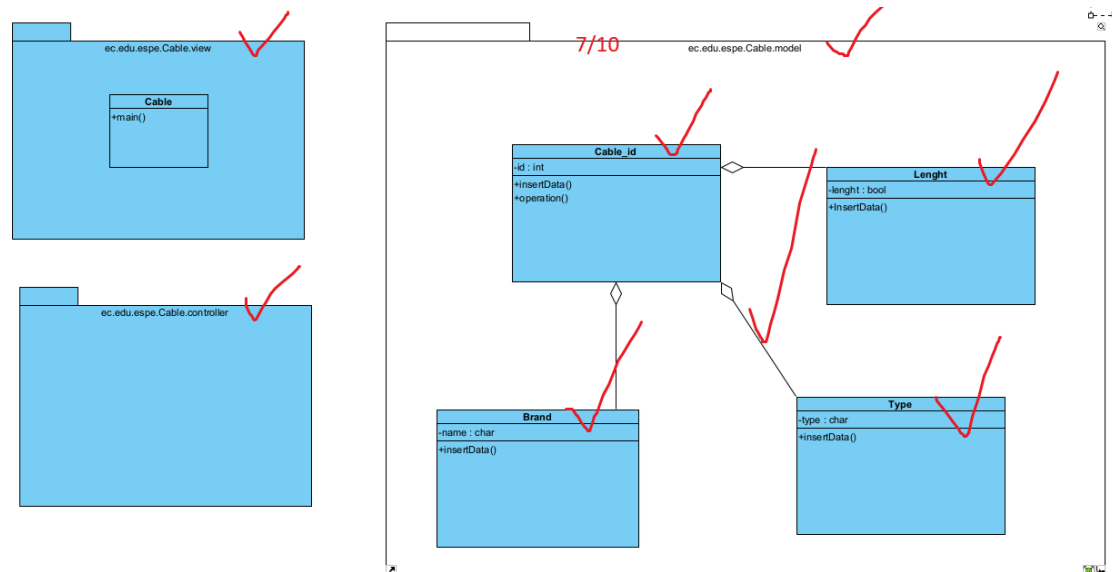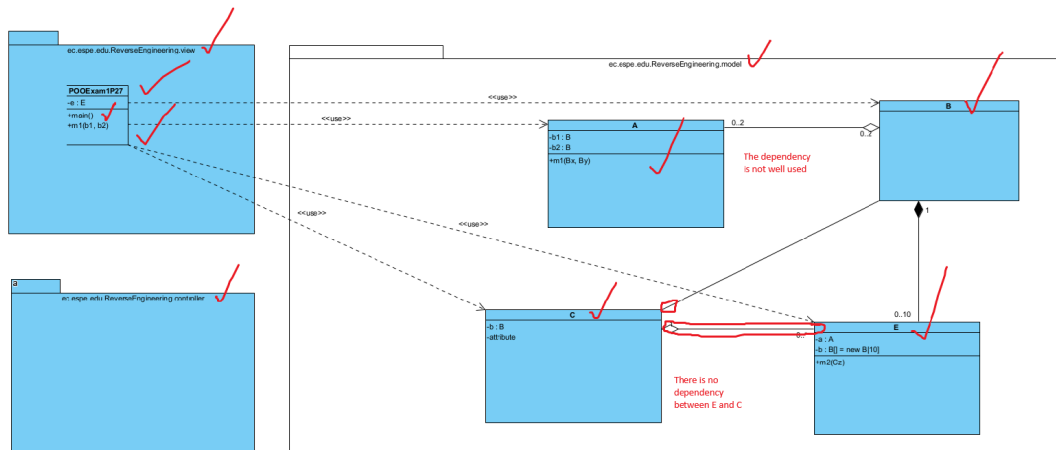


RUN AND DEBUG


view.py | model.py | controller.py

1 #author:Tammy Caizapanta  
2  
3 from dataclasses import dataclass  
4  
5 @dataclass  
6 class Cable:  
7 def \_\_init\_\_(self, cable\_id,brand,length,type):  
8 self.cable\_id=cable\_id  
9 self.brand=brand  
10 self.length=length  
11 self.type=type  
12  
13 def \_\_str\_\_(self):  
14 return f"Chicken({id={self.cable\_id}, brand={self.brand}, length={self.length}, type={self.type}})"  
15  
16 def insertData(self):  
17 print(f"Cable id -> {self.cable\_id}")  
18 print(f"Cable brand -> {self.brand}")  
19 print(f"Cable length -> {self.length}")  
20 print(f"Cable type -> {self.type}")  
21  
22 def showData(self):  
23 print(f"Cable id -> {self.cable\_id}")  
24 print(f"Cable brand -> {self.brand}")  
25 print(f"Cable length -> {self.length}")  
26 print(f"Cable type -> {self.type}")

Diagram: 7/10  
Folders: 7/10  
CleanCode: 8/10  
Run: 5/10  
READ: 5/10  
32/50

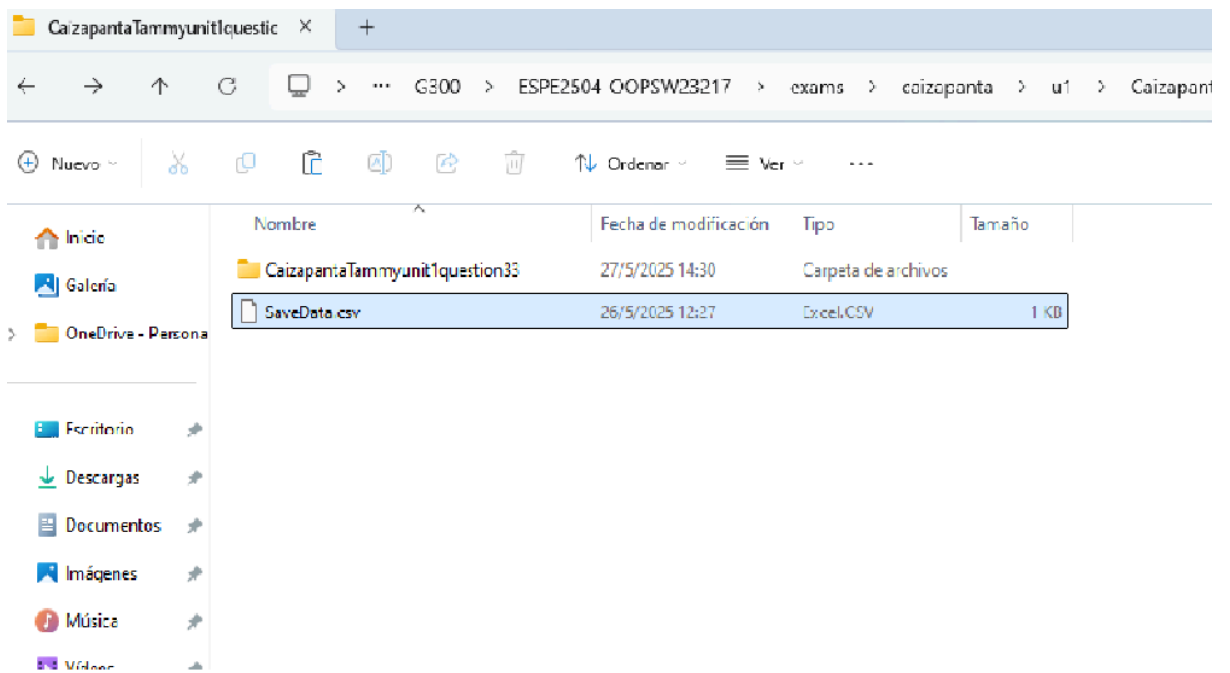

5. Chicaiza Michael Alexis

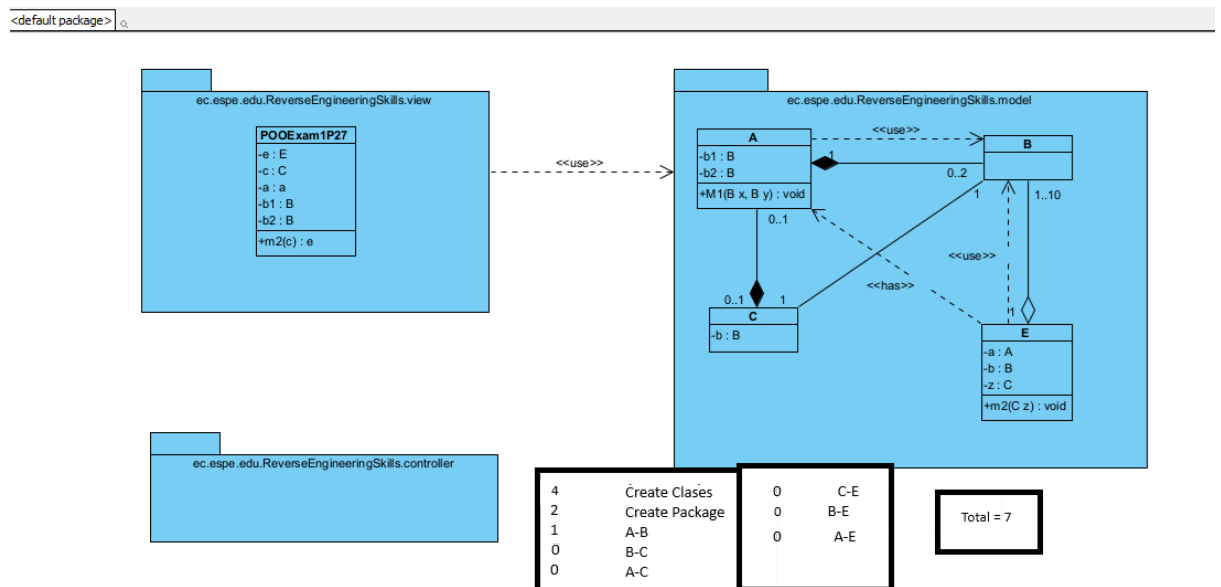

Inspector: Bonilla David

```
Bienvenido | modelosdiscretos.py | MODELOS.py | JS compactdis.js X
JS compactdis.js > ...
4  class CompactDisc {
44 }
45
46  class ReadDisc {
47    static read(filename) {
48      try {
49        const jsonString = fs.readFileSync(filename, 'utf8');
50        const discData = JSON.parse(jsonString);

```

PROBLEMAS SALIDA CONSOLA DE DEPURACIÓN TERMINAL PUERTOS

```
PS C:\Users\chica\Downloads> node compactdisPS C:\Users\chica\Downloads> node compactdis.js
Enter brand for disc 1: sony
Enter capacity in MB for disc 1: 700
Enter used space in MB for disc 1: 300
Enter type (e.g., CD-R, CD-RW) for disc 1: c
d-r
Do you want to add another disc? (yes/no): y
es
Enter brand for disc 2: no
Enter capacity in MB for disc 2: 300
Enter used space in MB for disc 2: 300
Enter type (e.g., CD-R, CD-RW) for disc 2: C
D-R
Do you want to add another disc? (yes/no): Y
yes
Discs saved to compact_discs.json
Read Discs: [
  CompactDisc {
    id: 1,
    _brand: 'sony',
    _capacity: 700,
    _usedSpace: 300,
    type: 'cd-r'
  }
]
```


DIAGRAM CLASS - 0P  
STRUCTURE - 2P  
QUALITY - 5P  
DATA INPUT - 10 P  
READ FROM CSV - 7 P      Use Json

TOTAL = 24 P

Inspector: Bonilla David

## 6. Fuentes Jorge Luis

### - Class Diagram: 6.5 points

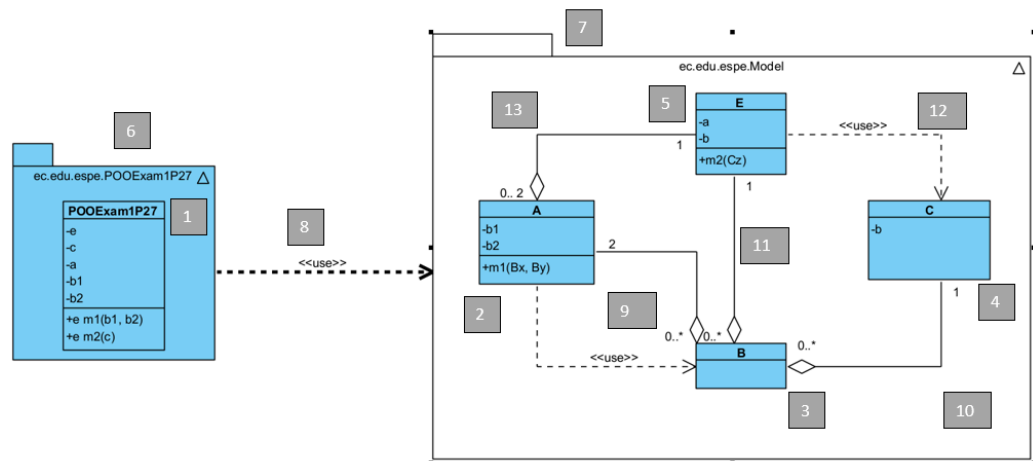


1. Incorrect attributes and method
2. Incomplete class
3. 1pt
4. Incomplete class
5. Incomplete class
6. 1pt
7. 1pt
8. 1pt
9. 0.5pt
10. 1pt
11. Direction incorrect
12. 1pt
13. Direction incorrect

Inspector: Tammy  
Caizapanta

- Coding Skill TOTAL: 29.5


Class diagram: 4 points

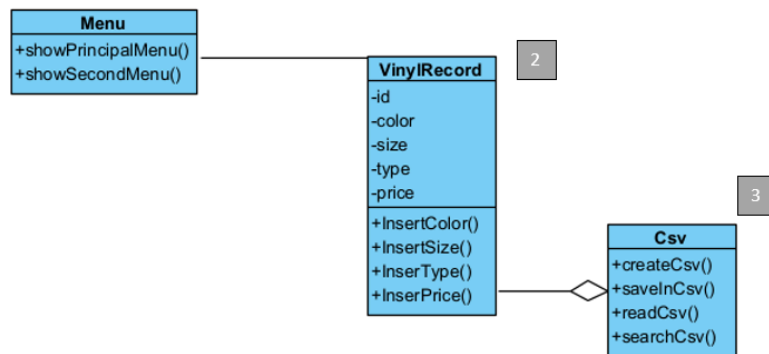

1. There is not q33
2. 2 pt
3. 2 pt
4. There is not package view
5. There is not package model
6. There is not package utils
7. There is not dependencies


Inspector: Tammy  
Caizapanta

Project Structure: 6 points

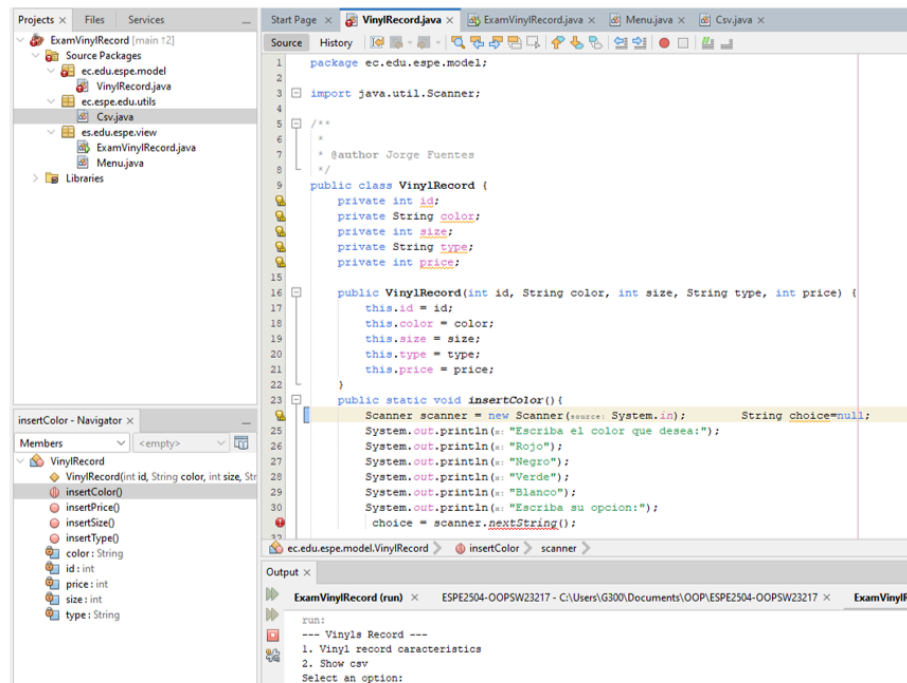


1. 2pts there is model
2. 2pts there is class
3. 2pts there is utils
4. There is one class left
5. There is not filemanager

## Code Quality: 8 points

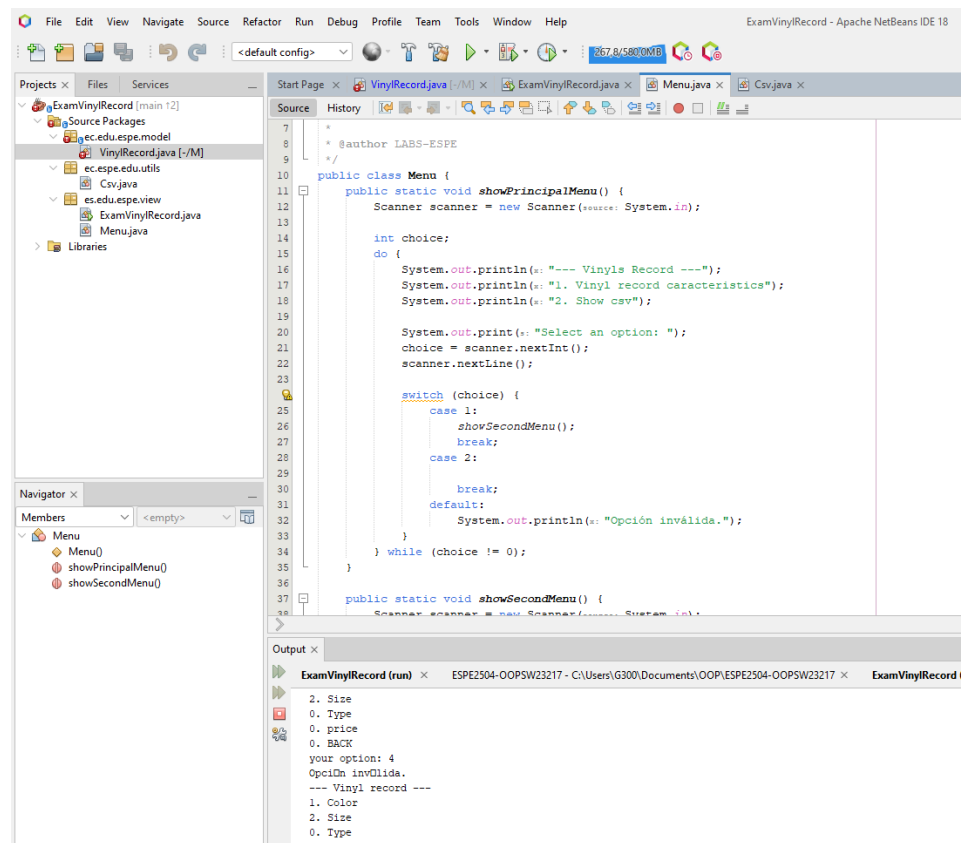

## data input and CSV file: 5 points



it does permit input and csv files but does not save it

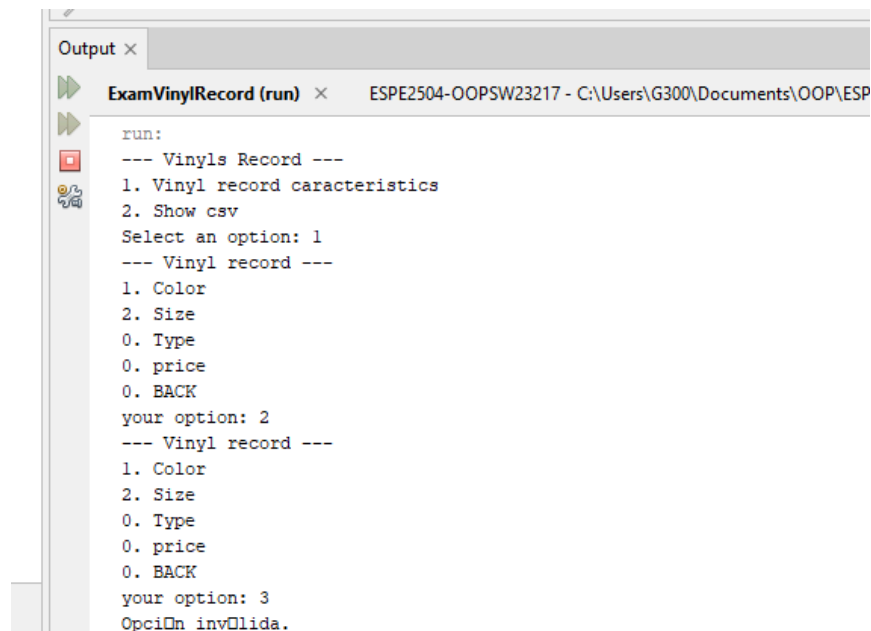

## Read from CSV file: 0 points

There is not read files

## 7. Jácome Micaela Victoria

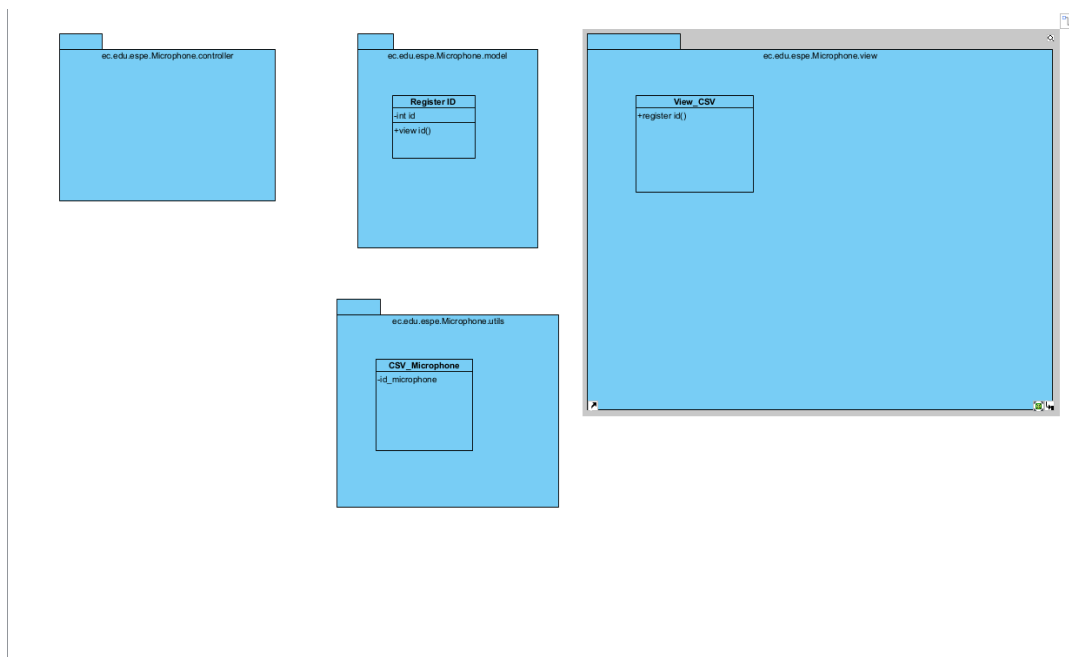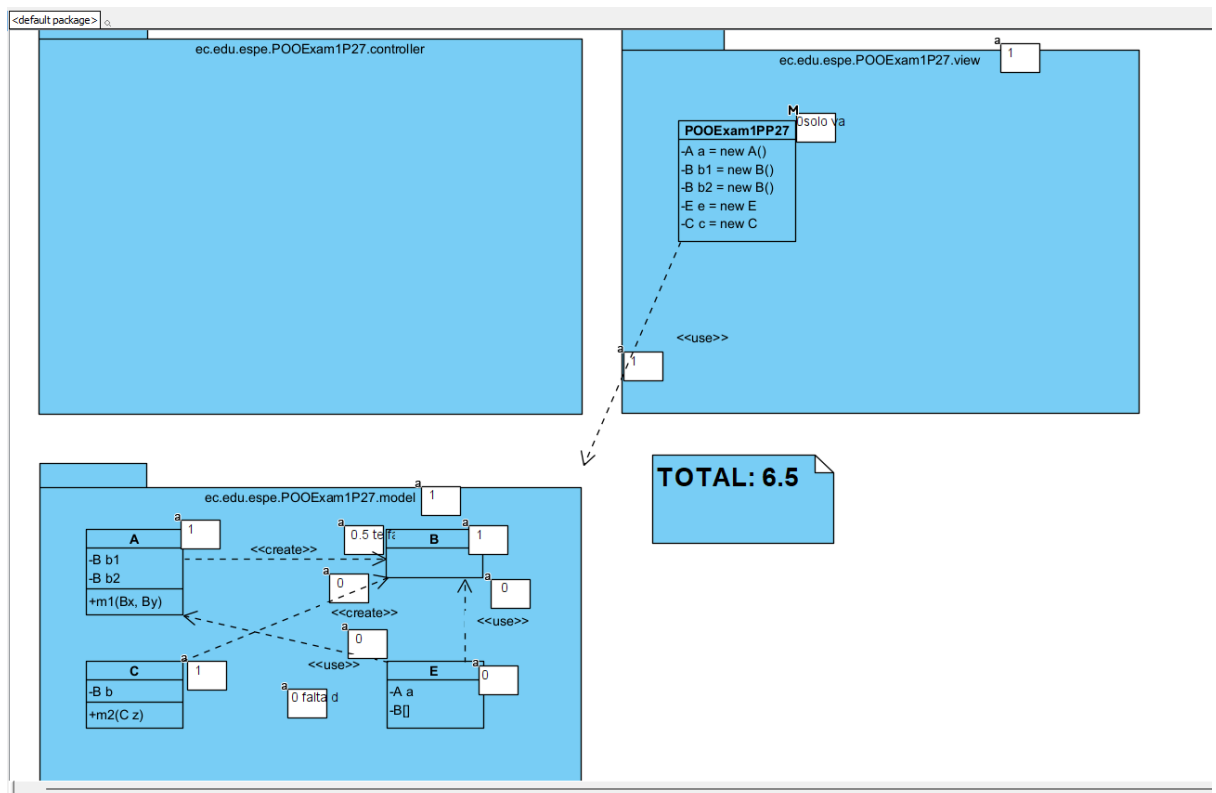


there is not class main


there is not dependences

TOTAL: 7

## 8. Maisincho Paucar Pedro Isaac

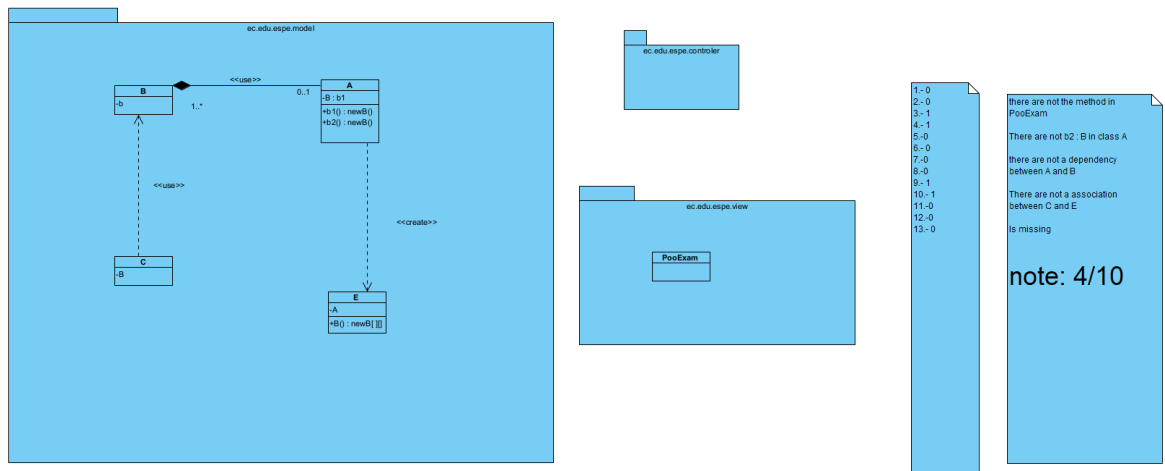

Class Diagram: 4 pts

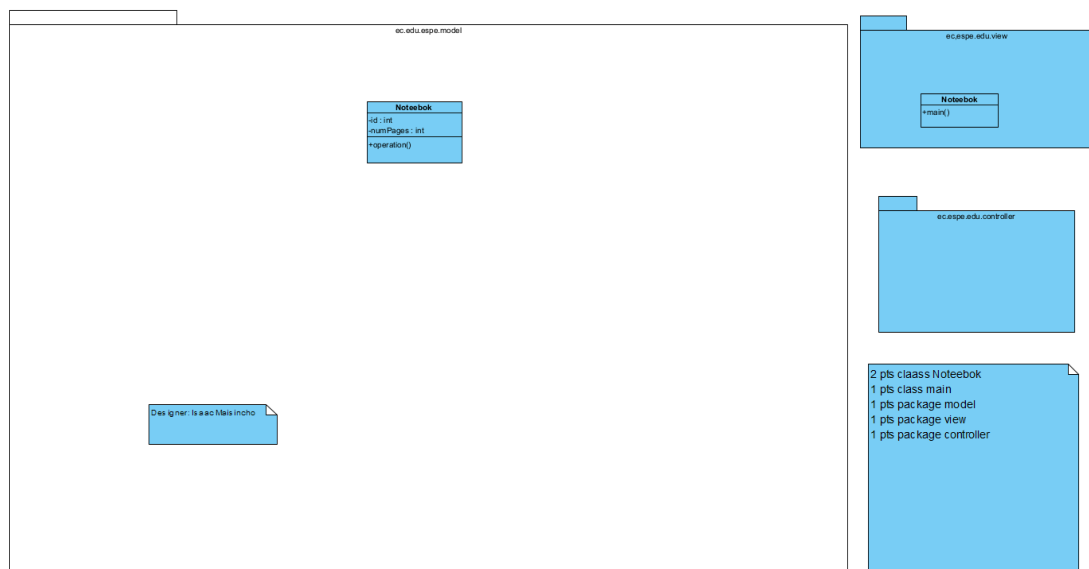

```

EXPLORER
EXAMPOO
  Exampy
  Notebook.py

Exampy
1 # 2 pts class Notebook
2 # 1 pts class main
3 # 1 pts class main Menu
4 # 5 input
5
6
7
8 while True:
9     print("\n--- MENÚ ---")
10    print("1. Agregar persona")
11    print("2. Guardar en CSV")
12    print("3. Salir")
13
14    opcion = input("Elige una opción: ") # good name fot attribute 1 pts
15
16    if opcion == "1":
17        agregar_persona() #Good name for method 1 pts
18    elif opcion == "2":
19        guardar_csv() #Good name for method 1 pts
20    elif opcion == "3":
21        print("Saliendo del programa...")
22        break
23    else:
24        print("Opción inválida.")

C:\Windows\system32\cmd.exe
C:\Users\G380\Documents\ESPE\OOP\ESPE2584-00PSW23217\exams\maisincho\ui\Exam\ExamPoo.py
Exam.py

--- MENÚ ---
1. Agregar persona
2. Guardar en CSV
3. Salir
Elige una opción: 1
Traceback (most recent call last):
  File "C:\Users\G380\Documents\ESPE\OOP\ESPE2584-00PSW23217\exams\maisincho\ui\Exam\ExamPoo.py", line 14, in <module>
    agregar_persona()
    ^^^^^^^^^^^^^^^
NameError: name 'agregar_persona' is not defined
C:\Users\G380\Documents\ESPE\OOP\ESPE2584-00PSW23217\exams\maisincho\ui\Exam\ExamPoo>

```

Class Diagram: 6 pts

Project Structure: 4 pts

Code Quality: 3 pts


data input and CSV file: 5 pts

Read from CSV file: 0 pts


Total: 18

Inspector: Jorge Fuentes

9. Paillacho Carlos Adrián



Class Diagram:0


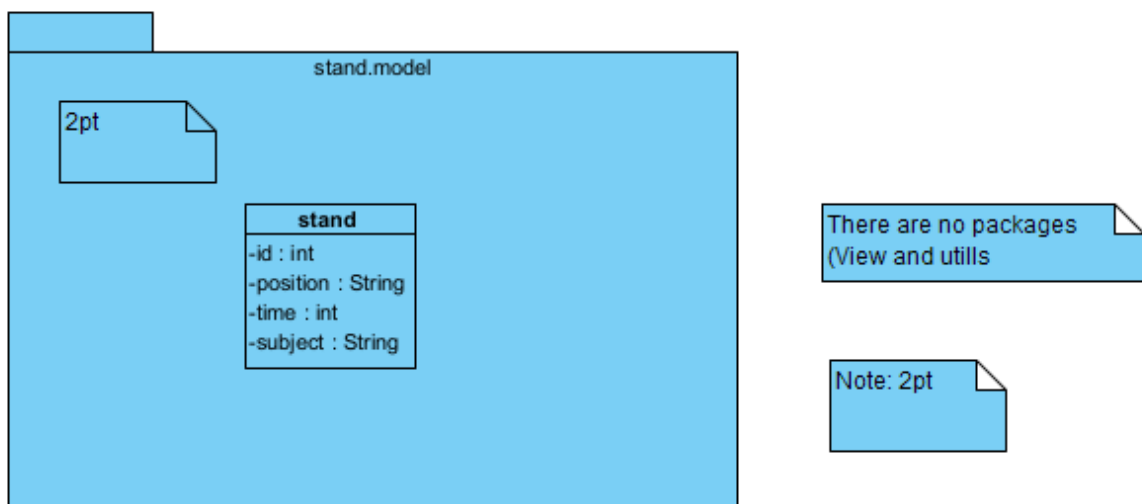


there is no code :0

total: 2

Inspector: Isaac Maisincho

10. Palacios Daniel Eduardo

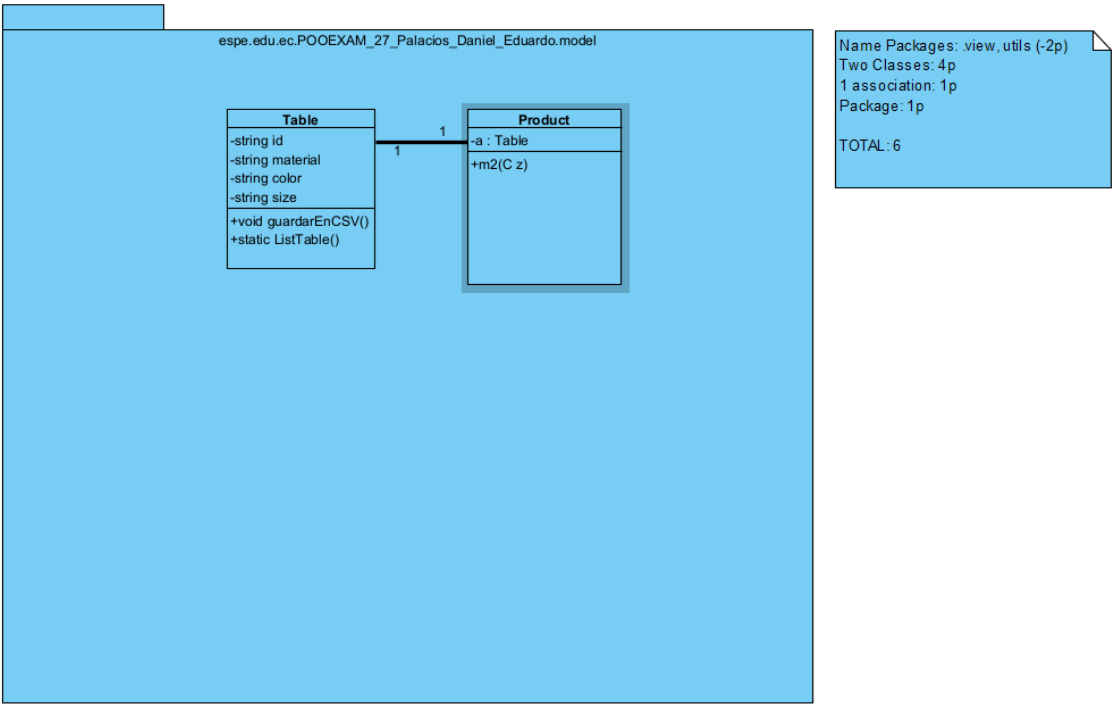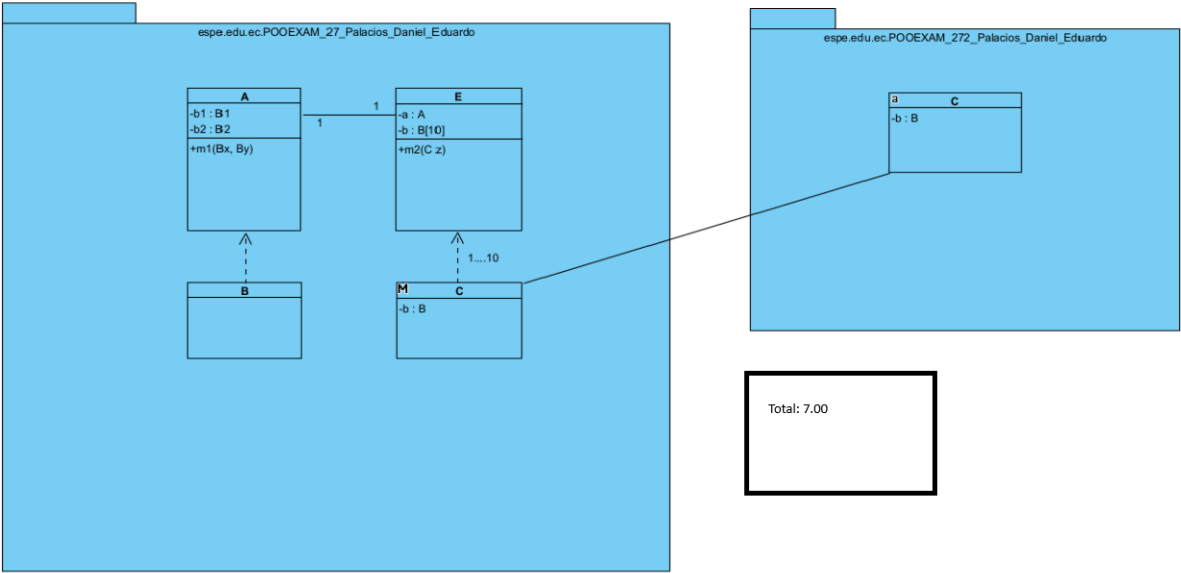

```
JS Tablejs X
C: > Users > G300 > Downloads > JS Table.js > Table > leerDesdeCSV
4 class Table {
23 }
24
25 static leerDesdeCSV() {
26   const filePath = path.join(__dirname, 'data', 'tables.csv');
27   const tables = [];
28
29   fs.readFile(filePath, 'utf8', (err, data) => {
30     if (err) {
31       console.error('Error:', err);
32       return;
33     }
34
35     const lines = data.split('\n');
36     for (const line of lines) {
37       const [id, material, color, size] = line.split(',');
38       if (id) { // Asegúrate de que la línea no esté vacía
39         tables.push(new Table(id, material, color, size));
40       }
41     }
42     console.log('Tablet:', tables);
43   });
44 }
45
46
47 const table1 = new Table('001', 'Model', 'Green', 'Big');
48 table1.guardarEnCSV();
49 Table.leerDesdeCSV();
50
51
52
```

There is no data entry, it's a  
constan table.  
It's only 1 file .js  
Have CSV archive  
Read CSV File

missing blank lines of  
spacing



```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
C:\Program Files\nodejs\node.exe --experimental-network-inspection .\..\..\Users\G300\Downloads\Table.js
v Tabla guardada en CSV: Table {id: '001', material: 'Model', color: 'Green', size: 'Big'}
| No debugger available, can not send 'variables'
v Tablet: (2) [Table, Table]
| No debugger available, can not send 'variables'
```

Total: 36 points

Inspector: Micaela Jácome

11. Quiroz Maria Laura

*Faltan direcciones, y paquetes*

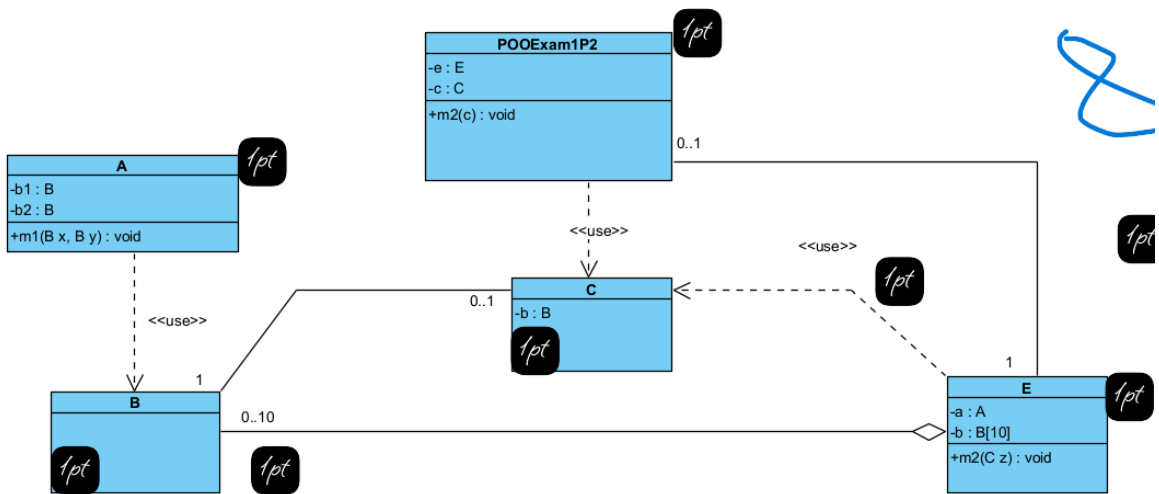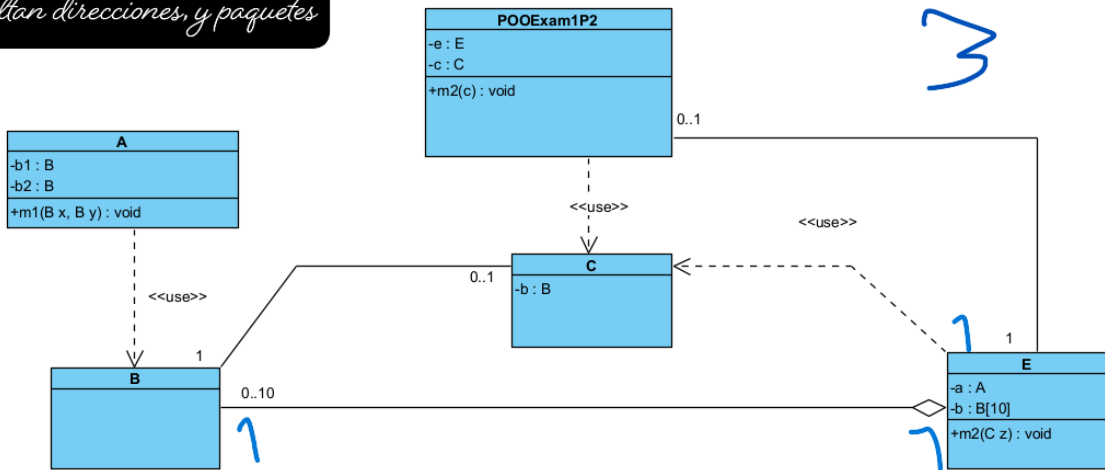

```

Goalkeeper Quiroz Maria.py x
C: > Users > G300 > Documents > Programación Orientada a Oibjetos > ESPE2504-OOPSW23217 > exams > quiroz > U1 > Goalkeeper Quiroz Maria.py
1 #Goalkeeper Quiroz Maria
2
3 import csv
4
5
6 class Goalkeeper:
7     def __init__(self, id, name, age, saves):
8         self.id = id
9         self.name = name
10        self.age = age
11        self.saves = saves
12
13    def to_list(self):
14        return [self.id, self.name, self.age, self.saves]
15
16    @staticmethod
17    def from_list(data):
18        return Goalkeeper(int(data[0]), data[1], int(data[2]), int(data[3]))
19
20    def __str__(self):
21        return f"Goalkeeper(id={self.id}, name='{self.name}', age={self.age}, saves={self.saves})"
22
23
24 class GoalkeeperCSVHandler:
25     def __init__(self, filename):
26         self.filename = filename
27
28     def save(self, goalkeepers):
29         with open(self.filename, 'w', newline='') as file:
30             writer = csv.writer(file)
31             for gk in goalkeepers:
32                 writer.writerow(gk.to_list())


```

Inspector: Carlos Paillacho

12. Sanchez Verduga Julio Esteban


13. Sivinta Kevin Jahir

Incorrect name of package model  
Without dependency C to B  
Without aggregation B to E  
Without dependency E to c  
Incorrect package view

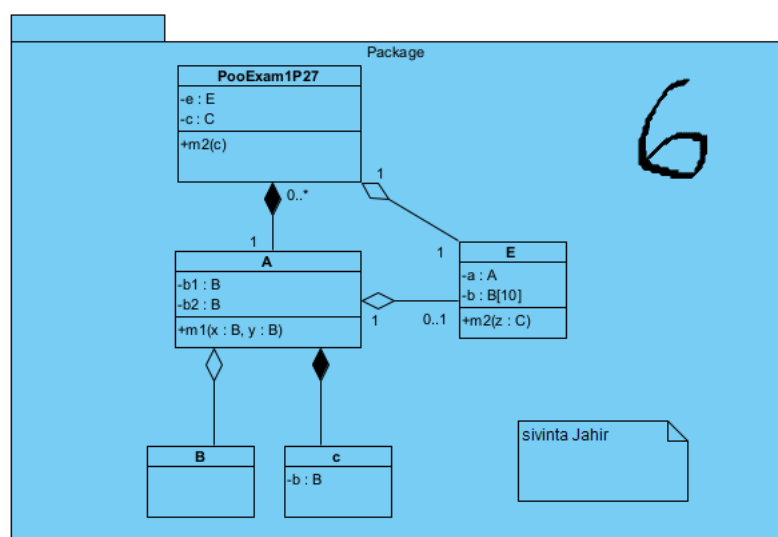

Without dependency

Main in incorrect package

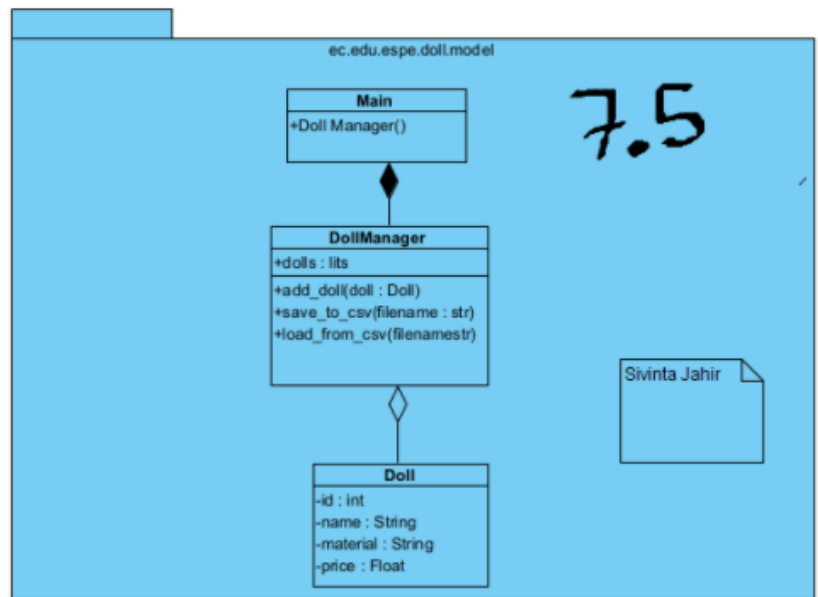

30

```
import csv

class Doll:
    def __init__(self, id, name, material, price):
        self.id = id
        self.name = name
        self.material = material
        self.price = price

    def __str__(self):
        return f"Doll(ID: {self.id}, Name: {self.name}, Material: {self.material}, Price: {self.price})"

class DollManager:
    def __init__(self):
        self.dolls = []

    def add_doll(self, doll):
        self.dolls.append(doll)

    def save_to_csv(self, filename):
        with open(filename, mode='w', newline='') as file:
            writer = csv.writer(file)
            writer.writerow(["ID", "Name", "Material", "Price"])
            for doll in self.dolls:
                writer.writerow([doll.id, doll.name, doll.material, doll.price])

    def load_from_csv(self, filename):
        with open(filename, mode='r') as file:
            reader = csv.reader(file)
            next(reader) # Saltar la cabecera
            for row in reader:
                id, name, material, price = row
                self.dolls.append(Doll(id, name, material, float(price)))

    def display_dolls(self):
```


PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS C:\Users\G380\Downloads> & C:\Users\G380\AppData\Local\Programs\Python\Python313\python.exe "c:/Users/G380/Downloads/Exercise(python)/Exercise/import_csv.py"
Doll(ID: 1, Name: Barbie, Material: Plastic, Price: 19.99)
Doll(ID: 2, Name: Rag Doll, Material: Plastic, Price: 12.5)
Doll(ID: 1, Name: Barbie, Material: Plastic, Price: 19.99)
Doll(ID: 2, Name: Rag Doll, Material: Fabric, Price: 12.5)
PS C:\Users\G380\Downloads>
```

Total: 37.5/50


Inspector: Maria Quiroz

14. Suarez Bernardo José

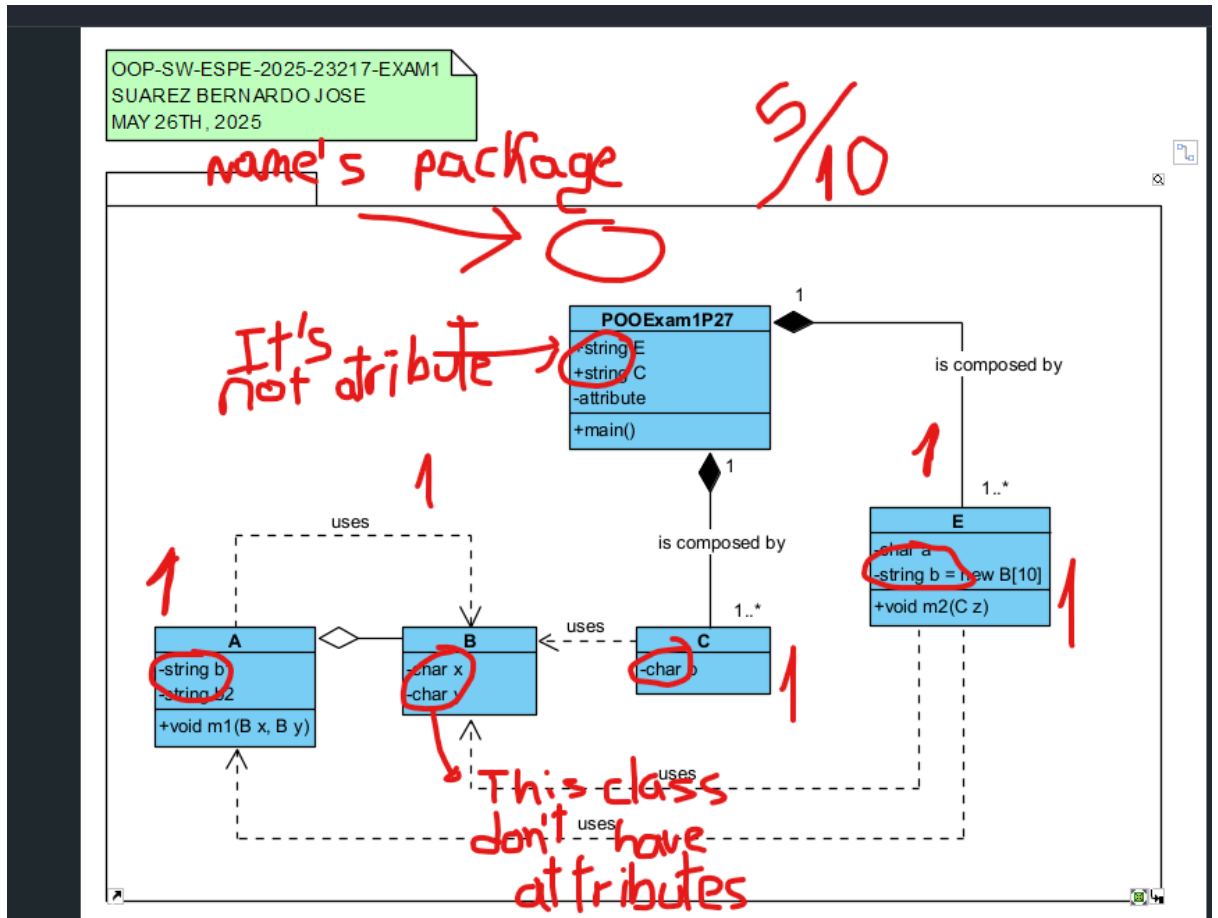

OOP-SW-23217-PracticalExam  
Suarez Bernardo Jose

3

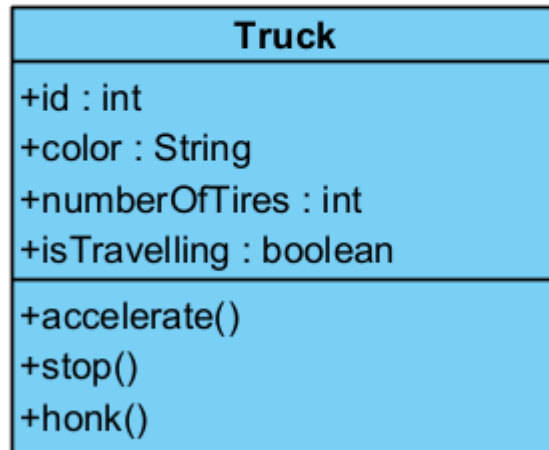

1

```
export class Truck{  
    constructor(){  
        this.id = 0  
    }  
  
    get Id(){  
        return this.id  
    }  
  
}
```

Class Diagram: 3 pts

Project Structure: 0 pts


Code Quality: 1 pts

data input and CSV file: 0 pts


Read from CSV file: 0 pts

Total: 4

15. Unda Mateo Josué

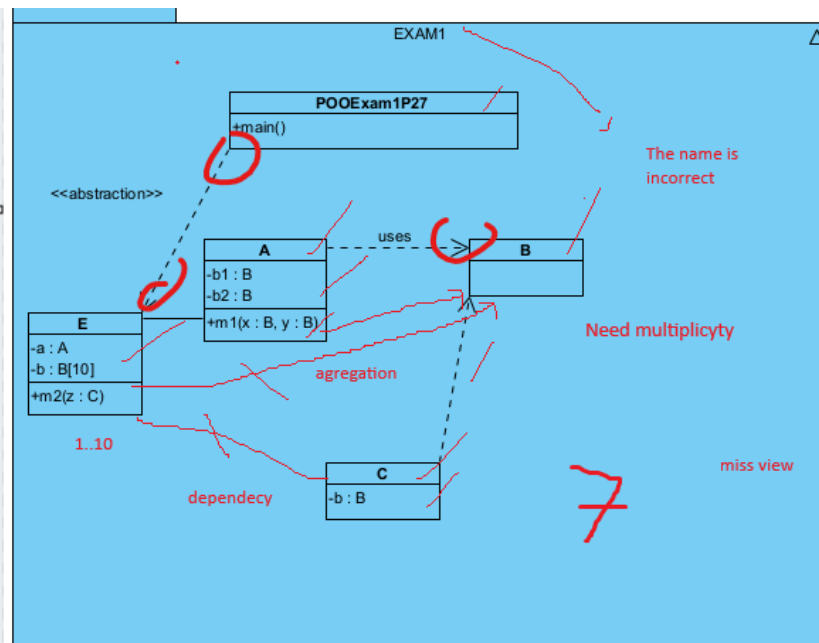

# OOP-SW-23217-UNDA-Exam Practic

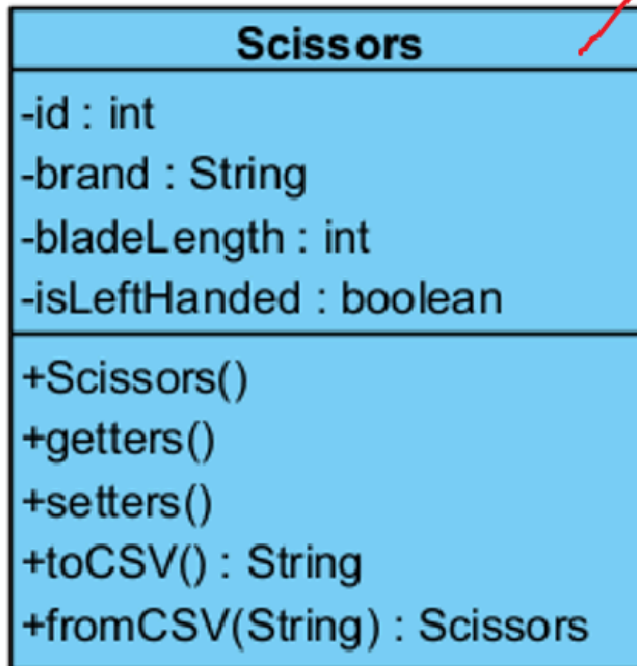

miss model, view,  
controller and  
dependencies

3

The screenshot shows an IDE with the following components:

- Left Panel (Project Explorer):** Shows the project structure with source packages and test packages. The package `unda_scissors` is highlighted, containing files `Unda_Main.java`, `Unda_Scissors.java`, and `Unda_ScissorsManager.java`.
- Right Panel (Source Editor):** Displays the code for `Unda_Main.java`. The code is as follows:

```
4 public static void main(String[] args) {
5     Unda_ScissorsManager manager = new Unda_ScissorsManager();
6
7     manager.addScissors(new Unda_Scissors(id: 1, brand: "Fiskars", bladeLength: 8, isLeftHanded: false));
8     manager.addScissors(new Unda_Scissors(id: 2, brand: "Maped", bladeLength: 6, isLeftHanded: true));
9     manager.addScissors(new Unda_Scissors(id: 3, brand: "Stanley", bladeLength: 7, isLeftHanded: false));
10
11     try {
12         manager.saveToCSV(); // Guardar en CSV
13         manager.loadFromCSV(); // Leer desde CSV
14         manager.showAll(); // Mostrar en consola
15     } catch (Exception e) {
16         System.out.println("Error: " + e.getMessage());
17     }
18 }
19 }
```

```

Start Page x Unda_Main.java x Unda_ScissorsManager.java x Unda_Scissors.java x
Source History
4 public static void main(String[] args) {
5     Unda_ScissorsManager manager = new Unda_ScissorsManager();
6
7     manager.addScissors(new Unda_Scissors(id: 1, brand: "Fiskars", bladeLength:8, isLeftHanded: false));
8     manager.addScissors(new Unda_Scissors(id: 2, brand: "Maped", bladeLength:6, isLeftHanded: true));
9     manager.addScissors(new Unda_Scissors(id: 3, brand: "Stanley", bladeLength:7, isLeftHanded: false));
10
11     try {
12         manager.saveToCSV(); // Guardar en CSV
13         manager.loadFromCSV(); // Leer desde CSV
14         manager.showAll(); // Mostrar en consola
15     } catch (Exception e) {
16         System.out.println("Error: " + e.getMessage());
17     }
18 }
19
20

```

```


import csv.py
Doll
Archivo Editar Ver
1, Fiskars, 8, false
2, Maped, 6, true
3, Stanley, 7, false


```

No hay input

33/50

# 16. Vaca Kevin Alexander

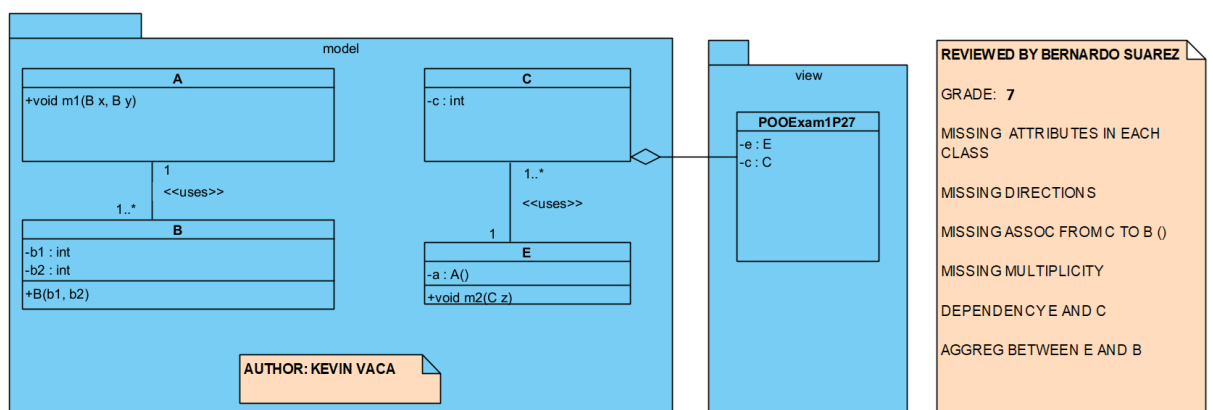

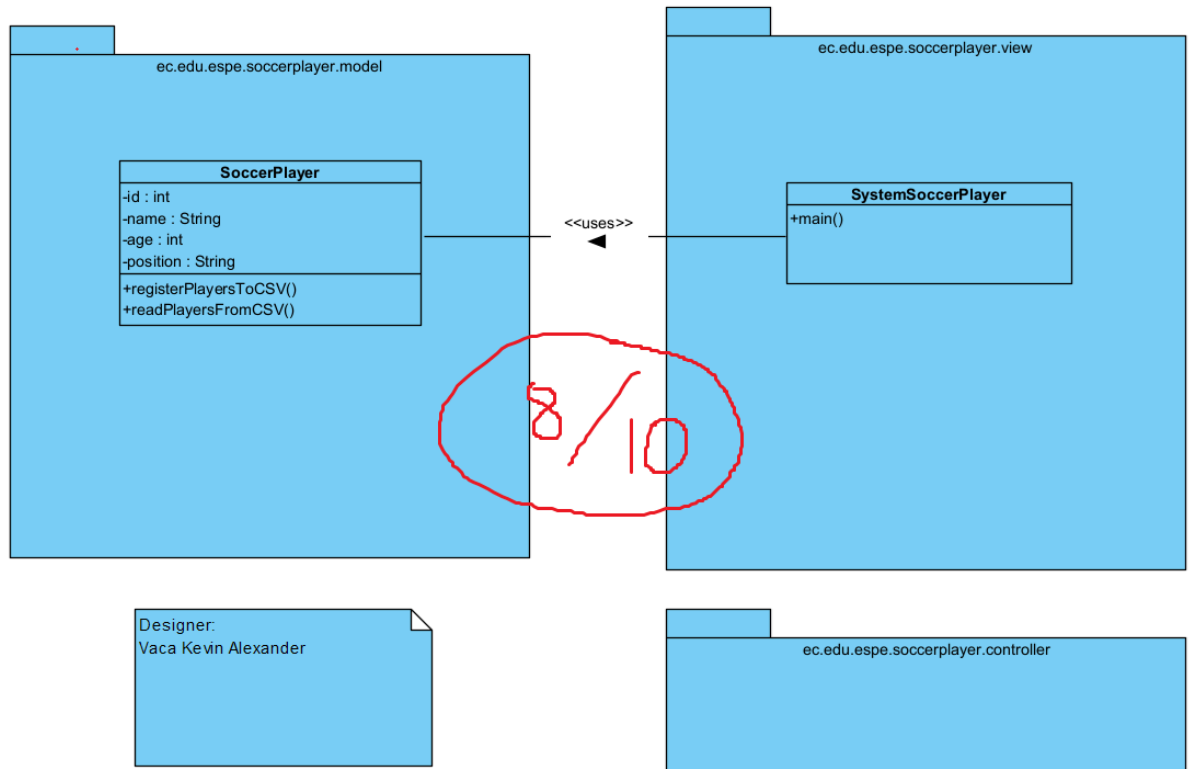


```
JS SoccerPlayer.js X JS pencil.js {} pencil.json
C: > Users > G300 > Documents > Dadroit JSON Generator > JS SoccerPlayer.js > ...

1  const fs = require('fs');
2
3  class SoccerPlayer {
4      constructor(id, name, position, age) {
5          this.id = id;
6          this.name = name;
7          this.position = position;
8          this.age = age;
9      }
10
11     toCSV() {
12         return `${this.id},${this.name},${this.position},${this.age}`;
13     }
14
15     static fromCSV(csvLine) {
16         const [id, name, position, age] = csvLine.split(',');
17         return new SoccerPlayer(parseInt(id), name, position, parseInt(age));
18     }
19 }
20
21 const players = [
22     new SoccerPlayer(1, 'Lionel Messi', 'Forward', 36),
23     new SoccerPlayer(2, 'Alexander Dominguez', 'Keeper', 37),
24     new SoccerPlayer(3, 'Cristiano Ronaldo', 'Forward', 40)
25 ];
26
27 function writePlayersToCSV(filename, players) {
28     const header = 'id,name,position,age\n';
29     const data = players.map(p => p.toCSV()).join('\n');
30     fs.writeFileSync(filename, header + data, 'utf8');
31     console.log(`Players saved to ${filename}`);
32 }
33
34 function readPlayersFromCSV(filename) {
35     const content = fs.readFileSync(filename, 'utf8');
```

total exam pt 2  
28

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

17. Yáñez José Gabriel

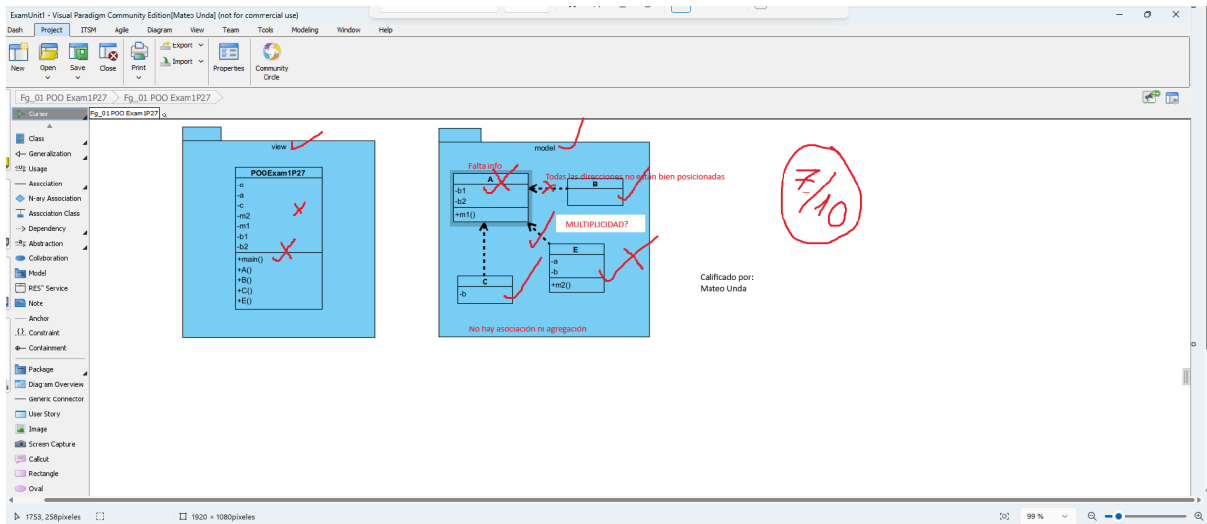

Restricted Mode is intended for safe code browsing. Trust this window to enable all features. Manage Learn More

FlashDriveV1.py

```

1 class FlashDrive:
2     def __init__(self):
3         return f'FlashDrive(id={self.id}, brand={self.brand}, capacity_gb={self.capacity_gb}, usb_type={self.usb_type})'
4
5     def save_to_csv(self, filename):
6         with open(filename, mode='w', newline='') as file:
7             writer = csv.writer(file)
8             writer.writerow(['ID', 'Brand', 'Capacity_GB', 'USB_Type']) # encabezado
9             for fd in self.flash_drives:
10                 writer.writerow(fd.to_list())
11
12     def read_from_csv(self, filename):
13         flash_drives = []
14         with open(filename, mode='r') as file:
15             reader = csv.DictReader(file)
16             for row in reader:
17                 fd = FlashDrive(
18                     int(row['ID']),
19                     row['Brand'],
20                     int(row['Capacity_GB']),
21                     row['USB_Type'])
22                 flash_drives.append(fd)
23         return flash_drives
24
25 if __name__ == '__main__':
26     flash_drives = [
27         FlashDrive('Sandisk', 32, 'USB 3.0'),
28         FlashDrive('Kingston', 64, 'USB 3.1'),
29         FlashDrive('PNV', 128, 'USB 2.0')
30     ]
31
32     save_to_csv(flash_drives, 'flash_drives.csv')
33
34     loaded_drives = read_from_csv('flash_drives.csv')
35
36     for fd in loaded_drives:
37         print(fd)
38
39

```

DIAGRAMA: 5/10  
 CARPETAS: 6/10  
 CLEAN CODE: 8/10  
 RUN CODE: 0/10  
 READ CODE: 0/10  
 TOTAL: 19/50

