



UNIVERSIDAD DE LAS FUERZAS ARMADAS ESPE
COMPUTER SCIENCE DEPARTMENT
ADVANCED WEB DEVELOPMENT
URIS/ API-ENDPOINTS- UNIT 2

Students: Altamirano Xavier, Andrade Danna, Ayuquina Danny.

NRC: 27819

Date: DECEMBER 7, 2025

Base URL

- http://localhost:3001
- https://nicekidscenter.onrender.com

Health

- GET /health: Server status.
- GET /api/health: Alias under /api.

```
{"status":"ok","time":"2025-12-08T04:21:19.732Z"}
```

Students

- GET /api/students: List of active students (IsActive=1).

```
[{"StudentID": 1, "FirstName": "Danna", "LastName": "Lucio", "BirthDate": "2022-12-16", "Gender": null, "DocumentNumber": null, "Address": null, "Email": null, "PhoneNumber": null, "GradeID": 1, "ProfilePicture": null, "MedicalInfo": null, "EmergencyContact": null, "EmergencyPhone": null, "IsActive": 1, "IsRecurrent": 1, "EnrollmentDate": null, "WithdrawalDate": null, "CreatedAt": "2025-11-15T23:54:33.298121", "UpdatedAt": null}, {"StudentID": 2, "FirstName": "ricky", "LastName": "starm"}]
```

- GET /api/students/:id: Gets the student by their ID.

The screenshot shows a REST client interface with a GET request to `https://nicekidscenter.onrender.com/api/students/2`. The response is a 200 OK status with a JSON body containing student details.

```
1 {
2   "StudentID": 2,
3   "FirstName": "ricky",
4   "LastName": "storm",
5   "BirthDate": "2002-02-07",
6   "Gender": null,
7   "DocumentNumber": null,
8   "Address": null,
9   "Email": null,
10  "PhoneNumber": null,
11  "GradeID": 1,
12  "ProfilePicture": null,
13  "MedicalInfo": null,
14  "EmergencyContact": null,
15  "EmergencyPhone": null,
16  "IsActive": 1,
17  "IsRecurrent": 1,
18  "EnrollmentDate": null,
19  "WithdrawalDate": null,
20  "CreatedAt": "2025-11-18T01:25:00.534221",
21  "UpdatedAt": null
22 }
```

- POST /api/students: Creates the student.

The screenshot shows a REST client interface with a POST request to `https://nicekidscenter.onrender.com/api/students`. The request body is a JSON object for a new student. The response is a 201 Created status with a JSON body containing the created student's details.

Request Body:

```
1 {
2   "FirstName": "Jose",
3   "LastName": "Bearman",
4   "BirthDate": "2022-06-07",
5   "Gender": null,
6   "DocumentNumber": null,
7   "Address": null,
8   "Email": null,
9   "PhoneNumber": null,
10  "GradeID": 1,
11  "ProfilePicture": null,
12  "MedicalInfo": null,
13  "EmergencyContact": "Marta Lomas".
}
```

Response Body:

```
1 {
2   "StudentID": 3,
3   "FirstName": "Jose",
4   "LastName": "Bearman",
5   "BirthDate": "2022-06-07",
6   "Gender": null,
7   "DocumentNumber": null,
8   "Address": null,
9   "Email": null,
```

- PUT /api/students/:id: Updates by their ID.

The screenshot shows a REST client interface for the URL `https://nicekidscenter.onrender.com/api/students/3`. The method is set to **PUT**. The request body is in **raw** mode, containing a JSON object with student details. The response is **200 OK** with a status of 516 ms and 767 B. The response body is also in **raw** mode, showing the updated student data.

```
PUT https://nicekidscenter.onrender.com/api/students/3
```

```
{
  "FirstName": "Jose",
  "LastName": "Bearman",
  "BirthDate": "2022-06-07",
  "Gender": null,
  "DocumentNumber": null,
  "Address": null,
  "Email": "ml@gmail.com",
  "PhoneNumber": null,
  "GradeID": 1,
  "ProfilePicture": null,
  "MedicalInfo": null,
  "EmergencyContact": "Marta Lomas",
}
```

200 OK • 516 ms • 767 B

```
{
  "StudentID": 3,
  "FirstName": "Jose",
  "LastName": "Bearman",
  "BirthDate": "2022-06-07",
  "Gender": null,
  "DocumentNumber": null,
  "Address": null,
  "Email": "ml@gmail.com",
  "PhoneNumber": null,
  "GradeID": 1,
}
```

- DELETE /api/students/:id: Logically deactivates (IsActive=0).

The left screenshot shows a **DELETE** request to `https://nicekidscenter.onrender.com/api/students/3`. The response body is in **raw** mode, showing a success message: `"success": true, "message": "Student logically deactivated"`.

```
DELETE https://nicekidscenter.onrender.com/api/students/3
```


```
{
  "success": true,
  "message": "Student logically deactivated"
}
```

The right screenshot shows a **GET** request to `https://nicekidscenter.onrender.com/api/students/3`. The response body is in **raw** mode, showing the updated student data with `"IsActive": 0`.

```
GET https://nicekidscenter.onrender.com/api/students/3
```


```
{
  "StudentID": 3,
  "FirstName": "Jose",
  "LastName": "Bearman",
  "BirthDate": "2022-06-07",
  "Gender": null,
  "DocumentNumber": null,
  "Address": null,
  "Email": "ml@gmail.com",
  "PhoneNumber": null,
  "GradeID": 1,
  "ProfilePicture": null,
  "MedicalInfo": null,
  "EmergencyContact": "Marta Lomas",
  "EmergencyPhone": "0912345674",
  "IsActive": 0,
  "IsRecurrent": 1,
  "EnrollmentDate": null,
  "WithdrawalDate": null,
  "CreatedAt": "2025-12-08T04:27:15.012116",
  "UpdatedAt": null
}
```

- PUT /api/students/:id/deactivate: Logically deactivates.

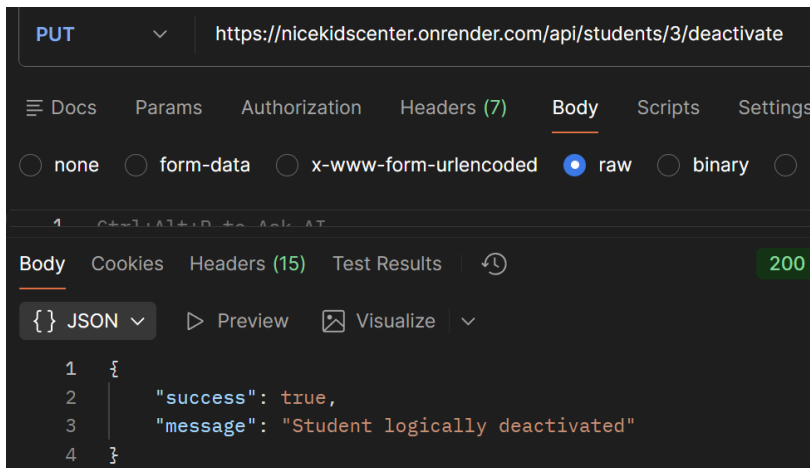


Guardians

- GET /api/guardians: List of active guardians (IsActive=1).

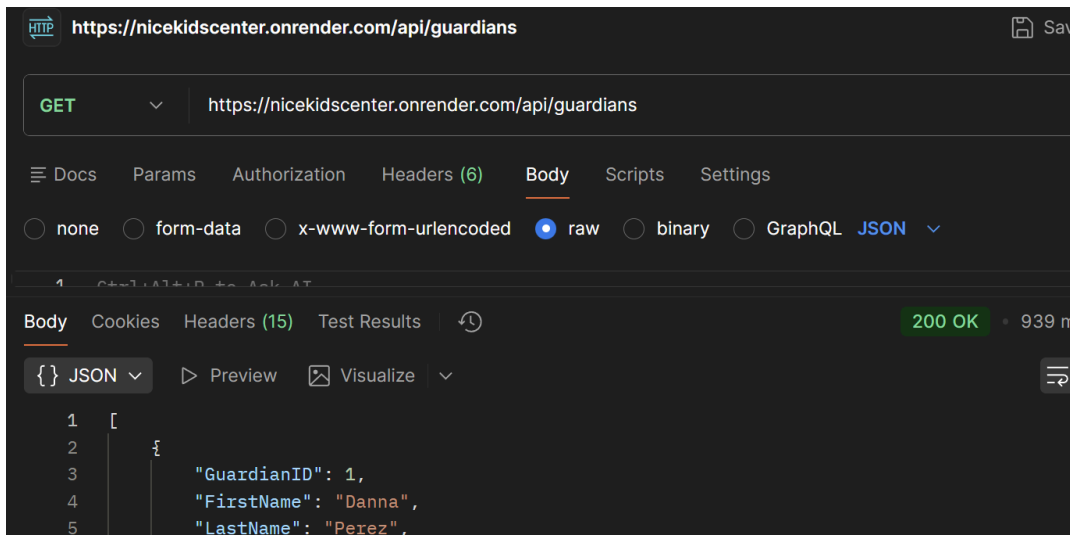

- GET /api/guardians/:id: Gets the guardian by GuardianID.

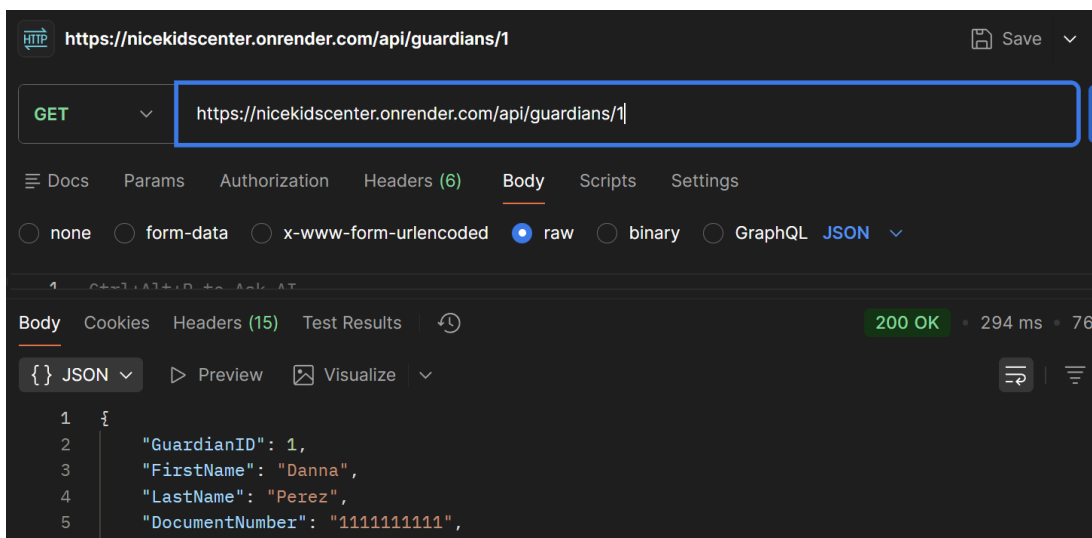

- POST /api/guardians: Creates the guardian.

The screenshot shows a REST client interface with the following details:

- URL:** `https://nicekidscenter.onrender.com/api/guardians`
- Method:** `POST`
- Body:** A JSON object with the following fields:

```
{  "FirstName": "Danna",  "LastName": "Andrade",  "DocumentNumber": "1722651567",  "Relationship": "Hermana",  "PhoneNumber": "0939185136",  "Email": "daandrade@espe.edu.ec",  "Address": "antonio borrero e inca roca",  "Occupation": "Estudiante",  "WorkPhone": "0939185136",  "UserID": null,
```
- Response:** A `201 Created` status with a response body:

```
{  "GuardianID": 2,  "FirstName": "Danna",  "LastName": "Andrade",  "DocumentNumber": "1722651567",  "Relationship": "Hermana",  "PhoneNumber": "0939185136",
```

- PUT /api/guardians/:id: Updates by GuardianID.


The screenshot shows a REST client interface with the following details:

- URL:** `https://nicekidscenter.onrender.com/api/guardians/1`
- Method:** `PUT`
- Body:** A JSON object with the following fields:


```
{  "GuardianID": 1,  "FirstName": "Danna",  "LastName": "Perez",  "DocumentNumber": "0000000000",  "Relationship": "Hermana",  "PhoneNumber": "0939185134",
```
- Response:** A `200 OK` status with a response body:

```
{  "GuardianID": 1,  "FirstName": "Danna",  "LastName": "Perez",  "DocumentNumber": "0000000000",  "Relationship": "Hermana",  "PhoneNumber": "0939185134",
```

- DELETE /api/guardians/:id: Logically deactivates (IsActive=0).

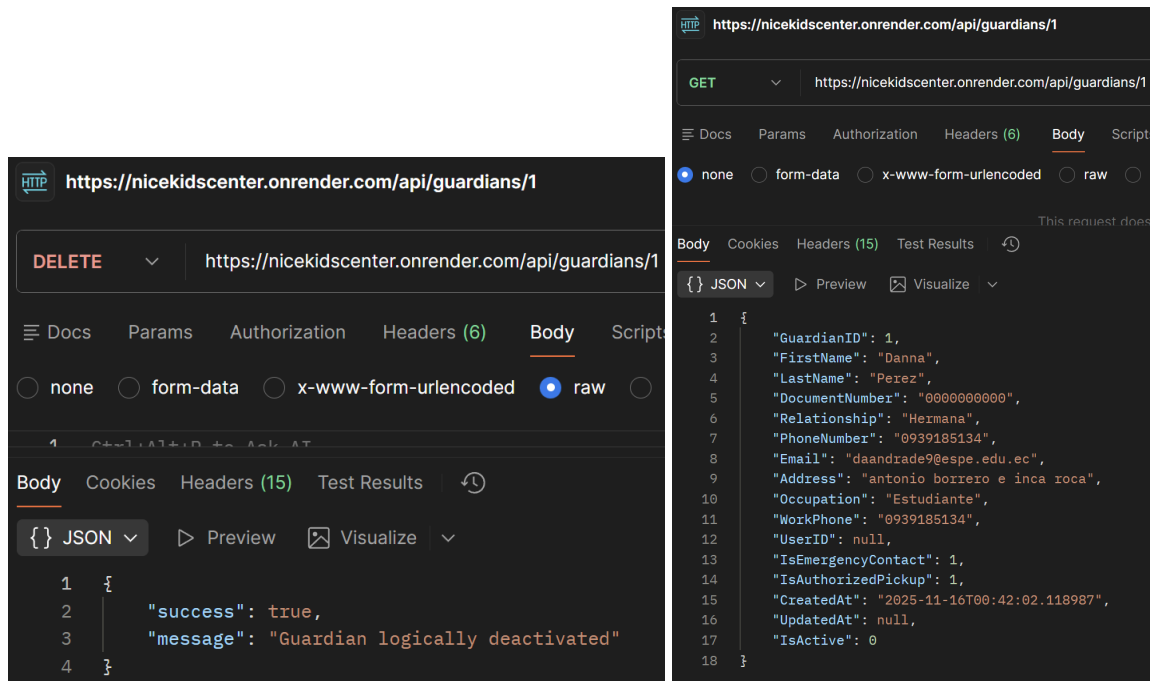

- PUT /api/guardians/:id/deactivate: Logically deactivates.

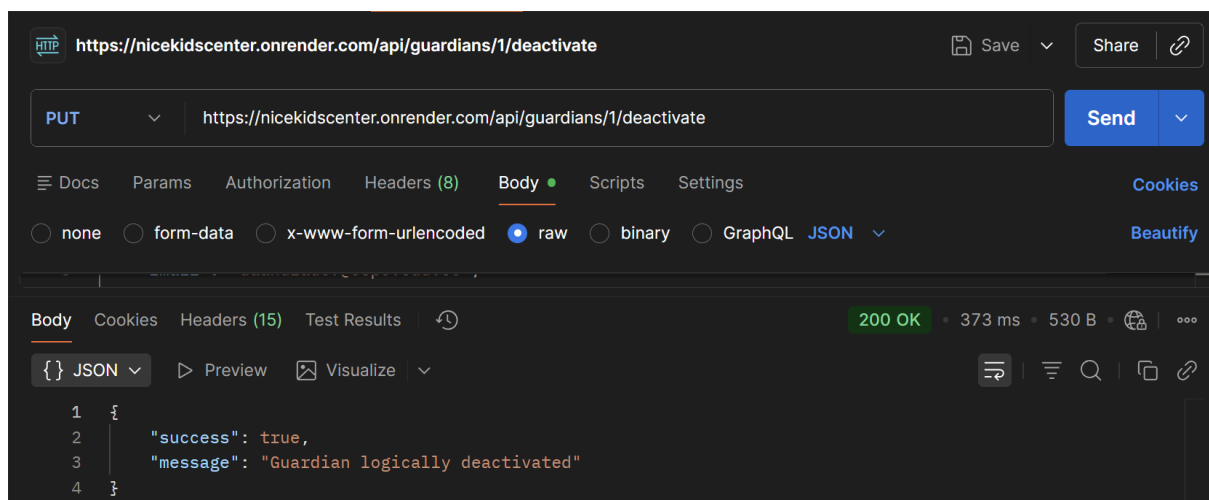

Staff

- GET /api/staff: Lists active staff (IsActive=1).

- GET /api/staff/:id: Gets staff by EmpID.

- POST /api/staff: Creates staff.

- PUT /api/staff/:id: Updates by EmpID.

- DELETE /api/staff/:id: Logically deactivates (IsActive=0).

- PUT /api/staff/:id/deactivate: Logically deactivates. Access (Roles and Permissions)

Access (Roles & Permissions)

- GET /api/access/permission: List of permissions.
- GET /api/access/permission/:id: Get permission by _id (UUID) or PermissionID.
- POST /api/access/permission: Create permission.
- PUT /api/access/permission/:id: Update permission by _id or PermissionID.
- GET /api/access/role: List of active roles (IsActive=1).
- GET /api/access/role/:id: Get role by _id (UUID) or RoleID.
- POST /api/access/role: Create role.
- PUT /api/access/role/:id: Update role by _id or RoleID.
- PUT /api/access/role/:id/deactivate: Logically deactivate role by RoleID (numeric). - GET /api/access/role-permission: Lists role-permission assignments.
- POST /api/access/role-permission: Assigns permission to a role.
- DELETE /api/access/role-permission/:id: Deletes by _id (UUID) or RoleID.

Grading

- GET /api/grades: Lists active grades (IsActive=1).
- GET /api/grades/:id: Gets a grade by GradeID.
- POST /api/grades: Creates a grade.
- PUT /api/grades/:id: Updates a grade by GradeID.
- DELETE /api/grades/:id: Logically disables a grade (IsActive=0).

Activity

- GET /api/activities: List of active activities (IsActive=1).
- GET /api/activities/:id: Get activity by ActivityID.
- POST /api/activities: Create activity.
- PUT /api/activities/:id: Update activity by ActivityID.
- DELETE /api/activities/:id: Logically deactivate activity (IsActive=0).

Activity Media

- GET /api/activity-media: List of media.
- GET /api/activity-media/:id: Get media by MediaID.
- POST /api/activity-media: Create media.
- PUT /api/activity-media/:id: Update media by MediaID.
- DELETE /api/activity-media/:id: Delete media by MediaID.

Attendance

- GET /api/attendance: List attendance.
- GET /api/attendance/:id: retrieves attendance data using AttendanceID.
- POST /api/attendance: creates attendance data.
- PUT /api/attendance/:id: updates attendance data using AttendanceID.
- DELETE /api/attendance/:id: deletes attendance data using AttendanceID.

Employee Tasks

- GET /api/employee-tasks: lists tasks.
- GET /api/employee-tasks/:id: retrieves attendance data using TaskID.
- POST /api/employee-tasks: creates a task.
- PUT /api/employee-tasks/:id: updates attendance data using TaskID.
- DELETE /api/employee-tasks/:id: deletes attendance data using TaskID.

Invoices

- GET /api/invoices: lists invoices. - GET /api/invoices/:id: retrieves by InvoiceID.
- POST /api/facturas: creates an invoice.
- PUT /api/invoices/:id: updates by InvoiceID.
- DELETE /api/invoices/:id: deletes by InvoiceID.

Notifications


- GET /api/notifications: lists notifications.
- GET /api/notifications/:id: retrieves by NotificationID.
- POST /api/notificaciones: creates a notification.
- PUT /api/notifications/:id: updates by NotificationID.
- DELETE /api/notifications/:id: deletes by NotificationID.


Users

- GET /api/users: lists active users (IsActive=1).
- GET /api/users/:id: retrieves by UserID.
- POST /api/users: Creates a user.
- PUT /api/users/:id: Updates by user ID.
- DELETE /api/users/:id: Logically disables (IsActive=0).


User Roles

- GET /api/user-roles: Lists user-role assignments.
- GET /api/user-roles/:id: Obtained by UserRoleID.
- POST /api/user-roles: Creates an assignment.
- PUT /api/user-roles/:id: Updates by UserRoleID.

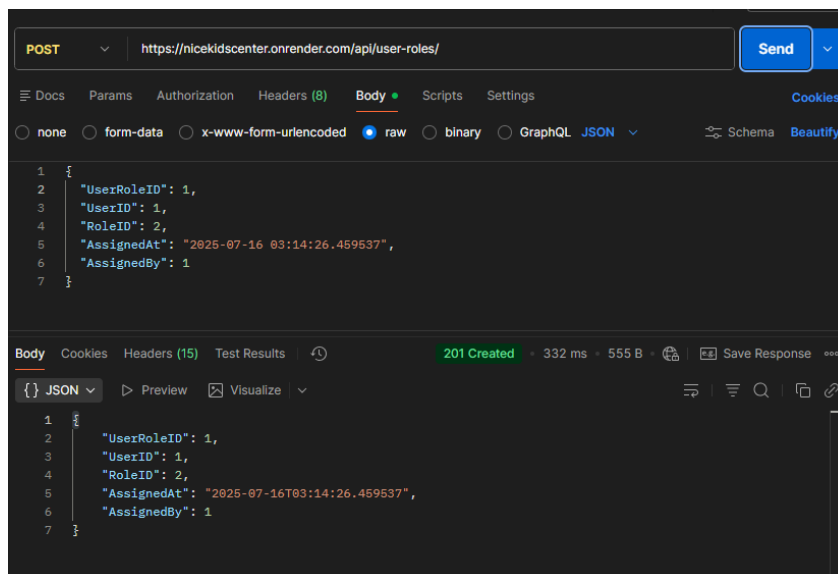

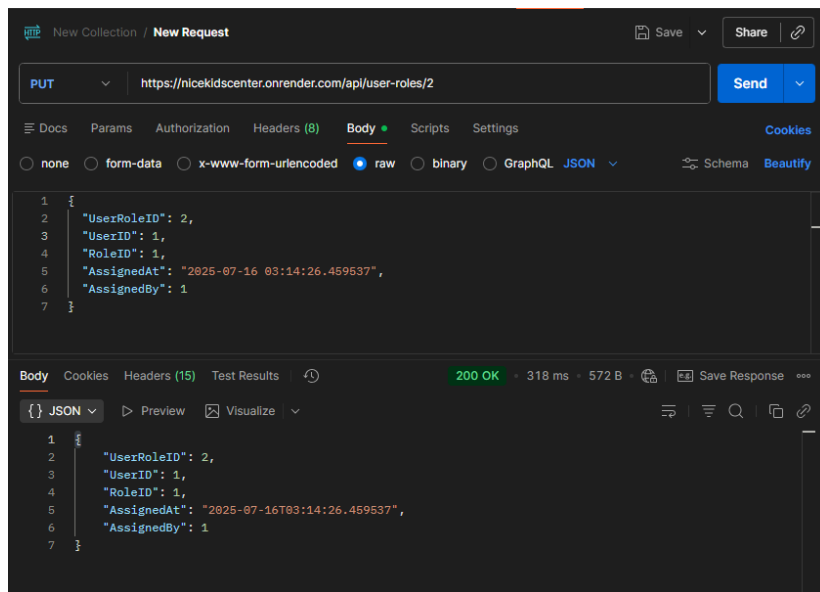

- DELETE /api/user-roles/:id: Deletes by UserRoleID.

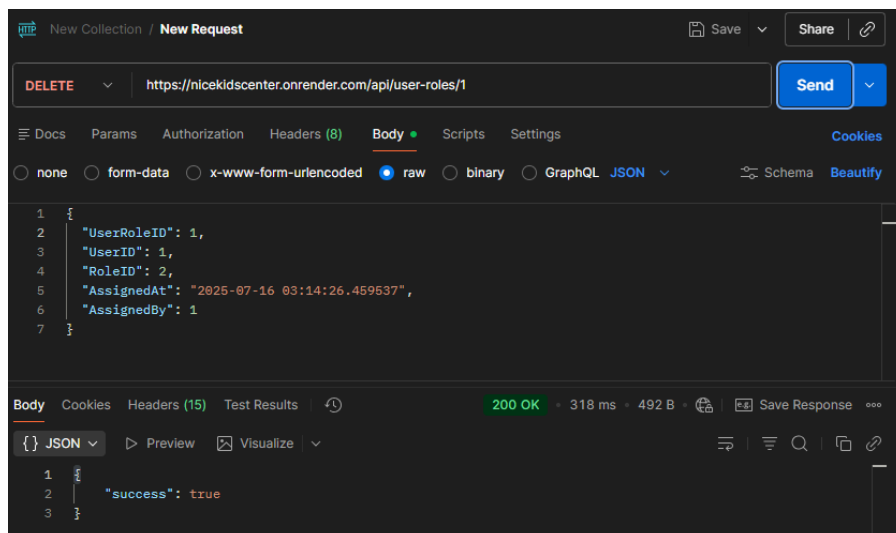

Student-Guardians Relationships

- GET /api/student-guardians: Lists relationships.
- GET /api/student-guardians/:id: Obtained by StudentGuardianID.
- POST /api/student-guardians: creates a link.
- PUT /api/student-guardians/:id: updated by StudentGuardianID.
- DELETE /api/student-guardians/:id: deletes by StudentGuardianID.

Student Observations

- GET /api/student-observations: list of observations.

```
< > ↻ nicekidscenter.onrender.com/api/student-observations
PlantUML Web Server Unir PDF online | Co... Sistema Virtual de T... Claude DeepSe
Pretty-print ✓
[
  {
    "ObservationID": 2,
    "StudentID": 1,
    "EmpID": 1,
    "ObservationDate": "2025-02-20",
    "Category": "Comportamiento",
    "Observation": "Participó activamente en clase.",
    "IsPositive": 1,
    "RequiresAction": 0,
    "ActionTaken": null,
    "IsPrivate": 0,
    "CreatedAt": "2025-12-08T00:54:21.175524",
    "UpdatedAt": null
  }
]
```

- GET /api/student-observations/:id: retrieved by Observations/:id: removes by ObservationID.
- POST /api/student-observations`:
- PUT /api/student-observations/:id`: update by `ObservationID`.
- DELETE /api/student-observations/:id`: delete by `ObservationID`.

Student Payments

- GET /api/student-payments: list of student payments.
- GET /api/student-payments/:id: get by StudentPaymentID.

```
< > ↻ nicekidscenter.onrender.com/api/student-payments/1
PlantUML Web Server Unir PDF online | Co... Sistema Virtual de T... Claude DeepSeek -
Pretty-print ✓
{
  "StudentPaymentID": 1,
  "StudentID": 1,
  "ServiceType": "Monthly",
  "Hours": 20,
  "RatePerHour": 3.5,
  "MonthlyFee": 120,
  "DailyFee": 10,
  "TotalAmount": 120,
  "PaidAmount": 60,
  "BalanceRemaining": 60,
  "PaymentDate": "2025-02-20",
  "DueDate": "2025-02-28",
  "PaymentMethod": "Cash",
  "Status": "Pending",
  "IsRecurrent": 1,
  "StartDate": "2025-02-01",
  "EndDate": "2025-02-28",
  "InvoiceNumber": "FAC-001",
  "TransactionReference": "ABC123",
  "Notes": "Pago parcial.",
  "ProcessedBy": 1,
  "CreatedBy": 1,
  "CreatedAt": "2025-12-08T00:59:00.76005",
  "UpdatedAt": null
}
```

- POST /api/student-payments: create payment.
- PUT /api/student-payments/:id: Updates by StudentPaymentID.

- DELETE /api/student-payments/:id: delete by StudentPaymentID.

Teacher Payments

- GET /api/teacher-payments: list teacher payments.
- GET /api/teacher-payments/:id: Get by TeacherPaymentID.
- POST /api/teacher-payments: create payment.
- PUT /api/teacher-payments/:id: Update by TeacherPaymentID.
- DELETE /api/teacher-payments/:id: delete by TeacherPaymentID.

Sessions

- GET /api/sessions: list sessions.
- GET /api/sessions/:id: get by SessionID.
- POST /api/sessions: creates session.
- PUT /api/sessions/:id: updates by SessionID.
- DELETE /api/sessions/:id: delete by SessionID.