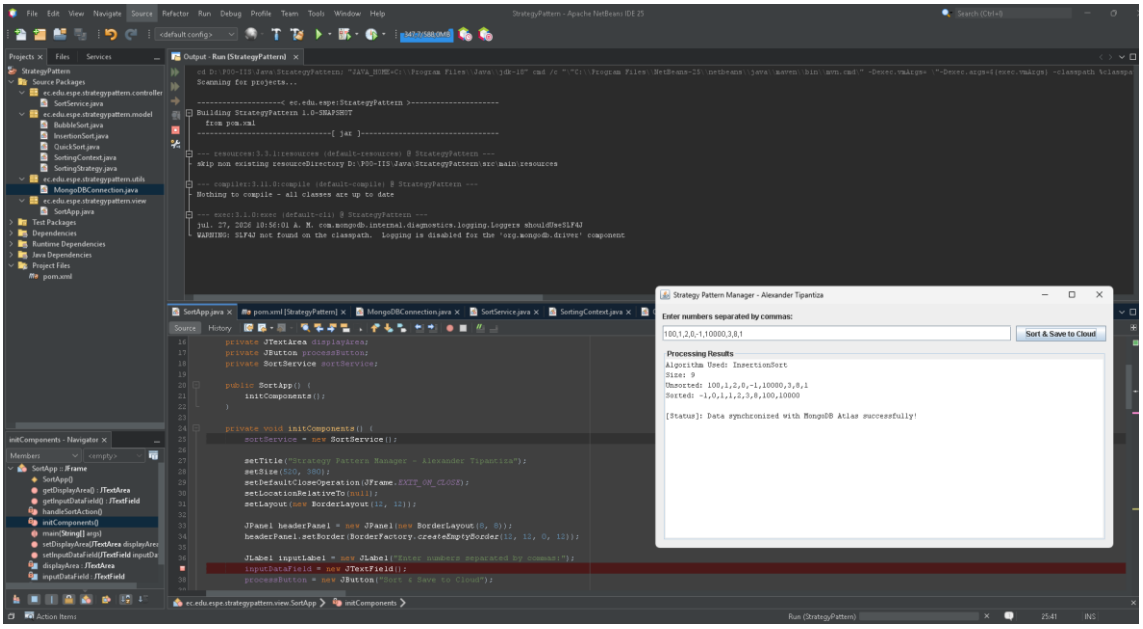
StrategyPattern - Apache NetBeans IDE 25
Output - Run (StrategyPattern)
Building StrategyPattern 1.0-SNAPSHOT
from pom.xml
jul. 27, 2026 10:56:01 A. M. com.mongodb.internal.diagnostics.logging.Loggers shouldUseSLF4J
WARNING: SLF4J not found on the classpath. Logging is disabled for the 'org.mongodb.driver' component
Strategy Pattern Manager - Alexander Tipantiza
Enter numbers separated by commas:
100,1,2,0,-1,10000,3,8,1
Sort & Save to Cloud
Processing Results
Algorithm Used: InsertionSort
Size: 9
Unsorted: 100,1,2,0,-1,10000,3,8,1
Sorted: -1,0,1,1,2,3,8,100,10000
[Status]: Data synchronized with MongoDB Atlas successfully!

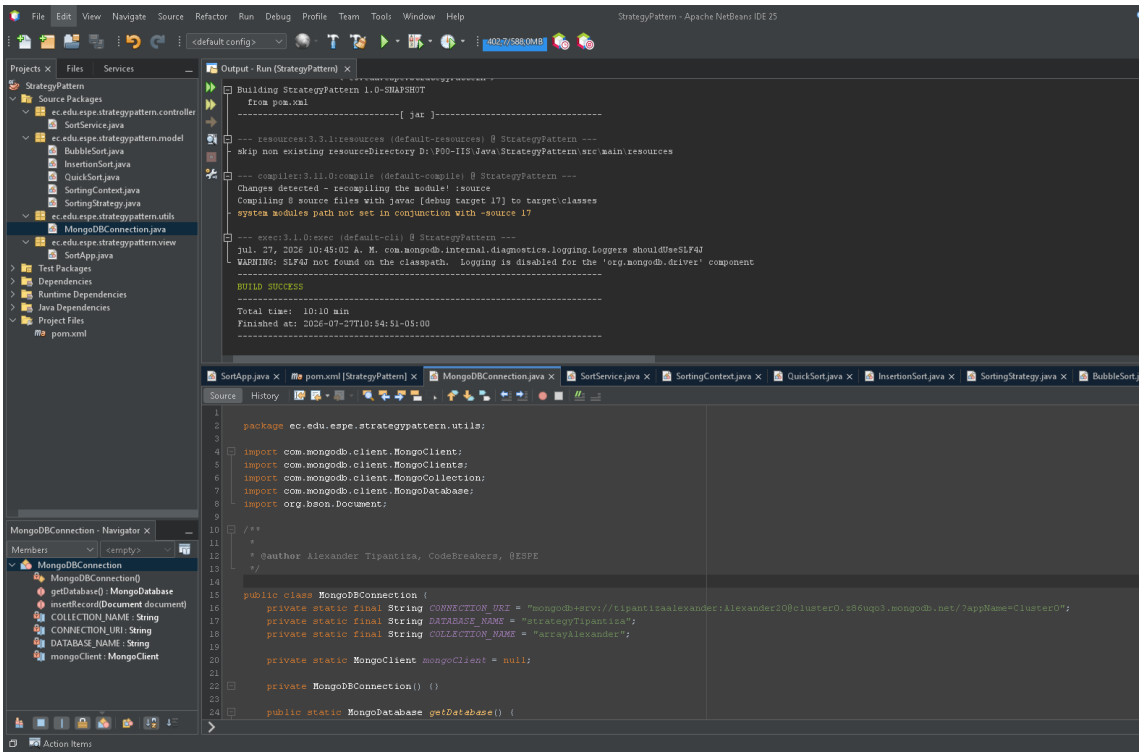
StrategyPattern - Apache NetBeans IDE 25
Output - Run (StrategyPattern)
Building StrategyPattern 1.0-SNAPSHOT
from pom.xml
--- resources:3.3.1:resources (default-resources) @ StrategyPattern ---
skip non existing resourceDirectory D:\POO-IIS\Java\StrategyPattern\src\main\resources
--- compiler:3.11.0:compile (default-compile) @ StrategyPattern ---
Changes detected - recompiling the module! :source
Compiling 8 source files with javac [debug target 17] to target\classes
system modules path not set in conjunction with -source 17
--- exec:3.1.0:exec (default-cli) @ StrategyPattern ---
jul. 27, 2026 10:45:02 A. M. com.mongodb.internal.diagnostics.logging.Loggers shouldUseSLF4J
WARNING: SLF4J not found on the classpath. Logging is disabled for the 'org.mongodb.driver' component
BUILD SUCCESS
Total time: 10:10 min
Finished at: 2026-07-27T10:54:51-05:00
package ec.edu.espe.strategypattern.utils;
import com.mongodb.client.MongoClient;
import com.mongodb.client.MongoClients;
import com.mongodb.client.MongoCollection;
import com.mongodb.client.MongoDatabase;
import org.bson.Document;
/**
* @author Alexander Tipantiza, CodeBreakers, @ESPE
*/
public class MongoDBConnection {
private static final String CONNECTION_URI = "mongodb+srv://tipantizaalexander:Alexander20@cluster0.z86uqo3.mongodb.net/?appName=Cluster0";
private static final String DATABASE_NAME = "strategyTipantiza";
private static final String COLLECTION_NAME = "arrayAlexander";
private static MongoClient mongoClient = null;
private MongoDBConnection() {}
public static MongoDatabase getDatabase() {

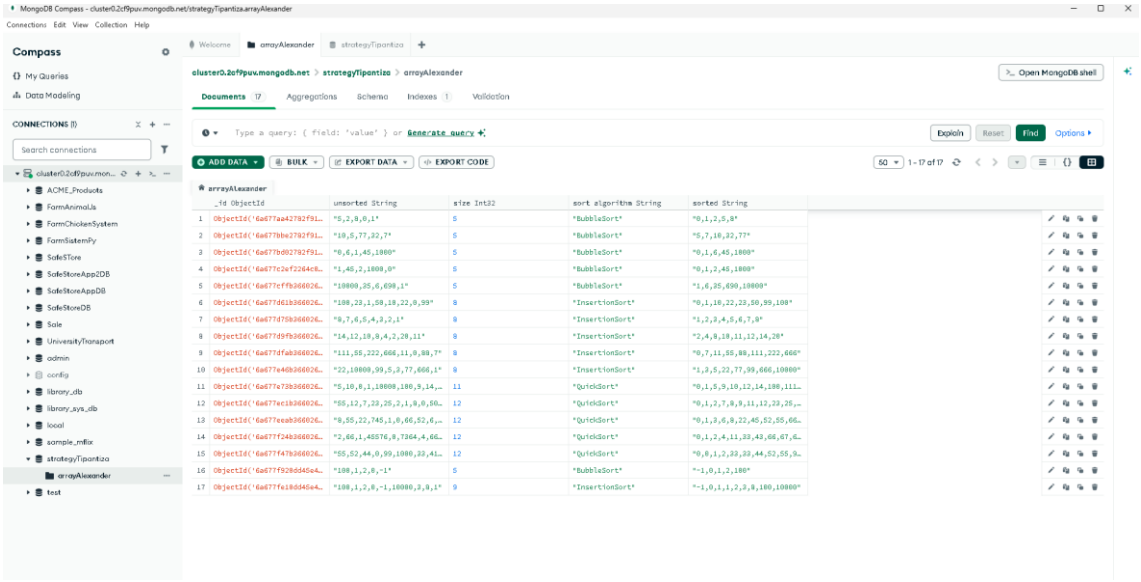
MongoDB Compass - cluster0.2cf9puv.mongodb.net/strategyTipantiza.arrayAlexander
Connections Edit View Collection Help
Compass
My Queries
Data Modeling
CONNECTIONS (1)
Search connections
cluster0.2cf9puv.mongodb.net > strategyTipantiza > arrayAlexander
Open MongoDB shell
Documents 17
Aggregations
Schema
Indexes 1
Validation
Type a query: { field: 'value' } or Generate query
Explain
Reset
Find
Options
ADD DATA
BULK
EXPORT DATA
EXPORT CODE
1-17 of 17
arrayAlexander
_id ObjectId
unsorted String
size Int32
sort algorithm String
sorted String
ACME_Products
FormAnimalUs
FormChickenSystem
FormSistemPy
SafeStore
SafeStoreApp2DB
SafeStoreAppDB
SafeStoreDB
Sale
UniversityTranaport
admin
config
library_db
library_sys_db
local
sample_mflix
strategyTipantiza
arrayAlexander
test

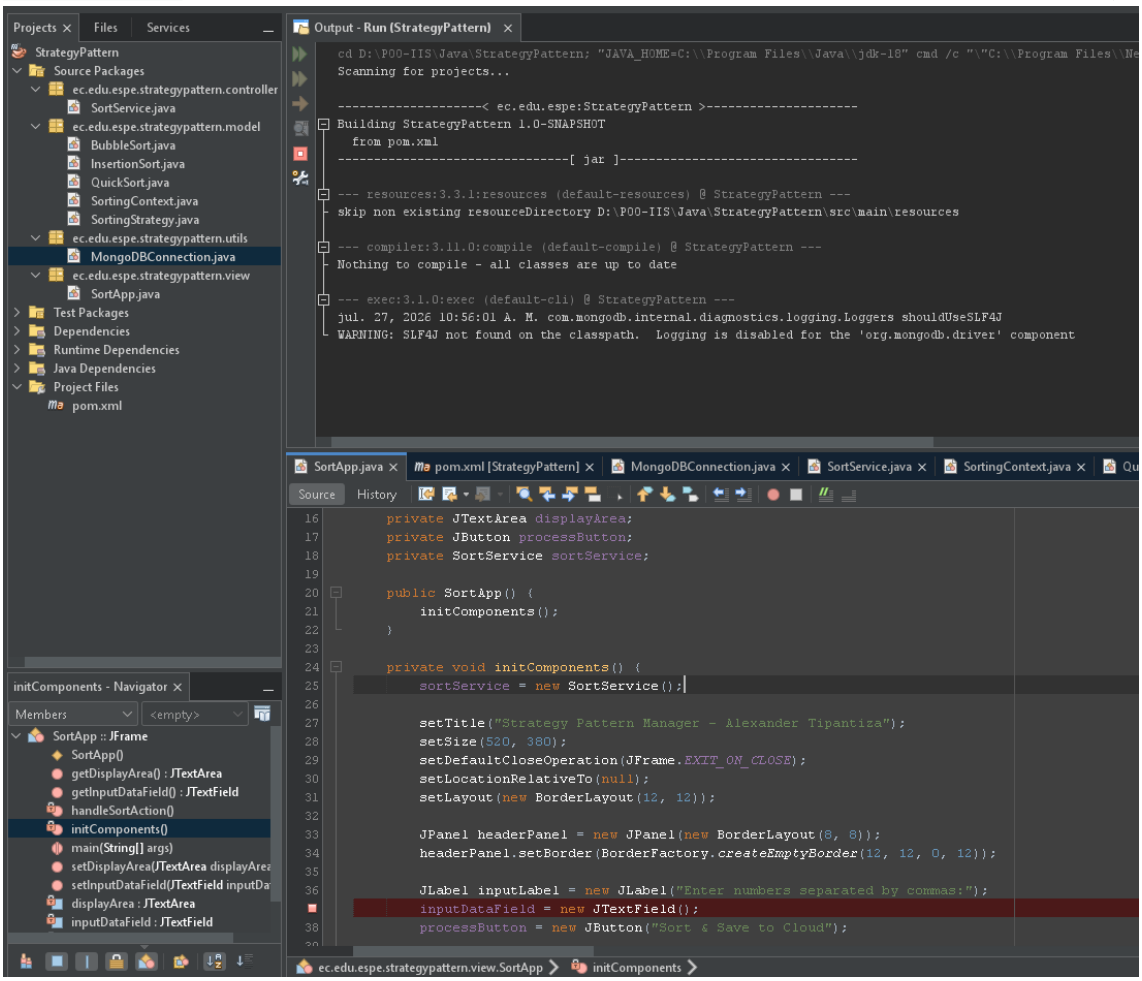
Projects
Files
Services
StrategyPattern
Source Packages
ec.edu.espe.strategypattern.controller
SortService.java
ec.edu.espe.strategypattern.model
BubbleSort.java
InsertionSort.java
QuickSort.java
SortingContext.java
SortingStrategy.java
ec.edu.espe.strategypattern.utils
MongoDBConnection.java
ec.edu.espe.strategypattern.view
SortApp.java
Test Packages
Dependencies
Runtime Dependencies
Java Dependencies
Project Files
pom.xml
Output - Run (StrategyPattern)
cd D:\P00-IIS\Java\StrategyPattern; "JAVA_HOME=C:\\Program Files\\Java\\jdk-18" cmd /c "\"C:\\Program Files\\Ne
Scanning for projects...
----------< ec.edu.espe:StrategyPattern >----------
Building StrategyPattern 1.0-SNAPSHOT
from pom.xml
--------[jar]--------
--- resources:3.3.1:resources (default-resources) @ StrategyPattern ---
skip non existing resourceDirectory D:\P00-IIS\Java\StrategyPattern\src\main\resources
--- compiler:3.11.0:compile (default-compile) @ StrategyPattern ---
Nothing to compile - all classes are up to date
--- exec:3.1.0:exec (default-cli) @ StrategyPattern ---
jul. 27, 2026 10:56:01 A. M. com.mongodb.internal.diagnostics.logging.Loggers shouldUseSLF4J
WARNING: SLF4J not found on the classpath. Logging is disabled for the 'org.mongodb.driver' component
SortApp.java
pom.xml [StrategyPattern]
MongoDBConnection.java
SortService.java
SortingContext.java
Source
History
private JTextArea displayArea;
private JButton processButton;
private SortService sortService;
public SortApp() {
initComponents();
}
private void initComponents() {
sortService = new SortService();
setTitle("Strategy Pattern Manager - Alexander Tipantiza");
setSize(520, 380);
setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
setLocationRelativeTo(null);
setLayout(new BorderLayout(12, 12));
JPanel headerPanel = new JPanel(new BorderLayout(8, 8));
headerPanel.setBorder(BorderFactory.createEmptyBorder(12, 12, 0, 12));
JLabel inputLabel = new JLabel("Enter numbers separated by commas:");
inputDataField = new JTextField();
processButton = new JButton("Sort & Save to Cloud");
initComponents - Navigator
Members
<empty>
SortApp :: JFrame
SortApp()
getDisplayArea() : JTextArea
getInputDataField() : JTextField
handleSortAction()
initComponents()
main(String[] args)
setDisplayArea(JTextArea displayArea
setInputDataField(JTextField inputDa
displayArea : JTextArea
inputDataField : JTextField
ec.edu.espe.strategypattern.view.SortApp
initComponents