Stakeholders: People involved in the project
Use case: Describe how the software is need or how it should work with all parties involved

Identificadores: (Identifiers): Names we use to call methods, variables, libraries, etc.
Key words: Reserved words or Keywords that have a specific function in the program, for example: float, int, void, for, if, while, ...

Test cases: Detailed set of conditions, steps, input data, and expected results use to verify that a specific software functionality works correctly

Diagrams creation models
- use cases: actions that the system will perform
- Class diagram: System structure


People involved

Use or process to be performed

NOTA /

An actor in a use case can be:
- Person
- Hardware
- Applications

How to identify a use case?
- Its shape is an oval
- Synonym for goal or use case, or is a function that the program has
- It reads: Subject + verb + complement

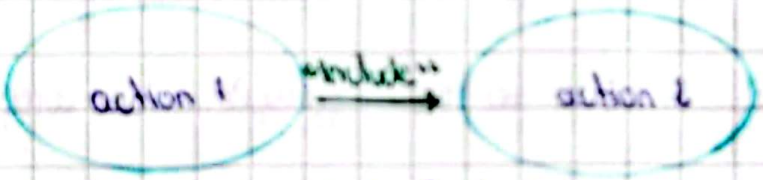

- A process must be executed first before the next one can be executed

Ideas

Use case diagrams: They come from the product backlog

Class diagram: Derived from the project definition or the SRS

Notes:
- The dependencies come out of the classes
- Associations arise from attributes

15/10/2024 Tuesday

DIA MES AÑO NOTA /

22/10/2026

Review Every thing

Clean Code: rules to follow, standars, According to the programing language

Ex. Snake_case, CamelCase

Programming Paradigms: Structured Programming (Procedural) OOP

VCS: Git, we manage versiong of software development

OPP:
- Encapsulation
- Abstraccion
- Inheritance
- Polymorphism

- Constructors: used to initialzael instance objects of a class

For Modeling class → Class Modeling Diagram
For Actors Modeling → Use Case Diagram

Classes relationships in Class Diagram

- Dependences
- Associations
- Compositions
- Aggregations

Collections

Programming interfaces
Set auf roles and protocals that allow computer programs to talk to each other
Contract / Blueprint that defines a set of methods that we must implemented so they can be used by other objects

A set of function prototypes (function declarations)

float add(function declarations)

float add(float addend1, float addend2) ; // declaration / prototype

```
public abstract class Operation {
    float operand1;
    float operand2;
    float result;
```