

UNIVERSITY OF THE ARMED FORCES - ESPE

Computer Science Department

Object Oriented Programming

36863

WorkShop16-LibsAndUnitTest

LASCANO, JORGE EDISON

October 23, 2026

Name: Erick Revelo

```
38      @Test
39      public void computeDistanceTest1() {
40          System.out.println("computeDistanceBetweenPoints");
41          float x1 = 0.0F;
42          float x2 = 0.0F;
43          float y1 = 0.0F;
44          float y2 = 0.0F;
45          DistanceBetweenPoints instance = new DistanceBetweenPoints();
46          float expResult = 0.0F;
47          float result = instance.computeDistanceBetweenPoints(x1, x2, y1, y2);
48          assertEquals(expResult, result, 0);
49      }
50
51      @Test
52      public void computeDistanceTest2Positives() {
53          System.out.println("Test with positive numbers");
54          float x1 = 4.0F;
55          float x2 = 3.0F;
56          float y1 = 7.0F;
57          float y2 = 2.0F;
58          DistanceBetweenPoints instance = new DistanceBetweenPoints();
59          float expResult = 5.1F;
60          float result = instance.computeDistanceBetweenPoints(x1, x2, y1, y2);
61          assertEquals(expResult, result, 0);
62      }
63
64      @Test
65      public void computeDistanceTest3Negatives() {
66          System.out.println("Test with negative numbers");
67          float x1 = -4.0F;
68          float x2 = -3.0F;
69          float y1 = -7.0F;
70          float y2 = -2.0F;
71          DistanceBetweenPoints instance = new DistanceBetweenPoints();
72          float expResult = 5.1F;
73          float result = instance.computeDistanceBetweenPoints(x1, x2, y1, y2);
```


```
 *
 * @author Erick Revelo, Code Crafters, @ESPE
 */
public class DistanceBetweenPointsTest {

    public DistanceBetweenPointsTest() {
    }

    @BeforeAll
    public static void setUpClass() {
    }

    @AfterAll
    public static void tearDownClass() {
    }

    @BeforeEach
```

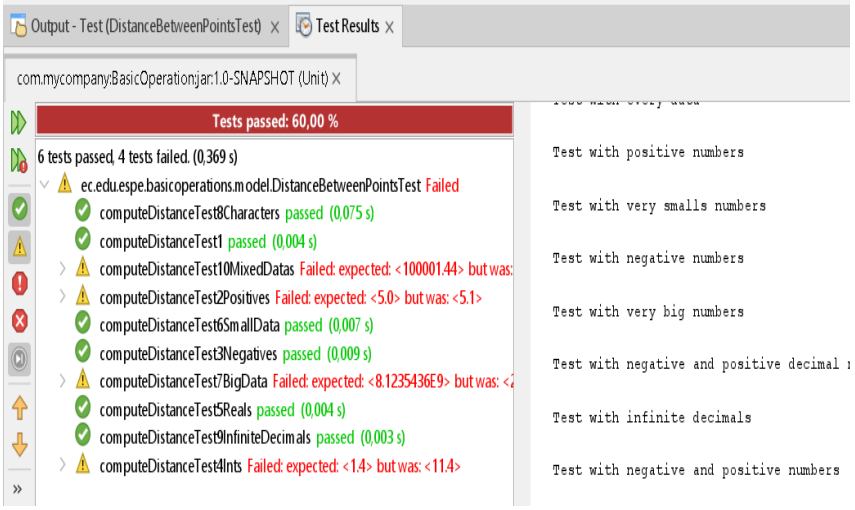

```
 *
 * @author Erick Revelo, Code Crafters, @ESPE
 */
public class DistanceBetweenPointsTest {

    public DistanceBetweenPointsTest() {
    }

    @BeforeAll
    public static void setUpClass() {
    }

    @AfterAll
    public static void tearDownClass() {
```

