




M80 Per-participant Wikipedia browsing style features

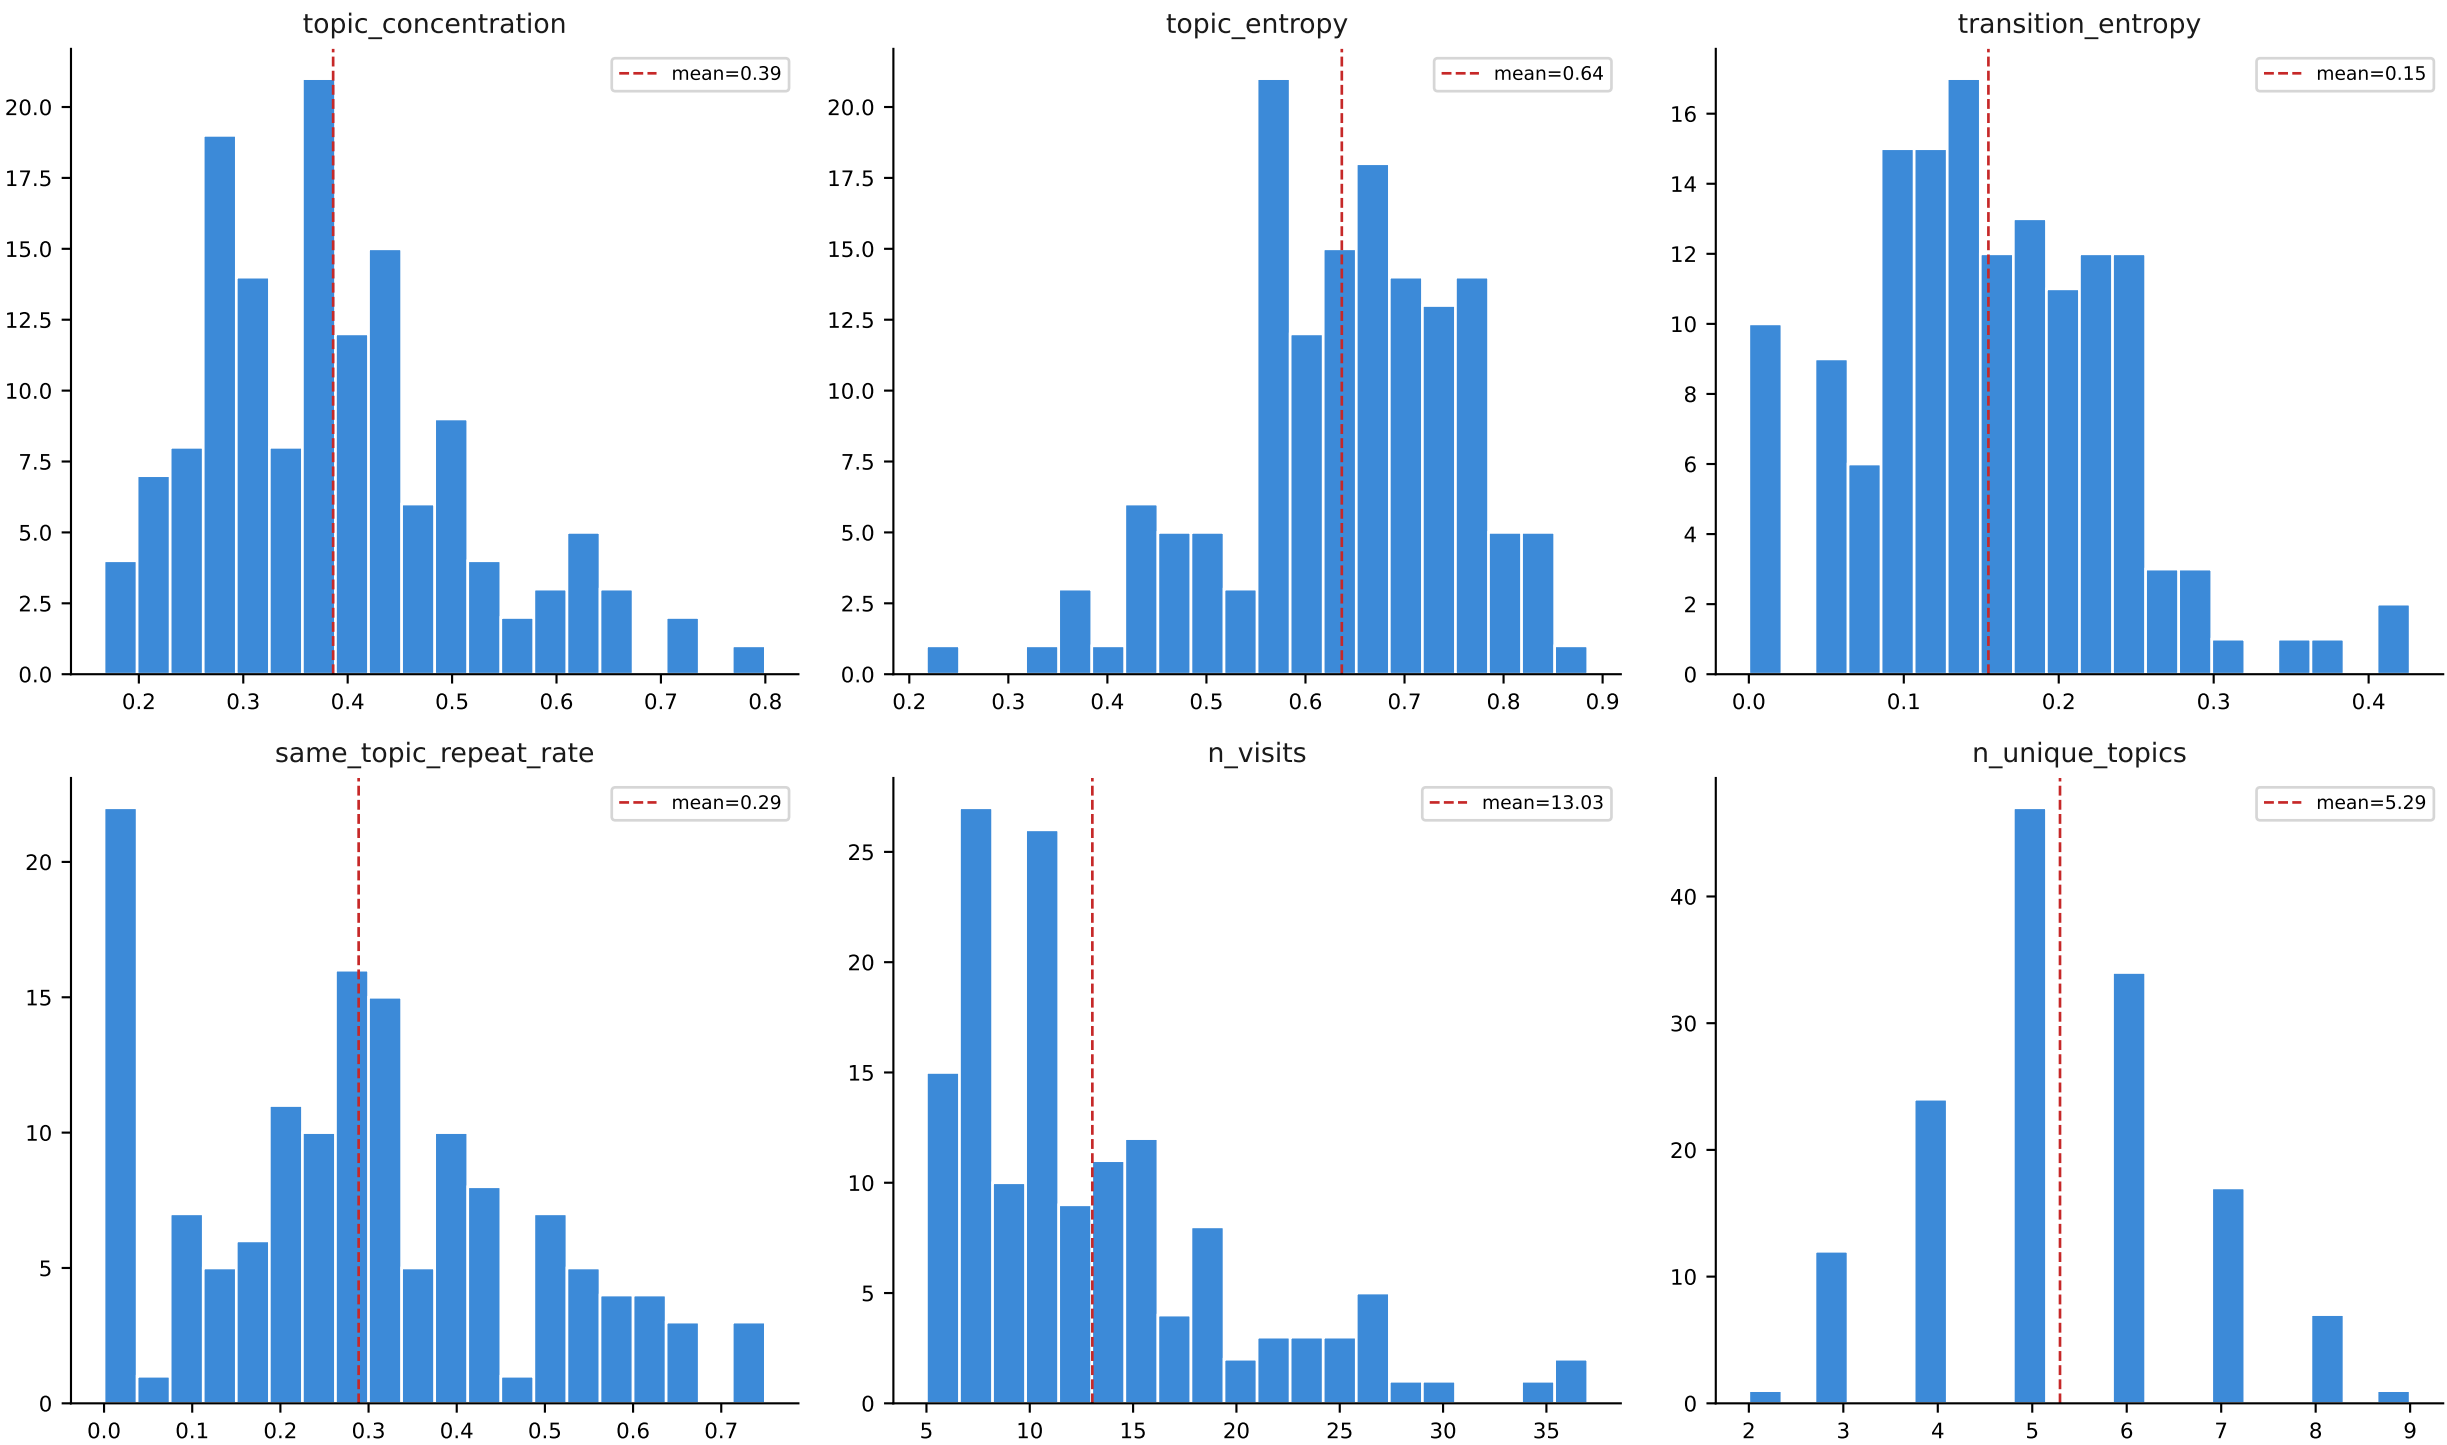

M80 Hunter vs Busybody clustering (KMeans k=2 on standardised features)

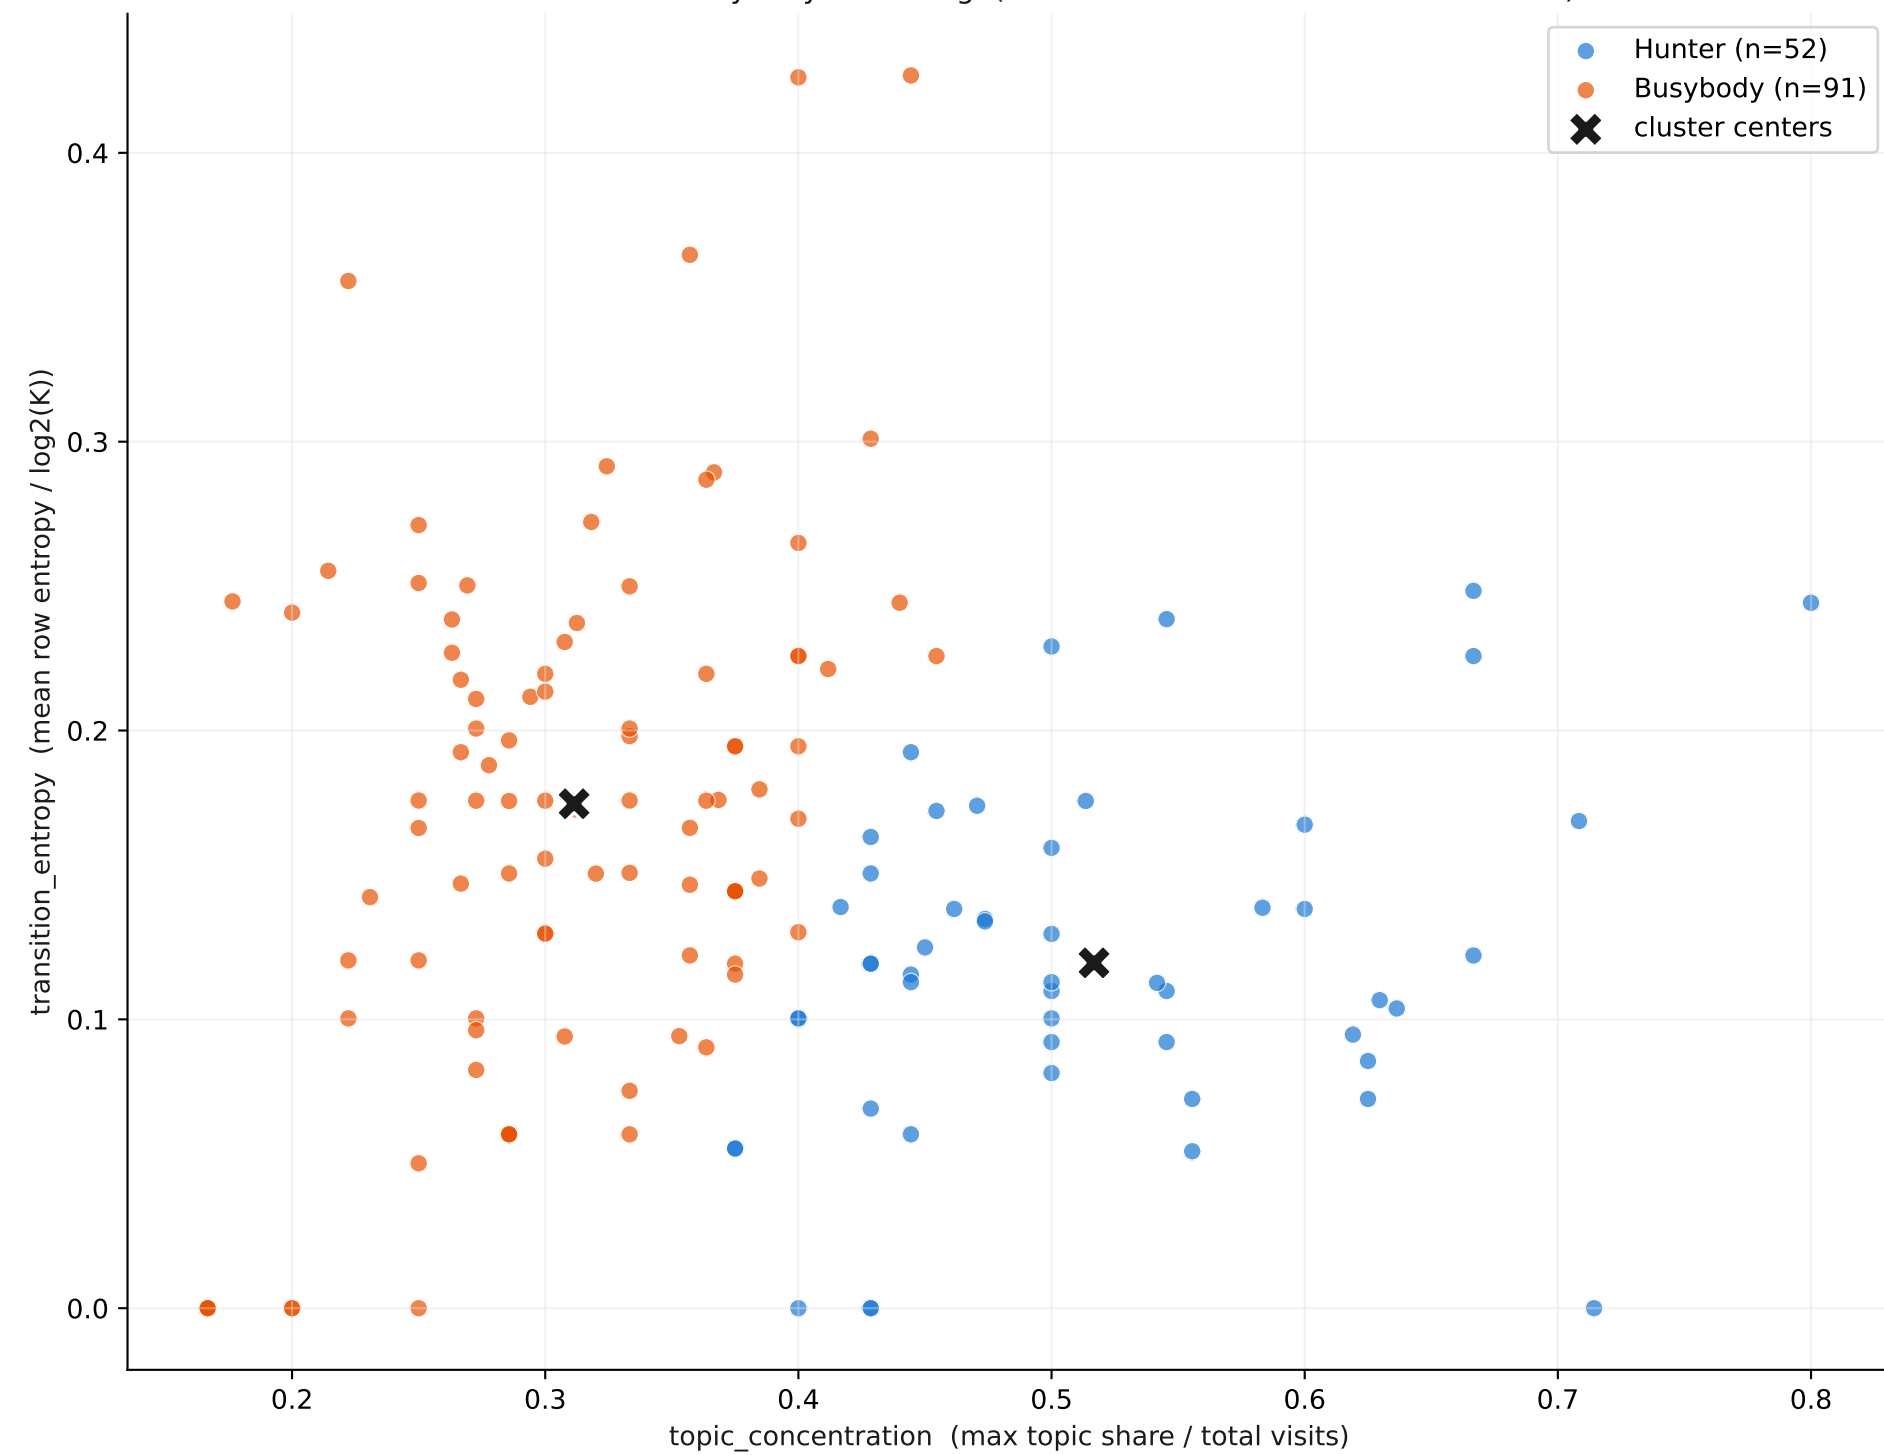

M80 Foraging condition vs Wikipedia style
chi-square = 0.01, df=1, p=0.924

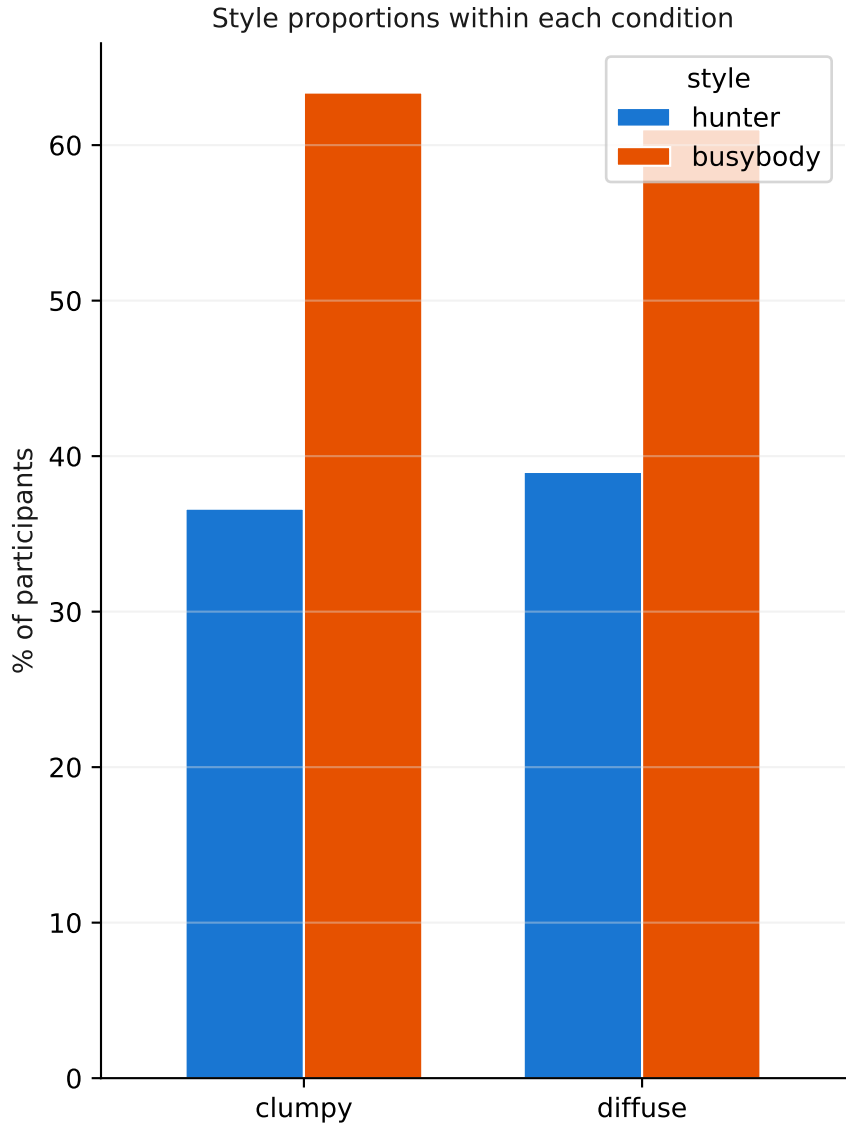


	hunter	busybody	total
clumpy	26	45	71
diffuse	23	36	59
total	49	81	130

M80 Spatial features by Wikipedia style (Hunter N=49, Busybody N=81)
No FDR-significant features. Top 15 by |Cohen's d|:


Feature	N_H	N_B	Mean_H	Mean_B	d	t	p	p_FDR
n_transitions_mean	49	81	2.22	1.83	+0.35	+1.86	0.066	0.844
patch_leaving_distance	44	71	20.50	26.24	-0.28	-1.66	0.100	0.844
n_transitions_sd	49	81	1.40	1.20	+0.25	+1.31	0.193	0.844
collection_rate_sd	49	81	1.25	1.51	-0.19	-1.12	0.264	0.844
total_collected_sd	49	81	74.27	89.05	-0.19	-1.09	0.279	0.844
levy_alpha_sd	49	81	0.01	0.01	-0.19	-1.08	0.282	0.844
time_to_first_resource	49	81	5.27	6.52	-0.18	-1.02	0.310	0.844
explore_dur_median_m	49	81	26.72	29.79	-0.18	-0.98	0.331	0.844
explore_dur_mean_m	49	81	27.13	30.12	-0.17	-0.96	0.341	0.844
heading_variability_sd	49	81	2.11	2.31	-0.16	-0.97	0.335	0.844
time_to_first_resource_m	49	81	4.68	5.51	-0.14	-0.80	0.427	0.844
inter_resource_mean_m	49	81	0.04	0.04	-0.14	-0.87	0.389	0.844
path_length_mean	49	81	4068.91	3970.18	+0.14	+0.74	0.461	0.844
exploit_dur_median_m	45	73	16.93	18.16	-0.12	-0.65	0.516	0.844
explore_dur_mean_sd	49	81	11.95	12.92	-0.12	-0.66	0.511	0.844

M80 Spatial features by Wiki style: top contrasts


n_transitions_mean
 $d=+0.35$, $p_FDR=0.844$

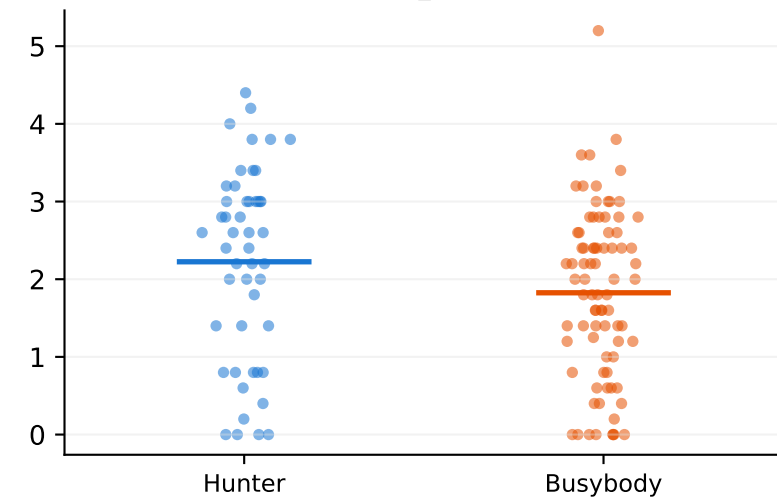


patch_leaving_distance_mean
 $d=-0.28$, $p_FDR=0.844$

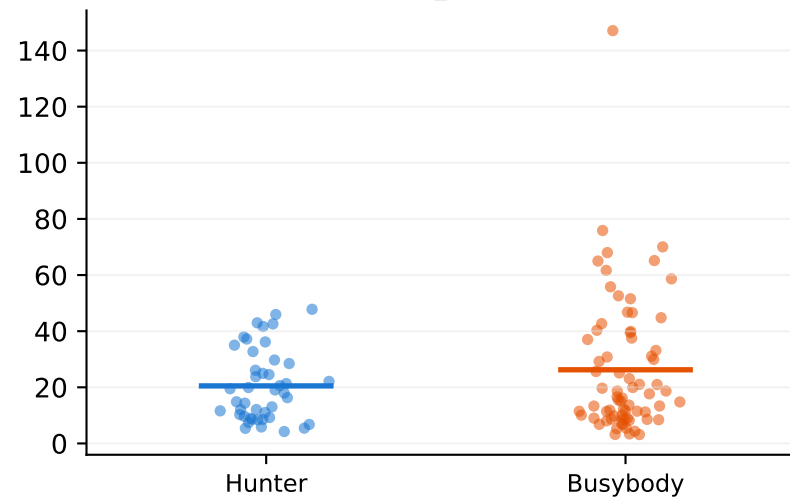


n_transitions_sd
 $d=+0.25$, $p_FDR=0.844$

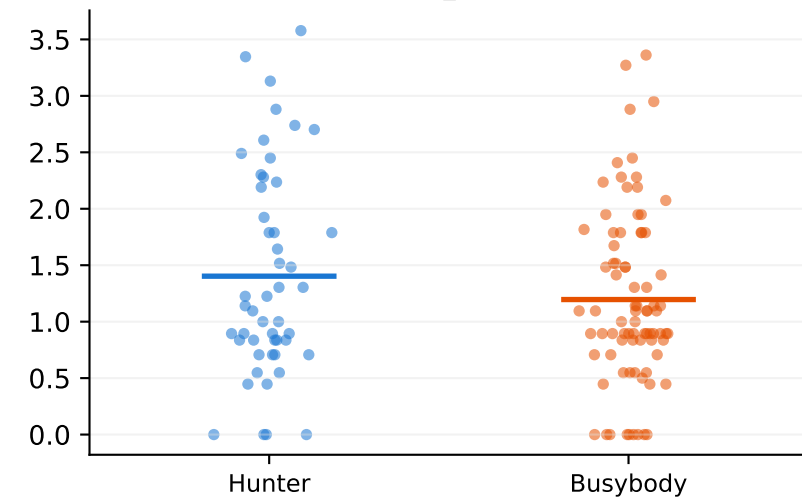

collection_rate_sd
 $d=-0.19$, $p_FDR=0.844$

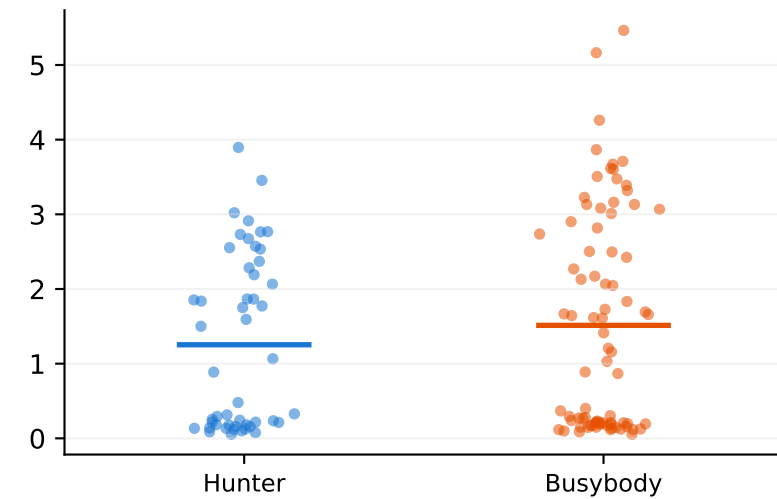

total_collected_sd
 $d=-0.19$, $p_FDR=0.844$

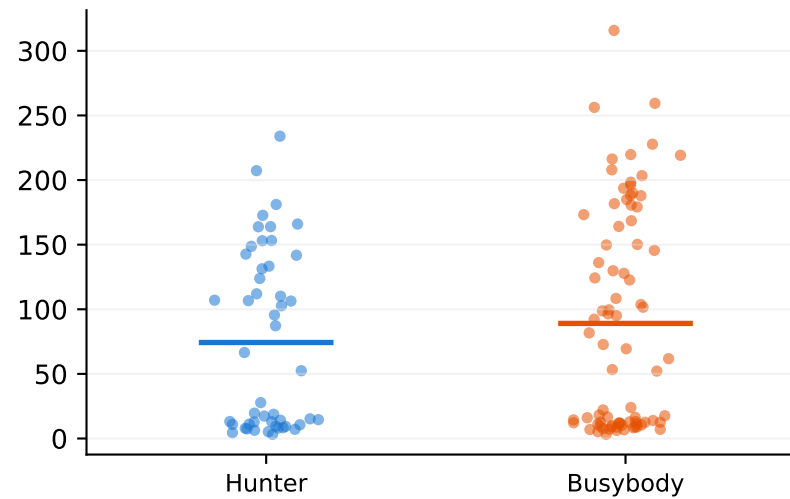

levy_alpha_sd
 $d=-0.19$, $p_FDR=0.844$

