

LAPORAN UAS PEMROGRAMAN WEB DAN PRAKTIKUM PEMROGRAMAN WEB
WEBSITE PET RESCUE



Disusun Oleh :

1. Putri Ravika Hidayat (2010512105)
2. Fadiyah Sutopo (2010512110)
3. Marella Elba Nafisa (2010512123)
4. Salsabila Faiha Puteri (2010512138)

Mata Kuliah :

Pemrograman Web dan Praktikum Pemrograman Web

Dosen Pengampu :

Catur Nugrahaeni Puspita Dewi, M. Kom

UNIVERSITAS PEMBANGUNAN NASIONAL VETERAN JAKARTA
FAKULTAS ILMU KOMPUTER
S1 SISTEM INFORMASI
2022

DAFTAR ISI

DAFTAR ISI	1
BAB I	4
PENDAHULUAN	4
1.1 Latar Belakang	4
1.2 Tujuan	4
1.3 Ruang Lingkup	4
1.4 Visi Misi	4
1.4.1 Visi	4
1.4.2 Misi	5
1.5 Framework	5
BAB II	6
TINJAUAN PUSTAKA	6
BAB III	8
PEMBAHASAN	8
3.1 Fitur	8
3.1.1 Register	8
3.1.2 Login	8
3.1.3 Home	8
3.1.4 Donation	8
3.1.5 Adoption	8
3.1.6 About Us	8
3.2 Kode Program	9
3.2.1 .env	9
3.2.2 Kernel.php	10
3.2.3 Auth	12
3.2.3.1 AuthenticatedSessionController.php	12
3.2.3.2 ConfirmablePasswordController.php	14
3.2.3.3 EmailVerificationNotificationController.php	15
3.2.3.4 EmailVerificationPromptController.php	16
3.2.3.5 NewPasswordController.php	17
3.2.3.6 PasswordResetLinkController.php	19
3.2.3.7 RegisteredUserController.php	20
3.2.3.8 VerifyEmailController.php	22
3.2.4 Middleware	23

3.2.4.1 Authenticate.php	23
3.2.5 Migrations	23
3.2.5.1 2014_10_12_000000_create_users_table.php	23
3.2.5.2 2014_10_12_100000_create_password_resets_table.php	24
3.2.5.3 2019_08_19_000000_create_failed_jobs_table.php	25
3.2.5.4 2019_12_14_000001_create_personal_access_tokens_table.php	26
3.2.5.5 2022_06_01_131855_create_user_table.php	27
3.2.6 Seeders	28
3.2.6.1 AkunSeeder.php	28
3.2.6.2 DatabaseSeeder.php	29
3.2.7 Controller	30
3.2.7.1 homeController.php	30
3.2.7.2 donationController.php	31
3.2.7.3 formAdoptController.php	33
3.2.8 Views	34
3.2.8.1 aboutUs.blade.php	34
3.2.8.2 admin.blade.php	38
3.2.8.3 adoption.blade.php	40
3.2.8.4 dashboard.blade.php	48
3.2.8.5 donation.blade.php	51
3.2.8.6 formAdopt.blade.php	58
3.2.8.7 home.blade.php	65
3.2.9 Routes	75
3.2.9.1 web.php	75
3.2.10 Models	77
3.2.10.1 User.php	77
3.3 Output	79
3.3.1 Admin	79
3.3.1.1 Form Login	79
3.3.1.2 Dashboard	79
3.3.2 User	80
3.3.2.1 Home	80
3.3.2.2 Donation	82
3.3.2.3 Adoption	83
3.3.2.4 About Us	87
BAB IV	89
PENUTUP	89

4.1 Kesimpulan	89
DAFTAR PUSTAKA	90

BAB I

PENDAHULUAN

1.1 Latar Belakang

Kucing dan Anjing merupakan hewan yang paling banyak berada di sekitar kita, sehingga kedua hewan ini sering dijadikan sebagai hewan peliharaan oleh masyarakat. Tetapi, tak jarang masyarakat yang hanya ingin memelihara tanpa bertanggungjawab atas hidup hewan peliharaan tersebut seperti membiarkan hewan peliharaan yang sakit, sehingga berujung pada penganiayaan dan penelantaran serta dibuangnya hewan tersebut ke jalanan, pasar, atau tempat sampah. Banyaknya kasus tersebut mengakibatkan menumpuknya hewan di jalanan yang sakit, kelaparan, kurang gizi bahkan mati mengenaskan.

Banyaknya hewan terlantar yang berkeliaran bebas di jalanan juga menjadi korban kejahanatan masyarakat-masyarakat yang usil, seperti yang sering viral di sosial media, dimana Anjing dan Kucing dicekoki minuman keras, bulu mereka dicat, diberi makan asal-asalan dan dijadikan bahan kenakalan lainnya..

1.2 Tujuan

Adapun tujuan dari pembuatan *website* ini adalah untuk meminimalisir kasus-kasus seperti yang sudah disebutkan tadi, memberikan pertolongan kepada hewan-hewan yang sakit, kurang gizi dll, serta memberikan kehidupan dan harapan baru yang lebih baik bagi para Kucing dan Anjing di jalanan dengan mencari majikan baru yang mampu berkomitmen untuk merawat sampai akhir hayat melalui fitur adopsi.

1.3 Ruang Lingkup

Website Pet Rescue menerima donasi dari seluruh Indonesia. Namun, hasil donasi yang terkumpul hanya akan digunakan untuk merawat anjing dan kucing yang membutuhkan di wilayah Jabodetabek.

Website Pet Rescue juga menerima *client* yang tinggal di wilayah Jabodetabek yang ingin mengadopsi anjing atau kucing dengan syarat dan ketentuan tertentu.

1.4 Visi Misi

1.4.1 Visi

- Menyelamatkan anjing dan kucing yang terlantar agar bisa kembali pulih dan memberikan rumah baru untuk mereka.
- Meminimalisir keterlantaran Kucing dan Anjing di jalanan

- Menjadikan *Pet Rescue* sebagai harapan baik bagi para hewan yang terlantar

1.4.2 Misi

- Membawa Kucing dan Anjing jalanan yang terlantar atau sakit ke partner dokter hewan kami untuk diperiksa dan dirawat.
- Menggalang dana (donasi) untuk nantinya digunakan sebagai biaya perawatan mereka.
- Mencariakan kehidupan yang lebih baik bagi Kucing dan Anjing jalanan dengan membuka adopsi.

1.5 Framework

Website Pet Rescue dikembangkan dengan menggunakan *framework* Bootstrap untuk membuat *front-end* (HTML, CSS, JavaScript) agar tampilan web tetap rapi dan konsisten, sedangkan untuk membuat *back-end* (PHP) menggunakan *framework* Laravel agar mudah dalam mengembangkan database sebagai sumber daya *website* dan menjaga keamanan aplikasi. Selain itu, penggunaan kedua *framework* ini dapat membantu agar kode program menjadi lebih terstruktur, pengembangan web menjadi lebih cepat dan efisien, dan lebih aman.

BAB II

TINJAUAN PUSTAKA

Pemrograman web adalah suatu proses pengembangan aplikasi *website* dari sisi *client* menggunakan bahasa pemrograman khusus, seperti HTML (*Hypertext Markup Language*) dan CSS (*Cascading Style Sheet*).

HTML merupakan bahasa pondasi untuk terbentuknya tampilan sebuah website dan CSS berfungsi sebagai mendesain tampilan pada layout website.

JavaScript adalah bahasa pemrograman yang digunakan dalam pengembangan website agar lebih dinamis dan interaktif sehingga dapat meningkatkan fungsionalitas dari website. JavaScript atau disingkat menjadi JS merupakan bahasa pemrograman jenis interpreter, sehingga tidak memerlukan *compiler* untuk menjalankannya. JavaScript memiliki fitur-fitur seperti *object oriented*, *client-side*, *high-level programming*, dan *loosely typed*.

PHP (*Hypertext Preprocessor*) adalah bahasa pemrograman yang digunakan untuk penanganan pengembangan website bersama dengan HTML. PHP merupakan bahasa script yang dijalankan pada sisi server (SSS: Server Side Scripting). *Database* yang didukung PHP, antara lain MySQL, Informix, Oracle, Sybase, Solid, PostgreSQL, Generic ODBC. PHP adalah *software Open Source*. Menurut Kustianingsih (2011:114), “PHP (atau resminya PHP: Hypertext Preprocessor) adalah skrip bersifat *server-side* yang ditambahkan ke dalam HTML”. Pada prinsipnya, *server* akan bekerja apabila ada permintaan dari *client*. Dalam hal ini *client* menggunakan kode-kode PHP untuk mengirimkan permintaan ke *server*. Jenis *server* yang sering digunakan bersama dengan PHP antara lain Apache, Nginx, dan LiteSpeed.

Bootstrap adalah *framework open-source* khusus *front-end* untuk mempermudah dan mempercepat pengembangan *web* di *front-end*. Bootstrap memiliki semua jenis HTML dan *template* desain berbasis CSS untuk berbagai fungsi dan komponen, seperti navigasi, sistem grid, *carousel* gambar, dan tombol (*button*). Adapun 3 file utama Bootstrap, yaitu Bootstrap.css, Bootstrap.js, dan Glyphicons.

Laravel adalah *framework* yang dapat membantu *web developer* dalam memaksimalkan penggunaan PHP dalam proses pengembangan *website*. *Framework* ini membuat PHP menjadi lebih *powerful*, cepat, aman, dan *simple*. Mengikuti struktur MVC atau *Model View Controller*. MVC adalah sebuah pola arsitektur dalam membuat sebuah aplikasi dengan cara memisahkan kode menjadi tiga bagian yang terdiri dari *model*, *view*, dan *controller* sehingga proses pengembangan *website* menjadi lebih efisien, penulisan kode lebih rapi, perbaikan *bug* cepat diselesaikan, dan memudahkan pemeliharaan.

- **Model**

Bagian yang bertugas untuk menyiapkan, mengatur, memanipulasi, dan mengorganisasikan data yang ada di *database*.

- **View**

Bagian yang bertugas untuk menampilkan informasi dalam bentuk *Graphical User Interface* (GUI).

- **Controller**

Bagian yang bertugas untuk menghubungkan serta mengatur model dan view agar dapat saling terhubung.

BAB III

PEMBAHASAN

3.1 Fitur

3.1.1 Register

Fitur ini berisi tentang *form register* untuk mendaftarkan akun admin baru yang akan disimpan dalam *database* untuk melihat data yang masuk. web admin cuma biar bisa lihat data yang masuk

3.1.2 Login

Fitur ini berisi tentang tabel username dan password yang terhubung ke database untuk admin yang ingin melihat data yang masuk. Fitur ini juga terhubung dengan fitur *register*. Fitur ini dapat menyimpan secara otomatis nama dan *password* menggunakan fitur "Remember Me".

3.1.3 Home

Fitur ini berisi tentang foto-foto hewan yang sedang membutuhkan bantuan, lokasi perusahaan dan *partner* dokter hewan yang bekerja sama langsung untuk penanganan hewan.

3.1.4 Donation

Fitur ini berisi tentang *form* donasi yang mencakup identitas pemberi donasi seperti nama, nama lengkap, *e-mail*, nominal transfer dan bukti transfer donasi yang berupa *image*.

3.1.5 Adoption

Fitur ini berisi tentang form adopsi yang mencakup data calon pengadopsi seperti nama, alamat, nomor telepon, e-mail, jenis hewan yang dipilih dan alasan mengapa ingin mengadopsi hewan tersebut.

3.1.6 About Us

Fitur ini berisi tentang penjelasan mengenai apa itu *pet rescue*, perkenalan dan kontak untuk menghubungi *pet rescue*.

3.2 Kode Program

3.2.1 .env

```
APP_NAME=Laravel
APP_ENV=local
APP_KEY=base64:bDqZMd6xEzY1c40ZU7K4MyDXyfqX+aSyQgnSfwUZ3Ig=
APP_DEBUG=true
APP_URL=http://localhost

LOG_CHANNEL=stack
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug

DB_CONNECTION=mysql
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=donasi
DB_USERNAME=root
DB_PASSWORD=

BROADCAST_DRIVER=log
CACHE_DRIVER=file
FILESYSTEM_DRIVER=local
QUEUE_CONNECTION=sync
SESSION_DRIVER=file
SESSION_LIFETIME=120

MEMCACHED_HOST=127.0.0.1

REDIS_HOST=127.0.0.1
REDIS_PASSWORD=null
REDIS_PORT=6379

MAIL_MAILER=smtp
MAIL_HOST=mailhog
MAIL_PORT=1025
MAIL_USERNAME=null
MAIL_PASSWORD=null
```

```

MAIL_ENCRYPTION=null
MAIL_FROM_ADDRESS=null
MAIL_FROM_NAME="${APP_NAME}"

AWS_ACCESS_KEY_ID=
AWS_SECRET_ACCESS_KEY=
AWS_DEFAULT_REGION=us-east-1
AWS_BUCKET=
AWS_USE_PATH_STYLE_ENDPOINT=false

PUSHER_APP_ID=
PUSHER_APP_KEY=
PUSHER_APP_SECRET=
PUSHER_APP_CLUSTER=mt1

MIX_PUSHER_APP_KEY="${PUSHER_APP_KEY}"
MIX_PUSHER_APP_CLUSTER="${PUSHER_APP_CLUSTER}"

```

3.2.2 Kernel.php

```

<?php

namespace App\Http;

use Illuminate\Foundation\Http\Kernel as HttpKernel;

class Kernel extends HttpKernel
{
    /**
     * The application's global HTTP middleware stack.
     *
     * These middleware are run during every request to your
     * application.
     *
     * @var array<int, class-string/string>
     */
    protected $middleware = [
        \App\Http\Middleware\TrustHosts::class,
        \App\Http\Middleware\TrustProxies::class,

```

```
\Fruitcake\Cors\HandleCors::class,  
  
\App\Http\Middleware\PreventRequestsDuringMaintenance::class,  
  
\Illuminate\Foundation\Http\Middleware\ValidatePostSize::class,  
    \App\Http\Middleware\TrimStrings::class,  
  
\Illuminate\Foundation\Http\Middleware\ConvertEmptyStringsToNull::cl  
ass,  
];  
  
/**  
 * The application's route middleware groups.  
 *  
 * @var array<string, array<int, class-string/string>>  
 */  
protected $middlewareGroups = [  
    'web' => [  
        \App\Http\Middleware\EncryptCookies::class,  
  
\Illuminate\Cookie\Middleware\AddQueuedCookiesToResponse::class,  
        \Illuminate\Session\Middleware\StartSession::class,  
        //  
\Illuminate\Session\Middleware\AuthenticateSession::class,  
  
\Illuminate\View\Middleware\ShareErrorsFromSession::class,  
        \App\Http\Middleware\VerifyCsrfToken::class,  
  
\Illuminate\Routing\Middleware\SubstituteBindings::class,  
    ],  
  
    'api' => [  
        //  
\Laravel\Sanctum\Http\Middleware\EnsureFrontendRequestsAreStateful::  
class,  
        'throttle:api',  
  
\Illuminate\Routing\Middleware\SubstituteBindings::class,  
    ],
```

```

];
/**
 * The application's route middleware.
 *
 * These middleware may be assigned to groups or used
individually.
*
* @var array<string, class-string/string>
*/
protected $routeMiddleware = [
    'auth' => \App\Http\Middleware\Authenticate::class,
    'auth.basic' =>
\Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
    'cache.headers' =>
\Illuminate\Http\Middleware\SetCacheHeaders::class,
    'can' => \Illuminate\Auth\Middleware\Authorize::class,
    'guest' =>
\App\Http\Middleware\RedirectIfAuthenticated::class,
    'password.confirm' =>
\Illuminate\Auth\Middleware\RequirePassword::class,
    'signed' =>
\Illuminate\Routing\Middleware\ValidateSignature::class,
    'throttle' =>
\Illuminate\Routing\Middleware\ThrottleRequests::class,
    'verified' =>
\Illuminate\Auth\Middleware\EnsureEmailIsVerified::class,
];
}

```

3.2.3 Auth

3.2.3.1 AuthenticatedSessionController.php

```

<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use App\Http\Requests\Auth\LoginRequest;

```

```

use App\Providers\RouteServiceProvider;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;

class AuthenticatedSessionController extends Controller
{
    /**
     * Display the login view.
     *
     * @return \Illuminate\View\View
     */
    public function create()
    {
        return view('auth.login');
    }

    /**
     * Handle an incoming authentication request.
     *
     * @param \App\Http\Requests\Auth\LoginRequest $request
     * @return \Illuminate\Http\RedirectResponse
     */
    public function store(LoginRequest $request)
    {
        $request->authenticate();

        $request->session()->regenerate();

        return redirect()->intended(RouteServiceProvider::HOME);
    }

    /**
     * Destroy an authenticated session.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\RedirectResponse
     */
    public function destroy(Request $request)

```

```

{
    Auth::guard('web')->logout();

    $request->session()->invalidate();

    $request->session()->regenerateToken();

    return redirect('/');
}
}

```

3.2.3.2 ConfirmablePasswordController.php

```

<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use App\Providers\RouteServiceProvider;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use Illuminate\Validation\ValidationException;

class ConfirmablePasswordController extends Controller
{
    /**
     * Show the confirm password view.
     *
     * @return \Illuminate\View\View
     */
    public function show()
    {
        return view('auth.confirm-password');
    }

    /**
     * Confirm the user's password.
     *
     * @param \Illuminate\Http\Request $request
     * @return mixed
     */
}

```

```

        */

    public function store(Request $request)
    {
        if (! Auth::guard('web')->validate([
            'email' => $request->user()->email,
            'password' => $request->password,
        ])) {
            throw ValidationException::withMessages([
                'password' => __('auth.password'),
            ]);
        }

        $request->session()->put('auth.password_confirmed_at',
time());

        return redirect()->intended(RouteServiceProvider::HOME);
    }
}

```

3.2.3.3 EmailVerificationNotificationController.php

```

<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use App\Providers\RouteServiceProvider;
use Illuminate\Http\Request;

class EmailVerificationNotificationController extends Controller
{
    /**
     * Send a new email verification notification.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\RedirectResponse
     */
    public function store(Request $request)

```

```

{
    if ($request->user()->hasVerifiedEmail()) {
        return
    redirect()->intended(RouteServiceProvider::HOME);
    }

    $request->user()->sendEmailVerificationNotification();

    return back()->with('status',
'verification-link-sent');
}
}

```

3.2.3.4 EmailVerificationPromptController.php

```

<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use App\Providers\RouteServiceProvider;
use Illuminate\Http\Request;

class EmailVerificationPromptController extends Controller
{
    /**
     * Display the email verification prompt.
     *
     * @param \Illuminate\Http\Request $request
     * @return mixed
     */
    public function __invoke(Request $request)
    {
        return $request->user()->hasVerifiedEmail()
            ?
        redirect()->intended(RouteServiceProvider::HOME)
            : view('auth.verify-email');
    }
}

```

3.2.3.5 NewPasswordController.php

```
<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use Illuminate\Auth\Events\PasswordReset;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Hash;
use Illuminate\Support\Facades\Password;
use Illuminate\Support\Str;
use Illuminate\Validation\Rules;

class NewPasswordController extends Controller
{
    /**
     * Display the password reset view.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\View\View
     */
    public function create(Request $request)
    {
        return view('auth.reset-password', ['request' => $request]);
    }

    /**
     * Handle an incoming new password request.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\RedirectResponse
     *
     * @throws \Illuminate\Validation\ValidationException
     */
    public function store(Request $request)
    {
        $request->validate([
            'password' => [
                'required',
                'confirmed',
                'min:6',
            ],
            'password_confirmation' => [
                'required',
                'same:password',
            ],
        ]);

        Password::reset($request->only('email', 'password'));

        event(new PasswordReset($request));
    }
}
```

```

        'token' => ['required'],
        'email' => ['required', 'email'],
        'password' => ['required', 'confirmed'],
    Rules\Password::defaults(),
]);

// Here we will attempt to reset the user's password.
If it is successful we
// will update the password on an actual user model
and persist it to the
// database. Otherwise we will parse the error and
return the response.

$status = Password::reset(
    $request->only('email', 'password',
'password_confirmation', 'token'),
    function ($user) use ($request) {
        $user->forceFill([
            'password' =>
Hash::make($request->password),
            'remember_token' => Str::random(60),
        ])->save();

        event(new PasswordReset($user));
    }
);

// If the password was successfully reset, we will
redirect the user back to
// the application's home authenticated view. If there
is an error we can
// redirect them back to where they came from with
their error message.

return $status == Password::PASSWORD_RESET
    ?
redirect()->route('login')->with('status', __($status))
    :
back()->withInput($request->only('email'))
    ->withErrors(['email' =>
__($status)]);

```

```
    }
}
```

3.2.3.6 PasswordResetLinkController.php

```
<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Password;

class PasswordResetLinkController extends Controller
{
    /**
     * Display the password reset link request view.
     *
     * @return \Illuminate\View\View
     */
    public function create()
    {
        return view('auth.forgot-password');
    }

    /**
     * Handle an incoming password reset link request.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\RedirectResponse
     *
     * @throws \Illuminate\Validation\ValidationException
     */
    public function store(Request $request)
    {
        $request->validate([
            'email' => ['required', 'email'],
        ]);
    }
}
```

```

    // We will send the password reset link to this user.
Once we have attempted
    // to send the link, we will examine the response then
see the message we
    // need to show to the user. Finally, we'll send out a
proper response.
    $status = Password::sendResetLink(
        $request->only('email')
    );

    return $status == Password::RESET_LINK_SENT
        ? back()->with('status', __($status))
        :
back()->withInput($request->only('email'))
        ->withErrors(['email' =>
__($status)]);
    }
}

```

3.2.3.7 RegisteredUserController.php

```

<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use App\Models\User;
use App\Providers\RouteServiceProvider;
use Illuminate\Auth\Events\Registered;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use Illuminate\Support\Facades\Hash;
use Illuminate\Validation\Rules;

class RegisteredUserController extends Controller
{
    /**
     * Display the registration view.
     *
     * @return \Illuminate\View\View

```

```

        */

    public function create()
    {
        return view('auth.register');
    }

    /**
     * Handle an incoming registration request.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\RedirectResponse
     *
     * @throws \Illuminate\Validation\ValidationException
     */
    public function store(Request $request)
    {
        $request->validate([
            'name' => ['required', 'string', 'max:255'],
            'email' => ['required', 'string', 'email',
'max:255', 'unique:users'],
            'password' => ['required', 'confirmed',
Rules\Password::defaults()],
        ]);

        $user = User::create([
            'name' => $request->name,
            'email' => $request->email,
            'password' => Hash::make($request->password),
        ]);

        event(new Registered($user));

        Auth::login($user);

        return redirect(RouteServiceProvider::HOME);
    }
}

```

3.2.3.8 VerifyEmailController.php

```
?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use App\Providers\RouteServiceProvider;
use Illuminate\Auth\Events\Verified;
use Illuminate\Foundation\Auth\EmailVerificationRequest;

class VerifyEmailController extends Controller
{
    /**
     * Mark the authenticated user's email address as
     * verified.
     *
     * @param \Illuminate\Foundation\Auth\EmailVerificationRequest $request
     * @return \Illuminate\Http\RedirectResponse
     */
    public function __invoke(EmailVerificationRequest $request)
    {
        if ($request->user()->hasVerifiedEmail()) {
            return
        redirect()->intended(RouteServiceProvider::HOME.'?verified=1')
        ;
        }

        if ($request->user()->markEmailAsVerified()) {
            event(new Verified($request->user()));
        }

        return
    redirect()->intended(RouteServiceProvider::HOME.'?verified=1')
    ;
    }
}
```

3.2.4 Middleware

3.2.4.1 Authenticate.php

```
<?php

namespace App\Http\Middleware;

use Illuminate\Auth\Middleware\Authenticate as Middleware;

class Authenticate extends Middleware
{
    /**
     * Get the path the user should be redirected to when they
     * are not authenticated.
     *
     * @param \Illuminate\Http\Request $request
     * @return string|null
     */
    protected function redirectTo($request)
    {
        if (! $request->expectsJson()) {
            return route('login');
        }
    }
}
```

3.2.5 Migrations

3.2.5.1 2014_10_12_000000_create_users_table.php

```
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

class CreateUsersTable extends Migration
{
    /**
     * Run the migrations.
     */
```

```

/*
 * @return void
 */
public function up()
{
    Schema::create('users', function (Blueprint $table) {
        $table->id();
        $table->string('name');
        $table->string('email')->unique();

        $table->timestamp('email_verified_at')->nullable();
        $table->string('password');
        $table->string('no_telepon')->nullable();
        $table->text('alamat')->nullable();
        $table->string('kelurahan')->nullable();
        $table->string('kecamatan')->nullable();
        $table->integer('kode_pos')->nullable();
        $table->string('profesi')->nullable();
        $table->rememberToken();
        $table->timestamps();

    });

}

/** 
 * Reverse the migrations.
 *
 * @return void
 */
public function down()
{
    Schema::dropIfExists('users');
}
}

```

3.2.5.2 2014_10_12_100000_create_password_resets_table.php

```
<?php
```

```

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

class CreatePasswordResetsTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('password_resets', function (Blueprint $table) {
            $table->string('email')->index();
            $table->string('token');
            $table->timestamp('created_at')->nullable();
        });
    }

    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('password_resets');
    }
}

```

3.2.5.3 2019_08_19_000000_create_failed_jobs_table.php

```

<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

```

```

class CreateFailedJobsTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('failed_jobs', function (Blueprint $table) {
            $table->id();
            $table->string('uuid')->unique();
            $table->text('connection');
            $table->text('queue');
            $table->longText('payload');
            $table->longText('exception');
            $table->timestamp('failed_at')->useCurrent();
        });
    }

    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('failed_jobs');
    }
}

```

3.2.5.4 2019_12_14_000001_create_personal_access_tokens_table.php

```

<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

```

```

class CreatePersonalAccessTokensTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('personal_access_tokens', function (Blueprint $table) {
            $table->id();
            $table->morphs('tokenable');
            $table->string('name');
            $table->string('token', 64)->unique();
            $table->text('abilities')->nullable();
            $table->timestamp('last_used_at')->nullable();
            $table->timestamps();
        });
    }

    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('personal_access_tokens');
    }
}

```

3.2.5.5 2022_06_01_131855_create_user_table.php

```

<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

```

```

class CreateUserTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('user', function (Blueprint $table) {
            $table->id();
            $table->timestamps();
        });
    }

    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('user');
    }
}

```

3.2.6 Seeders

3.2.6.1 AkunSeeder.php

```

<?php

namespace Database\Seeders;

use App\Models\User;
use Illuminate\Database\Seeder;

class AkunSeeder extends Seeder
{

```

```

    /**
     * Run the database seeds.
     *
     * @return void
     */
    public function run()
    {
        $user = [
            [
                'name'=>'Super Admin',
                'email'=>'superadmin@example.com',
                'password'=> bcrypt('adsaasdf'),
            ],
        ];
        foreach ($user as $key => $value) {
            User::create($value);

        }
    }
}

```

3.2.6.2 DatabaseSeeder.php

```

<?php

namespace Database\Seeders;

use Illuminate\Database\Seeder;

class DatabaseSeeder extends Seeder
{
    /**
     * Seed the application's database.
     *
     * @return void
     */
    public function run()
    {
        // \App\Models\User::factory(10)->create();
    }
}

```

```
}
```

3.2.7 Controller

3.2.7.1 homeController.php

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use Illuminate\Support\Facades\DB;
use RealRashid\SweetAlert\Facades\Alert;
use Illuminate\Support\Facades\Auth;

class HomeController extends Controller
{
    // public function __construct()
    // {
    //     $this->middleware('auth');
    // }

    public function index(){
        // Alert::success('Success', 'Terima Kasih Telah
        Berdonasi');

        // Alert::toast('Toast Message', 'Toast Type');
        return view('home');

    }
    public function get_donation()
    {
        return view('donation');
    }
    public function get_aboutUs()
    {
        return view('aboutUs');
    }
    public function get_home()
    {
```

```

        return view('home');
    }

    public function get_adoption()
    {
        return view('adoption');
    }

    public function auth()
    {
        return view('auth/login');
    }

    public function dashboard()
    {

        $donasi = DB::table('tbl_donasi as a')->join('users as b', 'a.id_user', '=', 'b.id')->get();
        $adopsi = DB::table('tbl_adopsi as a')->join('users as b', 'a.id_user', '=', 'b.id')->join('tbl_hewan as c', 'a.id_hewan','=','c.id_hewan')->select('a.*','b.*','c.*')->get();
        return view('dashboard', compact('adopsi','donasi'));

    }

}

```

3.2.7.2 donationController.php

```

<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use Illuminate\Support\Facades\DB;
use RealRashid\SweetAlert\Facades\Alert;
use Illuminate\Support\Facades\Auth;
// use Illuminate\Support\Facades\Auth;
// use Auth;

```

```

class donationController extends Controller
{
    // public function __construct()
    // {
    //     $this->middleware('auth');
    // }

    public function store(Request $request){
        // dd(Auth::user()->id);
        DB::table('users')->insert([
            'name' => $request->nama,
            'email' => $request->email,
        ]);

        $file = $request->file('file');
        // $fileName =
        date('dmY').".$file->getClientOriginalName();
        $fileName = time().".$file->getClientOriginalName();
        $tujuan_upload = 'bukti_upload';
        $file->move($tujuan_upload,$fileName);

        DB::table('tbl_donasi')->insert([
            'id_user' => Auth::user()->id,
            'nominal' => $request->donate,
            'file_upload' => $fileName,
        ]);

        Alert::success('Berhasil Donasi', 'Terima Kasih');

        return redirect()->back();
    }
}

```

3.2.7.3 formAdoptController.php

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use Illuminate\Support\Facades\DB;
use RealRashid\SweetAlert\Facades\Alert;
use Illuminate\Support\Facades\Auth;

class formAdoptController extends Controller
{
    public function get_formAdopt(){

        $hewan = DB::table('tbl_hewan')->get();
        $hwn = DB::table('tbl_hewan')->where('id_hewan',
1)->first();
        return view('formAdopt', compact('hewan', 'hwn'));

    }

    public function store(Request $request){
        // dd($request->all());
        // dd('ini');
        DB::table('users')->insert([
            'name' => $request->nama,
            'alamat' => $request->alamat,
            'kelurahan' => $request->kelurahan,
            'kecamatan' => $request->kecamatan,
            'kode_pos' => $request->kode_pos,
            'no_telepon' => $request->no_telepon,
            'profesi' => $request->profesi,
            'email' => $request->email,
        ]);

        DB::table('tbl_adopsi')->insert([
            'id_user' => Auth::user()->id,
```

```

        'id_hewan' => $request->jenis_hewan,
        'alasan' => $request->alasan,
    ]);
}

Alert::success('Form Berhasil Terkirim', 'Terima Kasih');
return redirect('get_formAdopt');

}
}

```

3.2.8 Views

3.2.8.1 aboutUs.blade.php

```

<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <meta http-equiv="X-UA-Compatible" content="IE=edge" />
        <meta name="viewport" content="width=device-width,
initial-scale=1.0" />

        <!-- Bootstrap CSS -->
        <link
            href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
            rel="stylesheet"
            integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfspd3yD65VohhpuuCOMLASjC"
            crossorigin="anonymous" />

        <!-- Bootstrap icon -->
        <link
            rel="stylesheet"
            href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.3/font/bootstrap-icons.css" />

    <title>About Us</title>

    <style>
        header {

```

```
        font-size: larger;
        letter-spacing: 2px;
        width: 100%;
        background-color: hsl(0, 0%, 100%);
        color: rgb(0, 0, 0);
        border-bottom: 1px solid gray;
        padding: 25px;
    }

    a {
        text-decoration: none;
        color: rgb(0, 0, 0);
        margin-right: 10px;
    }

    .about,
    .donation,
    .home,
    .adoption {
        float: right;
        padding-left: 10px;
    }

    .main {
        background-color: rgb(223, 223, 223);
        height: 300px;
    }

    .main img {
        width: 600px;
    }

    .main2 {
        height: 300px;
    }

```

</style>

</head>

<body>

<header class="sticky-top">

```

<a class="navbar-brand" href="#">
    Pet Rescue
    
</a>
<a class="about us" href="#">About Us</a>
<a class="adoption"
    href="{{'get_adoption'}}">Adoption</a>
<a class="donation"
    href="{{url('get_donation')}}">Donation</a>
<a class="home" href="{{url('get_home')}}">Home</a>

</header>

<div class="main text-center">
    <h1 class="p-5">About Us</h1>
    
</div>

<div class="main2"></div>

<div class="text text-center text-black">
    <div class="container">
        <p class="fs-5">
            Pet Rescue Indonesia merupakan suatu komunitas
            peduli kucing dan anjing yang didirikan pada tanggal 27 mei
            2015 dan berlokasi di Jakarta Selatan. Komunitas ini memiliki
            tujuan untuk membantu kucing dan anjing jalanan yang
            membutuhkan bantuan akibat kurang gizi, sakit
            ataupun keterlantarannya karena ditinggal oleh pemilik di
            jalanan.
        </p>
        <br />
        <h2 class="p-2">Contact</h3>
        <p class="fs-5 pb-4">
            Telepon: 081324576890 <br />
            E-mail : petrescueid@gmail.com <br />
            Instagram : petrescue.id <br />
        </p>
    </div>
</div>

```

```

        Facebook : Pet Rescue Indonesia
    </p>
</div>
</div>

<footer class="text-center text-white bg-dark p-3">
    <!-- Grid container -->
    <div class="container">
        <section mb-2>
            <!-- Facebook -->
            <a class="btn btn-link btn-floating btn-lg text-white m-1" href="#" type="button">
                <i class="bi bi-facebook"></i>
            </a>
            <!-- Instagram -->
            <a class="btn btn-link btn-floating btn-lg text-white m-1" href="#" type="button">
                <i class="bi bi-instagram"></i>
            </a>
            <!-- Instagram -->
            <a class="btn btn-link btn-floating btn-lg text-white m-1" href="#" type="button">
                <i class="bi bi-envelope"></i>
            </a>
        </section>
    </div>
    <p>&copy;2022 <strong>Pet Rescue Indonesia.</strong> All Rights Reserved.</p>
</footer>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-MrcW6ZMFYlzcLA8Nl+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIxVXM" crossorigin="anonymous"></script>
</body>
</html>
```

3.2.8.2 admin.blade.php

```
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <meta http-equiv="X-UA-Compatible" content="IE=edge" />
        <meta name="viewport" content="width=device-width,
initial-scale=1.0" />
        <!-- Bootstrap CSS -->
        <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" rel="stylesheet"
integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfspd
3yD65VohpuuCOMLASjC" crossorigin="anonymous" />

        <!-- Bootstrap icon -->
        <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.3/font/bootstrap-icons.css" />

        <title>Document</title>
    </head>
    <body>
        <nav class="navbar navbar-expand-lg bg-light p-3">
            <div class="container-fluid">
                <a class="navbar-brand" href="#">Pet Rescue -
Administrator</a>
                <button class="navbar-toggler" type="button"
data-bs-toggle="collapse" data-bs-target="#navbarNav"
aria-controls="navbarNav" aria-expanded="false"
aria-label="Toggle navigation">
                    <span class="navbar-toggler-icon"></span>
                </button>
                <div class="collapse navbar-collapse" id="navbarNav">
                    <!-- <ul class="navbar-nav">
                        <li class="nav-item">
                            <a class="nav-link" aria-current="page"
href="create.html">Create</a>
                    </ul> -->
                </div>
            </div>
        </nav>
        <div class="container py-5" style="text-align: center">
            <h1>Pet Rescue - Admin Panel</h1>
            <p>A simple Laravel application for managing a pet rescue organization. This panel allows administrators to create, read, update, and delete records of pets and their care needs. It includes a user management system and a reporting feature for tracking adoption progress. The application is built using the Laravel framework and includes a clean, modern UI with Bootstrap 5 and Tailwind CSS. The database is MySQL, and the application uses a RESTful API for communication between the front-end and back-end components.</p>
        </div>
    </body>

```

```

        </li>
    </ul> -->
</div>
</div>
</nav>

<!-- Tabel Donasi --&gt;
&lt;div class="container mt-5"&gt;
&lt;h3&gt;Data Donasi&lt;/h3&gt;
&lt;table class="table table-hover table-bordered"&gt;
&lt;thead&gt;
&lt;tr&gt;
&lt;th scope="col"&gt;Nama Lengkap&lt;/th&gt;
&lt;th scope="col"&gt;E-mail&lt;/th&gt;
&lt;th scope="col"&gt;Nominal&lt;/th&gt;
&lt;th scope="col"&gt;Bukti Transfer&lt;/th&gt;
&lt;th scope="col"&gt;Edit&lt;/th&gt;
&lt;/tr&gt;
&lt;/thead&gt;
&lt;tr&gt;
&lt;td&gt;&lt;/td&gt;
&lt;td&gt;&lt;/td&gt;
&lt;td&gt;&lt;/td&gt;
&lt;td&gt;&lt;/td&gt;
&lt;td&gt;&lt;/td&gt;
&lt;/tr&gt;
&lt;/table&gt;
&lt;/div&gt;

<!-- Tabel Adopsi --&gt;
&lt;div class="container mt-5"&gt;
&lt;h3&gt;Data Adopsi&lt;/h3&gt;
&lt;table class="table table-bordered table-hover"&gt;
&lt;thead&gt;
&lt;tr&gt;
&lt;th scope="col"&gt;Nama Lengkap&lt;/th&gt;
&lt;th scope="col"&gt;Alamat&lt;/th&gt;
&lt;th scope="col"&gt;E-mail&lt;/th&gt;
&lt;th scope="col"&gt;Jenis Hewan&lt;/th&gt;
</pre>

```

```

        <th scope="col">Nama Hewan</th>
        <th scope="col">Edit</th>
    </tr>
</thead>
<tr>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
</tr>
</table>
</div>
</body>
</html>

```

3.2.8.3 adoption.blade.php

```

<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <meta http-equiv="X-UA-Compatible" content="IE=edge" />
        <meta name="viewport" content="width=device-width,
initial-scale=1.0" />

        <!-- Bootstrap CSS -->
        <link
            href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" rel="stylesheet"
            integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfspd3yD65Vohhpuc0mLASjC" crossorigin="anonymous" />

        <!-- Bootstrap icon -->
        <link rel="stylesheet"
            href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.3/font/bootstrap-icons.css" />

        <style>

```

```
header {
    font-size: larger;
    letter-spacing: 2px;
    width: 100%;
    background-color: hsl(0, 0%, 100%);
    color: rgb(0, 0, 0);
    border-bottom: 1px solid gray;
    padding: 25px;
}

.about,
.donation,
.home,
.adoption {
    float: right;
    padding-left: 10px;
}

a {
    text-decoration: none;
    color: rgb(0, 0, 0);
    margin-right: 10px;
}

.card img {
    height: 200px;
    object-fit: cover;
}

body {
    background-image: url('img/Desktop\ -\ 8.png');
}
.button {
    display: inline-block;
    margin-top: 15px;
    padding: 8px 40px 8px 40px;
    border-radius: 10rem;
    color: #fff;
    text-decoration: none;
```

```
    font-size: 1rem;
    letter-spacing: 0.15rem;
    transition: all 0.3s;
    position: relative;
    overflow: hidden;
    z-index: 1;
}

.button:after {
    content: "";
    position: absolute;
    bottom: 0;
    left: 0;
    width: 100%;
    height: 100%;
    background-color: #000;
    border-radius: 5rem;
    z-index: -2;
}

.button:before {
    content: "";
    position: absolute;
    bottom: 0;
    left: 0;
    width: 0%;
    height: 100%;
    background-color: rgb(77, 77, 77);
    transition: all 0.3s;
    border-radius: 5rem;
    z-index: -1;
}

.button:hover {
    color: #fff;
}

.button:hover:before {
    width: 100%;
```

```

        }

    </style>

    <title>Adoption | Pet Rescue</title>
</head>
<body>
    <header class="sticky-top">
        <a class="navbar-brand" href="#">
            Pet Rescue
            
        </a>
        <a class="about us" href="{{url('get_aboutUs')}}">About Us</a>
        <a class="adoption" href="#">Adoption</a>
        <a class="donation" href="{{url('get_donation')}}">Donation</a>
        <a class="home" href="{{url('get_home')}}">Home</a>
    </header>

    <section class="pets mb-5">
        <div class="container">
            <div class="row mt-5 text-center">
                <div class="col">
                    <h2>Adoption</h2>
                </div>
            </div>
            <div class="row mt-5">
                <div class="col">
                    <div class="card h-100">
                        
                        <div class="card-body">
                            <h5 class="card-title">Mama</h5>
                            <p class="card-text">
                                Betina, 1 tahun, Jakarta Timur
                            </p>
                        </div>
                </div>
            </div>
        </div>
    </section>

```

```

        </div>
    </div>
    <div class="col">
        <div class="card h-100">
            
            <div class="card-body">
                <h5 class="card-title">Lucy</h5>
                <p class="card-text">
                    Betina, 8 bulan, Jakarta Selatan
                </p>
            </div>
        </div>
    <div class="col">
        <div class="card h-100">
            
            <div class="card-body">
                <h5 class="card-title">Vivi</h5>
                <p class="card-text">
                    Jantan, 4 tahun, Bekasi
                </p>
            </div>
        </div>
    <div class="col">
        <div class="card h-100">
            
            <div class="card-body">
                <h5 class="card-title">Temmy</h5>
                <p class="card-text">
                    Betina, 11 bulan, Jakarta Selatan
                </p>
            </div>
        </div>
    </div>

```

```

        </div>
    <div class="row mt-5">
        <div class="col">
            <div class="card h-100">
                
                <div class="card-body">
                    <h5 class="card-title">Kuma</h5>
                    <p class="card-text">
                        Jantan, 4 tahun, Bogor
                    </p>
                </div>
            </div>
        <div class="col">
            <div class="card h-100">
                
                <div class="card-body">
                    <h5 class="card-title">Ghia</h5>
                    <p class="card-text">
                        Betina, 5 bulan, Depok
                    </p>
                </div>
            </div>
        <div class="col">
            <div class="card h-100">
                
                <div class="card-body">
                    <h5 class="card-title">Bobby</h5>
                    <p class="card-text">
                        Jantan, 2 tahun, Jakarta Barat
                    </p>
                </div>
            </div>
        <div class="col">

```

```

        <div class="card h-100">
            
            <div class="card-body">
                <h5 class="card-title">Baha</h5>
                <p class="card-text">
                    Jantan, 8 bulan, Depok
                </p>
            </div>
        </div>
        </div>
    </div>
    <div class="row mt-5">
        <div class="col">
            <div class="card h-100">
                
                <div class="card-body">
                    <h5 class="card-title">Bibu</h5>
                    <p class="card-text">
                        Jantan, 1 tahun, Jakarta Utara
                    </p>
                </div>
            </a>
        </div>
        <div class="col">
            <div class="card h-100">
                
                <div class="card-body">
                    <h5 class="card-title">Belang</h5>
                    <p class="card-text">
                        Betina, 10 bulan, Jakarta Selatan
                    </p>
                </div>
            </div>
        <div class="col">

```

```

        <div class="card h-100">
            
            <div class="card-body">
                <h5 class="card-title">Zero</h5>
                <p class="card-text">
                    Jantan, 1 tahun, Bogor
                </p>
            </div>
        </div>
        <div class="col">
            <div class="card h-100">
                
                <div class="card-body">
                    <h5 class="card-title">Ayi</h5>
                    <p class="card-text">
                        Betina, 10 bulan, Bekasi
                    </p>
                </div>
            </div>
            </div>
        </div>
        <center><a href="{{url('get_formAdopt')}}">Adopsi</a></center>
    </div>
</section>

<footer class="text-center text-white bg-dark p-3">
    <!-- Grid container -->
    <div class="container">
        <section mb-2>
            <!-- Facebook -->
            <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
                <i class="bi bi-facebook"></i>
            </a>
            <!-- Instagram -->

```

```

        <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
            <i class="bi bi-instagram"></i>
        </a>
        <!-- E-mail -->
        <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
            <i class="bi bi-envelope"></i>
        </a>
    </section>
</div>
<p>&copy;2022 <strong>Pet Rescue Indonesia.</strong>
All Rights Reserved.</p>
</footer>
</body>
</html>
```

3.2.8.4 dashboard.blade.php

```

<x-app-layout>
    <x-slot name="header">
        <h2 class="font-semibold text-xl text-gray-800
leading-tight">
            {{ __('Dashboard') }}
        </h2>
    </x-slot>

    <div class="py-12">
        <div class="max-w-7xl mx-auto sm:px-6 lg:px-8">
            <div class="bg-white overflow-hidden shadow-sm
sm:rounded-lg">
                <div class="p-6 bg-white border-b
border-gray-200">
                    <!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <meta http-equiv="X-UA-Compatible" content="IE=edge" />
        <meta name="viewport" content="width=device-width,
initial-scale=1.0" />
```

```

<!-- Bootstrap CSS -->
<link
  href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" rel="stylesheet"
  integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfspd3yD65VohpuuCOMLASjC" crossorigin="anonymous" />

<!-- Bootstrap icon -->
<link rel="stylesheet"
  href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.3/font/bootstrap-icons.css" />

<title>Document</title>
</head>
<body>
  <nav class="navbar navbar-expand-lg bg-light p-3">
    <div class="container-fluid">
      <a class="navbar-brand" href="#">Pet Rescue -
      Administrator</a>
      <button class="navbar-toggler" type="button"
        data-bs-toggle="collapse" data-bs-target="#navbarNav"
        aria-controls="navbarNav" aria-expanded="false"
        aria-label="Toggle navigation">
        <span class="navbar-toggler-icon"></span>
      </button>
      <div class="collapse navbar-collapse" id="navbarNav">
        <!-- <ul class="navbar-nav">
          <li class="nav-item">
            <a class="nav-link" aria-current="page"
              href="create.html">Create</a>
          </li>
        </ul> -->
      </div>
    </div>
  </nav>

  <!-- Tabel Donasi -->
  <div class="container mt-5">
    <h3>Data Donasi</h3>

```

```

<table class="table table-hover table-bordered">
    <thead>
        <tr>
            <th scope="col">Nama Lengkap</th>
            <th scope="col">E-mail</th>
            <th scope="col">Nominal</th>
            <th scope="col">Bukti Transfer</th>

        </tr>
        @foreach($donasi as $p)
        <tr>
            <th scope="col">{{ $p->name }}</th>
            <th scope="col">{{ $p->email }}</th>
            <th scope="col">{{ $p->nominal }}</th>
            <th scope="col">{{ $p->file_upload }}</th>
        </tr>
        @endforeach

    </thead>
</table>
</div>

<!-- Tabel Adopsi -->
<div class="container mt-5">
    <h3>Data Adopsi</h3>
    <table class="table table-bordered table-hover">
        <thead>
            <tr>
                <th scope="col">Nama Lengkap</th>
                <th scope="col">Alamat</th>
                <th scope="col">E-mail</th>
                <th scope="col">Jenis Hewan</th>
                <th scope="col">Nama Hewan</th>
            </tr>
        @foreach($adopsi as $p)
        <tr>
            <th scope="col">{{ $p->name }}</th>
            <th scope="col">{{ $p->alamat }}</th>

```

```

        <th scope="col">{{$p->email}}</th>
        <th scope="col">{{$p->jenis_hewan}}</th>
        <th scope="col">{{$p->nama_hewan}}</th>
    </tr>
    @endforeach
</thead>
</table>
</div>
</body>
</html>

        </div>
        </div>
        </div>
        </div>
</x-app-layout>
```

3.2.8.5 donation.blade.php

```

<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <meta http-equiv="X-UA-Compatible" content="IE=edge" />
        <meta name="viewport" content="width=device-width,
initial-scale=1.0" />
        <title>Donation</title>

        <!-- Bootstrap CSS -->
        <link
            href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
            rel="stylesheet"
            integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfspd
3yD65VohhpuuCOMLASjC"
            crossorigin="anonymous"
        />
```

```

<!-- Bootstrap icon -->
<link
    rel="stylesheet"
    href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.3/font/bootstrap-icons.css"
/>

<style>
body{
    background-image:url("/img/Desktop - 9.jpg");
}

header {
    font-size: larger;
    letter-spacing: 2px;
    width: 100%;
    background-color: hsl(0, 0%, 100%);
    color: rgb(0, 0, 0);
    border-bottom: 1px solid gray;
    padding: 25px;
}

a {
    text-decoration: none;
    color: rgb(0, 0, 0);
    margin-right: 10px;
}

.about,
.donation,
.home,
.adoption {
    float: right;
    padding-left: 10px;
}
.main {
    background-color: rgb(255, 255, 255);
}

```

```
    height: 300px;
}

.spacer {
    padding-bottom: 80px;
}

.cont {
    background-color: rgb(223, 223, 223);
    height: fit-content;
    padding: 50px;
    width: fit-content;
    margin: auto;
    margin-bottom: 50px;
    border-radius: 20px;
}

form {
    width: 500px;
}

.kolom{
    display: inline-block;
    margin-top: 15px;
    padding: 8px 40px 8px 40px;
    /* border-radius: 10rem; */

    text-decoration: none;
    font-size: 1rem;
    /* letter-spacing: 0.15rem; */
    transition: all 0.3s;
    position: relative;
    overflow: hidden;
    z-index: 1;
}

.button {
    display: inline-block;
    margin-top: 15px;
    padding: 8px 40px 8px 40px;
```

```
border-radius: 10rem;
background-color: black;
color: white;
text-decoration: none;
font-size: 1rem;
letter-spacing: 0.15rem;
transition: all 0.3s;
position: relative;
overflow: hidden;
z-index: 1;
border: none;
}

.button:after {
content: "";
position: absolute;
bottom: 0;
left: 0;
width: 100%;
height: 100%;
background-color: black;
border-radius: 5rem;
z-index: -2;
}

.button:before {
content: "";
position: absolute;
bottom: 0;
left: 0;
width: 0%;
height: 100%;
background-color: rgb(77, 77, 77);
transition: all 0.3s;
border-radius: 5rem;
z-index: -1;
}

.button:hover {
```

```

        color: white;
    }

.button:hover:before {
    width: 100%;
}


```

</style>

</head>

<body>

@include('sweetalert::alert')

<header class="sticky-top">

Pet Rescue

About Us

<a class="adoption"

href="{{'get_adoption'}}>Adoption

Donation

Home

</header>

<!-- DONATION -->

<!-- DONATION -->

<section class="main text-center">

<h3 class="text-dark p-2">Donations</h3>

<p>(Berdonasi untuk hewan yang membutuhkan pertolongan)</p>

<div class="cont">

<h5>Silakan isi form dibawah ini</h5>

```

<div class="kolom">
    <form action="/store_donation" method="POST"
enctype="multipart/form-data" class="row text-center">
        {{ csrf_field() }}
        <table align="center">
            <tr>
                <td align="left" class="pb-3">
                    <label class="form-label">Nama
Lengkap:</label>
                    <input id="nama" name="nama" type="text"
class="form-control"/>
                </td>
            </tr>
            <tr>
                <td align="left" class="pb-3">
                    <label class="form-label">E-mail:</label>
                    <input id="email" name="email" type="text"
class="form-control" />
                </td>
            </tr>
            <tr>
                <td align="left" class="pb-3">
                    <label class="form-label">Nominal
Donasi:</label>
                    <input id="donate" name="donate" type="text"
class="form-control" placeholder="Contoh: 10000" />
                </td>
            </tr>
        </table><br>
        <p>
            Uang donasi dikirimkan ke nomor rekening: <br>
Bank BCA <br> 11383057264 atas nama Pet Rescue Indonesia</p>

        <table align="center">
            <tr colspan="3">
                <td>
                    <br>
                    <label for="formFile"
class="form-label">Upload bukti transfer</label>

```

```

                <input type="file" name="file"
class="form-control">
            </td>
        </tr>
    </table>

    <table align="center">
        <tr colspan="3" id="subbtn" >
            <td><input type="submit"
class="button"></td><br>
            </tr>
        </table><br><br><br>
    </form>
</div>

</div>
</div>
<!-- footer -->
<footer class="text-center text-white bg-dark p-3">
    <!-- Grid container -->
    <div class="container">
        <section mb-2>
            <!-- Facebook -->
            <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
                <i class="bi bi-facebook"></i>
            </a>
            <!-- Instagram -->
            <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
                <i class="bi bi-instagram"></i>
            </a>
            <!-- Instagram -->
            <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
                <i class="bi bi-envelope"></i>
            </a>
        </section>
    </div>
</footer>
```

```

        </div>
    <p>&copy;2022 <strong>Pet Rescue
Indonesia.</strong> All Rights Reserved.</p>
</footer>

<script

src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"

integrity="sha384-MrcW6ZMFYlzcLA8Nl+A7MsXsP1UyJoMp4YLEu
NSfAP+JcXn/tWtIxVXM"
    crossorigin="anonymous">
</script>

</body>
</html>

```

3.2.8.6 formAdopt.blade.php

```

<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <meta http-equiv="X-UA-Compatible" content="IE=edge" />
        <meta name="viewport" content="width=device-width,
initial-scale=1.0" />

        <!-- Bootstrap CSS -->
        <link
            href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
            rel="stylesheet"
            integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfspd
3yD65VohhpuuCOMLASjC"
            crossorigin="anonymous" />

        <!-- Bootstrap icon -->
        <link
            rel="stylesheet"
            href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.3/font/bootstrap-icons.css" />

```

```
<style>

header {
    font-size: larger;
    letter-spacing: 2px;
    width: 100%;
    background-color: hsl(0, 0%, 100%);
    color: rgb(0, 0, 0);
    border-bottom: 1px solid gray;
    padding: 25px;
}

.about,
.donation,
.home,
.adoption {
    float: right;
    padding-left: 10px;
}

a {
    text-decoration: none;
    color: rgb(0, 0, 0);
    margin-right: 10px;
}

}

.card img {
    height: 200px;
    object-fit: cover;
}

body {
    background-image: url('img/Desktop\ -\ 8.png');
}
.container {
    width: 700px;
/* background-color: Lightblue;
border-radius: 25px;
```

```
padding: 20px; /*  
}  
.button {  
    display: inline-block;  
    margin-top: 15px;  
    padding: 8px 40px 8px 40px;  
    border-radius: 10rem;  
    color: #fff;  
    text-decoration: none;  
    font-size: 1rem;  
    letter-spacing: 0.15rem;  
    transition: all 0.3s;  
    position: relative;  
    overflow: hidden;  
    z-index: 1;  
}  
  
.button:after {  
    content: "";  
    position: absolute;  
    bottom: 0;  
    left: 0;  
    width: 100%;  
    height: 100%;  
    background-color: #000;  
    border-radius: 5rem;  
    z-index: -2;  
}  
  
.button:before {  
    content: "";  
    position: absolute;  
    bottom: 0;  
    left: 0;  
    width: 0%;  
    height: 100%;  
    background-color: rgb(77, 77, 77);  
    transition: all 0.3s;  
    border-radius: 5rem;
```

```

        z-index: -1;
    }

    .button:hover {
        color: #fff;
    }

    .button:hover:before {
        width: 100%;
    }


```

</style>

<title>Adoption | Pet Rescue</title>

</head>

<body>

@include('sweetalert::alert')

<header class="sticky-top">

[Pet Rescue](#)

[About Us]({{url('get_aboutUs')}})

[Adoption]({{url('get_adoption')}})

[Donation]({{url('get_donation')}})

[Home]({{url('get_home')}})

</header>

<div class="container">

Adoption Form

```

<!-- Data Calon Adopter -->
<h5 class="text-start">Data Calon Adopter</h5>
<form class="row g-3" action="/store_formAdopt"
method="post">
    {{ csrf_field() }}
    <div class="col-12">
        <label for="inputName4"
class="form-label">Nama Lengkap</label>
        <input type="text" class="form-control"
id="inputName4" name="nama" />
    </div>
    <div class="col-12">
        <label for="inputAddress4"
class="form-label">Alamat</label>
        <input type="text"
            class="form-control"
            placeholder="Nama jalan, RT, RW, dan nomor
rumah"
            id="inputAddress4"
            name="alamat"
        />
    </div>
    <div class="col-sm-5">
        <label for="inputKelurahan4"
class="form-label">Kelurahan</label>
        <input type="text" class="form-control"
id="inputKelurahan4" name="kelurahan" />
    </div>
    <div class="col-sm-5">
        <label for="inputKecamatan4"
class="form-label">Kecamatan</label>
        <input type="text" class="form-control"
id="inputKecamatan4" name="kecamatan" />
    </div>
    <div class="col-sm-2">
        <label for="inputKodePos4"
class="form-label">Kode Pos</label>
        <input type="text" class="form-control"
id="inputKodePos4" name="kode_pos" />

```

```

        </div>
        <div class="col-md-6">
            <label for="inputPhone4"
class="form-label">Nomor Telepon/HP</label>
            <input type="text" class="form-control"
id="inputProfesi4" name="no_telepon"/>
        </div>
        <div class="col-md-6">
            <label for="inputProfesi4"
class="form-label">Profesi/Pekerjaan</label>
            <input type="text" class="form-control"
id="inputProfesi4" name="profesi"/>
        </div>
        <div class="col-12">
            <label for="inputEmail4"
class="form-label">E-mail</label>
            <input type="email" class="form-control"
id="inputEmail4" name="email"/>
        </div>
        <!-- Data Hewan yang Akan Diadopsi -->
        <h5 class="text-start mt-5">Data Hewan yang Akan
Diadopsi</h5>
        <form class="row g-3">
            <div class="col-md-4">
                <label for="inputHewan"
class="form-label">Jenis Hewan</label>
                <select id="inputHewan" class="form-select"
name="jenis_hewan">
                    @foreach($hewan as $h)
                    <option
value="{{ $h->id_hewan}}>{{ $h->jenis_hewan}} -
{{ $h->nama_hewan}}</option>
                @endforeach
            </select>
        </div>
        <div class="col-12">
            <label for="inputAlasan4"
class="form-label">Alasan Adopsi </label>

```

```

        <input type="text" class="form-control"
name="alasan"/>
    </div>
    <!-- <div class="col-12">
        <div class="form-check">
            <input class="form-check-input"
type="checkbox" id="gridCheck" />
            <label class="form-check-label mb-3"
for="gridCheck">
                Dengan ini saya menyatakan ketersediaan
                saya untuk mengadopsi hewan dari Pet Rescue Indonesia dan saya
                bersedia untuk dihubungi lebih lanjut oleh pihak Pet Rescue
                Indonesia untuk melengkapi dokumen-dokumen yang diperlukan.
            </label>
        </div>
    </div> -->
    <div class="col-12 mb-5 text-center">
        <button type="submit"
class="button">Submit</button>
    </div>
</form>
</div>

<footer class="text-center text-white bg-dark p-3">
    <!-- Grid container -->
    <div class="container">
        <section mb-2>
            <!-- Facebook -->
            <a
                class="btn btn-link btn-floating btn-lg text-white
m-1"
                href="#!"
                type="button"
            >
                <i class="bi bi-facebook"></i>
            </a>
            <!-- Instagram -->
            <a

```

```

        class="btn btn-link btn-floating btn-lg text-white
m-1"
        href="#!"
        type="button"
      >
        <i class="bi bi-instagram"></i>
      </a>
<!-- E-mail -->
<a
        class="btn btn-link btn-floating btn-lg text-white
m-1"
        href="#!"
        type="button"
      >
        <i class="bi bi-envelope"></i>
      </a>
    </section>
  </div>
<p>
  &copy;2022 <strong>Pet Rescue Indonesia.</strong> All
  Rights Reserved.
</p>
</footer>
</body>
</html>

```

3.2.8.7 home.blade.php

```

<!DOCTYPE html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width,
initial-scale=1" />

    <!-- Bootstrap CSS -->
    <link
      href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" rel="stylesheet"

```

```

integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfspd
3yD65VohhpuuCOMLASjC" crossorigin="anonymous" />

    <!-- Bootstrap icon -->
    <link rel="stylesheet"
    href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.8.3/font/
bootstrap-icons.css"/>

<title>Home | Pet Rescue</title>

<style>
* {
    margin: 0%;
    padding: 0;
}

header{
    font-size: larger;
    letter-spacing: 2px;
    width:100%;
    background-color:hsl(0, 0%, 100%);
    color:rgb(0, 0, 0);
    border-bottom: 1px solid gray;
    padding:25px;
}

a{
    text-decoration: none;
    color: rgb(0, 0, 0);
    margin-right: 10px;
}

.about,.donation,.home,.adoption{
    float: right;
    padding-left: 10px;
}

.jumbotron{

```

```
padding: 2rem 1rem;
height: 150vh;
border: 1px solid;
background-image: url("/img/Pet3.jpeg");
background-size: cover;
position: relative;
display: flex;
justify-content: center;
align-items: center;
}

.blockquote-footer {
color: #fff;
z-index:1;
padding: 20px 25px;
}

.carousel-contain {
background-color: #fff;
}
.carousel-item img {
width: 500px;
height: 400px;
object-fit: cover;
padding: 25px 25px 25px 25px;
}

.button {
display: inline-block;
margin-top: 15px;
padding: 8px 40px 8px 40px;
border-radius: 10rem;
color: #fff;
text-decoration: none;
font-size: 1rem;
letter-spacing: 0.15rem;
transition: all 0.3s;
position: relative;
overflow: hidden;
```

```
    z-index: 1;
}

.button:after {
    content: "";
    position: absolute;
    bottom: 0;
    left: 0;
    width: 100%;
    height: 100%;
    background-color: #000;
    border-radius: 5rem;
    z-index: -2;
}

.button:before {
    content: "";
    position: absolute;
    bottom: 0;
    left: 0;
    width: 0%;
    height: 100%;
    background-color: rgb(77, 77, 77);
    transition: all 0.3s;
    border-radius: 5rem;
    z-index: -1;
}

.button:hover {
    color: #fff;
}

.button:hover:before {
    width: 100%;
}

.loc {
    padding: 1rem 1rem;
```

```

        height: 120vh;
        background-image: url("../img/catdog2.jpeg");
        background-size: cover;
        position: relative;
        display: flex;
        justify-content: center;
        align-items: center;

    }

    a {
        text-decoration: none;
    }

    a.one:visited {
        color: #000000;
    }

    a.one:hover {
        color: #0b0edf;
    }

    .main {
        background-image: url(img/cover.jpg);
        background-size: cover;
        background-repeat: no-repeat;
        height: 500px;
        width: auto;
    }

    .partner img {
        max-width: 200px;
        max-height: 200px;
    }

</style>

</head>
<body>
```

```

@include('sweetalert::alert')

<header class="sticky-top">
    <a class="navbar-brand" href="#">
        Pet Rescue
        
    </a>
    <a class="about" href="{{url('get_aboutUs')}}">About Us</a>
    <a class="adoption" href="{{'get_adoption'}}>Adoption</a>
    <a class="donation"
    href="{{url('get_donation')}}">Donation</a>
    <a class="home" href="#">Home</a>

</header>

<div class="jumbotron text-center">
    <div class="container-fluid">
        <h1 class="text-white"><strong>Welcome to</strong> Pet
        Rescue</h1>
        <h1 class="display-4 text-white">Speak for the
        voiceless</h1>
        <figure class="text-white">
            <blockquote class="blockquote">
                <p>"</p>
                <p>Some people talk to animals.</p>
                <p>Not many listen though.</p>
                <p>That's the problem.</p>
                <p>"</p>
            </blockquote>
            <figcaption class="blockquote-footer">
                A.A. Milne, <cite title="Source
                Title">Winnie-the-Pooh</cite>
            </figcaption>
        </figure>
    </div>
</div>

<!-- Wrap -->
<!-- Carousel Animal Slider -->

```

```

<div class="container-fluid carousel-contain py-4">
    <div class="container">
        <h2 class="text-center mb-2">These Animals Need
Your Help</h2>
        <div id="carouselExampleIndicators"
class="carousel slide col-lg-6 offset-lg-3" >
            <div id="carouselExampleIndicators"
class="carousel slide" data-ride="carousel">
                <ol class="carousel-indicators">
                    <li
data-target="#carouselExampleIndicators" data-slide-to="0"
class="active"></li>
                    <li
data-target="#carouselExampleIndicators"
data-slide-to="1"></li>
                    <li
data-target="#carouselExampleIndicators"
data-slide-to="2"></li>
                </ol>
                <div class="carousel-inner">
                    <div class="carousel-item active">
                        
                    </div>
                    <div class="carousel-item">
                        
                    </div>
                    <div class="carousel-item">
                        
                    </div>
                    <div class="carousel-item">
                        
                    </div>
                    <div class="carousel-item">
                        
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

                </div>
            <div class="carousel-item">
                
            </div>
        </div>
        <a class="carousel-control-prev"
href="#carouselExampleIndicators" role="button"
data-slide="prev">
            <span class="carousel-control-prev-icon"
aria-hidden="true"></span>
            <span class="sr-only"></span>
        </a>
        <a class="carousel-control-next"
href="#carouselExampleIndicators" role="button"
data-slide="next">
            <span class="carousel-control-next-icon"
aria-hidden="true"></span>
            <span class="sr-only"></span>
        </a>
    </div>
</div>
<center><a href="{{url('get_donation')}}">Donate</a></center>
</div>
<!-- End of Carousel -->

<!-- Location -->
<div class="loc text-center">
    <div class="container">
        <h2 class="text-white pb-5">Location</h2>
        <div class="card">
            <center>
                <iframe
src="https://www.google.com/maps/embed?pb=!1m23!1m12!1m3!1d634
49.661736972776!2d106.75842538290034!3d-6.315654618114536!2m3!
1f0!2f0!3f0!3m2!1i1024!2i768!4f13.1!4m8!3e6!4m0!4m5!1s0x2e69ee

```

```

3e065d4f6b%3A0xe176f81a31564166!2sUniversitas%20Pembangunan%20
Nasional%20Veteran%20Jakarta%2C%20MQMV%2BP94%2C%20Jalan%20RS.%20
Fatmawati%20Raya%2C%20Pd.%20Labu%2C%20Kec.%20Cilandak%2C%20D
epok%20City%2C%20West%20Java%2012450!3m2!1d-6.3157410999999999!
2d106.7934451!5e0!3m2!1sen!2sid!4v1653672758243!5m2!1sen!2sid"
width="600"
height="450"
style="border: 0"
allowfullscreen=""
loading="lazy"
referrerpolicy="no-referrer-when-downgrade"
class="card-img-top"
alt="loc1"
style="width: 200px"
style="display: block; margin: auto"
></iframe>
</center>

<div class="card-body">
<p class="card-text">
<a
    class="one"
    href="https://goo.gl/maps/DVGNqz5FzYM87bRr9"
    class="text-dark"
    ><i class="bi bi-geo-alt-fill text-danger"></i>
Jl. Rs.
        Fatmawati, Pondok Labu, Jakarta Selatan, DKI
        Jakarta, 12450</a>
    </p>
</div>
</div>
</div>
<!-- Partner -->
<div class="partner">
<div class="container">
<div class="row text-center p-5">
<div class="col">
<h2>Partner</h2>

```

```

        </div>
    </div>
<div class="row row-2 row-sm-2 row-md-3 gy-5 pb-5
text-center">
    <div class="col">
        
    </div>
    <div class="col">
        
    </div>
    <div class="col">
        
    </div>
    <div class="col">
        
    </div>
    </div>
</div>

<footer class="text-center text-white bg-dark p-3">
    <!-- Grid container -->
    <div class="container">
        <section mb-2>
            <!-- Facebook -->
            <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
                <i class="bi bi-facebook"></i>
            </a>
            <!-- Instagram -->
            <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">
                <i class="bi bi-instagram"></i>
            </a>
            <!-- Instagram -->
            <a class="btn btn-link btn-floating btn-lg
text-white m-1" href="#" type="button">

```

```

        <i class="bi bi-envelope"></i>
    </a>
</section>
</div>
<p>©2022 <strong>Pet Rescue Indonesia.</strong> All
Rights Reserved.</p>
</footer>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-MrcW6ZMFYlzcLA8Nl+NdUVF0sA7MsXsP1UyJoMp4YLEu
NSfAP+JcXn/tWtIaxVXM" crossorigin="anonymous"></script>
<script
src="https://code.jquery.com/jquery-3.2.1.slim.min.js"
integrity="sha384-KJ3o2DKtIkvYIK3UENzmM7KClRr/rE9/Qpg6aAZGJwFD
MVNA/GpGFF93hXpG5KkN" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/umd/po
pper.min.js"
integrity="sha384-ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39
j7fakFPskvXusvfa0b4Q" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/boot
strap.min.js"
integrity="sha384-JZR6Spejh4U02d8j0t6vLEHfe/JQGiRRSQxSfFWpi1M
quVdAyjUar5+76PVCmYl" crossorigin="anonymous"></script>
<script src="script.js"></script>
</body>
</html>
```

3.2.9 Routes

3.2.9.1 web.php

```

- <?php
-
-
use Illuminate\Support\Facades\Route;
use App\Http\Controllers\donationController;
```

```

use App\Http\Controllers\homeController;
use App\Http\Controllers\formAdoptController;

/*
|--------------------------------------------------------------------------
|
| Web Routes
|
|
|
| Here is where you can register web routes for your
| application. These
| routes are loaded by the RouteServiceProvider within a
| group which
| contains the "web" middleware group. Now create
| something great!
|
*/
Route::get('/', [homeController::class,
    'index'])->name('home');
Route::get('get_donation', [homeController::class,
    'get_donation'])->name('get_donation');
Route::get('get_aboutUs', [homeController::class,
    'get_aboutUs'])->name('get_aboutUs');
Route::get('get_home', [homeController::class,
    'get_home'])->name('get_home');
Route::get('get_adoption', [homeController::class,
    'get_adoption'])->name('get_adoption');
Route::get('get_formAdopt', [formAdoptController::class,
    'get_formAdopt'])->name('get_formAdopt');
Route::post('store_formAdopt',
    [formAdoptController::class, 'store'])->name('store');
Route::post('store_donation',
    [donationController::class, 'store'])->name('store');
Route::get('auth', [homeController::class,
    'auth'])->name('auth');

```

```

Route::get('dashboard', [homeController::class,
'dashboard'])->name('dashborad');

Route::middleware(['auth'])->group(function(){
    Route::get('dashboard', [homeController::class,
'dashboard'])->name('dashboard');
});

// Route::get('/dashboard', function () {
//     return view('dashboard');
// })->middleware(['auth'])->name('dashboard');

require __DIR__.'/auth.php';

```

3.2.10 Models

3.2.10.1 User.php

```

<?php

namespace App\Models;

use Illuminate\Contracts\Auth\MustVerifyEmail;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Foundation\Auth\User as Authenticatable;
use Illuminate\Notifications\Notifiable;
use Laravel\Sanctum\HasApiTokens;

class User extends Authenticatable
{
    use HasApiTokens, HasFactory, Notifiable;

    /**
     * The attributes that are mass assignable.
     *
     * @var array<int, string>
     */
    protected $fillable = [
        'name',

```

```

        'email',
        'password',
        'email_verified_at',
        'no_telepon',
        'alamat',
        'kelurahan',
        'kecamatan',
        'kode_pos',
        'profesi',
        'remember_token',

    ];

/***
 * The attributes that should be hidden for serialization.
 *
 * @var array<int, string>
 */
protected $hidden = [
    'password',
    'remember_token',
];

/***
 * The attributes that should be cast.
 *
 * @var array<string, string>
 */
protected $casts = [
    'email_verified_at' => 'datetime',
];
}

```

3.3 Output

3.3.1 Admin

3.3.1.1 Form Login

(i) 127.0.0.1:8000/auth


Email
superadmin@gmail.com

Password
••••••

Remember me

[Forgot your password?](#) [Register](#) **LOG IN**

3.3.1.2 Dashboard



Pet Rescue - Administrator

Data Donasi

Nama Lengkap	E-mail	Nominal	Bukti Transfer
superadmin	superadmin@gmail.com	100000	1654136388/Desktop - 9.jpg
superadmin	superadmin@gmail.com	100000	1654136572/Desktop - 9.jpg
superadmin	superadmin@gmail.com	10000	1654137253/Desktop - 9.jpg
superadmin	superadmin@gmail.com	200000	1654399317/Desktop - 9.jpg
superadmin	superadmin@gmail.com	2000000	1654399377.lalala.jpeg

Data Adopsi

Nama Lengkap	Alamat	E-mail	Jenis Hewan	Nama Hewan
superadmin		superadmin@gmail.com	Kucing	Mama
superadmin		superadmin@gmail.com	Kucing	Mama
superadmin		superadmin@gmail.com	Kucing	Mama

3.3.2 User

3.3.2.1 Home

① 127.0.0.1:8000/get_home

Pet Rescue 🐾

Welcome to Pet Rescue
Speak for the voiceless

Some people talk to animals.
Not many listen though.
That's the problem.

— A.A. Milne, Winnie-the-Pooh

These Animals Need Your Help

[Donate](#)

Location



Partner



©2022 Pet Rescue Indonesia. All Rights Reserved.

3.3.2.2 Donation

The screenshot shows a web browser window with the URL '127.0.0.1:8000/get_donation'. The page title is 'Pet Rescue 🐾'. At the top right, there are links for 'Home', 'Donation', 'Adoption', and 'About Us'. The main content area is titled 'Donations' with the sub-instruction '(Berdonasi untuk hewan yang membutuhkan pertolongan)'. A central gray box contains the donation form with fields for 'Nama Lengkap', 'E-mail', and 'Nominal Donasi' (set to 'Contoh: 10000'). It also includes a note about the transfer to Bank BCA account '11383057264' and a file upload section for 'Upload bukti transfer' with a placeholder 'Choose File | No file chosen'. A 'Submit' button is at the bottom. The footer of the page includes social media icons and the copyright notice '©2022 Pet Rescue Indonesia. All Rights Reserved.'

Donations

(Berdonasi untuk hewan yang membutuhkan pertolongan)

Silakan isi form dibawah ini

Nama Lengkap:

E-mail:


Nominal Donasi:

Uang donasi dikirimkan ke nomor rekening:
Bank BCA
11383057264 atas nama Pet Rescue Indonesia

Upload bukti transfer

Choose File | lalala.jpeg

Submit

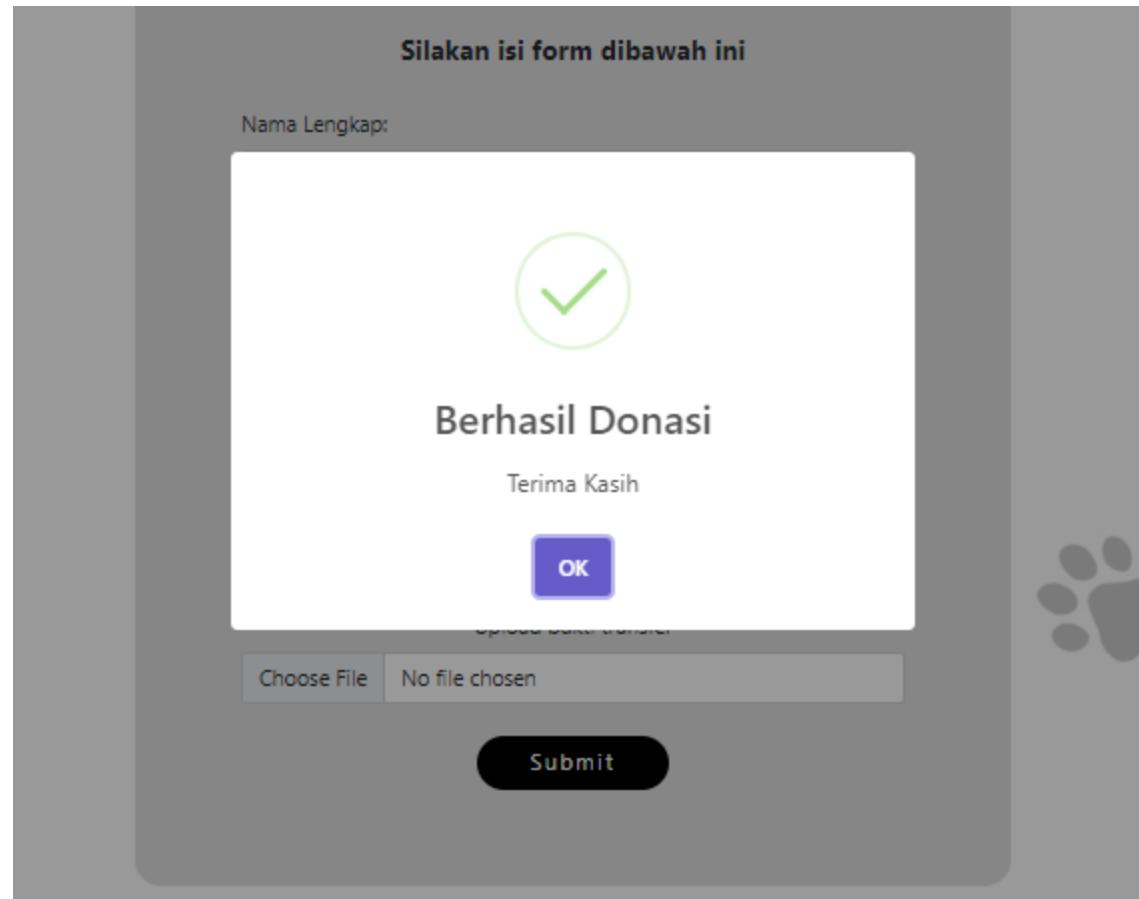


id	name	email	email_verified_at	password	no_telepon
19	Widya Arum Amalia	qw@gmial.com	NULL	NULL	081317776305
20	salsa	asd@gmail.com	NULL	NULL	NULL
21	salsa	z@gmail.com	NULL	NULL	NULL
22	marella	marella@gmail.com	NULL	NULL	NULL

3.3.2.3 Adoption

① 127.0.0.1:8000/get_adoption

Adoption

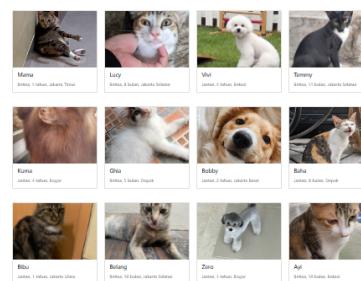[Adopsi](#)

0/2021 Pet Rescue Indonesia. All Rights Reserved.

Adoption



Mama
Betina, 1 tahun, Jakarta Timur



Lucy
Betina, 8 bulan, Jakarta Selatan



Vivi
Jantan, 4 tahun, Bekasi



Temmy
Betina, 11 bulan, Jakarta Selatan



Kuma
Jantan, 4 tahun, Bogor




Ghia
Betina, 5 bulan, Depok



Bobby
Jantan, 2 tahun, Jakarta Barat



Baha
Jantan, 8 bulan, Depok



Bibi
Jantan, 1 tahun, Jakarta Utara



Belang
Betina, 10 bulan, Jakarta Selatan



Zero
Jantan, 1 tahun, Bogor



Ayi
Betina, 10 bulan, Bekasi

[Adopsi](#)

Adoption Form

Data Calon Adopter

Nama Lengkap

Alamat

Nama jalan, RT, RW, dan nomor rumah

Kelurahan

Kecamatan

Kode Pos

Nomor Telepon/HP

Profesi/Pekerjaan

E-mail

Data Hewan yang Akan Diadopsi

Jenis Hewan

Kucing - Mama

Alasan Adopsi

©2022 Pet Rescue Indonesia. All Rights Reserved.

Adoption Form

Data Calon Adopter

Nama Lengkap

Alamat

Nama jalan, RT, RW, dan nomor rumah

Kelurahan

Kecamatan

Kode Pos

Nomor Telepon/HP

Profesi/Pekerjaan

E-mail

Data Hewan yang Akan Diadopsi

Jenis Hewan

Kucing - Mama

Alasan Adopsi

Adoption Form

Data Calon Adopter

Nama Lengkap

selse

Alamat

lembah griya

Kelurahan

cipayung jaya

Kecamatan

cipayung

Kode Pos

12345

Nomor Telepon/HP

082242349103

Profesi/Pekerjaan

mhs

E-mail

selse@gmail.com

Data Hewan yang Akan Diadopsi


Jenis Hewan

Kucing - Mama

Alasan Adopsi

karna aku suka

Submit

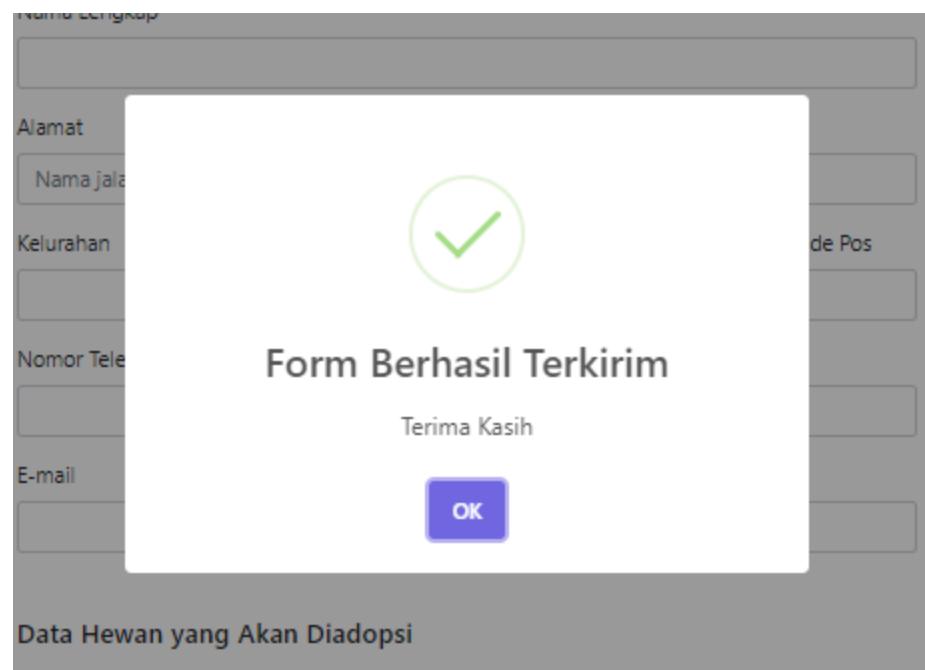

	id	name	email	email_verified_at	password			no_telepon
<input type="checkbox"/>	20	salsa	asd@gmail.com	NULL	NULL			NULL
<input type="checkbox"/>	21	salsa	z@gmail.com	NULL	NULL			NULL
<input type="checkbox"/>	22	marella	marella@gmail.com	NULL	NULL			NULL
<input type="checkbox"/>	23	selse	selse@gmail.com	NULL	NULL			082242349103

3.3.2.4 About Us

ⓘ 127.0.0.1:8000/get_aboutUs

Pet Rescue
Home
Donation
Adoption
About Us

About Us

Pet Rescue Indonesia merupakan suatu komunitas peduli kucing dan anjing yang didirikan pada tanggal 27 mei 2015 dan berlokasi di Jakarta Selatan. Komunitas ini memiliki tujuan untuk membantu kucing dan anjing jalanan yang membutuhkan bantuan akibat kurang gizi, sakit ataupun keterlantar karena ditinggalkan oleh pemiliknya di jalanan.

Contact

Telp: 081324576999
 E-mail: petrescueid@gmail.com
 Instagram: petrescue.id
 Facebook: Pet Rescue Indonesia

©2022 Pet Rescue Indonesia. All Rights Reserved.

About Us



Pet Rescue Indonesia merupakan suatu komunitas peduli kucing dan anjing yang didirikan pada tanggal 27 mei 2015 dan berlokasi di Jakarta Selatan. Komunitas ini memiliki tujuan untuk membantu kucing dan anjing jalan yang membutuhkan bantuan akibat kurang gizi, sakit ataupun keterlantar karena ditinggal oleh pemilik di jalanan.

Contact

Telepon: 081324576890
E-mail : petrescueid@gmail.com
Instagram : petrescue.id
Facebook : Pet Rescue Indonesia

BAB IV

PENUTUP

4.1 Kesimpulan

Website ini merupakan website peduli Kucing dan Anjing jalanan yang terlantar terutama akibat ulah masyarakat dan pemilik hewan peliharaan yang tidak bertanggungjawab atas kelangsungan hidup hewan peliharaannya. *Website Pet Rescue* dapat digunakan untuk melakukan donasi yang diperuntukkan kepada hewan-hewan liar yang di-rescue dan membutuhkan pertolongan di daerah Jabodetabek. *Website* ini juga diperuntukkan untuk masyarakat yang tinggal di Jabodetabek apabila mau mengadopsi hewan-hewan tersebut dengan syarat dan ketentuan tertentu.

DAFTAR PUSTAKA

Getbootstrap.com

<https://laravel.com/>

Ariata, C. (2021, August 13). Apa Itu Bootstrap dan Fungsinya? Panduan Bagi Pemula. Hostinger. <https://www.hostinger.co.id/tutorial/apa-itu-bootstrap>

Ibnu, (2022, March 2). Laravel: Ini Pengertian dan Fitur Di Dalamnya! - Accurate Online. Accurate. <https://accurate.id/teknologi/laravel/>

Setiawan, R. (2021, September 29). Apa Itu MVC? Pahami Konsepnya dengan Baik - Dicoding Blog. Dicoding. <https://www.dicoding.com/blog/apa-itu-mvc-pahami-konsepnya/>

<https://youtu.be/vPLkxtufl5U>

<https://youtu.be/LkR-9Z1sle8>