


La vectorisation

masse (g)

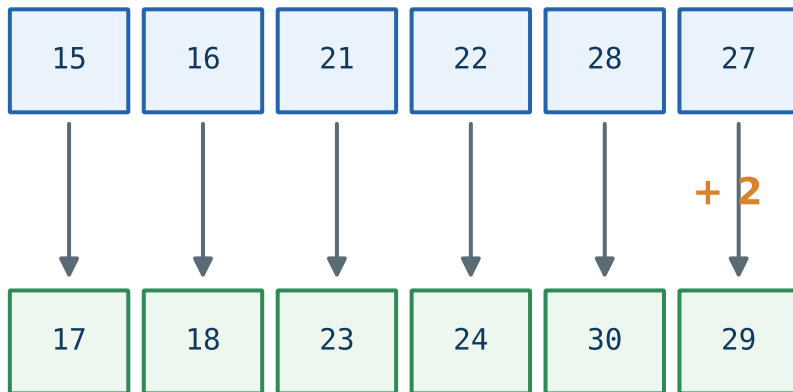

une seule operation agit sur chaque masse, sans boucle

L'argument **axis** axis=1 (par specimen)

A 6x4 grid of light blue boxes representing a data structure. The columns are labeled 'bec_l', 'bec_h', 'aile', and 'masse' at the top. A green arrow points to the right above the labels, indicating the direction of axis=1 (par specimen). A blue arrow points downwards to the left of the grid, labeled 'axis=0 (par mesure)', indicating the direction of axis=0 (par mesure). The grid contains the following values:

	bec_l	bec_h	aile	masse
	9.1	8.0	67	15
	9.4	8.3	68	16
	12.8	10.5	74	21
	13.2	10.9	75	22
	16.1	14.2	80	28
	15.7	13.8	79	27

axis=0 : par mesure (colonne) ; axis=1 : par specimen (ligne)