

A Conceptual Framework for Evaluating and Designing Information Discovery and Curation Web Tools

Margaret-Anne Storey^a, Elena Voyloshnikova^{b,*}

University of Victoria

3800 Finnerty Rd, Victoria, BC, Canada, V8P 5C2

^a*mstorey@uvic.ca*

^b*elenavoy@uvic.ca*

Abstract

Everyday life involves the discovery and curation of digital information. People search the Web continuously, from quickly looking up information needed to complete a task, to endlessly searching for inspiration and knowledge. A variety of studies have modeled information seeking strategies and characterized curation activities on the Web. However, there is a lack of research on how existing Web applications support the discovery and curation of information, especially concerning user motivations and how different approaches can be compared. This paper presents a study of information discovery tools and how they relate to the nature of information seeking. We propose a conceptual framework of application design elements that support different aspects of information discovery and curation. This framework can be used for designing, evaluating and updating Web applications.

Keywords: Information discovery, information curation, Web design

1. Introduction

Web technologies help people satisfy their information needs. People research their interests and hobbies using various online resources, shoppers search

*Corresponding author

Email address: elenavoy@uvic.ca (Elena Voyloshnikova)

online stores for product characteristics to make purchasing decisions, and trav-
5 elers visit online booking sites to find information about flights and hotels. To
accommodate diverse and evolving user needs, Web applications continuously
introduce new features and services, empowering information discovery and cu-
ration.

The term “information discovery” has been used to define or explain vari-
10 ous information behaviour paradigms, such as information exploration [1] and
serendipitous information seeking [2]. Information discovery can take on many
forms. Web users might be hoping to find particular pieces of information, such
as show times and phone numbers, to satisfy specific information needs [3]. Al-
ternatively, they might be lacking well-articulated information needs, so they
15 engage in opportunistic browsing [4]. Sometimes people discover information
online without even looking for it [5]. The nature of information discovery can
vary, and therefore, requires elaborate tool support. With people having such
diverse information needs and methods of looking for information, designing for
information discovery is a challenging task [6, 7].

20 Our research goal is to gain an understanding of how existing tools support
digital information discovery and curation so that we can improve the design
of Web applications for information discovery. While several researchers pro-
pose frameworks targeted at designing information discovery systems [3, 8], the
importance of information curation in the realm of information discovery has
25 been largely overlooked despite the rapidly increasing popularity of socially-
curated information spaces. Moreover, much of the existing work that focuses
on how people look for and discover information online [5, 9, 10, 11, 4, 12, 13]
fails to examine concrete features of existing Web-based information discovery
applications that empower real-world users. More research is necessary to de-
30 termine how different tool features provide fundamental support for information
discovery and curation.

To enhance information seeking and curating experiences and support users’
interactions, we extend existing research by: (1) deriving factors that enable
information discovery and curation and relating them within a framework; (2)

35 using the framework to establish a set of questions for evaluating and designing
new applications; (3) iteratively evaluating the framework by using it to study
and describe current Web applications, which in turn helped refine the frame-
work of factors and questions; and (4) relating the framework to information
discovery and curation motives that drive the underlying usage of Web-based
40 applications.

2. Web-based Information Discovery and Curation

Given the complexity of Web-based information discovery and curation tasks,
a variety of research topics are examined to gain an understanding of how cur-
rent Web tools support these tasks, including information-related Web usage
45 characteristics and current information behavior models.

2.1. *Information Behavior*

Information behavior refers to the totality of ways in which humans behave
in relation to information [14]. A number of models and frameworks have at-
tempted to represent human information behaviour in its entirety or to represent
50 some of its components, such as information seeking and searching, information
discovery, and information curation.

2.1.1. *Information Seeking Models*

Information seeking refers to “the purposive seeking for information as a
consequence of a need to satisfy some goal [14].” Several researchers have tried
55 to identify what different modes of information seeking behaviour may entail.
According to Kellar et al. [11], information seeking is composed of browsing,
fact finding, and information gathering. Although the authors categorized in-
formation gathering as part of information seeking, it appears to be more closely
related to digital curation [15, 16]. Ellis et al. [10, 17, 18] proposed a model of
60 information seeking characterized by six different patterns: starting, chaining,
browsing, extracting, monitoring, and differentiating.

2.1.2. Information Foraging

Information foraging theory is another approach towards understanding how people adapt their strategies of interacting with technology when seeking, gathering, or consuming information, depending on the environment [19]. The theory resonates with explanations of human behavior in the context of food foraging. The underlying assumption of the information foraging theory is that people, similarly to when they forage for food, adopt their foraging strategies to the environment in order to gain the maximum amount of valuable information. The theory states that “natural information systems evolve towards stable states that maximize gains of valuable information per unit cost.” The theory introduces three key concepts to formulate an understanding of information foraging: 1) *information scent* that refers to proximal cues (often visual or linguistic) that people use to identify the value of information; 2) *information diet* which deals with user preferences when it comes to information and 3) *information patches* that are clusters of information that an information system presents before the user. This theory lays the foundation for existing information foraging models [20, 21] as well as social information foraging models [22, 23].

2.1.3. Information Discovery

Kerne and Smith proposed an information discovery framework [8] that connects human cognitive states to those of an information system. The framework represents a continuum of information flowing through different system and cognitive states as a result of an iterative reformulation process. The framework consists of five mental states: formulating a problem, evaluating results, updating and forming mental models, running mental models, and discovering solutions. Each mental state has a corresponding interaction with the system. For example, browsing resources (human-system interaction) facilitates evaluation of immediate results (cognitive state).

2.1.4. Digital Curation

90 In 2002, Bates extended her research on the topic of information behaviour with the notion of *information farming*, which involves people collecting and organizing information for future use and revisitation [24]. More commonly, information farming is referred to as digital curation. Whittaker suggests that in terms of Web use, a significant shift is happening from information consumption
95 to information curation. People no longer use the Web just to find and consume information of interest, but they also try to save and manage that information to refine and exploit later [16].

In summary, existing models and frameworks for information seeking, searching, exploration, discovery and curation try to explain human information-
100 related behavior using different but comparable terminology. They help establish an understanding of how humans interact with information, however, they fail to address the required tool support for information-related activities or they address the needs at too high a level.

2.2. Web Tasks and Modes of Web Use

105 Outside the realm of cognitive models and frameworks for information behavior, we find research that examines information discovery, curation, and other Web information behaviours and corresponding tasks, methods, and modes.

Kellar et al. [11] separated Web tasks into five categories: transactions, browsing, fact finding, information gathering, and other uncategorized tasks.
110 In later work, Kellar et al. [25] added communication and maintenance as additional Web tasks. Similarly, Sellen et al. [13] identified six tasks that are performed by Web users: browsing, finding, housekeeping, information gathering, communicating, and transacting. Using different terms, Kellar et al. and Sellen et al. both identified highly comparable tasks, such as fact finding and
115 finding [information], housekeeping and maintenance, etc.

Building on Ellis' model of information seeking [10, 17, 18], Choo et al. [9] derived anticipated Web tasks that correspond to the information seeking patterns

in the model, such as identifying which Websites would point to information of interest, navigating through links, bookmarking, etc.

120 People often engage in information seeking activities to close some knowledge gap that occurred as a result of not having enough information to perform a task [3]. Therefore, when providing tool support for various information discovery tasks, it is useful to consider the motivations as they can be different for each task. Morrison et al. [12] make a distinction between methods of Web
125 use and purposes. The authors derived a purpose-based taxonomy of Web use, including three purposes or motivations: finding information, comparing pieces of information or choosing products to make a decision, and using the Web to find relevant information to gain an understanding of some subject. Consequently, methods of finding information identified by Morrison et al. are
130 collecting, finding, exploring, and monitoring. The differences between the two taxonomies suggest that different information seeking tasks may be performed to satisfy more than one information seeking purpose. Therefore, each purpose may require more than one task-supporting mechanism.

Categorizing Web usage into information seeking, digital curation, and other
135 Web tasks may not adequately describe how information-related tasks are performed. Lindley et al. [4] conducted a qualitative study and identified five distinct modes of Web use: respite, orienting, opportunistic, purposeful, and lean-back. Understanding the characteristics of different modes can guide the design of Web interactions. For example, opportunistic use can have unarticu-
140 lated or continuously changing information needs. Later they may resume their opportunistic information seeking. Opportunistic use is also ‘grasshopper-like’ as users often jump from one resource to another [4]. Thus, there is a need to consider mechanisms for supporting users’ information needs, revisitation, and arbitrary navigation.

145 Different taxonomies of information seeking and curation tasks reflect on actual Web usage rather than theoretical modeling of human behavior, however, these taxonomies still focus on human activities when they interact with technology. A better understanding of how a system can support these activities is

needed in order to effectively support human information-related interactions.

150 In summary, there are a multitude of tools that support different aspects of information discovery and curation, but understanding how these tools are similar (or differ) is difficult. Moreover, the existing research is not useful for identifying gaps in current tools or ways that current tools may be improved to support information discovery and curation. We address these problems by
155 presenting a conceptual framework for information discovery and curation.

3. Methodology

Our methodology consisted of four steps. To gain a deeper understanding of the problem of information discovery and curation, we conducted an extensive literature review where we derived a preliminary set of information discovery and
160 curation design factors and related them within a framework. The framework was then applied as part of the evaluation of 20 different information discovery applications and iteratively refined after every evaluation. Lastly, the framework was applied to a reevaluation of some of the previously evaluated tools with the purpose of validating its effectiveness.

165 3.1. Research Questions and Objective

This study was designed to address the problem of designing Web applications for information discovery and was motivated by the following:

RQ1: How do existing Web applications support information discovery?

RQ2: How do existing information discovery applications support informa-
170 *tion curation?*

To address RQ1 and RQ2, we conducted an extensive literature review and a case study of 20 information discovery tools. Using insights from RQ1 and RQ2, we established our main research objective: ***to develop a framework for performing summative and formative evaluation of Web-based***
175 ***information discovery and curation tools.***

3.2. Literature Review

The development of the framework began with an extensive literature review. A diverse set of topics contributed to forming an understanding of information discovery and curation, including information behaviour and information seeking models, high-level Web tasks, and modes of Web use, exploration-based models of discovery, and methods of personal and social curation. From this review, the preliminary design factors for the framework were derived.

3.3. Building and Refining the Conceptual Framework

The Conceptual Framework we present in this paper was iteratively developed and refined through a careful analysis of 20 information discovery applications (see Table 1) and an in depth literature review. To guide the development of the framework, we selected some of the most used information discovery applications today. The popularity of information discovery applications was determined using Website popularity ranks provided by Alexa¹, a commercial Web traffic data provider. The focus was on applications that had strong information discovery components and less priority was given to applications whose purpose revolved only around curation. We examined the overall purpose of each application, its description as defined within the application, as well as literature and documentation related to the application (if they were available) against the features that the application provided. For example, if an application provided bookmarking features, we checked if it was indeed intended to be used for information preservation.

Our methodology involved an iterative process of selecting tools, analyzing them, and determining whether they could be described and evaluated using the framework. If we found a key feature that could not be described, we adapted the framework according to the findings. We repeated the process of tool selection and evaluation until the framework was usable for all tools. We then

¹Alexa is available at www.alexa.com

grouped the elements of the framework into categories, recording corresponding questions to ask in order to evaluate other applications.

Application	Address	Description
Pinterest	www.pinterest.com	Visual discovery tool
Delicious	delicious.com	Social bookmarking service
Tumblr	www.tumblr.com	Microblogging platform
StumbleUpon	www.stumbleupon.com	Web page discovery tool
Wikipedia	en.wikipedia.org	Free content Internet encyclopedia
Google Maps	www.google.ca/maps	Web mapping service
Rotten Tomatoes	www.rottentomatoes.com	Movie and TV database
500px	500px.com	Photography site
BucketList	bucketlist.org	Goal tracking and discovery service
We Heart It	weheartit.com	Visual discovery tool
Scoop.it!	www.scoop.it	Online publishing platform
Google Images	images.google.com	Image discovery service
Vimeo	vimeo.com	Video sharing Website
LifeHacker	lifehacker.com	Daily blog
YouTube	www.youtube.com	Video hosting platform
Yelp	www.yelp.ca	Business review site
IMDb	www.imdb.com	Movie database
Trip Adviser	www.tripadvisor.ca	Travel site
Urban Spoon	www.urbanspoon.com	Online bar and restaurant guide
Thesaurus	thesaurus.com	Online thesaurus

Table 1: Web-based Information Discovery and Curation Tools Studied

205 3.4. Framework Validation

In order to demonstrate the benefits of having such a framework, we applied the framework to five of the previously examined tools and show how its appli-

cation can help in describing (and comparing) the features of these tools while revealing how the tools may be improved. Furthermore, we used the framework
210 to guide the design of a novel tool. Due to space constraints, we can only report one of these results here (see Section Framework Validation) and we direct the reader to [26] for full details on this validation.

3.5. Limitations

The case study we conducted has a number of limitations. A lack of docu-
215 mentation, research literature, and formal descriptions of available features for some applications introduces a threat to the construct validity of the study. In addition, information discovery tools and features can be used in unintended or unforeseen ways by designers and developers. Therefore, the recorded use of some features within information discovery applications was recorded in our
220 interpretations. To compensate for such limitations, the researchers personally employed the tools over an extended period of time to gain a deeper understanding of their use. In addition, we considered some cases with similar functionality and design to be able to validate or clarify prior findings. Additionally, framework validation was performed on five of the previously examined tools,
225 introducing another limitation.

Another limitation was the lack of prior research on the subject matter. Some researchers have studied information seeking models and high-level Web tasks, but there is a lack of literature on how to enable and support different Web tasks. This opens up opportunities for future research to analyze meth-
230 ods of developing and building frameworks for facilitating and evaluating tools that support other Web tasks, such as communication, transactions, and goal realization.

4. A Conceptual Framework for Information Discovery and Curation on the Web

235 In our framework, we build on existing models and frameworks of information discovery and curation and our analysis of existing Web tools to derive cor-

responding design factors for Web design. The first part of the framework deals with the *motives* behind information discovery and curation. These motives often define use cases for Web application design and help set initial assumptions
240 about the required functionality.

The second part of the framework defines the *actions* that comprise discovery and curation activities, and the design factors that enable them. Some examples of actions include managing and preserving information. To support these actions, a Web-based application must provide corresponding mechanisms, such
245 as bookmarking and tagging capabilities.

Actions can be further decomposed into *operations* performed using mechanisms that enable the actions. For example, the information preservation (action) can be enabled using a bookmarking feature (enabling mechanism) so that users can bookmark information using the feature (operation). The third part
250 of the framework deals with improving operations for information discovery and curation.

Our framework considers human motives and relates information discovery and curation actions with corresponding enabling mechanisms. We relate operations that arise from actions with corresponding cognitive support, personal-
255 ization, and automation. One of our very early versions of the framework [27], which has a different structure and an incomplete set of design features, also lacks the distinction between operations and actions, and the support they require. Similar terminology is used in Activity Theory [28] to describe human practices. Figure 1 gives a high-level overview of the framework and illustrates
260 how the different components of the framework are connected.

4.1. *Motives Behind Information Discovery and Curation*

There are a wide variety of user motives behind information discovery and curation, and certain aspects of these motives can significantly impact the design of an application. Understanding a user’s motives can help form a conceptual
265 model of a needed Web application and its features. The following generalizations of motives and their properties can help define conceptual models and

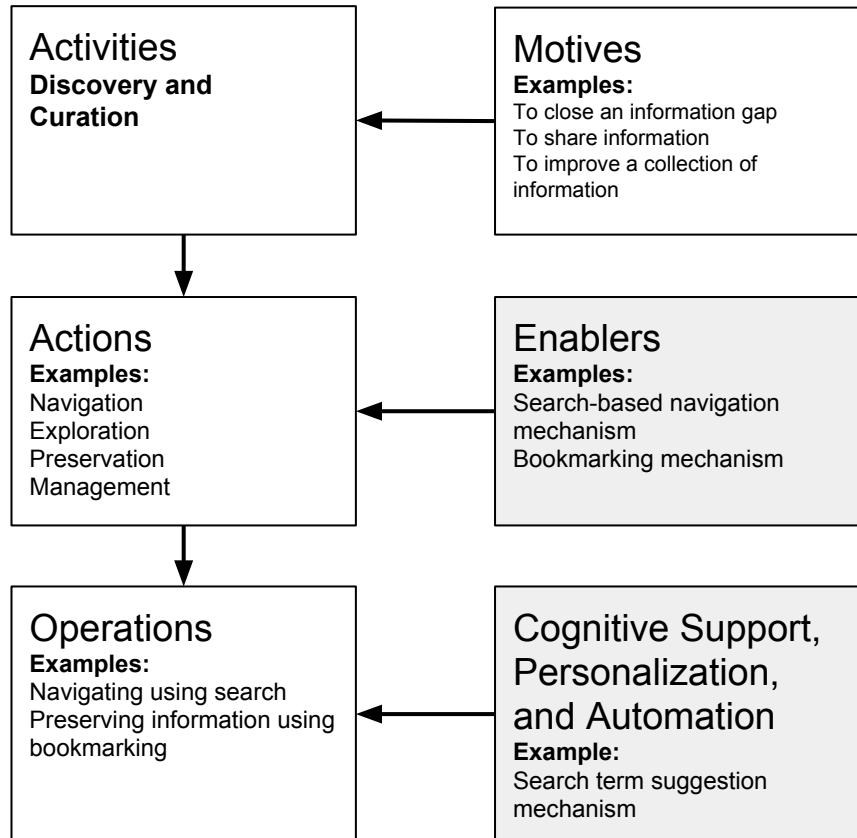


Figure 1: Framework Composition

identify primary information discovery and curation use cases.

4.1.1. Closing a Knowledge Gap

The primary motive for information discovery is usually to close a knowledge gap that occurs when the user tries to accomplish a task but lacks information to do so. Depending on the context in which the motive arose, an information need can have various degrees of specificity. For example, if the motive is to find inspiration for a project, the information need is vaguely defined. However, if the motive is to find a phone number of a specific business, an information need is well-defined. In some cases, the information need may be hidden and

the user might not be aware of the existing knowledge gap. The specificity of an information need determines important properties of information discovery mechanisms, such as whether users can benefit more from mechanisms that allow them to specify an information need, help form an information need, or
280 allow them to randomly retrieve information. This property has to be taken into consideration when evaluating or designing a Web application.

The nature of an information need predetermines whether discovery is serendipitous or oriented towards fact finding. Thus, an application can be designed to increase serendipity and opportunistic discovery or to improve purposeful fact
285 finding. On the one hand, displaying featured content can improve serendipitous discovery because of its unexpected nature and novelty. On the other hand, using context (e.g., location and date) to tailor search results can improve fact finding.

Another motive type for information discovery relates to the two qualities
290 of the Web defined by Lindley et al.[4]: *persistence* refers to the quality of the Web that allows people to habitually revisit Web pages and continue ongoing Web projects; and *temporality* refers to the quality of the Web that allows the content of Websites to be continuously updated to provide users with new information. Persistence alone usually facilitates information *rediscovery*, which
295 is an act of refinding previously found information. However, if persistence is combined with temporality, they can facilitate discovery of new information within the same application or channel. We refer to this type of discovery as *channel-based discovery*. Some of the common motives for channel-based discovery include orienting (or monitoring for updates) and opportunistic information
300 discovery [4].

The motive behind information rediscovery involves finding previously discovered information and reclosing the previously closed knowledge gap (e.g., in case the information was forgotten). It usually results in the user looking for previously found resources and Web pages. In fact, Web page revisitation is
305 one of the most commonly performed Web browsing activities [29, 30]. The percentage of revisited Web pages involved in Web browsing can range from

58% [31] to 81% [32]. Some Web pages and resources can be rediscovered using navigation, while others need to be previously preserved (bookmarked) to afford rediscovery. Rediscovery is one of the many ways in which information discovery and curation interweave.

4.1.2. *Supporting Future Use and Reaccess*

The main motive behind information curation is to make it possible to retrieve and use information. In order to facilitate easy information retrieval, many Web applications employ various forms of bookmarking systems. Traditionally, bookmarks must be manually organized into folders, but this method of organization is considered inefficient because folders with bookmarks become easily cluttered [33]. Therefore, in order to efficiently support information rediscovery, Web tools need to provide mechanisms for information preservation along with information management.

4.1.3. *Improving Collections*

People gather information to improve existing collections [4]. Although some deeper motives may include self reflection or the possibility of future use, collecting information is a motive in itself. Information gathering may be stretched over a period of time [11], resulting in repeated page visitation. Although information gathering comprises only 13.4% of Web usage, it contributes to many goal-supporting activities, such as decision making and planning [11].

4.1.4. *Facilitating Communication*

As part of his information behavior model, Wilson identified communication of information as an outcome of information seeking. Communication can also be thought of as a motive for information discovery and curation. To support communication of information, Web tools provide mechanisms that allow various users to share information among themselves. *Social bookmarking* is one popular way to preserve and share information across communities and to communicate with other users [34]. One of the first visions of social bookmarking was associated with Web blogging. Oravec [35] suggests that Web blogs help

users annotate or bookmark important information and build a “map” of the Internet. The evolution of social bookmarking has led to advanced techniques for collaborative information discovery and curation.

In summary, while it is not feasible to list all of the possible motives for information discovery and curation, this section outlined some of the key motives
340 that can aid in developing use cases and formalizing conceptual models for Web applications. These motives also make it easier to showcase how mechanisms for discovery and curation (presented in the next section) complement each other.

4.2. *Discovery and Curation Activities*

The next part of the framework deals with the actions associated with enablers of information discovery and curation. A more detailed overview is depicted in Figure 2; the two main activities (discovery and curation) are decomposed into actions, and each of the actions is supported by a group of features or mechanisms that enable a given aspect of discovery or curation in a Web
350 application.

4.2.1. *Navigation in Discovery: Following Information Scent*

To discover information, a user needs a way to navigate to it. Navigation in information discovery can be thought of as following an information scent. In general, the information scent models deal with how users identify value, cost, or the access path of information sources based on proximal cues, such as
355 links, icons, categories, etc. [19]. Common methods of navigation that facilitate information discovery include descriptive, referential, opportunistic, and system-regulated. We describe these methods below and direct the reader to the top part of Table ?? to see an overview of these methods and the enabling
360 mechanisms possible for each method.

Descriptive Navigation: A navigation is descriptive when the user has a means of describing their information need. It is usually implemented as **search-based navigation** since it allows users to enter a search query and

describe what they want to find. Some modern descriptonal navigation systems
365 are voice-activated.

Descriptonal navigation can also help to rediscover information, but it is not
always a reliable way of refinding information [30]. In information portals that
provide access to fairly ambiguous information and that have regularly updated
information flow, the search feature is usually designed around retrieving infor-
370 mation related to some general topic. In order to make search-based navigation
a reliable way to rediscover information, it must return consistent results.

Referential Navigation: A navigation is referential when the user finds
a reference to the term that they are looking for, such as a link or icon. This
reference represents an information scent. The underlying assumption of this
375 method of navigation is that the user can recognize the needed information or
a reference to it as they see it [1].

Referential navigation mechanisms can take many forms. Some common
types are **categories**, **facets**, **filters** and **tags**. In some applications, users
can search by a given **resource**. For example, YouTube provides a playlist with
380 music related to the currently playing song. Information scent representatives
may also reference sources outside of the given system, enabling another type
of **integration** of Web applications. Referential navigation can help the user
identify their information needs by suggesting terms, topics or categories to
use, and therefore, direct the user to relevant resources [36]. It can also help
385 narrow the results to a specific type of resource so that further discovery is
bounded by that type. For example, TripAdvisor helps narrow search results
by allowing users to choose among hotels, flights, vacation rentals, restaurants
and destinations.

Opportunistic Navigation: Opportunistic navigation is a method of navi-
390 gating ‘randomly’ through resources and Web pages. We call this ‘opportunistic’
because it is not truly random, but its serendipitous nature makes users feel like
it is. This navigation method is especially useful when the information need is
fully undefined. Many applications support opportunistic jumping from one re-
source to another. For example, StumbleUpon makes it possible to explore the

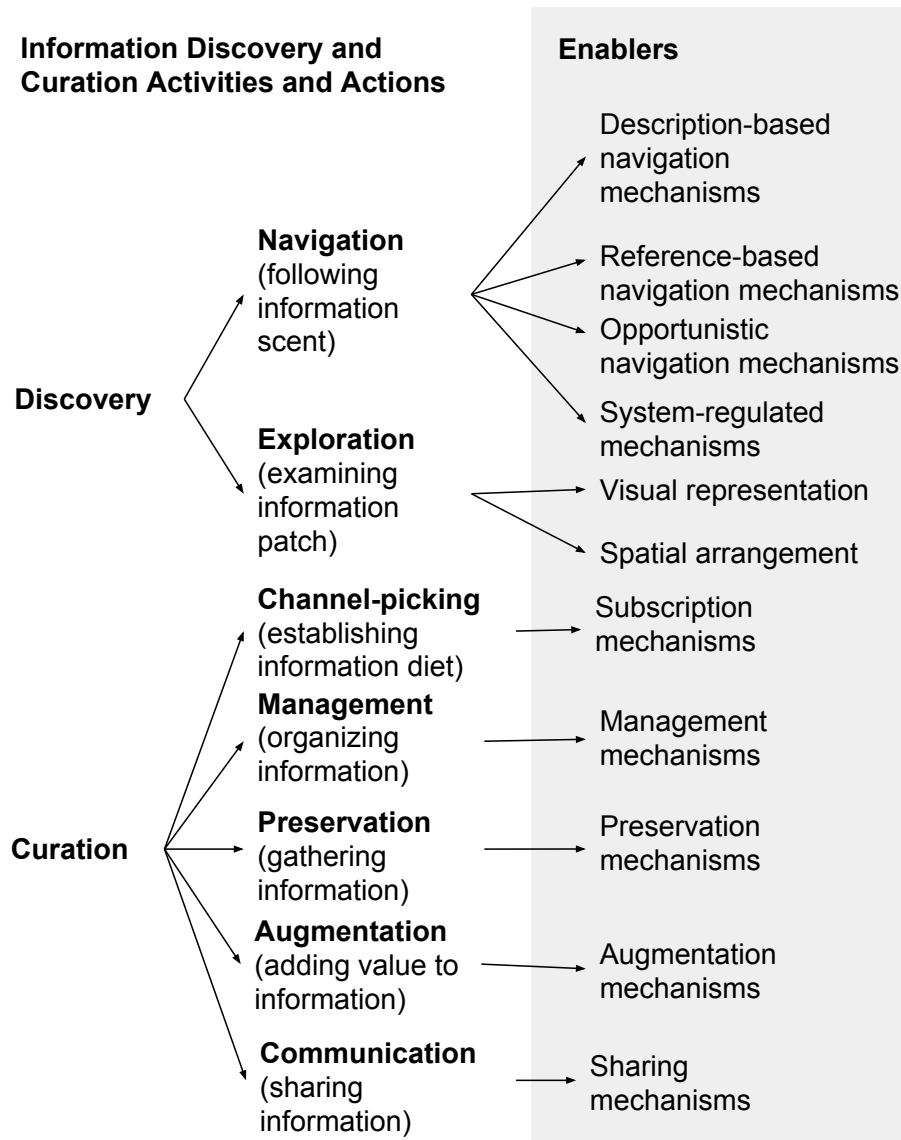


Figure 2: Information Discovery and Curation Activities, Actions, and Corresponding Enablers

395 Web in general—other Websites and Web applications, allows for **integrated** navigation—whereas Wikipedia provides opportunistic access to its own articles.

System-regulated Navigation: Web applications often display informa-

tion without the user’s active participation. This information can be a **news feed**, **featured** deals or articles or other types of content. We refer to this type
 400 of navigation as system-regulated because it occurs when the application brings the content to the user instead of the user applying any effort to find content. It differs from opportunistic navigation because the the user cannot choose when to observe new information; instead, all updates are regulated by the application. One application that utilizes system-regulated navigation is Yelp. As
 405 soon as the user enters the site, this tool displays featured restaurants as well as the user’s recent activities. As with any other navigation method, system-regulated navigation can ensure cross-application **integration** by displaying content from other Web applications.

4.2.2. *Exploration in Discovery: Examining Information Patches*

410 Exploration of resources is another action that facilitates information discovery. Visual and spatial cues, which help representing single or multiple resources, enable this action by allowing users to conveniently examine information patches (please refer to the middle part of Table ??).

Visual and textual previews: Abrams et al. [33] identified link representation as one of the problems with traditional bookmarking. Analogous with
 415 browsing through a bookmark manager, identifying relevant information when browsing through links in a Web application can be a challenging task. **Visual previews** and **textual previews** make it easier to evaluate the relevance of resources by providing the user with more information scent. Many social bookmarking systems, such as Scoop.it! and Pinterest, support visual previews of
 420 bookmarked pages. Delicious is a social bookmarking application that lacks this type of link representation support, and so it is harder to determine if a link will lead to a relevant resource.

Visual and textual cues: Visual and textual information cues are
 425 also important for a single resource exploration. Not only do they help navigation within the resource or Web page, but they can also contribute to the learning experience. For example, if the user would like to know what something

looks like, they can learn it from the representation in question.

Spatial visualizations: Similar to link representation, spatial visualization
430 of numerous links is another problem that occurs when browsing through diverse
content [33]. Therefore, a semantic to the **spatial arrangement** of information
(single and multiple resources) is of major importance. Information discovery
applications often employ sophisticated ways of spatially arranging resources to
make it easier to browse through large amounts of information. Common ways
435 of arranging multiple resources include **list**, **grid**, and **gallery** layouts. Addi-
tionally, **consistency** in the way multiple and single resources are represented
helps form a conceptual model of how the application can be used and provides
some degree of predictability [37].

4.3. Curation

440 Information curation is a common activity across many information discov-
ery applications. By asking questions about application design with regards to
information curation designers can find ways to add value to information and
enable information discovery over time. Information discovery applications vary
from being completely socially curated and populated by users, to those that
445 lack any curation mechanisms. By definition, digital information curation is the
notion of managing, preserving, and adding value to collections of information
[15, 16]. Thus, curation activity consists of actions such as information man-
agement, preservation, information augmentation, sharing, and channel-picking.
Refer to the bottom of Table ?? for this part of the framework.

450 **Information management** is one of the key elements of information cu-
ration [15, 16]. These mechanisms are prevalent in applications that have a
lot of information that is hard to categorize automatically or can mean some-
thing different for each user. In the context of Web information management,
tag and **collection-based** information categorization play major roles. Re-
455 source categorization also helps establish relationships between various resources
[15, 16]. Tagging can aid rediscovery and discovery in a socially curated space,
as well as add more value to resources [38]. Sample applications that facili-

tate information management are Pinterest, a tool that supports tagging and collection-based categorization, and Tumblr, a tool that supports tagging.

460 **Information preservation** is a common Web task usually performed with the intent of revisiting information [33, 16]. However, information gathering is sometimes performed with just the goal of collecting information [4]. Bookmarking is a traditional way of preserving information. **Internal preservation of internal resources** means bookmarking resources can be reaccessed within
465 the same application. Such bookmarking facilitates information curation within the system. **Internal preservation of external resources** signifies bookmarking other Web pages within an application. **External preservation** means bookmarking resources so that they are available through other bookmarking systems. An application must facilitate integration with other appli-
470 cations to enable external preservation [33].

Augmentation: One of the most important elements of digital curation is augmentation: adding value to information [15, 16]. It is often performed within social bookmarking systems, and many Web applications allow users to add value to the resources they curate. One way to augment information is
475 by **annotating** it with comments and descriptions. Annotations are metadata attached to a resource that make it easier to search for and interpret information. For example, Yelp and TripAdvisor largely rely on reviews written by their users. **Evaluation** methods can have various forms. They usually take place in socially curated information systems. However, evaluation can also contribute
480 to personal reflection and information preservation. Many applications allow users to evaluate resources by rating them or recording other forms of approval or disapproval, such as "I like this" and "I dislike this" buttons on YouTube.

Sharing information is key to empowering social information curation [15]. Therefore, the main components that facilitate sharing are the adding of re-
485 sources, and external and internal information sharing. **Adding resources** not only facilitates global Web information curation, but it also scales the information available through the system, providing more opportunities for information discovery. Resources can be created by users themselves, taken from some other

sources online, or both. For example, YouTube allows users to upload their own
490 videos, whereas Pinterest permits adding images from other sites in addition to
users' personal images. Sharing resources through different media and resharing
them within the Web application supports channel-based information discovery
within the media channels. Information discovery applications commonly allow
for sharing information on popular networking sites outside the application.

495 **Channel-picking** is an action of selecting information sources. A common
enabler for this action is subscriptions that help users follow the news [39].
To support channel-based discovery, an application must provide a subscrip-
tion mechanism. For example, Rotten Tomatoes allows **subscriptions** to
newsletters, but it does not allow subscriptions to movie critics that would be
500 allowed with a user-based subscription mechanism such as the one in Pinterest.
In some applications, the content is updated and curated by users, and users
can **subscribe** to other **users** or **artifacts**. Similar to site subscriptions, user
and artifact subscriptions are subscriptions to activity updates. These subscrip-
tion mechanisms help with networking and provide awareness about other users'
505 activities [40]. Such subscriptions also help filter new content delivered to the
user.

In summary, information discovery and curation tools can have different
implementations depending on the motives behind the activities. The design
factors presented in this section can help enable different actions associated
510 with information discovery and curation. However, the activities can be signifi-
cantly improved by additional support and automation, as described in the next
section.

4.4. *Enhancing the Discovery and Curation Experience*

The information discovery and curation enablers just presented are design
515 elements that afford various operations. For example, the search feature enables
typing in a query and searching for information. These operations can be further
supported by another set of design elements that introduce cognitive support,
personalization, and automation. The primary goal of this part of the framework

(see right column of Table 2) is to highlight opportunities for improvement over various information discovery and curation enabling mechanisms. Strategies for improvement include providing additional cognitive support for a given operation, personalizing the user experience, and automating an operation. Not all of the strategies are feasible for every single operation, and some operations can be supported in multiple ways. The following outline some of the possibilities for advancing information discovery and curation features.

Enhancing Navigation: There are two common methods of enhancing information discovery when search-based navigation is used (see Table ??). The first method entails returning personalized results when the user enters a search query. **Personalization** can be accomplished using a variety of techniques, including predefined user preferences, social interactions, context, browsing history, etc. The second method is to **suggest search terms** to make it easier for the user to formulate their information need. For example, Yelp suggests search terms as the user enters their query.

To further support referential navigation, applications can **personalize** reference suggestions, such as **categories**, **tags**, and **topics** of interest. They can also suggest relevant resources based on the one that the user already selected. As an example, after a user clicks a ‘pin’, Pinterest showcases other similar ‘pins’.

For opportunistic navigation, Web tools sometimes allow users to **personalize** types or categories of information that they the users would like to discover. StumbleUpon allows users to not only choose topics of interests, but it can also help them discover new promising topics.

Featured content can also be **personalized** to improve information discovery with system-regulated navigation. For example, Yelp showcases restaurants from a predefined area, such as the city where the user is from.

Finally, to make better use of subscribed content and to reduce human efforts when searching, an application can support various **notification mechanisms**. These can advise the user about updates on the **Website content**, various **artifacts**, and activities of other **users**.

550 **Enhancing Exploration: Personalization** of the **spatial** information representation usually has limited support in Web applications. Presumably, it is because consistency is more welcomed within information discovery applications than spatial personalization. However, it is still possible to personalize the arrangement of multiple resources or information within a single resource.

555 **Visual and textual personalizations** are more common, especially when the content within the application is curated by its users. For example, Flickr Web application for managing and sharing photographs personalizes album covers so that they are easier to rediscover.

Enhancing Curation: Information management can be improved if the

560 system helps the user make decisions about information categorization or tagging (see Table ??). Alternatively, information can be **categorized** or **tagged automatically**. For example, when the user bookmarks a restaurant on Yelp, it is automatically categorized. The user can filter bookmarks by category whenever they go into the embedded bookmark manager.

565 Preservation operations can also be automated. An example of the most common automatic preservation mechanism is **history**. Applications such as YouTube and Google Maps preserve users' browsing history so that they can review it later. Additionally, preservation mechanisms can be **suggested** to the user. YouTube allows users to **automatically share** information about

570 their activities, such as comments, added videos, liked or disliked videos, and created playlists. In general, socially curated spaces offer **sharing channels** to support convenient information communication. Augmentation is another aspect of information curation that can be either **automated** for or **suggested** to the user. For example, Yelp asks users to rate the places which the application

575 identifies as having been visited by the user.

 Notification mechanisms enable user awareness about new content on the subscribed channel [40]. Web applications that facilitate rapidly updating content support various notification mechanisms, such as messages within the application, informative emails, and smartphone notifications. Many types of

580 notifications include suggested users or artifacts to follow. Some Web tools

automatically subscribe users to notifications, usually during the registration process.

In summary, providing cognitive support, personalization, and automation dramatically improves the user experience when people interact with information discovery and curation systems. The framework can be used for identifying
585 gaps in information discovery support and developing new technologies as described in the following section.

5. Framework Validation

In order to validate the conceptual framework and verify its stability, we
590 used it to design a tool for location based photograph discovery and curation, we used it to evaluate five of the applications that were used in the construction of the preliminary framework: Pinterest, Google Maps, Wikipedia, Delicious, and Yelp. Due to space limitations, we only present the evaluation for one of the tools, Pinterest. The other tool evaluations and the location based discovery
595 tool description can be found in [26]. As for Pinterest, we first summarize our observations resulting from asking the questions from the framework in a systematic manner. Based on our assumptions, judgment, and use of the framework, we propose directions for future development and reflect on certain needed mechanisms, as not all mechanisms are always required.

600 Pinterest is a Web application designed for image discovery and curation, oriented towards finding inspiration and collecting knowledge about hobbies and interests [41, 42, 43]. Users of Pinterest are commonly referred to as ‘pinners’. Resources on Pinterest are called ‘pins’, and each ‘pin’ consists of an image, a short description, the user’s name, and the name of the collection that the pin
605 belongs to. More information is available once the user clicks on a ‘pin’.

Motivated by the desire to gain inspiration and knowledge, Pinterest users have either under-defined or absent information needs. Other motives for using Pinterest could be to rediscover previously found information (and possibly use it), to be oriented about new ‘pins’ that emerge from subscribed channels, and

610 to gather information for future rediscovery and the act of collection itself.

Navigation in Pinterest is mostly supported by descriptive, referential, or system-regulated mechanisms. Although an explicit **opportunistic navigation mechanism** is absent, both descriptive and referential mechanisms usually return novel and serendipitous results to facilitate opportunistic browsing. Descriptive navigation is enabled with a **guided search** mechanism that suggests search terms to the user.

Referential navigation is enabled in Pinterest using a range of techniques. To support articulation of an information need, a **category-based** navigation mechanism makes suggestions on subcategories or interests. Through clicking on a ‘pin’, the user can see related resources, enabling **resource-based** referential navigation. Most of the images on Pinterest are ‘pinned’ from other Websites, and users are provided with links to their original sources. Therefore, Pinterest supports **integrated** referential navigation.

System-regulated navigation within Pinterest is highly personalized. When the user enters the site, they see a history of their own information gathering activities and updates from the people they are subscribed to. Additionally, the application suggests **featured** ‘pins’ based on the user’s interests.

To reinforce the discovery of visual data, Pinterest provides extensive support for various exploration mechanisms. Multiple resources are represented in a **gallery layout**, often referred to as a ‘pinboard’. This layout provides good spatial support for exploration and makes it easier to build a mental model of the tool by drawing analogies with a real pinboard. Users can create multiple ‘pinboards’ (also known as ‘boards’) which have **personalized** covers to enhance future exploration and rediscovery. A single resource does not have a lot of distinct spatial arrangements, however, it provides a visual glimpse into what can be found on the Website that the image came from, with **textual preview** being limited to the address of the Website.

Information management is accomplished through sorting ‘pins’ into different collections (‘pinboards’) thus enabling **collection-based classification** and **internal preservation of internal and external resources**. All user

information collecting actions are **automatically** preserved and displayed. Users can augment the information pool by uploading new ‘pins’, commenting on existing ‘pins’, or adding descriptions. Users can also **internally share** ‘pins’ among themselves. Channel-picking actions are carried out by following or
645 **subscribing** to users or individual ‘pinboards’. The system also **automatically** sends **notifications** through emails and **suggests** new ‘boards’ to follow.

Applying the framework to Pinterest revealed that it employs a variety of techniques to facilitate information discovery and curation. However, individual mechanisms could be further improved. For example, **textual previews**
650 of multiple and individual resources is rather limited and provides little insight into what information source Websites actually contain. Furthermore, Pinterest could benefit from **automatically classifying** ‘pins’ into ‘boards’ because finding an appropriate ‘board’ for a ‘pin’ can be difficult when a user has a large number of existing ‘boards’. Overall, Pinterest provides rich support for infor-
655 mation discovery and curation, and in some ways, enables each of the discovery or curation actions of the conceptual framework.

6. Research and Design Implications

The conceptual framework for information discovery and curation is designed to perform formative and summative evaluation of existing Web applications
660 and to reveal how these tools support information-related activities in question. The framework as a tool and its ability to guide the process of analyzing Web applications makes it broadly applicable in research and Web design.

In the previous section, we demonstrated how the framework can be used to reveal missing features in tools. Using similar methods, the framework can
665 also be applied to compare different Web applications. When used for evaluation, the framework helps to identify which areas of a tool require further attention. Therefore, the framework can be helpful for designers who wish to improve existing tools or get ideas for new information discovery and curation applications.

670 Factors and questions of the framework are there to guide the developer
and may expose gaps, but they do not dictate which features should be in an
application. It is up to designers to decide whether to close those gaps and some
gaps cannot be closed because of certain constraints or trade-offs that have to
be made, such as data type and system design.

675 Even though applying the framework requires initial expertise and critical
reasoning, it opens up opportunities for research and practice. For the research
domain, the framework can serve as a guide for drawing distinctions between
different Web-based information discovery and curation applications, finding
gaps in tools, and selecting cases for studies based on required functionality.
680 While, systematic evaluation of Web tools for information discovery and cura-
tion helps the designer improve user experience and gain better understanding
of information behaviour within a given system.

7. Future Work and Conclusions

In our study, we analyzed information curation and seeking tasks and devel-
685 oped a conceptual framework of factors and questions that are important when
building and evaluating Web information discovery and curation tools. We then
evaluated and iteratively refined the framework by analyzing 20 different infor-
mation discovery applications and provided concrete examples of tool support
addressing various concepts of the framework. Finally, we validated the frame-
690 work by reevaluating five of the previously examined tools and used it to design
a novel application (described in [26]).

The current version of the framework is designed to be generally applicable
to information discovery applications. Finding ways to instantiate the frame-
work and extend it for use in domain-specific practices could serve as a potential
695 future research goal. For example, video discovery and curation activities have
unique properties related to the type of data to be discovered—information is
mostly found in the video itself, and it cannot be viewed all at the same time.
Hence, the framework could be extended to address domain-specific challenges.

Another potential research direction would be to expand our investigation to
700 include factors that influence the need for one information discovery type over
another and further deepen an understanding of the relationships between the
motives for information discovery and curation activities and information discovery types.

Our framework opens up opportunities for structured information discovery
705 and curation tool evaluation and design. As more tools are being developed
within the social space of information discovery and curation, understanding
how these tasks can be supported promises advancements in how Web applications are designed.

References

- 710 [1] J. A. Waterworth, M. H. Chignell, A model of information exploration, *Hypermedia* 3 (1) (1991) 35–58.
- [2] A. Foster, N. Ford, Serendipity and information seeking: an empirical study, *Journal of Documentation* 59 (3) (2003) 321–340.
- [3] H. A. Proper, P. Bruza, What is information discovery about?, *Journal of the American Society for Information Science* 50 (9) (1999) 737–750.
- 715 [4] S. E. Lindley, S. Meek, A. Sellen, R. Harper, It’s simply integral to what i do: enquiries into how the web is weaved into everyday life, in: *Proceedings of the 21st international conference on World Wide Web*, ACM, 2012, pp. 1067–1076.
- 720 [5] M. J. Bates, An exploratory paradigm for online information retrieval, *Intelligent Information Systems for the Information Society*. Amsterdam: North-Holland (1986) 91–99.
- [6] A. Conaway, C. Pikas, U. McLean, S. Morris, L. Palmer, L. Rosman, S. Sears, E. Uzelac, S. Woodson, Designing for information discovery: User
725 needs analysis, *Johns Hopkins Applied Technical Digest* 28 (3) (2010) 290–291.

- [7] G. Marchionini, Exploratory search: from finding to understanding, *Communications of the ACM* 49 (4) (2006) 41–46.
- [8] A. Kerne, S. M. Smith, The information discovery framework, in: *Proceedings of the 5th conference on Designing interactive systems: processes, practices, methods, and techniques*, ACM, 2004, pp. 357–360.
- [9] C. W. Choo, B. Detlor, D. Turnbull, Information seeking on the web: An integrated model of browsing and searching, *first monday* 5 (2).
- [10] D. Ellis, A behavioural model for information retrieval system design, *Journal of information science* 15 (4-5) (1989) 237–247.
- [11] M. Kellar, C. Watters, M. Shepherd, A goal-based classification of web information tasks, *Proceedings of the American Society for Information Science and Technology* 43 (1) (2006) 1–22.
- [12] J. B. Morrison, P. Pirolli, S. K. Card, A taxonomic analysis of what world wide web activities significantly impact people’s decisions and actions, in: *CHI’01 extended abstracts on Human factors in computing systems*, ACM, 2001, pp. 163–164.
- [13] A. J. Sellen, R. Murphy, K. L. Shaw, How knowledge workers use the web, in: *Proceedings of the SIGCHI conference on Human factors in computing systems*, ACM, 2002, pp. 227–234.
- [14] T. D. Wilson, Human information behavior, *Informing science* 3 (2) (2000) 49–56.
- [15] N. Beagrie, Digital curation for science, digital libraries, and individuals, *International Journal of Digital Curation* 1 (1) (2008) 3–16.
- [16] S. Whittaker, Personal information management: from information consumption to curation, *Annual review of information science and technology* 45 (1) (2011) 1–62.

- [17] D. Ellis, D. Cox, K. Hall, A comparison of the information seeking patterns of researchers in the physical and social sciences, *Journal of documentation* 49 (4) (1993) 356–369.
- [18] D. Ellis, M. Haugan, Modelling the information seeking patterns of engineers and research scientists in an industrial environment, *Journal of documentation* 53 (4) (1997) 384–403.
- [19] P. Pirolli, S. Card, Information foraging., *Psychological review* 106 (4) (1999) 643.
- [20] W.-T. Fu, P. Pirolli, Snif-act: A cognitive model of user navigation on the world wide web, *Human-Computer Interaction* 22 (4) (2007) 355–412.
- [21] M. Kitajima, M. H. Blackmon, P. G. Polson, A comprehension-based model of web navigation and its application to web usability analysis, in: *People and Computers XIV Usability or Else!*, Springer, 2000, pp. 357–373.
- [22] P. Pirolli, An elementary social information foraging model, in: *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, ACM, 2009, pp. 605–614.
- [23] W.-T. Fu, The microstructures of social tagging: a rational model, in: *Proceedings of the 2008 ACM conference on Computer supported cooperative work*, ACM, 2008, pp. 229–238.
- [24] M. J. Bates, Toward an integrated model of information seeking and searching, *The New Review of Information Behaviour Research* 3 (2002) 1–15.
- [25] M. Kellar, C. Watters, M. Shepherd, A field study characterizing web-based information-seeking tasks, *Journal of the American Society for Information Science and Technology* 58 (7) (2007) 999–1018.
- [26] E. Voyloshnikova, A Conceptual Framework for Evaluating and Designing Information Discovery and Curation Tools, Master’s thesis, University of Victoria (2015).

- 780 [27] E. Voyloshnikova, M.-A. Storey, Towards understanding digital information discovery and curation, in: Proceedings of the 2014 Conference of the Center for Advanced Studies on Collaborative Research, ACM, 2014, pp. 247–261.
- [28] K. Kuutti, Activity theory as a potential framework for human-computer interaction research, Context and consciousness: Activity theory and human-computer interaction (1996) 17–44.
- 785 [29] E. Adar, J. Teevan, S. T. Dumais, Large scale analysis of web revisitation patterns, in: Proceedings of the SIGCHI conference on Human Factors in Computing Systems, ACM, 2008, pp. 1197–1206.
- 790 [30] A. Cockburn, S. Greenberg, S. Jones, B. McKenzie, M. Moyle, Improving web page revisitation: Analysis, design, and evaluation.
- [31] L. Tauscher, S. Greenberg, How people revisit web pages: Empirical findings and implications for the design of history systems, International Journal of Human-Computer Studies 47 (1) (1997) 97–137.
- 795 [32] A. Cockburn, B. McKenzie, What do web users do? an empirical analysis of web use, International Journal of human-computer studies 54 (6) (2001) 903–922.
- [33] D. Abrams, R. Baecker, M. Chignell, Information archiving with bookmarks: personal web space construction and organization, in: Proceedings of the SIGCHI conference on Human factors in computing systems, ACM Press/Addison-Wesley Publishing Co., 1998, pp. 41–48.
- 800 [34] E. Estellés, E. Del Moral, F. González, Social bookmarking tools as facilitators of learning and research collaborative processes: The diigo case, Interdisciplinary Journal of E-Learning and Learning Objects 6 (1) (2010) 175–191.
- 805 [35] J. A. Oravec, Bookmarking the world: Weblog applications in education, Journal of Adolescent & Adult Literacy (2002) 616–621.

- [36] M. Levene, An introduction to search engines and web navigation, John Wiley & Sons, 2011.
- 810 [37] D. A. Norman, The design of everyday things, Basic books, 2002.
- [38] T. Gruber, Ontology of folksonomy: A mash-up of apples and oranges, International Journal on Semantic Web and Information Systems (IJSWIS) 3 (1) (2007) 1–11.
- [39] A. Java, P. Kolari, T. Finin, A. Joshi, T. Oates, Feeds that matter: A
815 study of bloglines subscriptions., in: ICWSM, 2007.
- [40] D. Millen, J. Feinberg, B. Kerr, Social bookmarking in the enterprise, Queue 3 (9) (2005) 28–35.
- [41] E. Gilbert, S. Bakhshi, S. Chang, L. Terveen, I need to try this?: a statistical overview of pinterest, in: Proceedings of the SIGCHI conference on
820 human factors in computing systems, ACM, 2013, pp. 2427–2436.
- [42] M. Zarro, C. Hall, Pinterest: Social collecting for# linking# using# sharing, in: Proceedings of the 12th ACM/IEEE-CS joint conference on Digital Libraries, ACM, 2012, pp. 417–418.
- [43] R. Ottoni, J. P. Pesce, D. B. Las Casas, G. Franciscani Jr, W. Meira Jr,
825 P. Kumaraguru, V. Almeida, Ladies first: Analyzing gender roles and behaviors in pinterest., in: ICWSM, 2013.

Types of discovery and curation features	Questions to be posed during the design or evaluation of discovery and curation tools and sample features	
Navigation features	Enabling mechanisms	Cognitive support, personalization, and automation
Descriptonal	How does the application support descriptonal navigation? Search-based navigation / Integrated search	How can descriptonal navigation mechanisms be enhanced? Personalized results / Guided search
Referential	How does the application support referential navigation? Categories / Facets / Filters / Tags / Search by item or resource / Integrated reference	How can referential navigation mechanisms be enhanced? Suggesting categories / Suggesting topics of interest / Suggesting tags / Suggesting similar resources
Opportunistic	How does the application support opportunistic navigation? Opportunistic navigation feature / Integrated opportunistic navigation	How can opportunistic navigation mechanisms be enhanced? Personalized opportunistic navigation
System-regulated	How does the application support system-regulated navigation? Static direct display / Integrated static display / Featured content / Integrated featured content / News feed / Integrated news feed	How can system-regulated navigation mechanisms be enhanced? Personalized featured content / User activity update notification / Application activity update notification / Artifact update notification

Table 2: Types of Information Discovery and Curation Features and Related Questions

Types of discovery and curation features	Questions to be posed during the design or evaluation of discovery and curation tools and sample features	
Exploration features	Enabling mechanisms	Cognitive support, personalization, and automation
Visual and textual cues of multiple resources	<p>How does the application use visual and textual cues to help identify resources of value?</p> <p>Visual preview / Textual preview</p>	<p>How can visual and textual cues of multiple resources be enhanced?</p> <p>Personalized visual preview / Personalized textual preview</p>
Visual and textual cues of a single resource	<p>How does the application use visual and textual cues to help identify the value of information within a resource?</p> <p>Visual cues / Textual cues</p>	<p>How can visual and textual cues of a single resource be enhanced?</p> <p>Personalized visual cues / Personalized textual cues</p>
Spatial proximal cues of multiple resources	<p>How does the application use spatial proximal cues to effectively present multiple resources?</p> <p>List / Grid / Gallery / Spatial semantic / Consistency</p>	<p>How can the use of spatial proximal cues be enhanced to effectively present multiple resources?</p> <p>Personalized arrangement of multiple resources</p>
Spatial proximal cues of a single resource	<p>How does the application use spatial proximal cues to effectively present information within a single resource?</p> <p>Spatial semantic / Consistency</p>	<p>How can the use of spatial proximal cues be enhanced to effectively present information within a resources?</p> <p>Personalized arrangement of information within a resource</p>

Table 3: Types of Information Discovery and Curation Features and Related Questions

Types of discovery and curation features	Questions to be posed during the design or evaluation of discovery and curation tools and sample features	
Curation features	Enabling mechanisms	Cognitive support, personalization, and automation
Management	How does the application support management of information? Public or private collection-based categorization / Public or private tag-based categorization	How can management of information be enhanced? Suggesting collections / Suggesting tags / Automated classification into collections / Automated tagging
Preservation	How does the application support preservation of information? Internal preservation of internal resources / Internal preservation of external resources / External preservation of internal resources	How can preservation of information be enhanced? History / Suggested preservation
Augmentation	How does the application support augmentation of information? Annotation / Evaluation	How can augmentation of information be enhanced? Automated augmentation / Suggested augmentation
Sharing	How does the application support sharing of information? Adding resources / Internal sharing / External sharing	How can sharing of information be enhanced? Automated sharing / Suggested sharing
Channel-picking	How does the application support the user in establishing their information preferences? User subscription / Site subscription / Artifact subscription	How can establishment of information preferences be enhanced? Suggesting users for subscription / Suggesting artifacts for subscription / Automated subscription

Table 4: Types of Information Discovery and Curation Features and Related Questions