

Redmi Note4X high-end series first-class and second-class maintenance guide

Technical support internal document control: TSIMMN40 Redmi Note4X high-profile series first-class and second-class maintenance guide V01

- Redmi Note4X high-end series
 - first-class and second-class maintenance guide Abnormal fever of mobile phone

Abnormal fever of mobile phone

- Abnormal fever of mobile phone


确认故障

故障现象为：手机异常发热或玩王者荣耀游戏时卡顿。

主板涂胶

如果没有以下标识的主板，则需要网点进行手动涂胶：

1. 主板二维码旁边有1或2 镭雕标识；

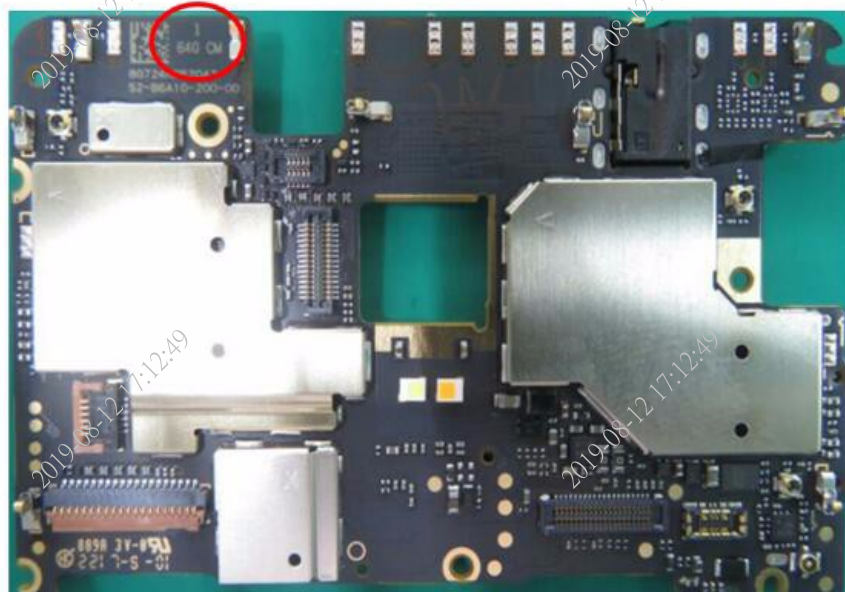


2. 主板二维码旁边有“黑点”标识；



3. 请排除以上两种标识的主板，其他主板则需要进行涂胶。

- 所点类型为散热冷凝胶；
- 料号为SCNE010006800；
- 点胶方式为人工点胶。

系统维修方法选择 407清洁清洗/调整重装

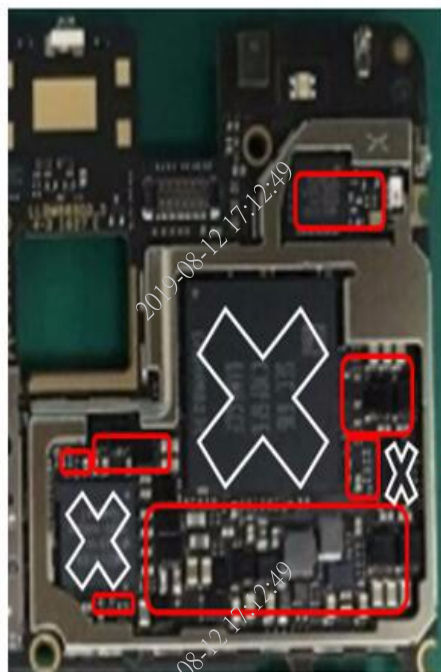

屏蔽盖内部涂胶说明:

1、涂胶区域

1) 胶水覆盖红色圆框区域，覆盖器件。
(U301、U601、U701芯片禁止涂胶)

2) 点胶样式，推荐采用B图形。

B图形



2、涂胶量

1) 胶水覆盖区域不低于90%；

2) 扣合屏蔽盖后，胶水与屏蔽盖内部充分接触。

3、注意事项

1) 合上盖子后不要被顶起；


2) 屏蔽盖内部到PCB间隙1.4mm；

3) 胶水不能污染到屏蔽框表面，发生污染后，需要清除溢胶。

涂胶完成后，需要在主板二维码旁边标记字母“V”



涂胶完成后效果

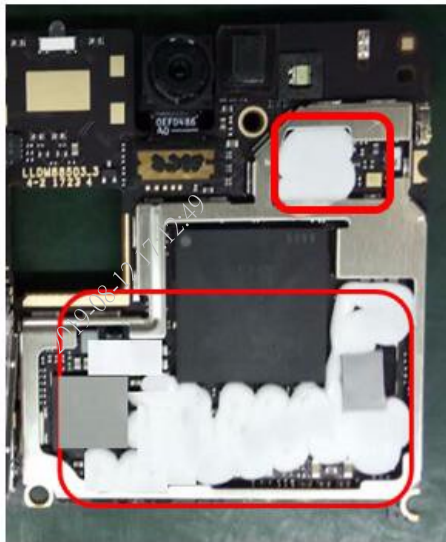

其他问题
分析解决